

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPPLICATE
(Other instructions on reverse side)Form Approved
Budget Bureau No. 42-R1424

2. LEASE DESIGNATION AND SERIAL NO.

82-08 0003

3. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)

1. ☐ OIL WELL ☐ GAS WELL ☒ OTHER

2. NAME OF OPERATOR
Tenneco Oil Company

3. ADDRESS OF OPERATOR
720 So. Colorado Blvd., Denver, Colorado 80222

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.
See also space 17 below.)
At surface
1460' FSL and 840' FEL, Unit I

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

FLORANCE

9. WELL NO.

10. FIELD AND POOL, OR WILDCAT

BLANCO MESAVERDE

11. SEC. T., R., M., OR BLK. AND
SURVEY OR AREA

SEC. 22, T30N, R9W

12. COUNTY OR PARISH 13. STATE

SAN JUAN

NM

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GK, etc.)

6080' GL

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL



ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting on proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

5/2 PREP TO PERF 2nd STAGE. SET CIBP @ 5086'. TIH W/ TBG. LOAD HOLE W/ WTR. PRESS TEST
to TO 3000 PSI. HELD OK. SPOT 300 GAL 15% HCL 5066-4726'. PERF'D MESAVERDE FMTN
5/9 4736-5064 W/ 19 HOLES. ACIDIZE W/ 1100 GAL 15% HCL. FRAC'D FMTN W/ 900 BBL PAD
& 103,700# 20/40 SAND IN 1605 BBLS WTR. AIR 1800 PSI @ 41 BPM. ISIP VAC. CO SAND.
WELL ON VAC. PERF'D MESAVERDE FMTN 4442-4675' W/ 16 HOLES. BRK DN PERFS W/ 750
GAL 15% HCL. FRAC'D W/ 35,000 GAL WTR PAD & 60,900 GAL WTR W/ 80,000# 20/40
SAND. MAX PRESS 1900 PSI. AIR 40 BPM @ 1825 PSI. ISIP VAC. CO SAND. FLW WELL
TO CLN UP.

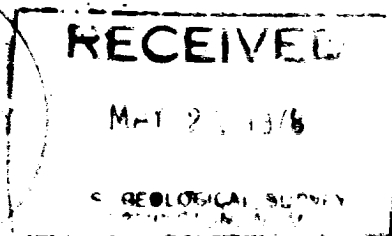

18. I hereby certify that the foregoing is true and correct.

SIGNED

Carley J. Hatten

TITLE: Administrative Supervisor

DATE 5/12/78

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY: