


Typical B.O.P. Installation
for Daken Well

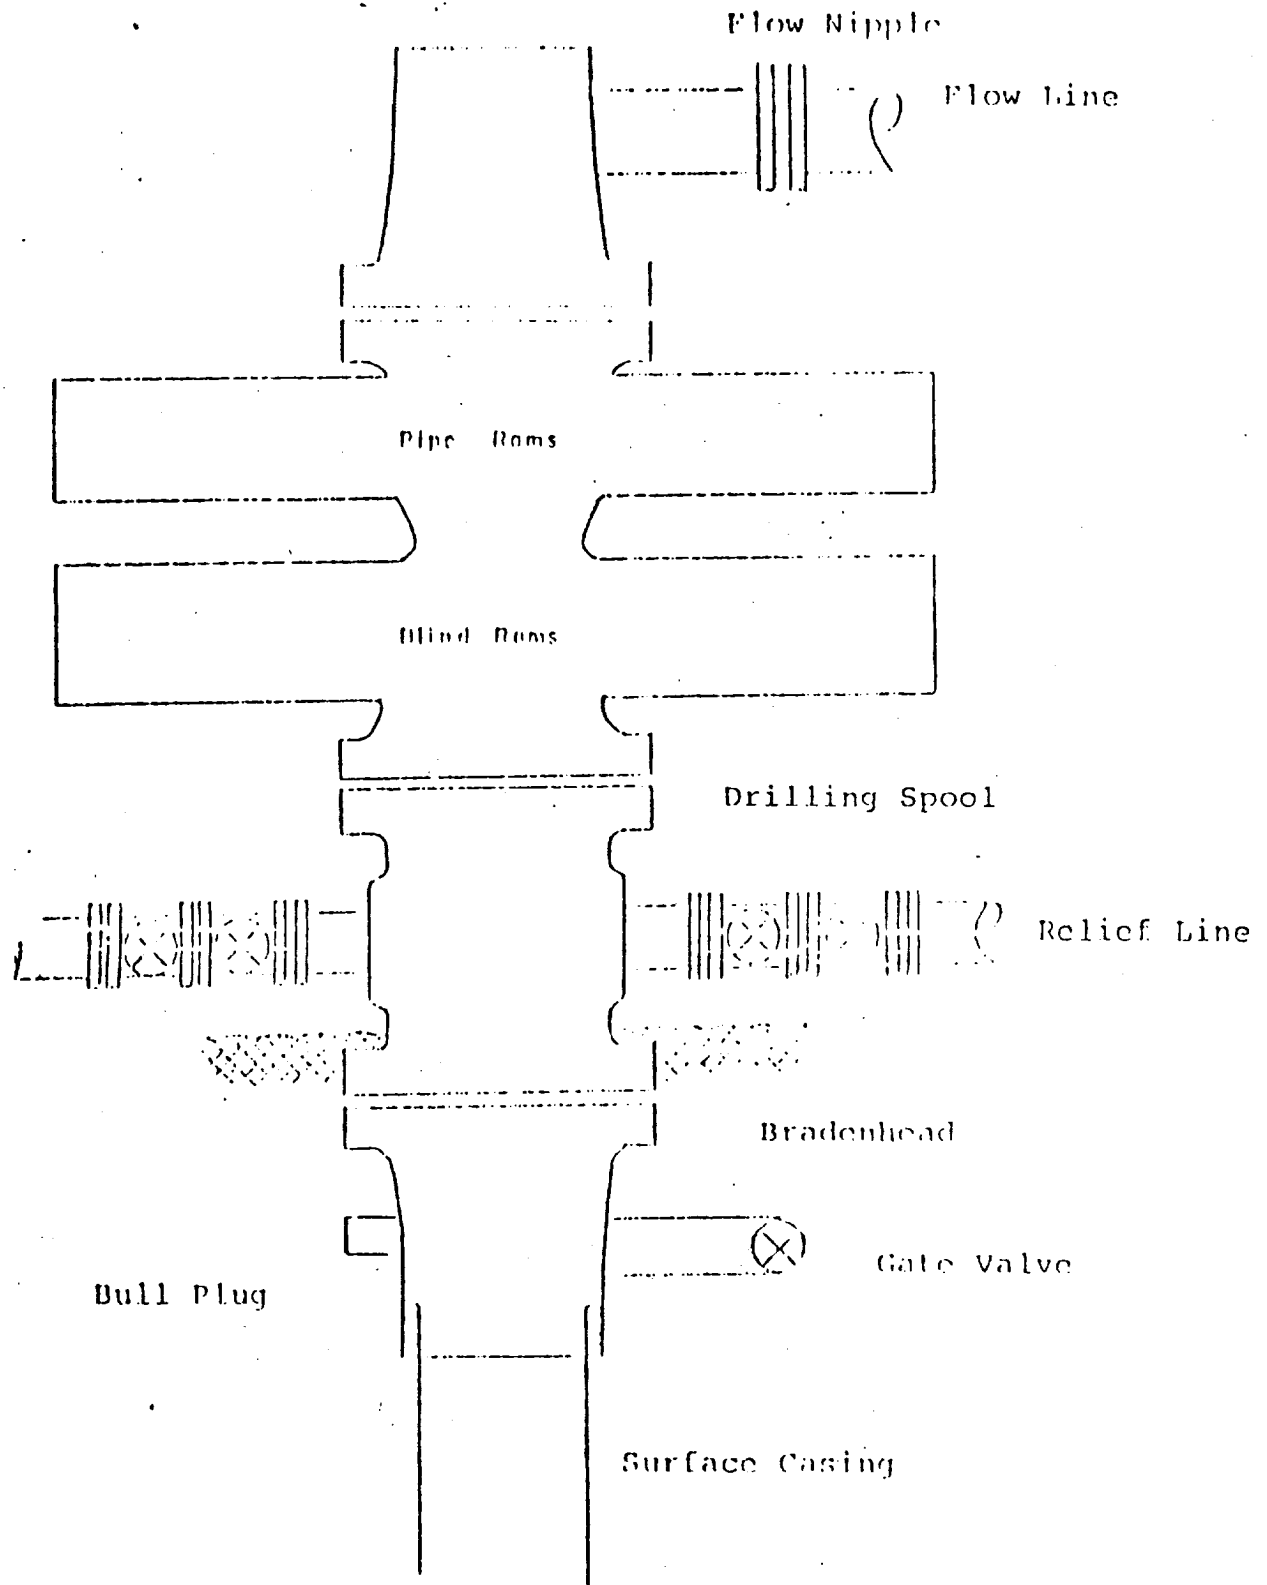

Series 900 Double Gate BOP, rated
at 3000 psi Working Pressure

When airdrilling operations begin a Shaffer type
50 or equivalent rotating head is installed on top of
the flow nipple and the flow line is converted into
a blowie line.