



Legacy Reserves

Lea County, NM (NAD-27 2015)

Hamon Fed Com A #5H

Hamon Fed Com A #5H

Lateral #1

Plan: Design #1

Standard Planning Report

26 September, 2015

HOBBS OCD

MAY 09 2016

RECEIVED



MAY 12 2016



TDS
Planning Report



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Site Hamon Fed Com A #5H
Company:	Legacy Reserves	TVD Reference:	KB @ 3628.00usft (McVay 4)
Project:	Lea County, NM (NAD-27-2015)	MD Reference:	KB @ 3628.00usft (McVay 4)
Site:	Hamon Fed Com A #5H	North Reference:	Grid
Well:	Hamon Fed Com A #5H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral #1		
Design:	Design #1		

Project	Lea County, NM (NAD-27-2015)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	Hamon Fed Com A #5H		
Site Position:		Northing:	581,480.40 usft
From:	Map	Easting:	726,776.50 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 35' 47.173 N
		Longitude:	103° 35' 49.149 W
		Grid Convergence:	0.40 °

Well	Hamon Fed Com A #5H		
Well Position	+N/-S	0.00 usft	Northing:
	+E/-W	0.00 usft	Easting:
Position Uncertainty	0.00 usft	Wellhead Elevation:	0.00 usft
		Latitude:	32° 35' 47.173 N
		Longitude:	103° 35' 49.149 W
		Ground Level:	3,610.00 usft

Wellbore	Lateral #1		
Magnetics	Model Name	Sample Date	Declination
	IGRF2015	7/18/2015	(°)
			7.20
			Dip Angle
			(°)
			60.43
			Field Strength
			(nT)
			48,354

Design	Design #1		
Audit Notes:			
Version:	Phase:	PLAN	Tie On Depth:
			0.00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(usft)	(usft)	(usft)
	0.00	0.00	0.00
			Direction
			(°)
			183.69

Plan Sections										
Measured Depth	Inclination	Azimuth	Vertical Depth	+N/-S	+E/-W	Dogleg Rate	Build Rate	Turn Rate	TFO	Target
(usft)	(°)	(°)	(usft)	(usft)	(usft)	(°/100usft)	(°/100usft)	(°/100usft)	(°)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5,500.00	0.00	0.00	5,500.00	0.00	0.00	0.00	0.00	0.00	0.00	
5,938.00	8.76	221.70	5,936.30	-24.95	-22.23	2.00	2.00	0.00	221.70	
8,966.65	8.76	221.70	8,929.62	-369.34	-329.07	0.00	0.00	0.00	0.00	
9,801.61	90.00	179.75	9,435.00	-938.83	-378.66	10.00	9.73	-5.02	-42.28	
14,420.23	90.00	179.75	9,435.00	-5,557.40	-358.70	0.00	0.00	0.00	0.00	LTP/BHL (HFCA #5H/



TDS
Planning Report



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Site Hamon Fed Com A #5H
Company:	Legacy Reserves	TVD Reference:	KB @ 3628.00usft (McVay 4)
Project:	Lea County, NM (NAD-27, 2015)	MD Reference:	KB @ 3628.00usft (McVay 4)
Site:	Hamon Fed Com A #5H	North Reference:	Grid
Well:	Hamon Fed Com A #5H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral #1		
Design:	Design #1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00
5,100.00	0.00	0.00	5,100.00	0.00	0.00	0.00	0.00	0.00	0.00
5,200.00	0.00	0.00	5,200.00	0.00	0.00	0.00	0.00	0.00	0.00
5,300.00	0.00	0.00	5,300.00	0.00	0.00	0.00	0.00	0.00	0.00



TDS
Planning Report



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Site Hamon Fed Com A #5H
Company:	Legacy Reserves	TVD Reference:	KB @ 3628.00usft (McVay 4)
Project:	Lea County, NM (NAD-27 2015)	MD Reference:	KB @ 3628.00usft (McVay 4)
Site:	Hamon Fed Com A #5H	North Reference:	Grid
Well:	Hamon Fed Com A #5H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,400.00	0.00	0.00	5,400.00	0.00	0.00	0.00	0.00	0.00	0.00
5,500.00	0.00	0.00	5,500.00	0.00	0.00	0.00	0.00	0.00	0.00
NUDGE - Start Build 2.00									
5,600.00	2.00	221.70	5,599.98	-1.30	-1.16	1.38	2.00	2.00	0.00
5,700.00	4.00	221.70	5,699.84	-5.21	-4.84	5.50	2.00	2.00	0.00
5,800.00	6.00	221.70	5,799.45	-11.72	-10.44	12.37	2.00	2.00	0.00
5,900.00	8.00	221.70	5,898.70	-20.82	-18.55	21.97	2.00	2.00	0.00
5,938.00	8.76	221.70	5,936.30	-24.95	-22.23	26.33	2.00	2.00	0.00
HOLD - Start 3028.65 hold at 5938.00 MD									
6,000.00	8.76	221.70	5,997.57	-32.00	-28.51	33.77	0.00	0.00	0.00
6,100.00	8.76	221.70	6,096.41	-43.37	-38.64	45.77	0.00	0.00	0.00
6,200.00	8.76	221.70	6,195.24	-54.74	-48.77	57.77	0.00	0.00	0.00
6,300.00	8.76	221.70	6,294.07	-66.11	-58.91	69.77	0.00	0.00	0.00
6,400.00	8.76	221.70	6,392.91	-77.49	-69.04	81.77	0.00	0.00	0.00
6,500.00	8.76	221.70	6,491.74	-88.86	-79.17	93.77	0.00	0.00	0.00
6,600.00	8.76	221.70	6,590.57	-100.23	-89.30	105.77	0.00	0.00	0.00
6,700.00	8.76	221.70	6,689.41	-111.60	-99.43	117.77	0.00	0.00	0.00
6,800.00	8.76	221.70	6,788.24	-122.97	-109.56	129.77	0.00	0.00	0.00
6,900.00	8.76	221.70	6,887.07	-134.34	-119.69	141.77	0.00	0.00	0.00
7,000.00	8.76	221.70	6,985.91	-145.71	-129.82	153.77	0.00	0.00	0.00
7,100.00	8.76	221.70	7,084.74	-157.08	-139.95	165.77	0.00	0.00	0.00
7,200.00	8.76	221.70	7,183.57	-168.45	-150.09	177.77	0.00	0.00	0.00
7,300.00	8.76	221.70	7,282.41	-179.82	-160.22	189.77	0.00	0.00	0.00
7,400.00	8.76	221.70	7,381.24	-191.20	-170.35	201.77	0.00	0.00	0.00
7,500.00	8.76	221.70	7,480.07	-202.57	-180.48	213.77	0.00	0.00	0.00
7,600.00	8.76	221.70	7,578.91	-213.94	-190.61	225.77	0.00	0.00	0.00
7,700.00	8.76	221.70	7,677.74	-225.31	-200.74	237.77	0.00	0.00	0.00
7,800.00	8.76	221.70	7,776.58	-236.68	-210.87	249.77	0.00	0.00	0.00
7,900.00	8.76	221.70	7,875.41	-248.05	-221.00	261.77	0.00	0.00	0.00
8,000.00	8.76	221.70	7,974.24	-259.42	-231.14	273.77	0.00	0.00	0.00
8,100.00	8.76	221.70	8,073.08	-270.79	-241.27	285.77	0.00	0.00	0.00
8,200.00	8.76	221.70	8,171.91	-282.16	-251.40	297.77	0.00	0.00	0.00
8,300.00	8.76	221.70	8,270.74	-293.53	-261.53	309.77	0.00	0.00	0.00
8,400.00	8.76	221.70	8,369.58	-304.90	-271.66	321.77	0.00	0.00	0.00
8,500.00	8.76	221.70	8,468.41	-316.28	-281.79	333.77	0.00	0.00	0.00
8,600.00	8.76	221.70	8,567.24	-327.65	-291.92	345.77	0.00	0.00	0.00
8,700.00	8.76	221.70	8,666.08	-339.02	-302.05	357.77	0.00	0.00	0.00
8,800.00	8.76	221.70	8,764.91	-350.39	-312.19	369.77	0.00	0.00	0.00
8,900.00	8.76	221.70	8,863.74	-361.76	-322.32	381.77	0.00	0.00	0.00
8,966.65	8.76	221.70	8,929.62	-369.34	-329.07	389.77	0.00	0.00	0.00
KOP - Start DLS 10.00 TFO -42.28									
9,000.00	11.45	210.33	8,962.45	-374.09	-332.43	394.73	10.00	8.06	-34.10
9,050.00	15.94	200.90	9,011.02	-384.80	-337.39	405.73	10.00	8.98	-18.86
9,100.00	20.66	195.61	9,058.48	-399.71	-342.21	420.93	10.00	9.44	-10.58
9,150.00	25.48	192.23	9,104.47	-418.73	-346.87	440.20	10.00	9.65	-6.75
9,200.00	30.36	189.88	9,148.64	-441.71	-351.32	463.42	10.00	9.76	-4.71
9,250.00	35.27	188.13	9,190.65	-468.46	-355.53	490.39	10.00	9.82	-3.51
9,300.00	40.20	186.75	9,230.18	-498.80	-359.47	520.91	10.00	9.86	-2.75
9,350.00	45.14	185.64	9,266.93	-532.48	-363.11	554.76	10.00	9.88	-2.24
9,400.00	50.09	184.69	9,300.63	-569.25	-366.42	591.67	10.00	9.90	-1.88
9,450.00	55.05	183.88	9,331.01	-608.83	-369.38	631.36	10.00	9.92	-1.63
9,500.00	60.01	183.16	9,357.84	-650.92	-371.96	673.53	10.00	9.93	-1.44
9,550.00	64.98	182.51	9,380.92	-695.21	-374.15	717.86	10.00	9.93	-1.30



TDS
Planning Report



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Site Hamon Fed Com A #5H
Company:	Legacy Reserves	TVD Reference:	KB @ 3628.00usft (McVay 4)
Project:	Lea County, NM (NAD-27 2015)	MD Reference:	KB @ 3628.00usft (McVay 4)
Site:	Hamon Fed Com A #5H	North Reference:	Grid
Well:	Hamon Fed Com A #5H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,600.00	69.95	181.91	9,400.08	-741.34	-375.92	764.01	10.00	9.94	-1.20
9,650.00	74.92	181.34	9,415.16	-788.97	-377.27	811.64	10.00	9.94	-1.13
9,700.00	79.89	180.80	9,426.06	-837.75	-378.18	860.37	10.00	9.94	-1.08
9,750.00	84.87	180.28	9,432.69	-887.29	-378.65	909.83	10.00	9.95	-1.04
9,801.61	90.00	179.75	9,435.00	-938.83	-378.66	961.27	10.00	9.95	-1.03
EOC - Start 4618.61 hold at 9801.61 MD									
9,900.00	90.00	179.75	9,435.00	-1,037.22	-378.24	1,059.43	0.00	0.00	0.00
10,000.00	90.00	179.75	9,435.00	-1,137.22	-377.81	1,159.19	0.00	0.00	0.00
10,100.00	90.00	179.75	9,435.00	-1,237.21	-377.37	1,258.95	0.00	0.00	0.00
10,200.00	90.00	179.75	9,435.00	-1,337.21	-376.94	1,358.72	0.00	0.00	0.00
10,300.00	90.00	179.75	9,435.00	-1,437.21	-376.51	1,458.48	0.00	0.00	0.00
10,400.00	90.00	179.75	9,435.00	-1,537.21	-376.08	1,558.24	0.00	0.00	0.00
10,500.00	90.00	179.75	9,435.00	-1,637.21	-375.65	1,658.01	0.00	0.00	0.00
10,600.00	90.00	179.75	9,435.00	-1,737.21	-375.21	1,757.77	0.00	0.00	0.00
10,700.00	90.00	179.75	9,435.00	-1,837.21	-374.78	1,857.53	0.00	0.00	0.00
10,800.00	90.00	179.75	9,435.00	-1,937.21	-374.35	1,957.30	0.00	0.00	0.00
10,900.00	90.00	179.75	9,435.00	-2,037.21	-373.92	2,057.06	0.00	0.00	0.00
11,000.00	90.00	179.75	9,435.00	-2,137.21	-373.48	2,156.82	0.00	0.00	0.00
11,100.00	90.00	179.75	9,435.00	-2,237.21	-373.05	2,256.59	0.00	0.00	0.00
11,200.00	90.00	179.75	9,435.00	-2,337.20	-372.62	2,356.35	0.00	0.00	0.00
11,300.00	90.00	179.75	9,435.00	-2,437.20	-372.19	2,456.12	0.00	0.00	0.00
11,400.00	90.00	179.75	9,435.00	-2,537.20	-371.76	2,555.88	0.00	0.00	0.00
11,500.00	90.00	179.75	9,435.00	-2,637.20	-371.32	2,655.64	0.00	0.00	0.00
11,600.00	90.00	179.75	9,435.00	-2,737.20	-370.89	2,755.41	0.00	0.00	0.00
11,700.00	90.00	179.75	9,435.00	-2,837.20	-370.46	2,855.17	0.00	0.00	0.00
11,800.00	90.00	179.75	9,435.00	-2,937.20	-370.03	2,954.93	0.00	0.00	0.00
11,900.00	90.00	179.75	9,435.00	-3,037.20	-369.59	3,054.70	0.00	0.00	0.00
12,000.00	90.00	179.75	9,435.00	-3,137.20	-369.16	3,154.46	0.00	0.00	0.00
12,100.00	90.00	179.75	9,435.00	-3,237.20	-368.73	3,254.22	0.00	0.00	0.00
12,200.00	90.00	179.75	9,435.00	-3,337.20	-368.30	3,353.99	0.00	0.00	0.00
12,300.00	90.00	179.75	9,435.00	-3,437.19	-367.86	3,453.75	0.00	0.00	0.00
12,400.00	90.00	179.75	9,435.00	-3,537.19	-367.43	3,553.52	0.00	0.00	0.00
12,500.00	90.00	179.75	9,435.00	-3,637.19	-367.00	3,653.28	0.00	0.00	0.00
12,600.00	90.00	179.75	9,435.00	-3,737.19	-366.57	3,753.04	0.00	0.00	0.00
12,700.00	90.00	179.75	9,435.00	-3,837.19	-366.14	3,852.81	0.00	0.00	0.00
12,800.00	90.00	179.75	9,435.00	-3,937.19	-365.70	3,952.57	0.00	0.00	0.00
12,900.00	90.00	179.75	9,435.00	-4,037.19	-365.27	4,052.33	0.00	0.00	0.00
13,000.00	90.00	179.75	9,435.00	-4,137.19	-364.84	4,152.10	0.00	0.00	0.00
13,100.00	90.00	179.75	9,435.00	-4,237.19	-364.41	4,251.86	0.00	0.00	0.00
13,200.00	90.00	179.75	9,435.00	-4,337.19	-363.97	4,351.62	0.00	0.00	0.00
13,300.00	90.00	179.75	9,435.00	-4,437.19	-363.54	4,451.39	0.00	0.00	0.00
13,400.00	90.00	179.75	9,435.00	-4,537.18	-363.11	4,551.15	0.00	0.00	0.00
13,500.00	90.00	179.75	9,435.00	-4,637.18	-362.68	4,650.91	0.00	0.00	0.00
13,600.00	90.00	179.75	9,435.00	-4,737.18	-362.25	4,750.68	0.00	0.00	0.00
13,700.00	90.00	179.75	9,435.00	-4,837.18	-361.81	4,850.44	0.00	0.00	0.00
13,800.00	90.00	179.75	9,435.00	-4,937.18	-361.38	4,950.21	0.00	0.00	0.00
13,900.00	90.00	179.75	9,435.00	-5,037.18	-360.95	5,049.97	0.00	0.00	0.00
14,000.00	90.00	179.75	9,435.00	-5,137.18	-360.52	5,149.73	0.00	0.00	0.00
14,100.00	90.00	179.75	9,435.00	-5,237.18	-360.08	5,249.50	0.00	0.00	0.00
14,200.00	90.00	179.75	9,435.00	-5,337.18	-359.65	5,349.26	0.00	0.00	0.00
14,300.00	90.00	179.75	9,435.00	-5,437.18	-359.22	5,449.02	0.00	0.00	0.00
14,400.00	90.00	179.75	9,435.00	-5,537.17	-358.79	5,548.79	0.00	0.00	0.00
14,420.23	90.00	179.75	9,435.00	-5,557.40	-358.70	5,568.96	0.00	0.00	0.00

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Site Hamon Fed Com A #5H
Company:	Legacy Reserves	TVD Reference:	KB @ 3628.00usft (McVay 4)
Project:	Lea County, NM (NAD-27 2015)	MD Reference:	KB @ 3628.00usft (McVay 4)
Site:	Hamon Fed Com A #5H	North Reference:	Grid
Well:	Hamon Fed Com A #5H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral #1		
Design:	Design #1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
TD at 14420.23									


Design Targets

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
Target Window (HFCA # - plan hits target center - Rectangle (sides W100.00 H4,618.60 D30.00)	0.00	179.75	9,435.00	-5,557.40	-358.70	575,923.00	726,417.80	32° 34' 52.207 N	103° 35' 53.791 W
LTP/BHL (HFCA #5H/L1 - plan hits target center - Point	0.00	0.00	9,435.00	-5,557.40	-358.70	575,923.00	726,417.80	32° 34' 52.207 N	103° 35' 53.791 W
EOC (HFCA #5H/L1 De - plan hits target center - Point	0.00	0.00	9,435.00	-938.83	-378.66	580,541.58	726,397.83	32° 35' 37.909 N	103° 35' 53.651 W


Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
5,500.00	5,500.00	0.00	0.00	NUDGE - Start Build 2.00
5,938.00	5,936.30	-24.95	-22.23	HOLD - Start 3028.65 hold at 5938.00 MD
8,966.65	8,929.62	-369.34	-329.07	KOP - Start DLS 10.00 TFO -42.28
9,801.61	9,435.00	-938.83	-378.66	EOC - Start 4618.61 hold at 9801.61 MD
14,420.23	9,435.00	-5,557.40	-358.70	TD at 14420.23

McVay Rig 4

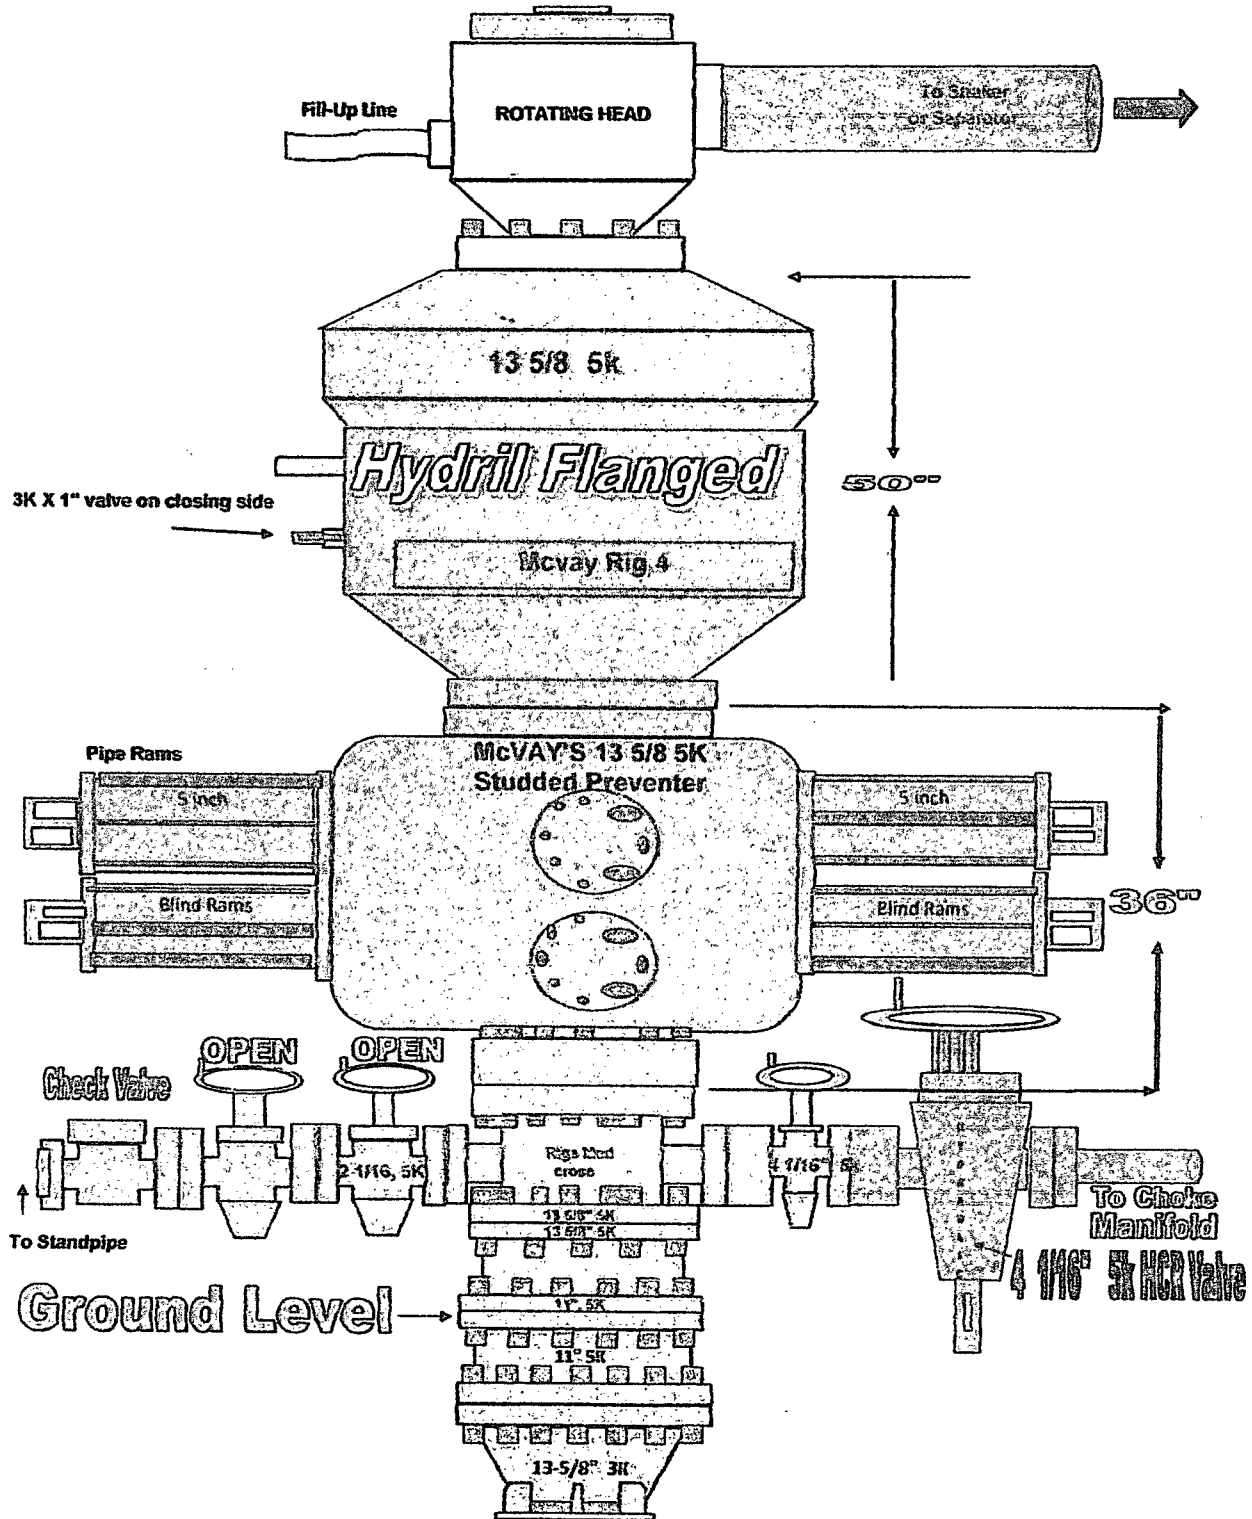

Note: Dimensional information reflected on this drawing are estimated measurements only.

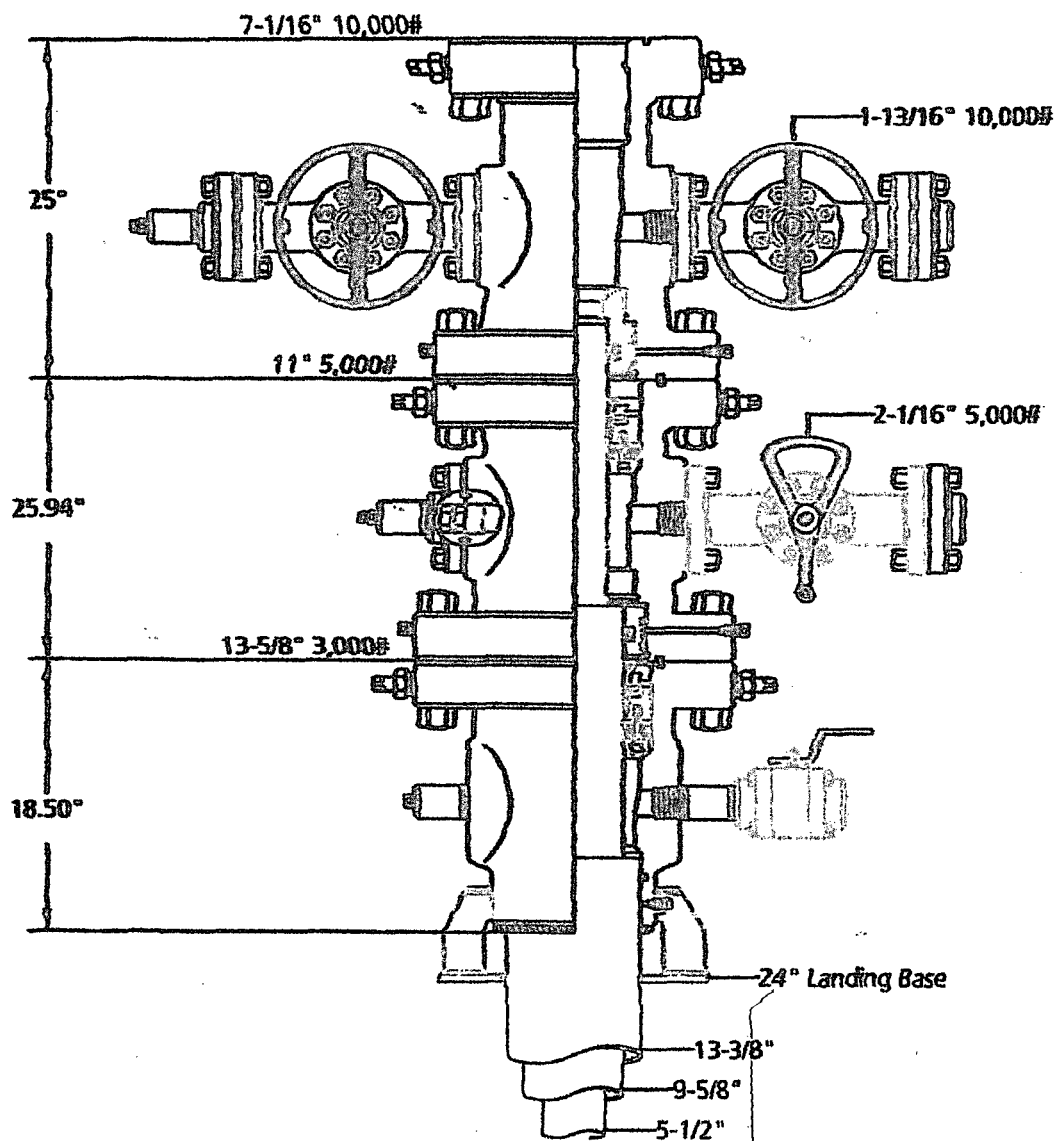


Legacy Reserves
Conventional 3-String

 CAMERON

jeanette	7-15-15	#	1274616
----------	---------	---	---------

McVay 4 Choke Manifold

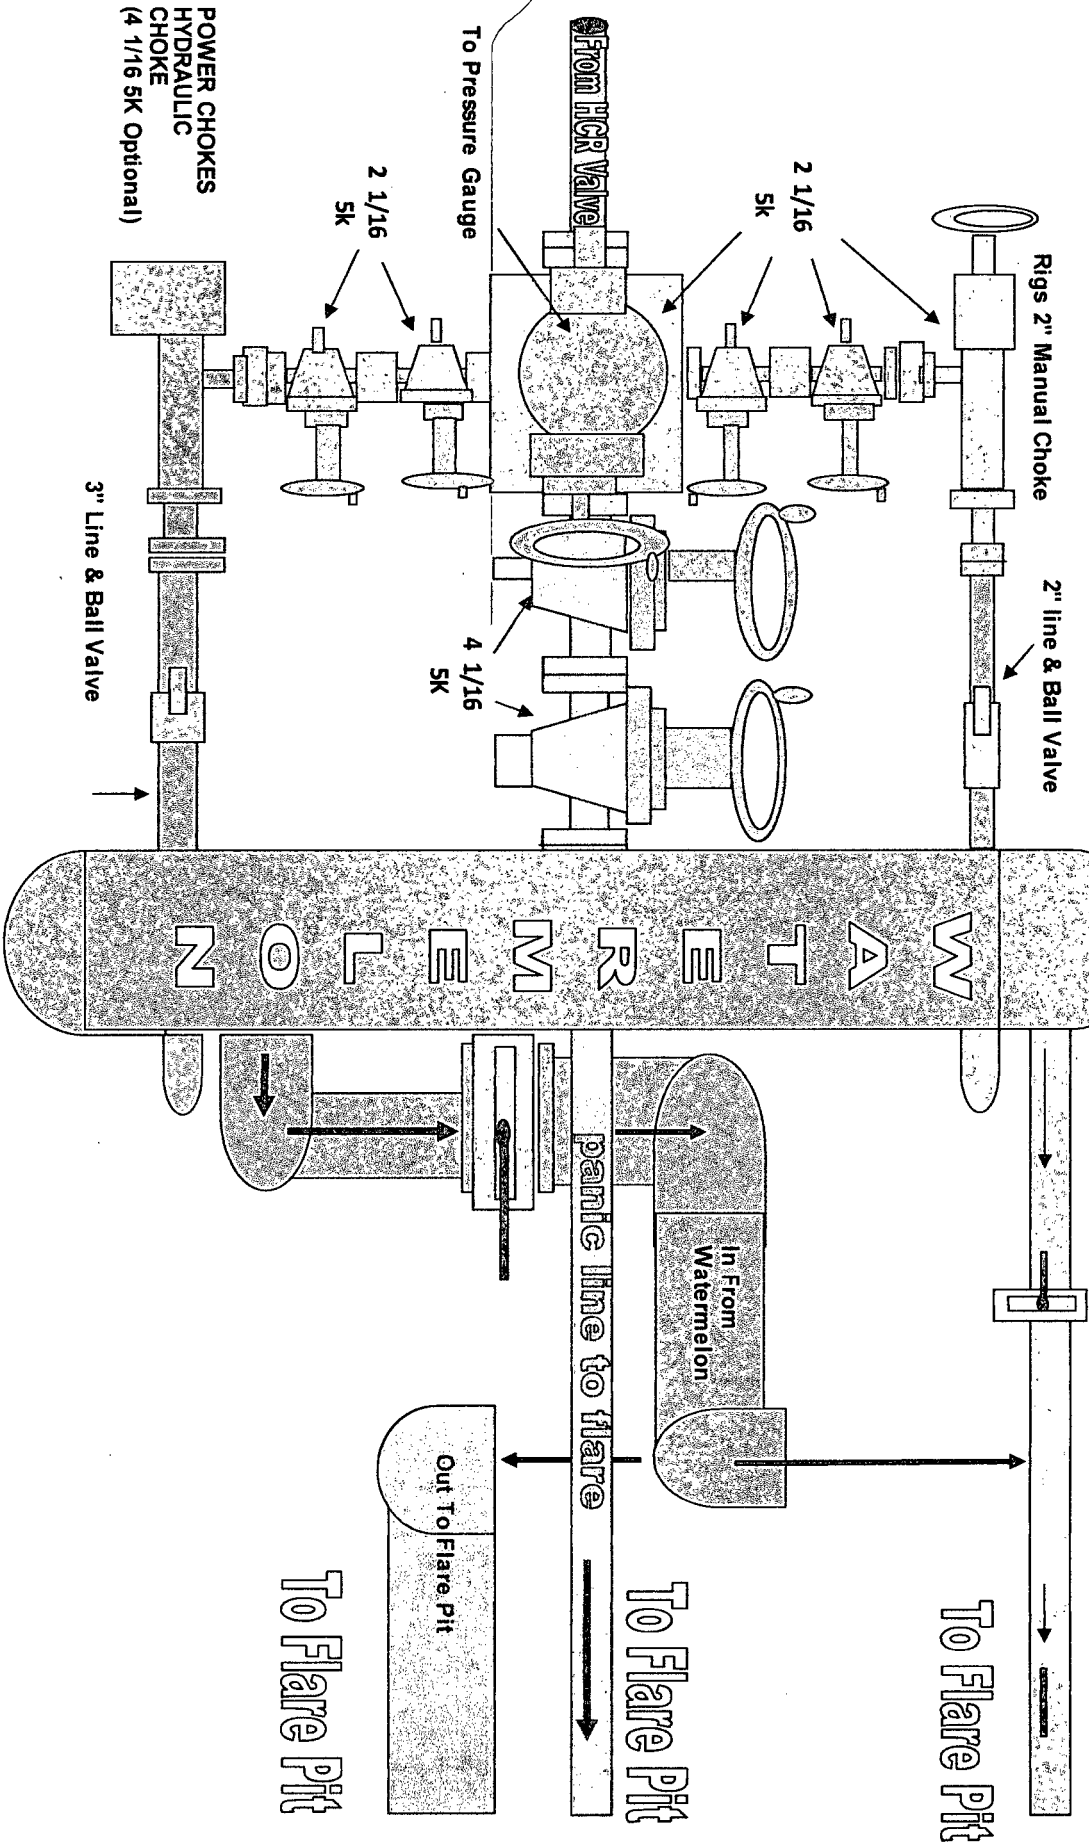

*We use the same choke manifolds for all aspects of our operations & all are rated to 10K;

* All connections downstream from BOP thru chokes Are Flanged, All connections downstream from chokes are Flanged .

Design Plan, Operating & Maintenance Plan & Closure Plan for the OCD Form C-144
Hamon Fed Com A ~~634~~ 1H - 4H & 5H-12H

DESIGN PLAN:

Fluid & cuttings coming from drilling operations will pass over the Shale Shaker with the cuttings going to the CRI haul off bin and the cleaned fluid returning to the working steel pits.

Equipment includes:

2-500 bbl steel tanks (fresh water for drilling)
2-700 bbl steel working pits (1400 bbls total)
2-20 cu yards steel haul off bins
2-pumps (CE FB1300)
2-shale shakers
1-mud cleaner (if needed)
1-centrifuge (if needed)

OPERATING AND MAINTENANCE PLAN:

Inspection to occur every tour for proper operation of system and individual components. If any problems are found they will be repaired and/or corrected immediately.

CLOSURE PLAN:

All haul bins containing cuttings will be removed from location and hauled to Controlled Recovery, Inc. (NM-01-0006) disposal site located near mile marker 66 on Highway 62/180.



Blain K. Lewis

Senior Operations Engineer

Plat for Closed Loop System

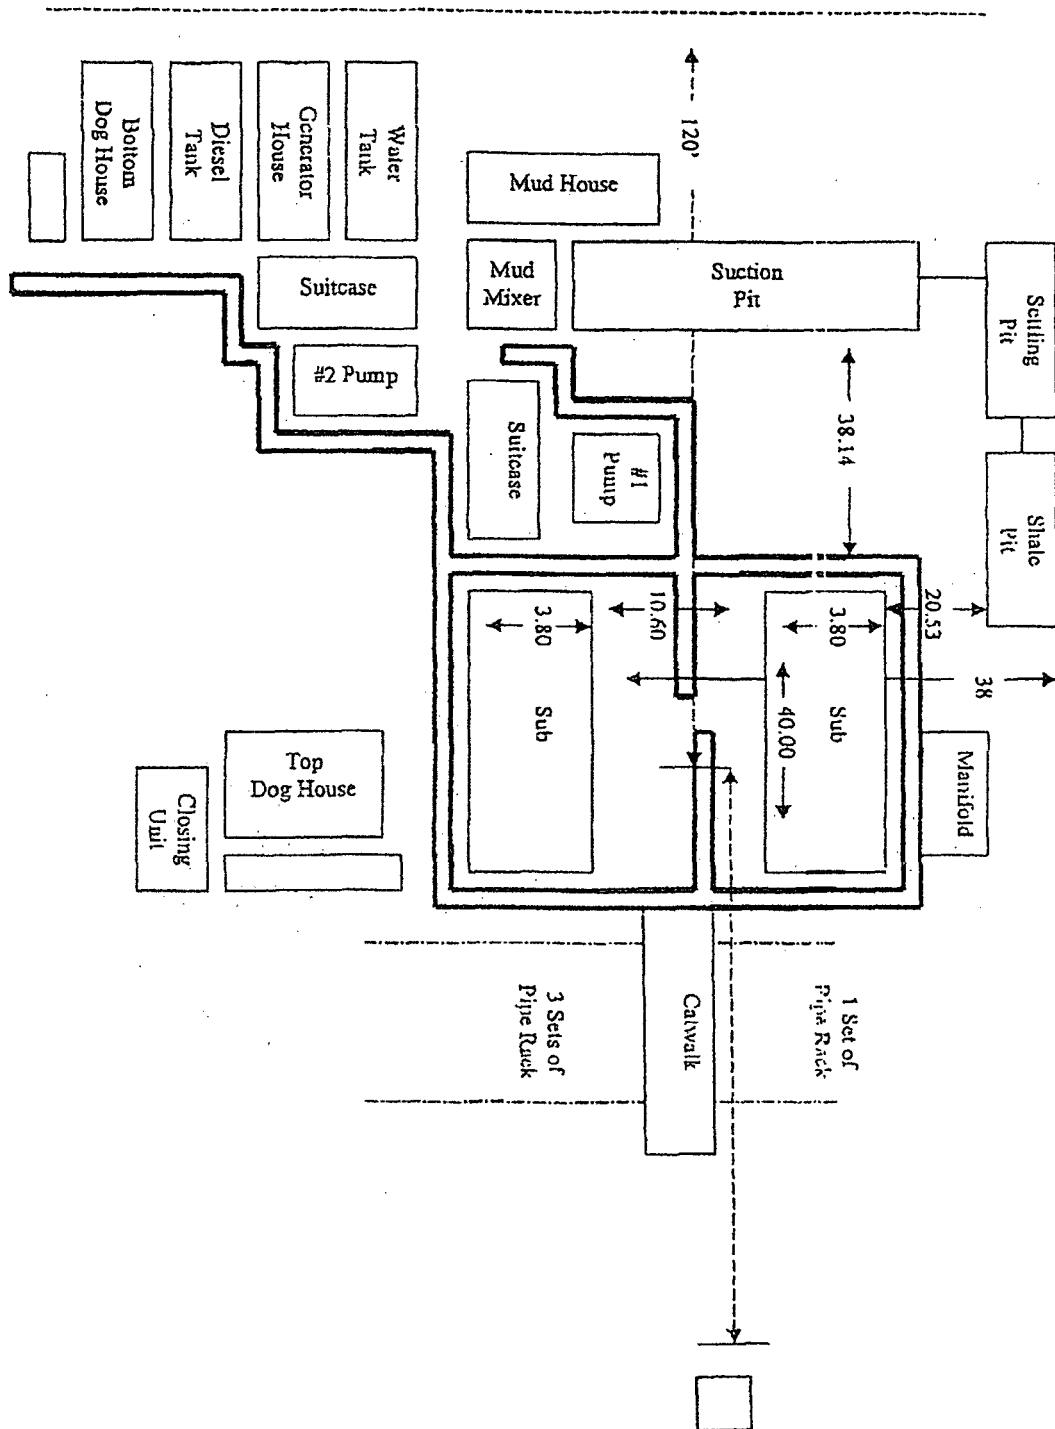


EXHIBIT D

Rig Plat Only
HAMON FED COM A 5H, 6H, 7H, 8H
V-DOOR SOUTHEAST

