Form 3160-3 FORM APPROVED (June 2015) OMB No. 1004-0137 Expires: January 31, 2018 **UNITED STATES** DEPARTMENT OF THE INTERIOR 5. Lease Serial No. NMNM0000587 BUREAU OF LAND MANAGEMENT APPLICATION FOR PERMIT TO DRILL OR REENTER 6. If Indian, Allotee or Tribe Name 7. If Unit or CA Agreement, Name and No. **✓** DRILL la. Type of work: REENTER BELL LAKE / NMNM 068292X 1b. Type of Well: ✓ Oil Well Gas Well Other 8. Lease Name and Well No. Hydraulic Fracturing 1c. Type of Completion: ✓ Single Zone Multiple Zone BELL LAKE UNIT NORTH [316707] 215H 2. Name of Operator 9. API Well No [12361] KAISER FRANCIS OIL COMPANY 10. Field and Pool, or Exploratory 3a. Address 3b. Phone No. (include area code) OJO CHISO/WOLFCAMP, SOUTHWEST PO BOX 21468, TULSA, OK 74121-1468 4. Location of Well (Report location clearly and in accordance with any State requirements.*) 11. Sec., T. R. M. or Blk. and Survey or Area SEC 5/T23S/R34E/NMP At surface SENW / 2058 FNL / 2230 FWL / LAT 32.3352497 / LONG -103.4934925 At proposed prod. zone SESW / 100 FSL / 2110 FWL / LAT 32.3121507 / LONG -103.4938531 12. County or Parish 14. Distance in miles and direction from nearest town or post office* 13. State 20 miles NM 15. Distance from proposed* 16. No of acres in lease 17. Spacing Unit dedicated to this well 410 feet location to nearest property or lease line, ft. 634.55 480.0 (Also to nearest drig. unit line, if any) 18. Distance from proposed location* 19. Proposed Depth 20, BLM/BIA Bond No. in file to nearest well, drilling, completed, 30 feet 10195 feet / 18304 feet FED: WYB000055 applied for, on this lease, ft. 22. Approximate date work will start* 21. Elevations (Show whether DF, KDB, RT, GL, etc.) 23. Estimated duration 3437 feet 07/01/2020 40 days 24. Attachments The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable) 1. Well plat certified by a registered surveyor. 4. Bond to cover the operations unless covered by an existing bond on file (see 2. A Drilling Plan. Item 20 above). 3. A Surface Use Plan (if the location is on National Forest System Lands, the 5. Operator certification. SUPO must be filed with the appropriate Forest Service Office) 6. Such other site specific information and/or plans as may be requested by the BLM. 25. Signature Name (Printed/Typed) Date (Electronic Submission) STORMI DAVIS / Ph: (918) 491-0000 02/13/2020 Regulatory Analyst Approved by (Signature) Name (Printed/Typed) Date (Electronic Submission) Cody Layton / Ph: (575) 234-5959 11/30/2020 Assistant Field Manager Lands & Minerals Carlsbad Field Office Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Conditions of approval, if any, are attached. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. GCP Rec 03/15/2021 APPROVED WITH CONDITION SL (Continued on page 2) *(Instructions on page 2) Approval Date: 11/30/2020

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME: KAISER FRANCIS OIL COMPANY

LEASE NO.: | NMNM0000587

WELL NAME & NO.: | BELL LAKE UNIT NORTH 215H

SURFACE HOLE FOOTAGE: 2058'/N & 2230'/W **BOTTOM HOLE FOOTAGE** 100'/S & 2110'/W

LOCATION: Section 5, T.23 S., R.34 E., NMPM

COUNTY: Lea County, New Mexico

COA

H2S	← Yes	© No	
Potash	None	○ Secretary	← R-111-P
Cave/Karst Potential	© Low	← Medium	← High
Cave/Karst Potential	C Critical		
Variance	○ None	Flex Hose	Other
Wellhead	© Conventional	Multibowl	← Both
Other	☐4 String Area	Capitan Reef	□WIPP
Other	Fluid Filled	Cement Squeeze	Pilot Hole
Special Requirements	Water Disposal	COM	V Unit

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H2S) monitors shall be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

- 1. The 13-3/8 inch surface casing shall be set at approximately 1515 feet (a minimum of 25 feet (Lea County) into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of 8

Page 1 of 8

- <u>hours</u> or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.
- 2. The 9-5/8 inch intermediate casing shall be set at 4952 feet. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above.
 Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
- 3. The minimum required fill of cement behind the 5-1/2 inch production casing is:

Option 1 (Single Stage):

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.
- Excess cement calculates to less than 25%; More cement may be needed.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).

2. BOP Requirements

Option 1

a. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 2000 (2M) psi.

Page 2 of 8

b. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the intermediate casing shoe shall be **3000 (3M)** psi.

Option 2

Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 10,000 (10M) psi. Variance is approved to use a 5000 (5M) Annular which shall be tested to 5000 (5M) psi.

- a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Unit Wells

The well sign for a unit well shall include the unit number in addition to the surface and bottom hole lease numbers. This also applies to participating area numbers. If a participating area has not been established, the operator can use the general unit designation, but will replace the unit number with the participating area number when the sign is replaced.

Commercial Well Determination

A commercial well determination shall be submitted after production has been established for at least six months. (This is not necessary for secondary recovery unit wells)

Page 3 of 8

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)
 - Eddy County
 Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, (575) 361-2822
 - Lea County
 Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
 393-3612
- 1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
- 2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on

Page 4 of 8

- which the draw works are located, this does not include the dog house or stairway area.
- 3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

- 1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
- 2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing intergrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- 3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing intergrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- 4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
- 5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
- 6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.

Page 5 of 8

- 7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
- 8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

- All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
- 2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
- 3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
- 4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.

Page 6 of 8

- 5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
 - c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
 - e. The results of the test shall be reported to the appropriate BLM office.
 - f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
 - g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to

Page 7 of 8

the test at full stack pressure.

h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

RI11252020

Page 8 of 8



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Application Data Report

11/30/2020

APD ID: 10400054238

Submission Date: 02/13/2020

Highlighted data

Operator Name: KAISER FRANCIS OIL COMPANY

reflects the most recent changes

Well Name: BELL LAKE UNIT NORTH

Well Number: 215H

Show Final Text

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

APD ID: 10400054238 Tie to previous NOS? N

Submission Date: 02/13/2020

BLM Office: CARLSBAD

User: Stormi Davis

Title: Regulatory Analyst

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM0000587

Lease Acres: 634.55

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? YES

Federal or Indian agreement: FEDERAL

Agreement number: NMNM068292X

Agreement name: BELL LAKE

Permitting Agent? YES

Keep application confidential? Y

APD Operator: KAISER FRANCIS OIL COMPANY

Operator letter of designation:

Operator Info

Operator Organization Name: KAISER FRANCIS OIL COMPANY

Operator Address: 6733 S. Yale Ave.

Zip: 74121

Operator PO Box: PO Box 21468

Operator City: Tulsa

State: OK

Operator Phone: (918)491-0000

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: BELL LAKE UNIT NORTH

Well Number: 215H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: OJO CHISO

Pool Name: WOLFCAMP,

SOUTHWEST

Is the proposed well in an area containing other mineral resources? NATURAL GAS,OIL

Page 1 of 3

Well Number: 215H Well Name: BELL LAKE UNIT NORTH

Is the proposed well in an area containing other mineral resources? NATURAL GAS,OIL

Is the proposed well in a Helium production area? N Use Existing Well Pad? N

New surface disturbance?

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name: NORTH BELL LAKE UNIT Number: 16

Well Class: HORIZONTAL

Number of Legs: 1

Well Work Type: Drill Well Type: OIL WELL **Describe Well Type:**

Well sub-Type: EXPLORATORY (WILDCAT)

Describe sub-type:

Distance to town: 20 Miles

Distance to nearest well: 30 FT

Distance to lease line: 410 FT

Reservoir well spacing assigned acres Measurement: 480 Acres

Well plat:

BLUN_215H_C102_20200212141136.pdf

Pay.gov_20200213063924.pdf

Well work start Date: 07/01/2020

Duration: 40 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number: 7670

Reference Datum: GROUND LEVEL

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
SHL Leg #1	205 8	FNL	223 0	FW L	23S	34E	5	Aliquot SENW	32.33524 97	- 103.4934 925	LEA		MEXI CO	F	NMNM 000124 4A	343 7	0	0	N
KOP Leg #1	205 8	FNL	223 0	FW L	23S	34E		Aliquot SENW	32.33524 97	- 103.4934 925	LEA		NEW MEXI CO	F	NMNM 000124 4A	- 618 5	962 4	962 2	N

Well Name: BELL LAKE UNIT NORTH Well Number: 215H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	DVT	Will this well produce from this lease?
PPP Leg #1-1	264 0	FSL	220 5	FW L	238	34E	5	Aliquot NESW	32.33364 07	- 103.4934 264	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 000058 7	- 679 5	104 84	102 32	Υ
PPP Leg #1-2	260 0	FSL	220 5	FW L	23S	34E	5	Aliquot NESW	32.33353 09	- 103.4934 286	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 000058 7	- 675 8	105 24	101 95	Υ
PPP Leg #1-3	0	FNL	220 0	FW L	238	34E	8	Aliquot NENW	32.32638 59	- 103.4935 724	LEA	NEW MEXI CO	NEW MEXI CO	F	NMLC0 064881	- 679 5	131 24	102 32	Υ
PPP Leg #1-4	264 0	FSL	220 0	FW L	23S	34E	8	Aliquot NESW	32.31913 04	- 103.4937 17	LEA	NEW MEXI CO	NEW MEXI CO	S	STATE	- 675 8	157 64	101 95	Υ
EXIT Leg #1	100	FSL	211 0	FW L	23S	34E	8	Aliquot SESW	32.31215 07	- 103.4938 531	LEA	NEW MEXI CO		S	STATE	- 675 8	183 04	101 95	Υ
BHL Leg #1	100	FSL	211 0	FW L	238	34E	8	Aliquot SESW	32.31215 07	- 103.4938 531	LEA	NEW MEXI CO	NEW MEXI CO	S	STATE	- 675 8	183 04	101 95	Υ



Melanie Wilson <nmogrservices@gmail.com>

Pay.gov Payment Confirmation: BLM Oil and Gas Online Payment

1 message

notification@pay.gov <notification@pay.gov>
To: nmogrservices@gmail.com

Thu, Feb 13, 2020 at 6:37 AM



An official email of the United States government



Your payment has been submitted to Pay.gov and the details are below. If you have any questions regarding this payment, please contact BLM OC CBS Customer Service at (303) 236-6795 or BLM_OC_CBS_Customer_Service@blm.gov.

Application Name: BLM Oil and Gas Online Payment

Pay.gov Tracking ID: 26NGV486 Agency Tracking ID: 75951499348

Transaction Type: Sale

Transaction Date: 02/13/2020 08:37:26 AM EST Account Holder Name: George B Kaiser

Transaction Amount: \$10,230.00

Card Type: Visa

Card Number: *********0061

Company: Kaiser-Francis Oil Company

APD IDs: 10400054238

Lease Numbers: NMNM0000587

Well Numbers: 215H

Note: You will need your Pay.gov Tracking ID to complete your APD transaction in AFMSS II. Please ensure

you write this number down upon completion of payment.

THIS IS AN AUTOMATED MESSAGE. PLEASE DO NOT REPLY.



Pay.gov is a program of the U.S. Department of the Treasury, Bureau of the Fiscal Service



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Well Name: BELL LAKE UNIT NORTH

Drilling Plan Data Report

11/30/2020

APD ID: 10400054238

Submission Date: 02/13/2020

Highlighted data reflects the most

recent changes

Operator Name: KAISER FRANCIS OIL COMPANY

Well Number: 215H

Show Final Text

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
660658		3437	0	0	OTHER : Surface	NONE	N
660659	RUSTLER	2237	1200	1200	SANDSTONE	NONE	N
660660	SALADO	1837	1600	1600	SALT	NONE	N
660661	TOP SALT	1637	1800	1800	SALT	NONE	N
660662	BASE OF SALT	-1263	4700	4700	SALT	NONE	N
660663	LAMAR	-1513	4950	4950	SANDSTONE	NATURAL GAS, OIL	N
660664	BELL CANYON	-1713	5150	5150	SANDSTONE	NATURAL GAS, OIL	N
660665	CHERRY CANYON	-2738	6175	6175	SANDSTONE	NATURAL GAS, OIL	N
660666	BRUSHY CANYON	-4063	7500	7500	SANDSTONE	NATURAL GAS, OIL	N
660667	BONE SPRING	-5063	8500	8500	LIMESTONE	NATURAL GAS, OIL	N
660668	AVALON SAND	-5158	8595	8595	SANDSTONE	NATURAL GAS, OIL	N
660669	BONE SPRING 1ST	-6063	9500	9500	SANDSTONE	NATURAL GAS, OIL	N
660676	BONE SPRING 2ND	-6558	9995	9995	SANDSTONE	NATURAL GAS, OIL	Υ

Section 2 - Blowout Prevention

Well Name: BELL LAKE UNIT NORTH Well Number: 215H

Pressure Rating (PSI): 5M

Rating Depth: 13000

Equipment: A 5M system will be installed according to Onshore Order #2 consisting of an Annular Preventer, BOP with two rams, a blind ram and safety valves and appropriate handles located on the rig floor. BOP will be equipped with 2 side outlets (choke side shall be a minimum 3 line, and kill side will be a minimum 2 line). Kill line will be installed with (2) valves and a check valve (2 min) of proper pressure rating for the system. Remote kill line (2 min) will be installed and ran to the outer edge of the substructure and be unobstructed. A manual and hydraulic valve (3 min) will be installed on the choke line, 3 chokes will be used with one being remotely controlled. Fill up line will be installed above the uppermost preventer. Pressure gauge of proper pressure rating will be installed on choke manifold. Upper and lower kelly cocks will be utilized with handles readily available in plain sight. A float sub will be available at all times. All connections subject to well pressure will be flanged, welded, or clamped.

Requesting Variance? YES

Variance request: Flex Hose Variance MultiBowl Wellhead

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all of the components installed will be functional and tested.

Choke Diagram Attachment:

BLUN_215H_Choke_Manifold_20200213061450.pdf

BOP Diagram Attachment:

Cactus_Flex_Hose_16C_Certification_20200203142843.pdf
BLUN_215H_BOP_20200213061511.pdf
BLUN_215H_Well_Head_20200213061512.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1		17.5	13.375	NEW	API	N	0	1250	0	1250	3437	2187	1250	J-55	54.5	BUTT	1.9	4.7	DRY	13.3	DRY	12.5
2	INTERMED IATE	12.2 5	9.625	NEW	API	N	0	4952	0	4950		-1513	4952	HCP -110		LT&C	1.8	3.4	DRY	6.4	DRY	6.4
3	PRODUCTI ON	8.75	5.5	NEW	API	N	0	18304	0	10195		-6758	18304	P- 110	20	OTHER - GBCD	2.4	2.7	DRY	3.3	DRY	3.1

Casing Attachments

Well Name: BELL LAKE UNIT NORTH Well Number: 215H

Casing Attachments

Casing ID: 1

String Type: SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

BLUN_215H_Casing_Assumptions_20200213061842.pdf

Casing ID: 2

String Type: INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

BLUN_215H_Casing_Assumptions_20200213061659.pdf

Casing ID: 3

String Type:PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

GBCD_5.5in_Connection_Spec_Sheet_20200124075519.pdf

BLUN_215H_Casing_Assumptions_20200213061811.pdf

Section 4 - Cement

Well Name: BELL LAKE UNIT NORTH Well Number: 215H

String Type	Lead/Tail	Stage Tool Depth	Тор МD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	1250	700	1.7	13.5	1223	75	HALCEM	4% Bentonite
SURFACE	Tail		0	1250	248	1.3	14.8	331	75	Halcem	0.125 #/sk Poly Flake
INTERMEDIATE	Lead		0	4952	790	2.08	12.5	1650	50	EconoCem	3#/sk Kol Seal
INTERMEDIATE	Tail		0	4952	545	1.3	14.8	726	50	Halcem	none
PRODUCTION	Lead		4000	1830 4	397	3.5	10.5	1386	10	NeoCem	2#/sk Kol Seal
PRODUCTION	Tail		4000	1830 4	1814	1.2	14.5	2219	10	Versacem	none

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all time.

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	ЬН	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
4950	1019 5	OIL-BASED MUD	8.7	8.9							
1250	4950	OTHER : Diesel- Brine Emulsion	8.7	8.9							
0	1250	OTHER : Fresh Water	8.4	9							

Well Name: BELL LAKE UNIT NORTH Well Number: 215H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Top of cement on production casing will be determined by calculation.

List of open and cased hole logs run in the well:

DIRECTIONAL SURVEY, GAMMA RAY LOG, MUD LOG/GEOLOGIC LITHOLOGY LOG, MUD LOG/GEOLOGICAL LITHOLOGY LOG,

Coring operation description for the well:

None planned

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 4718

Anticipated Surface Pressure: 2466

Anticipated Bottom Hole Temperature(F): 165

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geoharzards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

BLUN_H2S_Plan_20200114113955.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

BLUN_215H_Directional_Plan_20200213062334.pdf

Other proposed operations facets description:


Gas Capture Plan attached

Other proposed operations facets attachment:

BLUN_Pad_16_Gas_Capture_Plan_20200213062342.pdf

Other Variance attachment:

 $\label{lem:cactus_flex_Hose_16C_Certification_20200203143842.pdf} $$BLUN_215H_Well_Head_20200213062359.pdf$

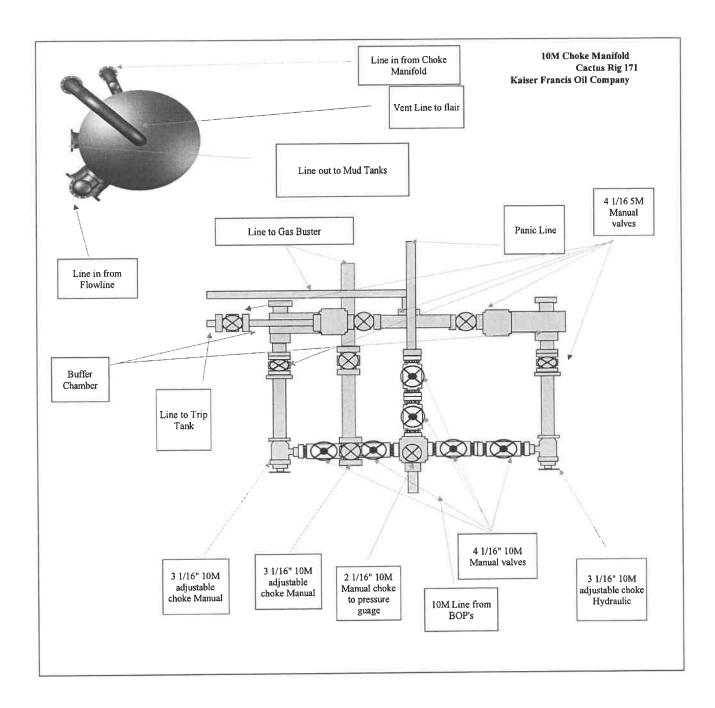

KAISER-FRANCIS OIL COMPANY HYDROGEN SULFIDE (H2S) CONTINGENCY PLAN FOR DRILLING/COMPLETION WORKOVER/FACILITY

Bell Lake Unit North SECTION 1 -T23S-R33E SECTION 6 -T23S-R34E SECTION 5 -T23S-R34E

LEA COUNTY, NM

This well/facility is not expected to have H₂S, but due to the sensitive location, the following is submitted as requested.

TABLE OF CONTENTS

Emergency Response Activation and General Responsibilities	3
Individual Responsibilities During An H₂S Release	4
Procedure For Igniting An Uncontrollable Condition	5
Emergency Phone Numbers	6
Protection Of The General Public/Roe	7
Characteristics Of H ₂ S And SO ₂	8
Training	8
Public Relations	8
Maps	

EMERGENCY RESPONSE ACTIVATION AND GENERAL RESPONSIBILITIES

Activation of the Emergency Action Plan

In the event of any emergency situation, all personnel on location should first ensure that the following items are initiated. After that, they should refer to the appropriate Specific Emergency Guidance sections below for further responsibilities:

- Notify the senior ranking contract representative on site.
- 2. Notify Kaiser-Francis representative in charge.
- 3. Notify civil authorities if the Kaiser-Francis Representative cannot be contacted and the situation dictates.
- 4. Perform rescue and first aid as required (without jeopardizing additional personnel).

General Responsibilities

In the event of an H₂S emergency, the following plan will be initiated.

- 1) All personnel will immediately evacuate to an up-wind and if possible up-hill "safe area".
- 2) If for any reason a person must enter the hazardous area, they must wear a SCBA (Self contained breathing apparatus).
- 3) Always use the "buddy system".
- 4) Isolate the well/problem if possible.
- 5) Account for all personnel
- 6) Display the proper colors, warning all unsuspecting personnel of the danger at hand
- 7) Contact the Company personnel as soon as possible if not at the location. (use the enclosed call list as instructed)

At this point the company representative will evaluate the situation and coordinate the necessary duties to bring the situation under control, and if necessary, the notification of emergency response agencies and residents.

INDIVIDUAL RESPONSIBILITIES DURING AN H2S RELEASE

The following procedures and responsibilities will be implemented on activation of the H_2S siren and lights.

All Personnel:

1. On alarm, don escape unit (if available) and report to upwind briefing area.

Rig Manager/Tool Pusher:

- 1. Check that all personnel are accounted for and their condition.
- 2. Administer or arrange for first aid treatment, and/or call EMTs as needed.
- 3. Identify two people best suited to secure well and perform rescue, and instruct them to don SCBA.
- 4. Notify Contract management and Kaiser-Francis Representative.
- 5. Remain at the briefing area, assess and monitor personnel and overall situation for hazards or conditions that might warrant a change in the action plan.

Two People Responsible for Shut-in and Rescue:

- Don SCBA and acquire tools to secure well and perform rescue, i.e., wrenches, retrieval ropes, etc.
- 2. Utilize the buddy system to secure well and perform rescue(s).
- 3. Return to the briefing area and stand by for further instructions.

All Other Personnel:

1. Isolate the area and prevent entry by other persons into the 100 ppm ROE.

Additionally the first responder(s) must evacuate any public places encompassed by the 100 ppm ROE. First responder(s) must take care not to injure themselves during this operation. Company and/or local officials must be contacted to aid in this operation. Evacuation of the public should be beyond the 100 ppm ROE.

Kaiser-Francis Oil Company Representative:

- 1. Remain at the briefing area, assess and monitor personnel and overall situation for hazards or conditions that might warrant a change in the action plan.
- 2. Notify company management or Local Incident Commander, and Police, Fire Department, or other local emergency services as required.

PROCEDURE FOR IGNITING AN UNCONTROLLABLE CONDITION:

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police shall be the Incident Command of any major release.

The decision to ignite a well should be a last resort and one if not both of the following pertain.

- 1) Human life and/or property are in danger.
- 2) There is no hope of bringing the situation under control with the prevailing conditions at the site.

INSTRUCTIONS FOR IGNITION:

- 1) Two people are required. They must be equipped with positive pressure; self contained breathing apparatus and a "D"-ring style, full body, OSHA approved safety harness. Non-flammable rope will be attached.
- One of the people will be a qualified safety person who will test the atmosphere for H₂S, Oxygen, & LFL. The other person will be the company supervisor; he is responsible for igniting the well.
- 3) Ignite up-wind from a distance no closer than necessary. Make sure that where you ignite from has the maximum escape avenue available. A 25mm flare gun shall be used, with a +/-500' range to ignite the gas.
- 4) Prior to ignition, make a final check for combustible gases.
- 5) Following ignition, continue with the emergency actions & procedures as before.

CONTACTING AUTHORITIES

Kaiser-Francis personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available. The following call list of essential and potential responders has been prepared for use during a release. This response plan must be in coordination with the State of New Mexico's 'Hazardous Materials Emergency Response Plan' (HMER).

EMERGENCY CALL LIST: (Start and continue until ONE of these people have been reached)

Kaiser-Francis Oil Co.	<u>OFFCE</u> 918/494-0000	MOBILE
Bill Wilkinson	580/668-2335	580/221-4637
David Zerger	918/491-4350	918/557-6708
Charles Lock	918/491-4337	918/671-6510
Stuart Blake	918/491-4347	918/510-4126
Robert Sanford	918/491-4201	918/770-2682
Eric Hansen	918/491-4339	918/527-5260

EMERGENCY RESPONSE NUMBERS: Lea County, New Mexico

State Police – Artesia State Police – Hobbs State Police – Carlsbad	575/748-9718 575/392-5580 575/885-3138
Lea County Sheriff - Lovington	575/396-3611
Local Emergency Planning Center – Lea County Local Emergency Planning Center – Eddy County	575/396-8607 575/885-3581
Fire Fighting, Rescue & Ambulance – Carlsbad Fire Fighting, Rescue & Ambulance – Hobbs Fire Fighting – Jal Volunteer Fire Department	911 or 575/885-3125 911 or 575/397-9308 911 or 505/395-2221
New Mexico Oil & Gas Commission – Artesia New Mexico Oil & Gas Commission – Hobbs	575/748-1283 575/393-6161
Air Medical Transport Services – Hobbs Med Flight Air Ambulance – Albuquerque Angel MedFlight	800/550-1025 505/842-4433 844/553-9033
DXP	432/580-3770
BJ Services	575/392-5556
Halliburton	575/392-6531 800/844-8451

PROTECTION OF THE GENERAL PUBLIC/ROE:

In the event of a release with a concentration greater than 100 ppm H₂S, the ROE (Radius of Exposure) calculations will be done to determine if the following conditions have been met:

- Does the 100 ppm ROE include any public area (any place not associated with this site)
- Does the 500 ppm ROE include any public road (any road which the general public may travel)
- Is the 100 ppm ROE equal to or greater than 3000 feet

If any one of these conditions have been met then the Contingency Plan will be implemented. The following shows how to calculate the radius of exposure and an example.

Calculation for the 100 ppm ROE:

```
(H2S concentrations in decimal form)
                                                                      10,000 ppm +=1.+
X = [(1.589)(concentration)(Q)] (0.6258)
                                                                       1,000 ppm +=.1+
                                                                         100 ppm +=.01+
                                                                          10 ppm +=.001+
```

Calculation for the 500 ppm ROE: X+[(0.4546)(concentration)(Q)] (.06258)

EXAMPLE: If a well/facility has been determined to have 150 ppm H₂S in the gas mixture and the well/facility is producing at a gas rate of 200 MCFPD then:

X=[(1.589)(.0150)(200)](0.6258)ROE for 100 PPM

X=2.65'

X=[(.4546)(.0150)(200)] (0.6258) ROE for 500 PPM

X=1.2'

(These calculations will be forwarded to the appropriate District NMOCD office when applicable.)

PUBLIC EVACUATION PLAN:

(When the supervisor has determined that the General Public will be involved, the following plan will be implemented)

- Notification of the emergency response agencies of the hazardous condition and 1) Implement evacuation procedures.
- A trained person in H2S safety, shall monitor with detection equipment the H2S 2) Concentration, wind and area of exposure (ROE). This person will determine the outer perimeter of the hazardous area. The extent of the evacuation area will be determined from the data being collected. Monitoring shall continue until the situation has been resolved. (All monitoring equipment will be UL approved, for use in class I groups A,B,C & D, Division I, hazardous locations. All monitors will have a minimum capability of measuring H₂S, oxygen, and flammable values.)
- Law enforcement shall be notified to set up necessary barriers and maintain such 3) for the duration of the situation as well as aid in the evacuation procedure.
- The company supervising personnel shall stay in communication with all 4) agencies through out the duration of the situation and inform such agencies when the situation has been contained and the effected area(s) is safe to enter.

CHARACTERISTICS OF H2S AND SO2

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H₂S	1.189 Air = 1	10 ppm	100 ppm	600 ppm
Sulfur Dioxide	SO ₂	2.21 Air = 1	2 ppm	N/A	1000 ppm

TRAINING:

All responders must have training in the detection of H₂S measures for protection against the gas, equipment used for protection and emergency response. Weekly drills by all crews will be conducted and recorded in the IADC daily log. Additionally, responders must be equipped with H₂S monitors at all times.

PUBLIC RELATIONS

Kaiser-Francis recognizes that the news media have a legitimate interest in incidents at Kaiser-Francis facilities that could affect the public. It is to the company's benefit to cooperate with the news media when incidents occur because these media are our best liaison with the public.

Our objective is to see that all reports of any emergency are factual and represent the company's position fairly and accurately. Cooperation with news media representatives is the most reliable quarantee that this objective will be met.

All contract and Kaiser-Francis employees are instructed <u>NOT</u> to make any statement to the media concerning the emergency incident. If a media representative contacts any employee, they should refer them to the designated Emergency Command Center where they should contact the Incident Commander or his designated relief for any information concerning the incident.

Kaiser-Francis Oil Company County: Lea Directional Drilling Site: BLUN Pad 16 Well: Bell Lake Unit North 215H West(-)/East(+) (1500 usft/in) -1500 -750Wellbore: #215H OH -750 Design: Plan #1 BLUN 215H SL CASING DETAILS Start Build 1.50 13 3/8 Azimuths to Grid North TVD MD Name Start 272.99 hold at 2333.33 MD. True North: -0.45° 1250.00 13 3/8" 4952.10 9 5/8" 1250.00 Start Drop -1.00 Magnetic North: 6.14° 4950.00 Start 6517.82 hold at 3106.32 MD Magnetic Field Strength: 47630.5snT Start Build 10.00 750 Start 7779.66 hold at 10524.14 MD = Dip Angle: 60.03° -750 BLUN 215H FTP Date: 11/07/2020 13 3/8j Rustler Model: IGRF2020 US State Plane 1983 1500 Salado New Mexico Eastern Zone 1500 Top of Salt 32° 20' 6.899 N Start Build 1.50 2000.00 103° 29' 36,573 W 2250 2332.91 **OFFSETS** 13 Start 272.99 hold at 2333.33 MD -2250 100'FSL FORMATION DETAILS 33 Start Drop -1.00 TVDPath **MDPath** Formation 3104.22 52 Start 6517.82 hold at 3106.32 MD 1200.00 1200.00 Rustler -3000 South(-)/North(+) 1600.00 1600.00 Salado 1800.00 Top of Salt 1800.00 4700.00 4702.10 Base of Salt 3750 4950.00 4952.10 Lamar -3750Bell Canyon 5152.10 5150.00 6175.00 6177.10 Cherry Canyon 7500.00 7502.10 Brushy Canyon 8500.00 8502 10 Bone Spring 9400-4500 8597.10 Avalon Base of Salt 8595.00 -4500 S 1st Bone Spring 9500.00 9502.10 9 5/8" Lamar 9995.00 10030.26 2nd Bone Spring Bell Canyon 9600-9622.0542 5250 Start Build 10.00 5250 10° Frue Vertical Depth (400 usft/in) True Vertical Depth (1500 usft/in) 9800 20° 6000 Cherry Canyon -6000 30° 10000 ζŝ 6750 -6750 å 90 10195.00 625 Start 7779.66 hold at 10524.14 MD 10200 7500 Brushy Canyon -7500BLUN 215H FTP BLUN 215H PBHL 8250 -8250 TD at 18303.80 1000 Bone Spring Avalon 200 400 600 800 -200 Vertical Section at 180.31° (400 usft/in) 9000 9000 1st Bone Spring 9622.04 52 Start Build 10.00 9750 2nd Bone Spring + TD at 18303.80 Start 7779.66 hold at 10524.14 MD 10195.00 8405 BLUN 215H PBHL 10500 BLUN 215H FTF 9000 7500 8250 6750 4500 5250 6000 2250 3000 3750 1500 -750 750 DESIGN TARGET DETAILS Vertical Section at 180.31° (1500 usft/in) Fasting Latitude Longitude +N/-S +E/-W Northing 486712.79 Name 20' 6.899 N 03° 29' 36.573 W 800730.42 BLUN 215H SL BLUN 215H FTP 0.00 -625.17 0.00 0.00 800755.05 32° 20' 0.711 N 03° 29' 36.343 W 486087.63 10195.00 24.63 800684.88 32° 18' 43.742 N03° 29' 37.871 W BLUN 215H PBHL 10195.00 -45.54 478308.40 -8404.51 SECTION DETAILS +N/-S +E/-W **VSect** Target TVD MD Inc Azi 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 2000.00 0.00 0.00 0.00 2000.00 0.00 S5-T23S-R34E SL 7.20 1.50 150.29 150.29 150.29 2332.91 -12.62 2333.33 5.00 2058'FNL 2230'FWL 0.00 33.19 52.06 2604.86 -33.29 18.99 2606.32 5.00 S5-T23S-R34E FTP 3106.32 0.00 0.00 3104.22 -52.23 29.80 1.00 180.00 2600'FSL 2250'FWL 0.00 0.00 52.06 9624.14 0.00 0.00 9622.04 -52.23 29.80 S8-T23S-R34E PBHL 625.02 -625.16 24.63 10.00 710524.14 90.00 180.52 10195.00 100'FSL 2110'FWL BLUN 215H PBHL 180.52 10195.00 -8404.51 45.54 0.00 0.00 8404.63 818303.80 90.00

Project: Permian NM E'83

Survey Report

Company: Project:

Site:

Kaiser-Francis Oil Company

Permian NM E'83 **BLUN Pad 16**

Bell Lake Unit North 215H Well: #215H OH Wellbore:

Plan #1 Design:

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Database:

Well Bell Lake Unit North 215H - Slot H est.GL+KB @ 3464.00usft (planning)

est.GL+KB @ 3464.00usft (planning)

Minimum Curvature EDM 5k-14

Project

Permian NM E'83

Map System: Geo Datum:

US State Plane 1983 North American Datum 1983 New Mexico Eastern Zone

System Datum:

Mean Sea Level

Using geodetic scale factor

Site

Map Zone:

BLUN Pad 16, Centered on 215H

Site Position: From: Position Uncertainty:

Мар

Northing: Easting: Slot Radius:

486,712.79 usft 800,730.42 usft 13-3/16 "

Latitude: Longitude: **Grid Convergence:**

32° 20' 6.899 N 103° 29' 36.573 W

0.45 °

Well

Bell Lake Unit North 215H - Slot H

0.00 usft

Well Position +N/-S +E/-W 0.00 usft 0.00 usft

IGRF2020

Northing: Easting:

486,712.79 usft 800,730.42 usft

Latitude: Longitude:

32° 20' 6.899 N 103° 29' 36.573 W

Position Uncertainty

0.00 usft

Wellhead Elevation:

0.00

Ground Level:

3,437.40 usft

0.00

Wellbore

#215H OH

Plan #1

Model Name Magnetics

Sample Date 11/07/20 Declination (°) 6.59

Dip Angle (°)

Field Strength (nT)

47,630.46483908

Design Audit Notes:

Version:

Phase:

PROTOTYPE

Tie On Depth:

Direction

60.03

Vertical Section:

Depth From (TVD) (usft)

+N/-S (usft) 0.00 +E/-W (usft) 0.00

(°)

180.31

lanned Survey									
Measured Depth (usft)	Inclination	Azimuth	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
Rustler									
1,250.00	0.00	0.00	1,250.00	0.00	0.00	0.00	0.00	0.00	0.00
13 3/8"									2.22
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
Salado								0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
Top of Salt									
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	1.50	150.29	2,099.99	-1.14	0.65	1.13	1.50	1.50	0.00
2,200.00	3.00	150.29	2,199.91	-4.55	2.59	4.53	1.50	1.50	0.00
2,300.00	4.50	150.29	2,299.69	-10.23	5.84	10.20	1.50	1.50	0.00
2,333.33	5.00	150.29	2,332.91	-12.62	7.20	12.59	1.50	1.50	0.00
2,400.00	5.00	150.29	2,399.32	-17.67	10.08	17.62	0.00	0.00	0.00
2,500.00	5.00	150.29	2,498.94	-25.24	14.40	25.16	0.00	0.00	0.00

Survey Report

Company: Project:

Kaiser-Francis Oil Company

Permian NM E'83 **BLUN Pad 16**

Site: Bell Lake Unit North 215H Well:

Wellbore:

#215H OH Design: Plan #1

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Database:

Well Bell Lake Unit North 215H - Slot H est.GL+KB @ 3464.00usft (planning)

est.GL+KB @ 3464.00usft (planning)

Minimum Curvature

EDM 5k-14

nned Survey			201					Bull d	Tues
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
2,606.32	5.00	150.29	2,604.86	-33.29	18.99	33.19	0.00	0.00	0.00
2,700.00	4.06	150.29	2,698.24	-39.72	22.66	39.60	1.00	-1.00	0.00
2,800.00	3.06	150.29	2,798.05	-45.12	25.74	44.98	1.00	-1.00	0.00
2,900.00	2.06	150.29	2,897.95	-49.00	27.96	48.85	1.00	-1.00	0.00
3,000.00	1.06	150.29	2,997.91	-51.37	29.31	51.21	1.00	-1.00	0.00
3,106.32	0.00	0.00	3,104.22	-52.23	29.80	52.06	1.00	-1.00	0.00
3,200.00	0.00	0.00	3,197.90	-52.23	29.80	52.06	0.00	0.00	0.00
3,300.00	0.00	0.00	3,297.90	-52.23	29.80	52.06	0.00	0.00	0.00
3,400.00	0.00	0.00	3,397.90	-52.23	29.80	52.06	0.00	0.00	0.00
3,500.00	0.00	0.00	3,497.90	-52.23	29.80	52.06	0.00	0.00	0.00
3,600.00	0.00	0.00	3,597.90	-52.23	29.80	52.06	0.00	0.00	0.00
3,700.00	0.00	0.00	3,697.90	-52.23	29.80	52.06	0.00	0.00	0.00
3,800.00	0.00	0.00	3,797.90	-52.23	29.80	52.06	0.00	0.00	0.00
0.000.00	0.00	0.00	3,897.90	-52.23	29.80	52.06	0.00	0.00	0.00
3,900.00	0.00	0.00	3,997.90	-52.23	29.80	52.06	0.00	0.00	0.00
4,000.00		0.00	4,097.90	-52.23	29.80	52.06	0.00	0.00	0.00
4,100.00	0.00	0.00	4,097.90	-52.23	29.80	52.06	0.00	0.00	0.00
4,200.00 4,300.00	0.00 0.00	0.00	4,297.90	-52.23	29.80	52.06	0.00	0.00	0.00
4.400.00	0.00	0.00	4,397.90	-52.23	29.80	52.06	0.00	0.00	0.00
4,500.00	0.00	0.00	4,497.90	-52.23	29.80	52.06	0.00	0.00	0.00
4,600.00	0.00	0.00	4,597.90	-52.23	29.80	52.06	0.00	0.00	0.00
4,700.00	0.00	0.00	4,697.90	-52.23	29.80	52.06	0.00	0.00	0.00
4,702.10	0.00	0.00	4,700.00	-52.23	29.80	52.06	0.00	0.00	0.00
Base of Sal		0.00	4,700.00						
2000 01 001	•								
4,800.00	0.00	0.00	4,797.90	-52.23	29.80	52.06	0.00	0.00	0.00
4,900.00	0.00	0.00	4,897.90	-52.23	29.80	52.06	0.00	0.00	0.00
4,952.10	0.00	0.00	4,950.00	-52.23	29.80	52.06	0.00	0.00	0.00
Lamar - 9 5	/8"								0.00
5,000.00	0.00	0.00	4,997.90	-52.23	29.80	52.06	0.00	0.00	0.00
5,100.00	0.00	0.00	5,097.90	-52.23	29.80	52.06	0.00	0.00	0.00
5,152.10	0.00	0.00	5,150.00	-52.23	29.80	52.06	0.00	0.00	0.00
Bell Canyo						50.65	0.00	0.00	0.00
5,200.00	0.00	0.00	5,197.90	-52.23	29.80	52.06	0.00	0.00	
5,300.00	0.00	0.00	5,297.90	-52.23	29.80	52.06	0.00	0.00	0.00
5,400.00	0.00	0.00	5,397.90	-52.23	29.80	52.06	0.00	0.00	0.00
5,500.00	0.00	0.00	5,497.90	-52.23	29.80	52.06	0.00	0.00	0.00
5,600.00	0.00	0.00	5,597.90	-52.23	29.80	52.06	0.00	0.00	0.00
5,700.00	0.00	0.00	5,697.90	-52.23	29.80		0.00	0.00	0.00
5,800.00	0.00	0.00	5,797.90	-52.23	29.80		0.00	0.00	0.00
5,900.00	0.00	0.00	5,897.90	-52.23	29.80		0.00		0.00
6,000.00		0.00	5,997.90	-52.23	29.80	52.06	0.00	0.00	0.00
6,100.00	0.00	0.00	6,097.90	-52.23	29.80	52.06	0.00		0.00
6,177.10			6,175:00	-52.23	29.80	52.06	0.00	0.00	0.00
Cherry Car									

Survey Report

Company: Project: Kaiser-Francis Oil Company

Permian NM E'83 BLUN Pad 16

Site: BLUN Pad 16
Well: Bell Lake Unit North 215H

Wellbore:

Bell Lake Unit North 215H #215H OH

Design: Plan #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Database:

Well Bell Lake Unit North 215H - Slot H est.GL+KB @ 3464.00usft (planning) est.GL+KB @ 3464.00usft (planning)

Grid

Minimum Curvature

EDM 5k-14

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
6,200.00	0.00	0.00	6,197.90	-52.23	29.80	52.06	0.00	0.00	0.00
6,300.00	0.00	0.00	6,297.90	-52.23	29.80	52.06	0.00	0.00	0.00
6,400.00	0.00	0.00	6,397.90	-52.23	29.80	52.06	0.00	0.00	0.00
6,500.00	0.00	0.00	6,497.90	-52.23	29.80	52.06	0.00	0.00	0.00
6,600.00	0.00	0.00	6,597.90	-52.23	29.80	52.06	0.00	0.00	0.00
6,700.00	0.00	0.00	6,697,90	-52.23	29.80	52.06	0.00	0.00	0.00
6,800.00	0.00	0.00	6,797.90	-52.23	29.80	52.06	0.00	0.00	0.00
6,900.00	0.00	0.00	6,897.90	-52.23	29.80	52.06	0.00	0.00	0.00
7 000 00	0.00	0.00	6,997.90	-52.23	29.80	52.06	0.00	0.00	0.00
7,000.00	0.00				29.80	52.06	0.00	0.00	0.00
7,100.00	0.00	0.00	7,097.90	-52.23		52.06	0.00	0.00	0.00
7,200.00	0.00	0.00	7,197.90	-52.23	29.80		0.00	0.00	0.00
7,300.00	0.00	0.00	7,297.90	-52.23	29.80	52.06			0.00
7,400.00	0.00	0.00	7,397.90	-52.23	29.80	52.06	0.00	0.00	0.00
7,500.00	0.00	0.00	7,497.90	-52.23	29.80	52.06	0.00	0.00	0.00
7,502.10	0.00	0.00	7,500.00	-52.23	29.80	52.06	0.00	0.00	0.00
Brushy Canyo	on								
7,600.00	0.00	0.00	7,597.90	-52.23	29.80	52.06	0.00	0.00	0.00
7,700.00	0.00	0.00	7,697.90	-52.23	29.80	52.06	0.00	0.00	0.00
7,800.00	0.00	0.00	7,797.90	-52.23	29.80	52.06	0.00	0.00	0.00
7,900.00	0.00	0.00	7,897.90	-52.23	29.80	52.06	0.00	0.00	0.00
8,000.00	0.00	0.00	7,997.90	-52.23	29.80	52.06	0.00	0.00	0.00
8,100.00	0.00	0.00	8,097.90	-52.23	29.80	52.06	0.00	0.00	0.00
8,200.00	0.00	0.00	8,197.90	-52.23	29.80	52.06	0.00	0.00	0.00
8,300.00	0.00	0.00	8,297.90	-52.23	29.80	52.06	0.00	0.00	0.00
8,400.00	0.00	0.00	8,397.90	-52.23	29.80	52.06	0.00	0.00	0.00
8,500.00	0.00	0.00	8,497.90	-52.23	29.80	52.06	0.00	0.00	0.00
8,502.10	0.00	0.00	8,500.00	-52.23	29.80	52.06	0.00	0.00	0.00
Bone Spring					00.00	E0.00	0.00	0.00	0.00
8,597.10	0.00	0.00	8,595.00	-52.23	29.80	52.06	0.00	0.00	0.00
Avalon 8,600.00	0.00	0.00	8,597.90	-52.23	29.80	52.06	0.00	0.00	0.00
			0.007.00	E0.00	29.80	52.06	0.00	0.00	0.00
8,700.00	0.00	0.00	8,697.90	-52.23		52.06	0.00	0.00	0.00
8,800.00	0.00	0.00	8,797.90	-52.23	29.80		0.00	0.00	0.00
8,900.00	0.00	0.00	8,897.90	-52.23	29.80	52.06			0.00
9,000.00	0.00	0.00	8,997.90	-52.23	29.80	52.06	0.00	0.00	
9,100.00	0.00	0.00	9,097.90	-52.23	29.80	52.06	0.00	0.00	0.00
9,200.00	0.00	0.00	9,197.90	-52.23	29.80	52.06	0.00	0.00	0.00
9,300.00	0.00	0.00	9,297.90	-52.23	29.80	52.06	0.00	0.00	0.00
9,400.00	0.00	0.00	9,397.90	-52.23	29.80	52.06	0.00	0.00	0.00
9,500.00	0.00	0.00	9,497.90	-52.23	29.80	52.06	0.00	0.00	0.00
9,502.10	0.00	0.00	9,500.00	-52.23	29.80	52.06	0.00	0.00	0.00
1st Bone Spi									
9,600.00	0.00	0.00	9,597.90	-52.23	29.80	52.06	0.00	0.00	0.00
9,624.14	0.00		9,622.04	-52.23	29.80		0.00	0.00	0.00

02/07/20 5:22:46PM Page 3 COMPASS 5000.14 Build 85F

Survey Report

Company:

Kaiser-Francis Oil Company

Project: Site:

Permian NM E'83 **BLUN Pad 16** Bell Lake Unit North 215H

Well: Wellbore:

#215H OH

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Database:

Well Bell Lake Unit North 215H - Slot H est.GL+KB @ 3464.00usft (planning) est.GL+KB @ 3464.00usft (planning)

Grid

Minimum Curvature EDM 5k-14

Design: Plan #1 Planned Survey Build Turn Vertical Dogleg Vertical Measured Rate Rate Depth Section Rate +N/-S +E/-W Depth Azimuth Inclination (°/100usft) (°/100usft) (°/100usft) (usft) (usft) (usft) (usft) (usft) (°) (°) 0.00 10.00 9,647.90 -52.81 29.79 52.65 10.00 180.52 9,650.00 2.59 10.00 0.00 10.00 29.75 57.08 180.52 9,697.68 -57.24 9,700.00 7.59 29.67 65.83 10.00 10.00 0.00 12.59 180.52 9,746.89 -65.99 9,750.00 10.00 10.00 0.00 29.56 78.84 9,795.16 -79.00 9,800.00 17.59 180.52 0.00 96.01 10.00 10.00 -96.17 29.40 9,842.10 9,850.00 22.59 180.52 10.00 10.00 0.00 9,887.37 -117.36 29.21 117.20 180.52 9,900.00 27.59 10.00 0.00 10.00 180.52 9,930.62 -142.42 28.98 142.26 32.59 9,950.00 10.00 10.00 0.00 170.99 28.73 10,000.00 37.59 180.52 9,971.52 -171.15

10,000.00	37.38	100.52	0,011.02	171.10					
10,030.26	40.61	180.52	9,995.00	-190.23	28.55	190.07	10.00	10.00	0.00
2nd Bone Spr									
10,050.00	42.59	180.52	10,009.76	-203.33	28.44	203.18	10.00	10.00	0.00
10,100.00	47.59	180.52	10,045.05	-238.73	28.12	238.57	10.00	10.00	0.00
10,150.00	52.59	180.52	10,077.12	-277.06	27.77	276.91	10.00	10.00	0.00
10,200.00	57.59	180.52	10,105.73	-318.05	27.40	317.90	10.00	10.00	0.00
10,200.00	07.00								
10,250.00	62.59	180.52	10,130.66	-361.37	27.01	361.22	10.00	10.00	0.00
10,300.00	67.59	180.52	10,151.72	-406.71	26.60	406.55	10.00	10.00	0.00
10,350.00	72.59	180.52	10,168.74	-453.70	26.18	453.55	10.00	10.00	0.00
10,400.00	77.59	180.52	10,181.60	-502.00	25.74	501.85	10.00	10.00	0.00
10,450.00	82.59	180.52	10,190.21	-551.23	25.30	551.09	10.00	10.00	0.00
10,450.00	02.33	100.02	10,100.21						
10,500.00	87.59	180.52	10,194.49	-601.03	24.85	600.89	10.00	10.00	0.00
10,524.14	90.00	180.52	10,195.00	-625.16	24.63	625.02	10.00	10.00	0.00
10,600.00	90.00	180.52	10,195.00	-701.02	23.95	700.88	0.00	0.00	0.00
10,700.00	90.00	180.52	10,195.00	-801.02	23.04	800.88	0.00	0.00	0.00
•	90.00	180.52	10,195.00	-901.01	22.14	900.88	0.00	0.00	0.00
10,800.00	90.00	100.02	10,100.00	551.51					
10,900.00	90.00	180.52	10,195.00	-1,001.01	21.24	1,000.88	0.00	0.00	0.00
11,000.00	90.00	180.52	10,195.00	-1,101.00	20.34	1,100.88	0.00	0.00	0.00
11,100.00	90.00	180.52	10,195.00	-1,201.00	19.44	1,200.88	0.00	0.00	0.00
11,200.00	90.00	180.52	10,195.00	-1,301.00	18.53	1,300.88	0.00	0.00	0.00
•	90.00	180.52	10,195.00	-1,400.99	17.63	1,400.88	0.00	0.00	0.00
11,300.00	90.00	100.52	10,100.00	1,100.00	*****	.,			
11,400.00	90.00	180.52	10,195.00	-1,500.99	16.73	1,500.87	0.00	0.00	0.00
11,500.00	90.00	180.52	10,195.00	-1,600.98	15.83	1,600.87	0.00	0.00	0.00
11,600.00	90.00	180.52	10,195.00	-1,700.98	14.93	1,700.87	0.00	0.00	0.00
	90.00	180.52	10,195.00	-1,800.98	14.02	1,800.87	0.00	0.00	0.00
11,700.00	90.00	180.52	10,195.00	-1,900.97	13.12	1,900.87	0.00	0.00	0.00
11,800.00	90.00	100.52	10, 155.00	-1,500.57	10.12	.,			
11 000 00	90.00	180.52	10.195.00	-2,000.97	12.22	2,000.87	0.00	0.00	0.00
11,900.00 12,000.00	90.00	180.52	10,195.00	-2,100.96	11.32	2,100.87	0.00	0.00	0.00
	90.00	180.52	10,195.00	-2,200.96	10.42	2,200.87	0.00	0.00	0.00
12,100.00	90.00	180.52	10,195.00	-2,300.95	9.51	2,300.87	0.00	0.00	0.00
12,200.00		180.52	10,195.00	-2,400.95	8.61	2,400.87	0.00	0.00	0.00
12,300.00	90.00	180.52	10,195.00	-2,400.55	0.01	2,700.07	0.00		
10 100 00	90.00	180.52	10,195.00	-2,500.95	7.71	2,500.87	0.00	0.00	0.00
12,400.00	90.00	180.52	10,195.00	-2,600.94	6.81	2,600.87	0.00	0.00	0.00
12,500.00		180.52	10,195.00	-2,700.94	5.91	2,700.87	0.00	0.00	0.00
12,600.00	90.00	180.52	10,195.00	-2,800.93	5.00	2,800.87	0.00	0.00	0.00
12,700.00	90.00			-2,800.93	4.10	2,900.87	0.00	0.00	0.00
12,800.00	90.00	180.52	10,195.00	-2,900.93	4.10	2,000.07	0.00	0.00	

Survey Report

Company: Project:

Site:

Kaiser-Francis Oil Company

Permian NM E'83

BLUN Pad 16

Well: Wellbore: Bell Lake Unit North 215H

Wellbore: #215H OH Design: #2n #1 Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Database:

Well Bell Lake Unit North 215H - Slot H est.GL+KB @ 3464.00usft (planning)

est.GL+KB @ 3464.00usft (planning) est.GL+KB @ 3464.00usft (planning)

Grid

Minimum Curvature

EDM 5k-14

ed Survey									Markett.
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,900.00	90.00	180.52	10,195.00	-3,000.93	3.20	3,000.86	0.00	0.00	0.00
13,000.00	90.00	180.52	10,195.00	-3,100.92	2.30	3,100.86	0.00	0.00	0.00
13,100.00	90.00	180.52	10,195.00	-3,200.92	1.40	3,200.86	0.00	0.00	0.00
13,200.00	90.00	180.52	10,195.00	-3,300.91	0.49	3,300.86	0.00	0.00	0.00
13,300.00	90.00	180.52	10,195.00	-3,400.91	-0.41	3,400.86	0.00	0.00	0.00
13,400.00	90.00	180.52	10,195.00	-3,500.91	-1.31	3,500.86	0.00	0.00	0.00
13,500.00	90.00	180.52	10,195.00	-3,600.90	-2.21	3,600.86	0.00	0.00	0.00
13,600.00	90.00	180.52	10,195.00	-3,700.90	-3.11	3,700.86	0.00	0.00	0.00
13,700.00	90.00	180.52	10,195.00	-3,800.89	-4.02	3,800.86	0.00	0.00	0.00
13,800.00	90.00	180.52	10,195.00	-3,900.89	-4.92	3,900.86	0.00	0.00	0.00
13,900.00	90.00	180.52	10,195.00	-4,000.89	-5.82	4,000.86	0.00	0.00	0.00
14,000.00	90.00	180.52	10,195.00	-4,100.88	-6.72	4,100.86	0.00	0.00	0.00
14,100.00	90.00	180.52	10,195.00	-4,200.88	-7.62	4,200.86	0.00	0.00	0.00
14,200.00	90.00	180.52	10,195.00	-4,300.87	-8.53	4,300.86	0.00	0.00	0.00
14,300.00	90.00	180.52	10,195.00	-4,400.87	-9.43	4,400.86	0.00	0.00	0.00
14,400.00	90.00	180.52	10,195.00	-4,500.87	-10.33	4,500.86	0.00	0.00	0.00
14,500.00	90.00	180.52	10,195.00	-4,600.86	-11.23	4,600.85	0.00	0.00	0.00
14,600.00	90.00	180.52	10,195.00	-4,700.86	-12.13	4,700.85	0.00	0.00	0.00
14,700.00	90.00	180.52	10,195.00	-4,800.85	-13.04	4,800.85	0.00	0.00	0.00
14,800.00	90.00	180.52	10,195.00	-4,900.85	-13.94	4,900.85	0.00	0.00	0.00
14,900.00	90.00	180.52	10,195.00	-5,000.85	-14.84	5,000.85	0.00	0.00	0.00
15,000.00	90.00	180.52	10,195.00	-5,100.84	-15.74	5,100.85	0.00	0.00	0.00
15,100.00	90.00	180.52	10,195.00	-5,200.84	-16.64	5,200.85	0.00	0.00	0.00
15,200.00	90.00	180.52	10,195.00	-5,300.83	-17.54	5,300.85	0.00	0.00	0.00
15,300.00	90.00	180.52	10,195.00	-5,400.83	-18.45	5,400.85	0.00	0.00	0.00
15,400.00	90.00	180.52	10,195.00	-5,500.82	-19.35	5,500.85	0.00	0.00	0.00
15,500.00	90.00	180.52	10,195.00	-5,600.82	-20.25	5,600.85	0.00	0.00	0.00
15,600.00	90.00	180.52	10,195.00	-5,700.82	-21.15	5,700.85	0.00	0.00	0.00
15,700.00	90.00	180.52	10,195.00	-5,800.81	-22.05	5,800.85	0.00	0.00	0.00
15,800.00	90.00	180.52	10,195.00	-5,900.81	-22.96	5,900.85	0.00	0.00	0.00
15,900.00	90.00	180.52	10,195.00	-6,000.80	-23.86	6,000.85	0.00	0.00	0.00
16,000.00	90.00	180.52	10,195.00	-6,100.80	-24.76	6,100.84	0.00	0.00	0.00
16,100.00	90.00	180.52	10,195.00	-6,200.80	-25.66	6,200.84	0.00	0.00	0.00
16,200.00	90.00	180.52	10,195.00	-6,300.79	-26.56	6,300.84	0.00	0.00	0.00
16,300.00	90.00	180.52	10,195.00	-6,400.79	-27.47	6,400.84	0.00	0.00	0.00
16,400.00	90.00	180.52	10,195.00	-6,500.78	-28.37	6,500.84	0.00	0.00	0.00
16,500.00	90.00	180.52	10,195.00	-6,600.78	-29.27	6,600.84	0.00	0.00	0.00
16,600.00	90.00	180.52	10,195.00	-6,700.78	-30.17		0.00	0.00	0.00
16,700.00	90.00	180.52	10,195.00	-6,800.77	-31.07		0.00	0.00	0.00
16,800.00	90.00	180.52	10,195.00	-6,900.77	-31.98	6,900.84	0.00	0.00	0.00
16,900.00	90.00	180.52	10,195.00	-7,000.76	-32.88		0.00	0.00	0.00
17,000.00	90.00	180.52	10,195.00	-7,100.76	-33.78		0.00	0.00	0.00
17,100.00	90.00	180.52	10,195.00	-7,200.76	-34.68	7,200.84	0.00	0.00	0.00

Survey Report

Company: Project: Kaiser-Francis Oil Company

Permian NM E'83 BLUN Pad 16

Site: BLUN Pad 16
Well: Bell Lake Unit North 215H

Wellbore: #215H OH
Design: Plan #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method: Database: Well Bell Lake Unit North 215H - Slot H est.GL+KB @ 3464.00usft (planning) est.GL+KB @ 3464.00usft (planning)

Grid

Minimum Curvature

EDM 5k-14

nned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
17.200.00	90.00	180.52	10,195.00	-7,300.75	-35.58	7,300.84	0.00	0.00	0.00
17,300.00	90.00	180.52	10,195.00	-7,400.75	-36.49	7,400.84	0.00	0.00	0.00
17.400.00	90.00	180.52	10,195.00	-7,500.74	-37.39	7,500.84	0.00	0.00	0.00
17,500.00	90.00	180.52	10,195.00	-7,600.74	-38.29	7,600.84	0.00	0.00	0.00
17,600.00	90.00	180.52	10,195.00	-7,700.74	-39.19	7,700.83	0.00	0.00	0.00
17,700.00	90.00	180.52	10,195.00	-7,800.73	-40.09	7,800.83	0.00	0.00	0.00
17,800.00	90.00	180.52	10,195.00	-7,900.73	-41.00	7,900.83	0.00	0.00	0.00
17.900.00	90.00	180.52	10,195.00	-8,000.72	-41.90	8,000.83	0.00	0.00	0.00
18,000.00	90.00	180.52	10,195.00	-8,100.72	-42.80	8,100.83	0.00	0.00	0.00
18,100.00	90.00	180.52	10,195.00	-8,200.71	-43.70	8,200.83	0.00	0.00	0.00
18,200.00	90.00	180.52	10,195.00	-8,300.71	-44.60	8,300.83	0.00	0.00	0.00
18,303.80	90.00	180.52	10,195.00	-8,404.51	-45.54	8,404.63	0.00	0.00	0.00

Casing Points						
	Measured Depth (usft)	Vertical Depth (usft)		Name	Casing Diameter (")	Hole Diameter (")
	1,250.00	1,250.00	13 3/8"		13-3/8	17-1/2
	4,952.10	4,950.00	9 5/8"		9-5/8	12-1/4

Formations							
	Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (*)	
	1,200.00	1,200.00	Rustler				
	1,600.00	1,600.00	Salado				
	1,800.00	1,800.00	Top of Salt				
	4,702.10	4,700.00	Base of Salt				
	4,952.10	4,950.00	Lamar				
	5,152.10	5,150.00	Bell Canyon				
	6,177.10	6,175.00	Cherry Canyon				
	7,502.10	7,500.00	Brushy Canyon				
	8,502.10	8,500.00	Bone Spring				
	8,597.10	8,595.00	Avaion				
	9,502.10	9,500.00	1st Bone Spring				
	10,030.26	9,995.00	2nd Bone Spring				



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

SUPO Data Report

APD ID: 10400054238

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Type: OIL WELL

Submission Date: 02/13/2020

Highlighted data reflects the most recent changes

Well Number: 215H

Well Work Type: Drill

Show Final Text

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

BLUN_215H_Existing_Roads_20200213062428.pdf

Existing Road Purpose: ACCESS,FLUID TRANSPORT

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

BLUN_215H_Access_Road_20200213062454.pdf

New road type: RESOURCE

Length: 3867

Feet

Width (ft.): 30

Max slope (%): 2

Max grade (%): 2

Army Corp of Engineers (ACOE) permit required? N

ACOE Permit Number(s):

New road travel width: 20

New road access erosion control: Road construction requirements and regular maintenance would alleviate potential impacts to the access road from water erosion damage.

New road access plan or profile prepared? N

New road access plan attachment:

Access road engineering design? N

Access road engineering design attachment:

Well Name: BELL LAKE UNIT NORTH Well Number: 215H

Turnout? N

Access surfacing type: OTHER

Access topsoil source: BOTH

Access surfacing type description: Native caliche

Access onsite topsoil source depth: 6

Offsite topsoil source description: BLM's caliche pit in SWSW Section 22-T24-R34E or NENE Section 20-T23S-R33E.

Onsite topsoil removal process: The top 6 inches of topsoil is pushed off and stockpiled along the side of the location. An approximate 160 X 160 area is used within the proposed well site to remove caliche. Subsoil is removed and stockpiled within the pad site to build the location and road. Then subsoil is pushed back in the hole and caliche is spread accordingly across proposed access road.

Access other construction information:

Access miscellaneous information:

Number of access turnouts:

Access turnout map:

Drainage Control

New road drainage crossing: OTHER

Drainage Control comments: Proposed access road will be crowned and ditched and constructed of 6 inch rolled and compacted caliche. Water will be diverted where necessary to avoid ponding, maintain good drainage, and to be consistent with local drainage patterns.

Road Drainage Control Structures (DCS) description: The ditches will be 3' wide with 3:1 slopes

Road Drainage Control Structures (DCS) attachment:

Access Additional Attachments

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Attach Well map:

BLUN_215H_1_Mile_Wells_Map_20200213062820.pdf BLUN_215H_1_Mile_Wells_20200213062820.pdf

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? DEFER

Estimated Production Facilities description: Production facilities are planned for the south side of pad. Plan for initial wells: 2-1000 bbl water tanks and 5 -1000 bbl oil tanks, a temporary 6X20 horizontal 3-phase sep, a 48 X 10 3-phase sep, a 8 X 20 heater treater and a 48X 10 2-phase sep

Well Name: BELL LAKE UNIT NORTH

Well Number: 215H

Section 5 - Location and Types of Water Supply

Water Source Table

Water source type: OTHER

Describe type: Brine Water

Water source use type:

INTERMEDIATE/PRODUCTION

CASING

Source latitude:

Source longitude:

Source datum:

Water source permit type:

PRIVATE CONTRACT

Water source transport method:

TRUCKING

Source land ownership: PRIVATE

Source transportation land ownership: OTHER

Water source volume (barrels): 20000

Describe transportation land ownership: Source trai

is a mixture of Federal, State and County. Source volume (acre-feet): 2.57786193

Source volume (gal): 840000

Water source type: OTHER

Describe type: FRESH WATER

Water source use type:

STIMULATION

OTHER

Describe use type: ROAD/PAD CONSTRUCTION ANI

SURFACE CASING

Source latitude:

Source longitude:

Source datum:

Water source permit type:

PRIVATE CONTRACT

Water source transport method:

TRUCKING

Source land ownership: PRIVATE

Source transportation land ownership: OTHER

Water source volume (barrels): 250000

Source volume (gal): 10500000

Describe transportation land ownership: Source trai

is a mixture of Federal, State and County. **Source volume (acre-feet):** 32.223274

Page 3 of 10

Well Name: BELL LAKE UNIT NORTH Well Number: 215H

Water source and transportation map:

BLUN_Pad_16_Water_Source_Map_20200213062911.pdf

Water source comments: Source transportation land ownership is a mixture of Federal, State and County.

New water well? N

New Water Well Info

Well latitude: Well Longitude: Well datum:

Well target aquifer:

Est. depth to top of aquifer(ft): Est thickness of aquifer:

Aquifer comments:

Aquifer documentation:

Well depth (ft): Well casing type:

Well casing outside diameter (in.): Well casing inside diameter (in.):

New water well casing?

Used casing source:

Drilling method: Drill material:

Grout material: Grout depth:

Casing length (ft.): Casing top depth (ft.):

Well Production type: Completion Method:

Water well additional information:

State appropriation permit:

Additional information attachment:

Section 6 - Construction Materials

Using any construction materials: YES

Construction Materials description: On site caliche will be used for construction if sufficient. In the event insufficient quantities of caliche are available onsite, caliche will be trucked in from BLM's caliche pit in SWSW Section 22-T24-R34E or NENE Section 20-T23S-R33E.

Construction Materials source location attachment:

Section 7 - Methods for Handling Waste

Waste type: DRILLING

Waste content description: Drilling fluids and cuttings

Amount of waste: 3900 barrels

Waste disposal frequency: Weekly

Safe containment description: All drilling fluids will be stored safely and disposed of properly

Well Name: BELL LAKE UNIT NORTH Well Number: 215H

Safe containment attachment:

Waste disposal type: HAUL TO COMMERCIAL Disposal location ownership: COMMERCIAL

FACILITY

Disposal type description:

Disposal location description: Cuttings will be hauled to R360's facility located in Section 27-T20S-R32E on US 62/180 at

Halfway, NM

Waste type: SEWAGE

Waste content description: Human waste and grey water

Amount of waste: 1000 gallons

Waste disposal frequency: Weekly

Safe containment description: Waste material will be stored safely and disposed of properly

Safe containment attachment:

Waste disposal type: HAUL TO COMMERCIAL Disposal location ownership: COMMERCIAL

FACILITY

Disposal type description:

Disposal location description: Trucked to an approved disposal facility (Carlsbad sewer plant SENW Section 10-T22S-

R27E)

Waste type: GARBAGE

Waste content description: Miscellaneous trash

Amount of waste: 500 pounds

Waste disposal frequency: Weekly

Safe containment description: Trash produced during drilling and completion operations will be collected in a trash

container and disposed of properly Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL Disposal location ownership: COMMERCIAL

FACILITY

Disposal type description:

Disposal location description: Trucked to an approved disposal facility (Sandpoint Landfill (solid materials dump) NW/4

Section 11-T21S-R28E)

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit? NO

Reserve pit length (ft.) Reserve pit width (ft.)

Reserve pit depth (ft.) Reserve pit volume (cu. yd.)

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Well Name: BELL LAKE UNIT NORTH Well Number: 215H

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? Y

Description of cuttings location Cuttings will be stored in roll off bins and hauled to R360 located in Section 27-T20S-R32E

on US 62/180 near Halfway.

Cuttings area length (ft.)

Cuttings area width (ft.)

Cuttings area depth (ft.)

Cuttings area volume (cu. yd.)

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Cuttings area liner specifications and installation description

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: N

Ancillary Facilities attachment:

Comments:

Section 9 - Well Site Layout

Well Site Layout Diagram:

BLUN_215H_Wellsite_Layout_20200213063007.pdf BLUN_Pad_16_Drilling_Layout_20200827121725.pdf

Comments:

Section 10 - Plans for Surface Reclamation

Type of disturbance: New Surface Disturbance Multiple Well Pad Name: NORTH BELL LAKE UNIT

Multiple Well Pad Number: 16

Recontouring attachment:

BLUN_215H_IR_20200213063026.pdf

Drainage/Erosion control construction: During construction proper erosion control methods will be used to control erosion, runoff and siltation of the surrounding area.

Drainage/Erosion control reclamation: Proper erosion control methods will be used on the area to control erosion, runoff and siltation of the surrounding area.

Well Number: 215H Well Name: BELL LAKE UNIT NORTH

Well pad proposed disturbance

(acres): 5.96

Road proposed disturbance (acres):

1.638

Powerline proposed disturbance

(acres): 0

Pipeline proposed disturbance

(acres): 0

Other proposed disturbance (acres): 0

Total proposed disturbance: 7.598

Well pad interim reclamation (acres): Well pad long term disturbance

Road interim reclamation (acres): 0

Powerline interim reclamation (acres):

Pipeline interim reclamation (acres): 0

Other interim reclamation (acres): 0

Total interim reclamation: 0.91

(acres): 5.05

Road long term disturbance (acres):

Powerline long term disturbance

(acres): 0

Pipeline long term disturbance

(acres): 0

Other long term disturbance (acres): 0

Total long term disturbance: 6.688

Disturbance Comments:

Reconstruction method: The areas planned for interim reclamation will then be recontoured to the original contour if feasible, or if not feasible, to an interim contour that blends with the surrounding topography as much as possible. Where applicable, the fill material of the well pad will be backfilled into the cut to bring the area back to the original contour. The interim cut and fill slopes prior to re-seeding will not be steeper than a 3:1 ratio, unless the adjacent native topography is steeper. Note: Constructed slopes may be much steeper during drilling, but will be recontoured to the above ratios during interim reclamation.

Topsoil redistribution: Topsoil will be evenly respread and aggressively revegetated over the entire disturbed area not needed for all-weather operations

Soil treatment: To seed the area, the proper BLM seed mixture, free of noxious weeds, will be used. Final seedbed preparation will consist of contour cultivating to a depth of 4 to 6 inches within 24 hours prior to seeding, dozer tracking, or other imprinting in order to break the soil crust and create seed germination micro-sites.

Existing Vegetation at the well pad: The historic climax plant community is a grassland dominated by black grama, dropseeds, and blue stems with sand sage and shinnery oak distributed evenly throughout. Current landscape displays mesquite, shinnery oak, yucca, desert sage, fourwing saltbush, snakeweed, and bunch grasses Existing Vegetation at the well pad attachment:

Existing Vegetation Community at the road: Refer to "Existing Vegetation at the well pad"

Existing Vegetation Community at the road attachment:

Existing Vegetation Community at the pipeline: Refer to "Existing Vegetation at the well pad"

Existing Vegetation Community at the pipeline attachment:

Existing Vegetation Community at other disturbances: None

Existing Vegetation Community at other disturbances attachment:

Non native seed used? N

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? N

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation? N

Well Name: BELL LAKE UNIT NORTH

Well Number: 215H

Seed harvest description:

Seed harvest description attachment:

Seed Management

Seed Table

Seed Summary

Total pounds/Acre:

Seed Type

Pounds/Acre

Seed reclamation attachment:

Operator Contact/Responsible Official Contact Info

First Name:

Last Name:

Phone:

Email:

Seedbed prep:

Seed BMP:

Seed method:

Existing invasive species? N

Existing invasive species treatment description:

Existing invasive species treatment attachment:

Weed treatment plan description: No invasive species present. Standard regular maintenance to maintain a clear location and road.

Weed treatment plan attachment:

Monitoring plan description: Identify areas supporting weeds prior to construction; prevent the introduction and spread of weeds from construction equipment during construction; and contain weed seeds and propagules by preventing segregated topsoil from being spread to adjacent areas. No invasive species present. Standard regular maintenance to maintain a clear location and road.

Monitoring plan attachment:

Success standards: To maintain all disturbed areas as per Gold Book standards

Pit closure description: N/A

Pit closure attachment:

Section 11 - Surface Ownership

Operator Name: KAISER FRANCIS OIL COMPANY	
Well Name: BELL LAKE UNIT NORTH	Well Number: 215H
Disturbance type: WELL PAD	
Describe:	
Surface Owner: BUREAU OF LAND MANAGEMENT	
Other surface owner description:	
BIA Local Office:	
BOR Local Office:	
COE Local Office:	
DOD Local Office:	
NPS Local Office:	
State Local Office:	
Military Local Office:	
USFWS Local Office:	
Other Local Office:	
USFS Region:	
USFS Forest/Grassland:	USFS Ranger District:
Disturbance type: NEW ACCESS ROAD	
Describe:	
Surface Owner: BUREAU OF LAND MANAGEMENT,S	TATE GOVERNMENT
Other surface owner description:	
BIA Local Office:	
BOR Local Office:	
COE Local Office:	
DOD Local Office:	
NPS Local Office:	CANAL OTE D. CARLODAD NIM 20020
State Local Office: NM STATE LAND OFFICE, 602 N (CANAL STE B, CARLSBAD NM 88220
Military Local Office:	
USFWS Local Office:	
Other Local Office:	

USFS Ranger District:

USFS Forest/Grassland:

USFS Region:

Operator Name: KAISER FRANCIS OIL COMPANY	
Well Name: BELL LAKE UNIT NORTH	Well Number: 215H
Disturbance type: WELL PAD	
Describe:	
Surface Owner: BUREAU OF LAND MANAGEMENT	
Other surface owner description:	
BIA Local Office:	
BOR Local Office:	
COE Local Office:	
DOD Local Office:	
NPS Local Office:	
State Local Office:	
Military Local Office:	
USFWS Local Office:	
Other Local Office:	
USFS Region:	
USFS Forest/Grassland:	USFS Ranger District:
Disturbance type: NEW ACCESS ROAD	
Describe:	
Surface Owner: BUREAU OF LAND MANAGEMENT,ST	ATE GOVERNMENT
Other surface owner description:	
BIA Local Office:	
BOR Local Office:	
COE Local Office:	
DOD Local Office:	
NPS Local Office:	ANNA OTE D. CARLORAD NIM 00000
State Local Office: NM STATE LAND OFFICE, 602 N C	ANAL STE B, CARLSBAD NM 88220
Military Local Office:	
USFWS Local Office:	
Other Local Office:	
USFS Region:	
USFS Forest/Grassland:	USFS Ranger District:

Well Name: BELL LAKE UNIT NORTH Well Number: 215H

Section 12 - Other Information

Right of Way needed? N

Use APD as ROW?

ROW Type(s):


ROW Applications

SUPO Additional Information:

Use a previously conducted onsite? Y

Previous Onsite information: Onsite conducted 10/24/2019 by Nik MacPhee (BLM), Eric Hansen (Kaiser-Francis) and Frank Jaramillo (Madron Surveying).

Other SUPO Attachment

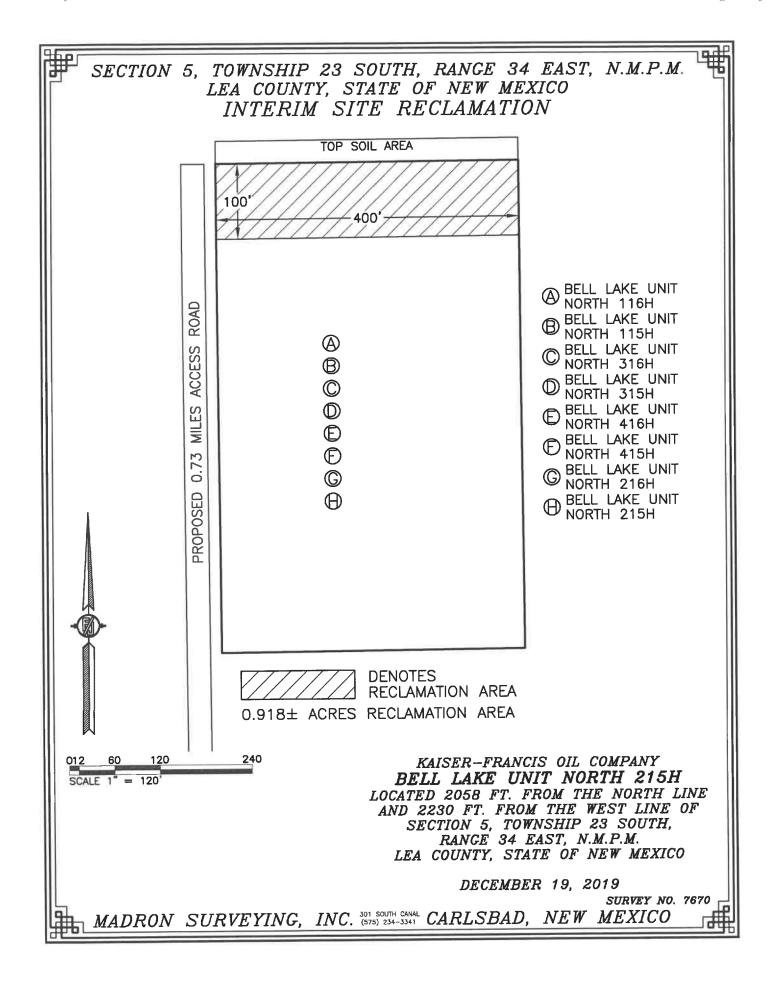



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

PWD Data Report

APD ID: 10400054238 Submission Date: 02/13/2020

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH
Well Type: OIL WELL
Well Work Type: Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? ${\sf N}$

Produced Water Disposal (PWD) Location:

PWD surface owner:

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Decribe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

PWD disturbance (acres):

Well Name: BELL LAKE UNIT NORTH Well Number: 215H

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD disturbance (acres): PWD surface owner:

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Decribe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Well Name: BELL LAKE UNIT NORTH Well Number: 215H

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner: PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number: Injection well name:

Assigned injection well API number? Injection well API number:

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner: PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner: PWD disturbance (acres):

Other PWD discharge volume (bbl/day):

Well Name: BELL LAKE UNIT NORTH Well Number: 215H

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Bond Info Data Report

11/30/2020

APD ID: 10400054238

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Type: OIL WELL

Submission Date: 02/13/2020

Highlighted data reflects the most

recent changes

Well Number: 215H

Show Final Text

Well Work Type: Drill

Bond Information

Federal/Indian APD: FED

BLM Bond number: WYB000055

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment:

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

☐ AMENDED REPORT


WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number	² Pool Code	² Pool Code ³ Pool Name					
30-025-48557	98259	Ojo Chiso; Bone Spring, Sou	Ojo Chiso; Bone Spring, Southwest				
* Property Code	5 Propert	⁶ Well Number					
316707	UNIT NORTH	215H					
OGRID No.	* Operato	⁹ Elevation					
12361	KAISER-FRANCIS OIL COMPANY 3437.4						

Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County			
F	5	23S	34E		2058	NORTH	2230	WEST	LEA			
" Bottom Hole Location If Different From Surface												
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County			
N	8	23S	34E		100	SOUTH	2110	WEST	LEA			
¹² Dedicated Acre	s ¹³ Joint	or Infill	4 Consolidation	Code	15 Order No.							
480					R-14527A							

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

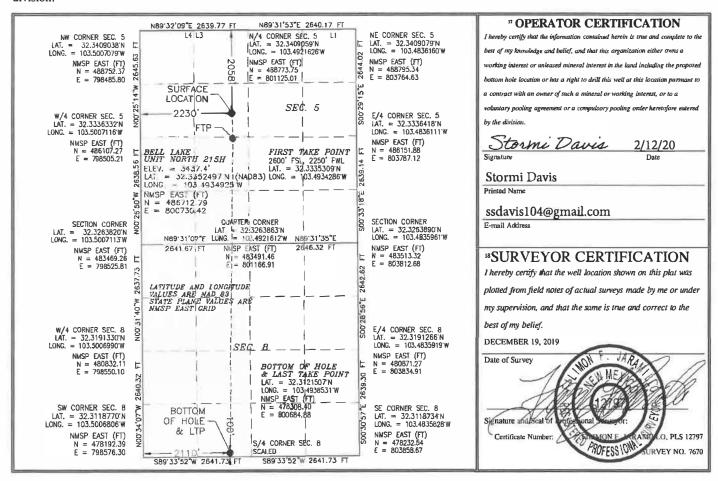

Date: 01/10/2020

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Original to Appropriate District Office

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

GAS CAPTURE PLAN

Date	
□ Original	Operator & OGRID No.: Kaiser-Francis Oil Company, 12361
☐ Amended - Reason for Amendment:	

This Gas Capture Plan outlines actions to be taken by the Operator to reduce well/production facility flaring/venting for new completion (new drill, recomplete to new zone, re-frac) activity.

Note: Form C-129 must be submitted and approved prior to exceeding 60 days allowed by Rule (Subsection A of 19.15.18.12 NMAC).

Well(s)/Production Facility - Name of facility

The well(s) that will be located at the production facility are shown in the table below.

Well Name	API	Well Location (ULSTR)	Footages	Expected MCF/D	Flared or Vented	Comments
Bell Lake Unit North 116H		5-23S-34E		2000	0	
Bell Lake Unit North 216H		5-23S-34E		2000	0	
Bell Lake Unit North 316H		5-23S-34E		2000	0	
Bell Lake Unit North 416H		5-23S-34E		2000	0	
Bell Lake Unit North 115H		5-23S-34E		2000	0	
Bell Lake Unit North 215H		5-23S-34E	30-025-48557	2000	0	
Bell Lake Unit North 315H		5-23S-34E		2000	0	
Bell Lake Unit North 415H		5-23S-34E		2000	0	

Gathering System and Pipeline Notification

Well(s) will be connected to a production facility after flowback operations are complete, if gas transporter system is in place. The gas produced from production facility is dedicated to <u>Targa</u> and will be connected to <u>Targa</u> low/high pressure gathering system located in <u>Lea_ County</u>, New Mexico. It will require <u>11,000</u>' of pipeline to connect the facility to low/high pressure gathering system. <u>Kaiser-Francis Oil Company</u> provides (periodically) to <u>Targa</u> a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, <u>Kaiser-Francis Oil Company</u> and <u>Targa</u> have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at <u>Targa</u> Processing Plant located in Sec. <u>36</u>, Twn. <u>198</u>, Rng. <u>36E</u>, <u>Lea_ County</u>, New Mexico. The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

Flowback Strategy

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on <u>Targa</u> system at that time. Based on current information, it is <u>Kaiser-Francis Oil Company's</u> belief the system can take this gas upon completion of the well(s).

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

Alternatives to Reduce Flaring

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation On lease
 - o Only a portion of gas is consumed operating the generator, remainder of gas will be flared
- Compressed Natural Gas On lease
 - o Gas flared would be minimal, but might be uneconomical to operate when gas volume declines
- NGL Removal On lease
 - Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines

Well Name: BELL LAKE UNIT NORTH Well Number: 215H

Pressure Rating (PSI): 5M Rating Depth: 13000

Equipment: A 5M system will be installed according to Onshore Order #2 consisting of an Annular Preventer, BOP with two rams, a blind ram and safety valves and appropriate handles located on the rig floor. BOP will be equipped with 2 side outlets (choke side shall be a minimum 3 line, and kill side will be a minimum 2 line). Kill line will be installed with (2) valves and a check valve (2 min) of proper pressure rating for the system. Remote kill line (2 min) will be installed and ran to the outer edge of the substructure and be unobstructed. A manual and hydraulic valve (3 min) will be installed on the choke line, 3 chokes will be used with one being remotely controlled. Fill up line will be installed above the uppermost preventer. Pressure gauge of proper pressure rating will be installed on choke manifold. Upper and lower kelly cocks will be utilized with handles readily available in plain sight. A float sub will be available at all times. All connections subject to well pressure will be flanged, welded, or clamped.

Requesting Variance? YES

Variance request: Flex Hose Variance MultiBowl Wellhead

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all of the components installed will be functional and tested.

Choke Diagram Attachment:

BLUN_215H_Choke_Manifold_20200213061450.pdf

BOP Diagram Attachment:

Cactus_Flex_Hose_16C_Certification_20200203142843.pdf
BLUN_215H_BOP_20200213061511.pdf
BLUN_215H_Well_Head_20200213061512.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	1250	0	1250	3437	2187	1250	J-55	54.5	BUTT	1.9	4.7	DRY	13.3	DRY	12.5
2	INTERMED IATE	12.2 5	9.625	NEW	API	N	0	4952	0	4950		-1513	4952	HCP -110	40	LT&C	1.8	3.4	DRY	6.4	DRY	6.4
3	PRODUCTI ON	8.75	5.5	NEW	API	N	0	18304	0	10195		-6758	18304	P- 110	-	OTHER - GBCD	2.4	2.7	DRY	3.3	DRY	3.1

Casing Attachments

Well Name: BELL LAKE UNIT NORTH Well Number: 215H

Casing Attachments

Casing ID: 1

String Type: SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

BLUN_215H_Casing_Assumptions_20200213061842.pdf

Casing ID: 2

String Type: INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

BLUN_215H_Casing_Assumptions_20200213061659.pdf

Casing ID: 3

String Type:PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

GBCD_5.5in_Connection_Spec_Sheet_20200124075519.pdf

BLUN_215H_Casing_Assumptions_20200213061811.pdf

Section 4 - Cement

Well Name: BELL LAKE UNIT NORTH Well Number: 215H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	1250	700	1.7	13.5	1223	75	HALCEM	4% Bentonite
SURFACE	Tail		0	1250	248	1.3	14.8	331	75	Halcem	0.125 #/sk Poly Flake
INTERMEDIATE	Lead		0	4952	790	2.08	12.5	1650	50	EconoCem	3#/sk Kol Seal
INTERMEDIATE	Tail		0	4952	545	1.3	14.8	726	50	Halcem	none
PRODUCTION	Lead		4000	1830 4	397	3.5	10.5	1386	10	NeoCem	2#/sk Kol Seal
PRODUCTION	Tail		4000	1830 4	1814	1.2	14.5	2219	10	Versacem	none

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all time.

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Depth	Bottom Depth	Mud Type	Min Weight (Ibs/gal)	. Weight (Ibs/gal)	Density (lbs/cu ft)	Strength (lbs/100 sqft)		Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
Top	Bot	Mu	ΣΞ	Мах	Del	Gel	표		Sa	置	Add
4950	1019 5	OIL-BASED MUD	8.7	8.9							
1250	4950	OTHER : Diesel- Brine Emulsion	8.7	8.9							
0	1250	OTHER : Fresh Water	8.4	9							

Page 4 of 6

Date: 3/12/2021

To: NMOCD

From: Charlotte Van Valkenburg

Re: Closed-Loop System

It is the intention of Kaiser-Francis Oil Company to use a closed-loop system during drilling of the following well:

Bell Lake Unit North 215H Sec. 5-23S-34E Lea Co., NM

Charlotte Van Valkenburg

Mgr., Regulatory Compliance

Kaiser-Francis Oil Company

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III
1000 Rio Brazos Rd., Aztec, NM 87410

Phone:(505) 334-6178 Fax:(505) 334-6170 1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 20663

CONDITIONS OF APPROVAL

Operator:			OGRID:		Action Number:	Action Type:
KAISER-FRANCIS OIL CO	P.O. Box 21468	Tulsa, OK74121	123	61	20663	FORM 3160-3

OCD Reviewer	Condition
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string