

(SUBMIT IN TRIPLICATE)


Indian Agency

Navajo Tribal

Allottee

Lease No. 14-20-603-2085

Old Trading Post

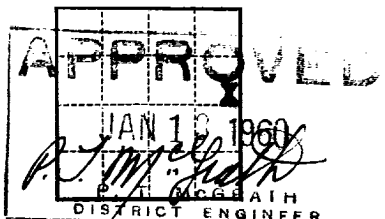

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL		SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO REDRILL OR REPAIR WELL		SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL	X		

RECEIVED
JAN 18 1960
U. S. GEOLOGICAL SURVEY
FARMINGTON, NEW MEXIC

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Old Trading Post

Farmington, New Mexico, January 14, 1960

Well No. 2 is located 1880 ft. from $\left\{ \begin{smallmatrix} N \\ E \end{smallmatrix} \right\}$ line and 660 ft. from $\left\{ \begin{smallmatrix} E \\ S \end{smallmatrix} \right\}$ line of sec. 10NE 1/4 of Section 10
(1/4 Sec. and Sec. No.)T-26N
(Twp.)R-14W
(Range)N.M.P.M.
(Meridian)Undesignated Gallup
(Field)San Juan
(County or Subdivision)New Mexico
(State or Territory)

The elevation of the derrick floor above sea level is 6153 ft. (RDS)

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

As a result of not obtaining a commercial oil well, we propose to plug and abandon Old Trading Post No. 2 as follows:

1. Spot 30 sack cement plug on bottom (approximately 360' of fill-up in casing) and squeeze with minimum pressure to cement off circumferential cut.
2. Cut off and pull recoverable 4-1/2" casing.
3. Spot 50 sack cement plug across casing stub to extend 50' down pipe and 100' up into open hole.
4. Spot 100 sack cement plug 1200-1450 across Pictured Cliffs formation.
5. Spot 10 sack cement surface plug 0-30' and erect Dry Hole Marker.
6. Fill hole with mud-laden fluid between cement plugs.
7. If pipe recovery is considerably less than 3500' the above plugging procedure may need to be modified.
8. Verbal approval for plugging procedure received from Mr. Shager to Mr. Bauer January 13, 1960.

I understand that this plan & work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Pan American Petroleum Corporation

Address Box 487

Farmington, New Mexico

Attn: L. O. Speer, Jr.

ORIGINAL SIGNED BY
R. M. Bauer, Jr.

By

Title Area Engineer

JAN 25 1960

OIL CON. COM.
DIST. 3

