

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 307997

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address STEWARD ENERGY II, LLC 2600 Dallas Parkway Frisco, TX 75034		2. OGRID Number 371682
		3. API Number 30-025-49775
4. Property Code 332349	5. Property Name HUELL FEE	6. Well No. 005H

7. Surface Location

UL - Lot N	Section 10	Township 13S	Range 38E	Lot Idn N	Feet From 381	N/S Line S	Feet From 2479	E/W Line W	County Lea
---------------	---------------	-----------------	--------------	--------------	------------------	---------------	-------------------	---------------	---------------

8. Proposed Bottom Hole Location

UL - Lot M	Section 15	Township 13S	Range 38E	Lot Idn M	Feet From 100	N/S Line S	Feet From 1200	E/W Line W	County Lea
---------------	---------------	-----------------	--------------	--------------	------------------	---------------	-------------------	---------------	---------------

9. Pool Information

BRONCO;SAN ANDRES, SOUTH	7500
--------------------------	------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type Private	15. Ground Level Elevation 3810
16. Multiple N	17. Proposed Depth 11000	18. Formation San Andres	19. Contractor	20. Spud Date 4/2/2022
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	12.25	9.625	36	2250	855	0
Prod	8.5	7	29	5600	0	0
Prod	8.5	5.5	20	11000	2800	0

Casing/Cement Program: Additional Comments

--

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Annular	3000	1500	schafer
Double Ram	3000	1500	schafer

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable.	OIL CONSERVATION DIVISION	
Signature:		
Printed Name: Electronically filed by Scott Stedman	Approved By: Paul F Kautz	
Title: Executive Vice President	Title: Geologist	
Email Address: scott.stedman@stewardenergy.net	Approved Date: 2/16/2022	Expiration Date: 2/16/2024
Date: 2/15/2022	Phone: 214-297-0514	Conditions of Approval Attached

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-49775	² Pool Code 7500	³ Pool Name BRONCO; SAN ANDRES, SOUTH
⁴ Property Code 371682	⁵ Property Name HUELL FEE	⁶ Well Number 5H
⁷ OGRID No. 371682	⁸ Operator Name STEWART ENERGY II, LLC	⁹ Elevation 3810'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	10	13S	38E		381	SOUTH	2479	WEST	LEA

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	15	13S	38E		100	SOUTH	1200	WEST	LEA

¹² Dedicated Acres 320.0	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
---	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

CORNER COORDINATES NAD 83, SPCS NM EAST
A - X: 923230.68' / Y: 802188.34'
B - X: 923298.37' / Y: 796935.38'
C - X: 920662.84' / Y: 796886.16'
D - X: 920597.59' / Y: 802156.83'

CORNER COORDINATES NAD 27, SPCS NM EAST
A - X: 882054.83' / Y: 802125.23'
B - X: 882122.48' / Y: 796872.42'
C - X: 879486.96' / Y: 796823.07'
D - X: 879421.74' / Y: 802093.60'

SURFACE HOLE LOCATION
381' FSL 2479' FWL, SECTION 10
NAD 83, SPCS NM EAST
X: 923073.43' / Y: 802567.71'
LAT: 33.19996790N / LON: 103.08539337W
NAD 27, SPCS NM EAST
X: 881897.58' / Y: 802504.59'
LAT: 33.19986047N / LON: 103.08489401W

KICK OFF/FIRST TAKE POINT
100' FSL 1200' FWL, SECTION 15
NAD 83, SPCS NM EAST
X: 921798.74' / Y: 802071.20'
LAT: 33.19864527N / LON: 103.08957892W
NAD 27, SPCS NM EAST
X: 880622.89' / Y: 802008.03'
LAT: 33.19853769N / LON: 103.08907946W

LAST TAKE POINT/BOTTOM HOLE LOCATION
100' FSL 1200' FWL, SECTION 15
NAD 83, SPCS NM EAST
X: 921861.42' / Y: 797008.56'
LAT: 33.18473196N / LON: 103.08957074W
NAD 27, SPCS NM EAST
X: 880685.54' / Y: 796945.53'
LAT: 33.18462433N / LON: 103.08907145W

¹⁷ OPERATOR CERTIFICATION
I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature: *Vanessa Lopez* Date: *2/10/22*
Printed Name: *Vanessa Lopez*
E-mail Address: *Vanessa.Lopez@stewardenergy.com*


¹⁸ SURVEYOR CERTIFICATION
I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

FEBRUARY 8, 2022
Date of Survey
Signature and Seal of Professional Surveyor: *David W. Myers*
Certificate Number: *DAVID W. MYERS 11403*

Distances/areas relative to NAD 83 Combined Scale Factor: 0.99990013 Convergence Angle: 00°41'16.54001"

☐ Horizontal Spacing Unit

LOCATION VERIFICATION MAP

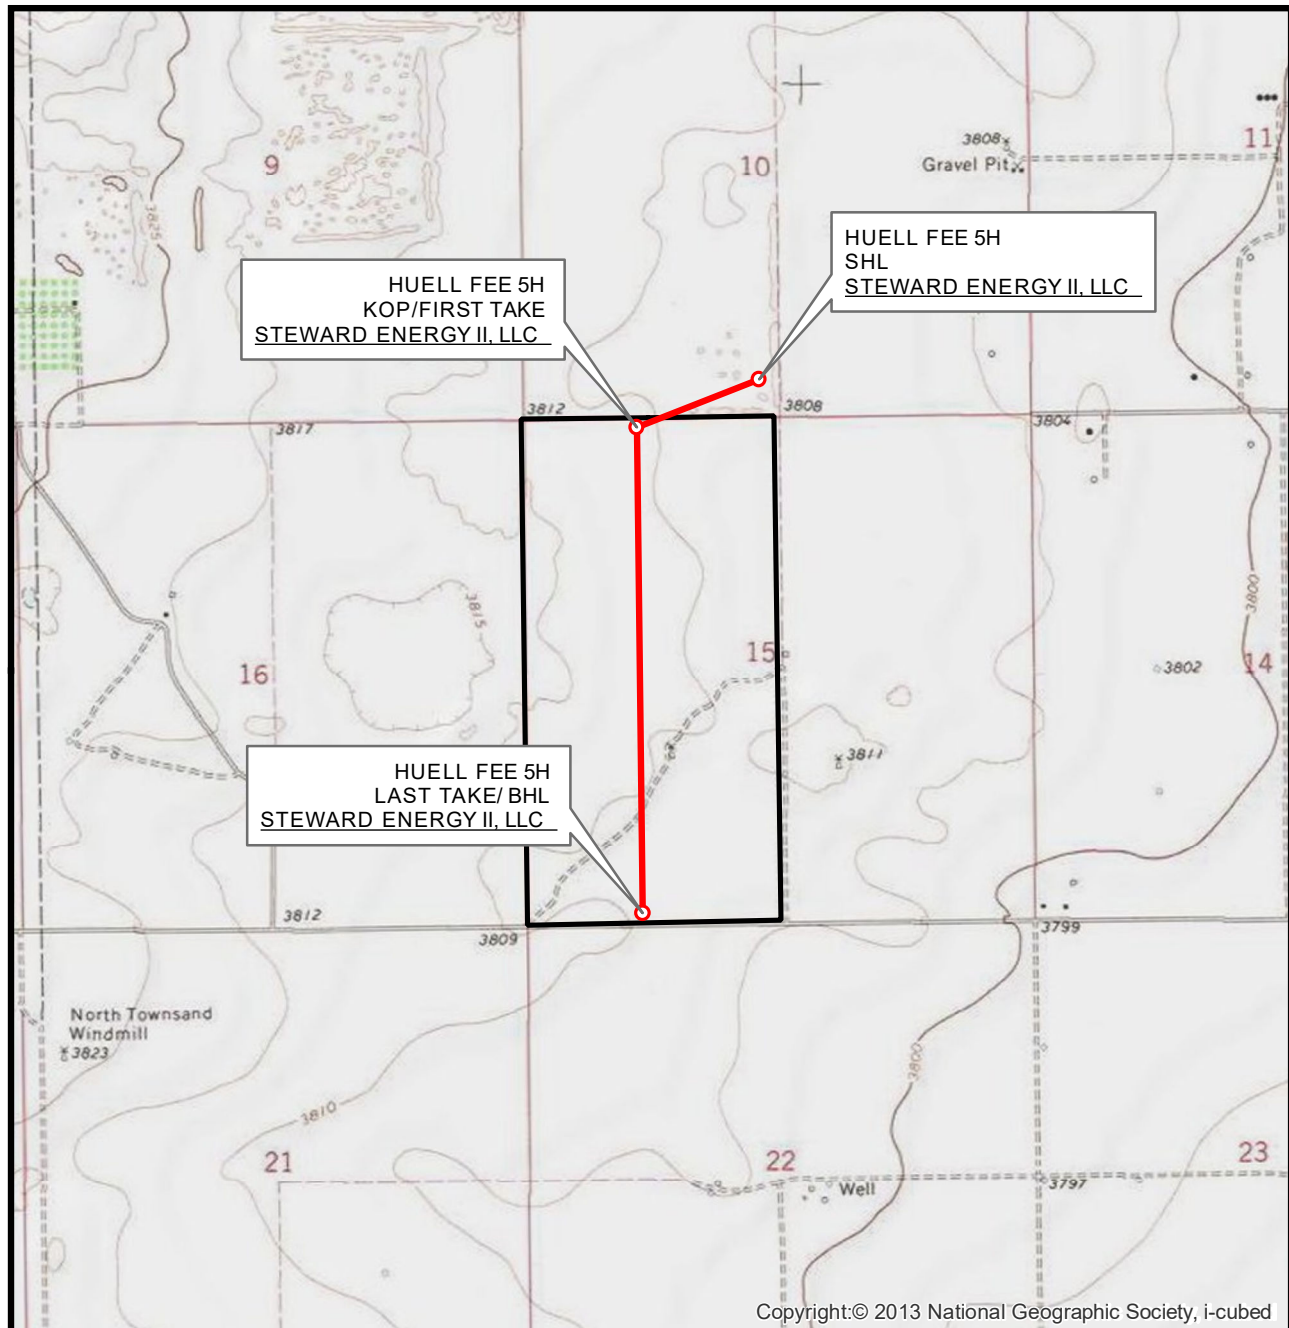

SEC. 10 TWP. 13-S RGE. 38-E
 SURVEY: N.M.P.M.
 COUNTY: LEA
 OPERATOR: STEWARD ENERGY II, LLC
 DESCRIPTION: 381' FSL & 2479' FWL
 ELEVATION: 3810'
 LEASE: HUELL FEE
 U.S.G.S. TOPOGRAPHIC MAP: PRAIRIEVIEW NE, NM, TX.


1" = 2,000'
 CONTOUR INTERVAL = 5'



SHEET 2 OF 3

PREPARED BY:
 R-SQUARED GLOBAL, LLC
 510 TRENTON ST., UNIT B, WEST MONROE, LA 71291
 318-323-6900 OFFICE
 JOB No. R4218_001

VICINITY MAP

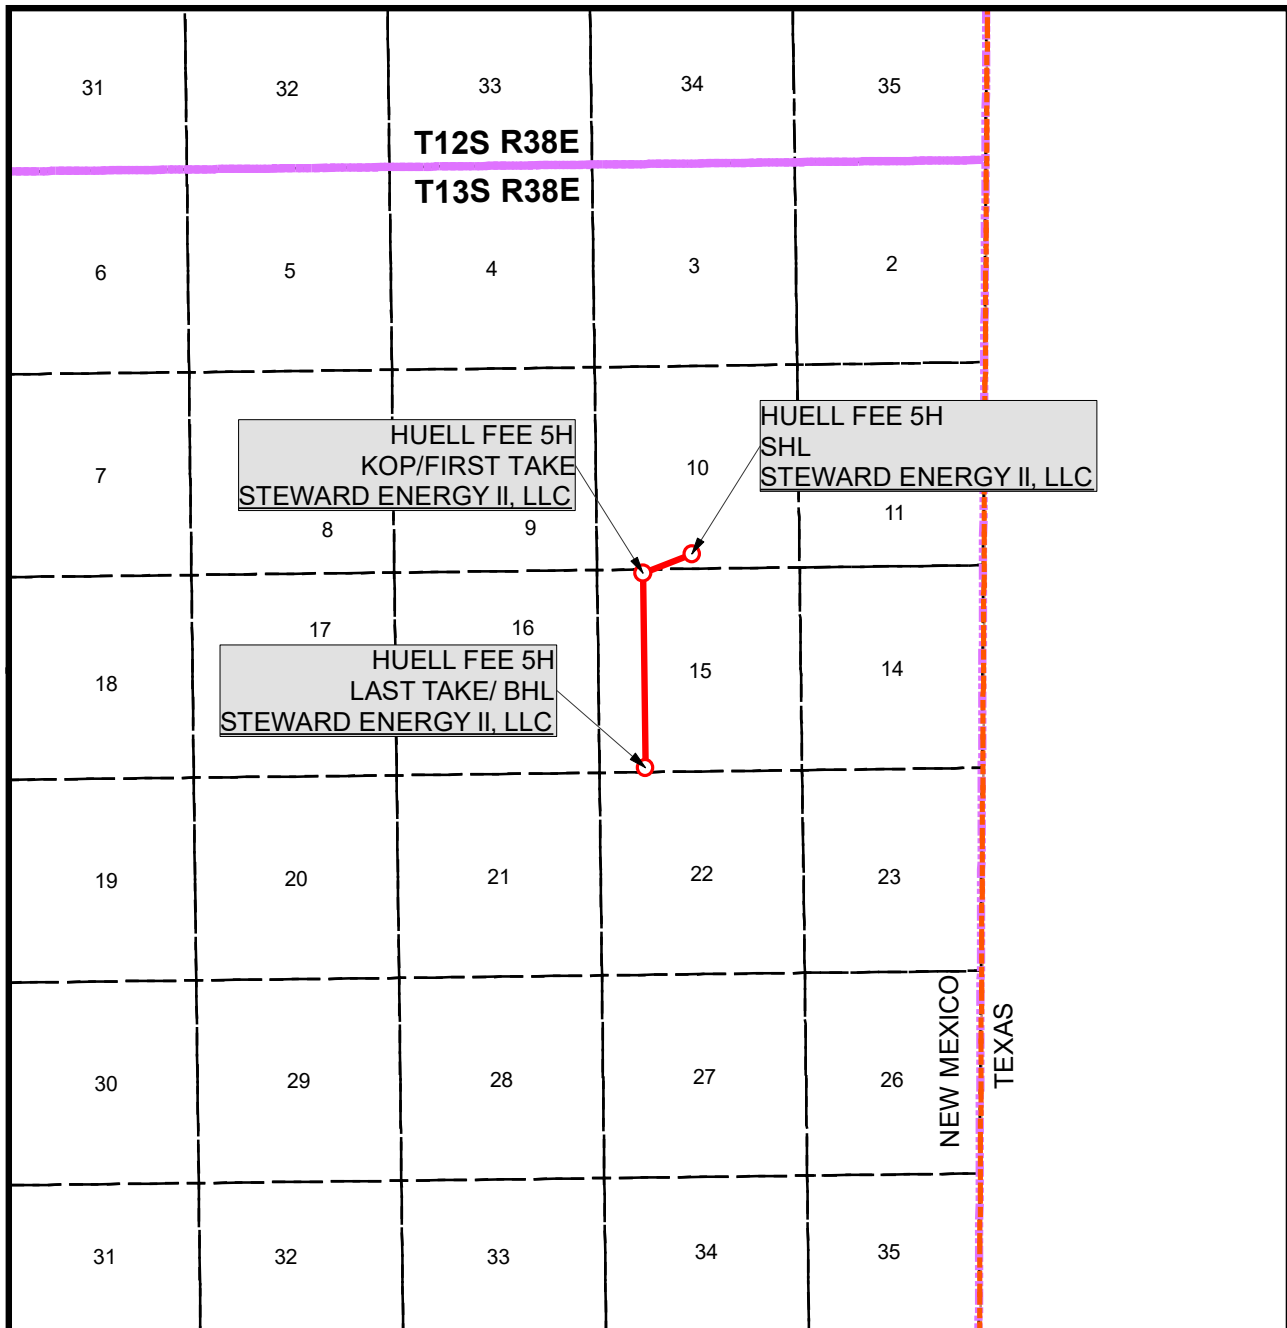

SEC. 10 TWP. 13-S RGE. 38-E
 SURVEY: N.M.P.M.
 COUNTY: LEA
 OPERATOR: STEWARD ENERGY II, LLC
 DESCRIPTION: 381' FSL & 2479' FWL
 ELEVATION: 3810'
 LEASE: HUELL FEE
 U.S.G.S. TOPOGRAPHIC MAP: PRAIRIEVIEW NE, NM, TX.

1" = 1 MILE



SHEET 3 OF 3

PREPARED BY:
 R-SQUARED GLOBAL, LLC
 510 TRENTON ST., UNIT B, WEST MONROE, LA 71291
 318-323-6900 OFFICE
 JOB No. R4218_001

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Comments

Permit 307997

PERMIT COMMENTS

Operator Name and Address: STEWARD ENERGY II, LLC [371682] 2600 Dallas Parkway Frisco, TX 75034		API Number: 30-025-49775
		Well: HUELL FEE #005H

Created By	Comment	Comment Date
vlopez	ALL TAPPERED STRING- ALL CEMENT IS ON 5 1/2" CASING	2/10/2022
ahvermersch	Fee Cancellation - Card Declined per operator	2/14/2022

District I

1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions

Permit 307997

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address: STEWARD ENERGY II, LLC [371682] 2600 Dallas Parkway Frisco, TX 75034	API Number: 30-025-49775
	Well: HUELL FEE #005H

OCD Reviewer	Condition
pkautz	Notify OCD 24 hours prior to casing & cement
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system
pkautz	Cement is required to circulate on both surface and production strings of casing
pkautz	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud

Steward Energy II, LLC

DrilTech, LLC

Steward Energy II, LLC

Huell Fee 5H
Wellbore #1
Plan #1 BLM



SURFACE LOCATION

US State Plane 1983
New Mexico Eastern Zone
Elevation: Mean Sea Level (System)




Northing	Easting	Latitude	Longitude
802383.23	920816.10	33.200	-103.093

WELLBORE TARGET DETAILS (MAP CO-ORDINATES)

Name	TVD	+N/-S	+E/-W	Northing	Eas
SHL Huell Fee 5H	0.00	0.00	0.00	802383.23	920816.10
FTP Huell Fee 5H	5350.00	-360.70	1121.80	802022.53	921937.00
LTP Huell Fee 5H	5350.00	-5383.17	1186.41	797000.07	922007.00

LATERAL SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	Vsect
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00
1660.00	17.00	55.00	1640.13	114.88	164.06	1.25	-112.75
2960.00	17.00	55.00	2883.33	332.89	475.41	0.00	-326.72
4320.00	0.00	0.00	4223.46	447.76	639.47	1.25	-439.47
4624.53	0.00	0.00	4527.99	447.76	639.47	0.00	-439.47
5374.53	60.00	159.12	5148.24	113.18	767.10	8.00	-103.26
5624.53	60.00	159.12	5273.24	-89.11	844.27	0.00	100.00
5924.53	90.00	159.12	5350.00	-356.77	946.37	10.00	368.96
6931.58	90.00	179.26	5350.00	-1340.87	1134.27	2.00	1355.40
10974.22	90.00	179.26	5350.00	-5383.17	1186.41	0.00	5398.05

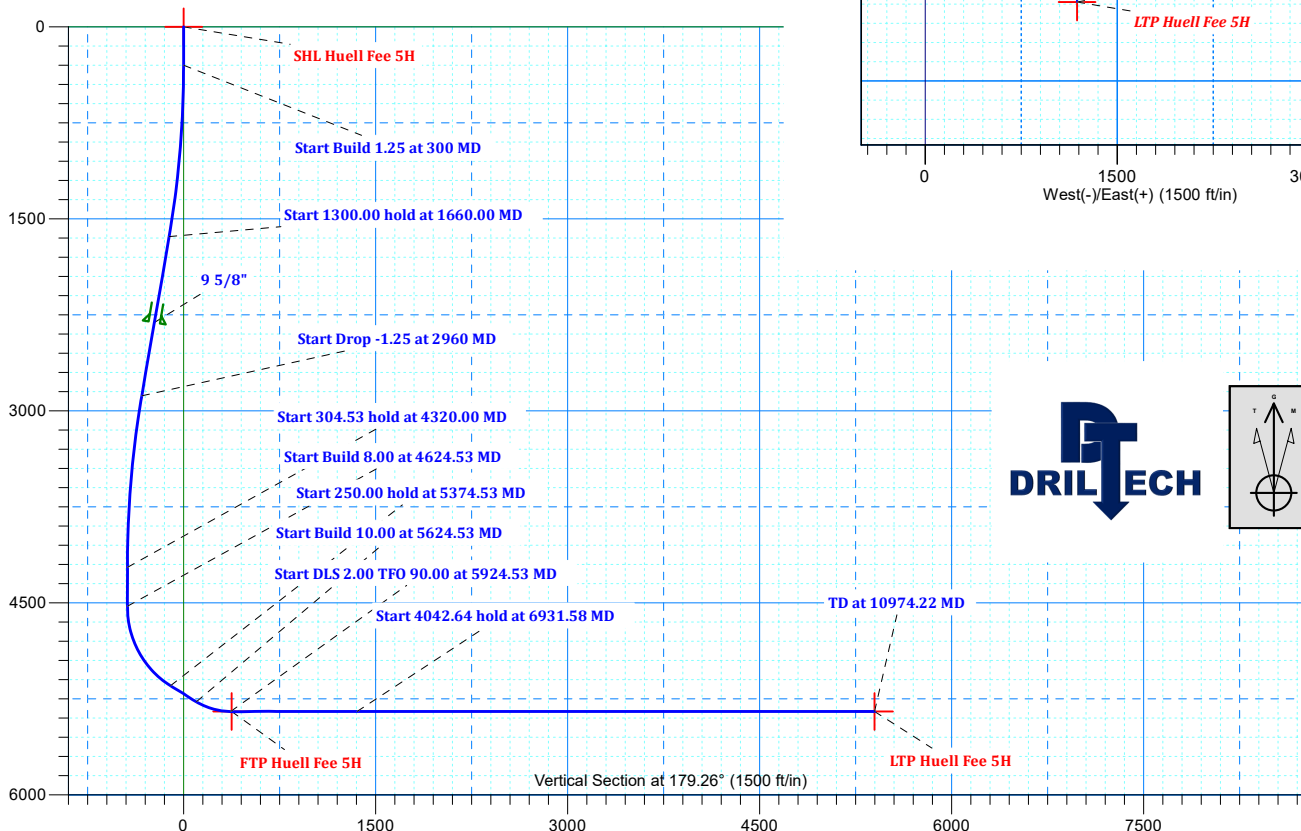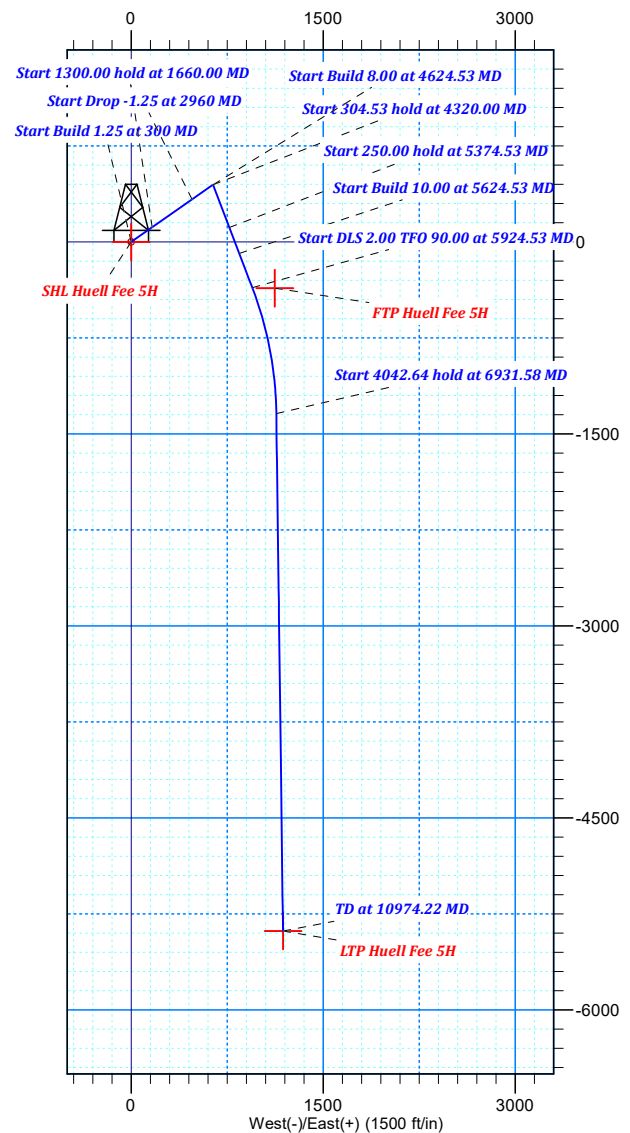

Steward Energy II, LLC

Lea County, NM (NAD 83) NM East Zone

Huell Fee 5H

Huell Fee 5H

Wellbore #1

Plan: Plan #1 BLM

Standard Planning Report

07 December, 2021

Planning Report

Database:	EDM	Local Co-ordinate Reference:	Well Huell Fee 5H
Company:	Steward Energy II, LLC	TVD Reference:	Mean Sea Level (System)
Project:	Lea County, NM (NAD 83) NM East Zone	MD Reference:	Mean Sea Level (System)
Site:	Huell Fee 5H	North Reference:	Grid
Well:	Huell Fee 5H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 BLM		

Project	Lea County, NM (NAD 83) NM East Zone		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Huell Fee 5H			
Site Position:		Northing:	802,383.23 usft	Latitude: 33.200
From:	Lat/Long	Easting:	920,816.10 usft	Longitude: -103.093
Position Uncertainty:	0.00 ft	Slot Radius:	13.200 in	

Well	Huell Fee 5H			
Well Position	+N/-S	0.00 ft	Northing:	802,383.23 usft
	+E/-W	0.00 ft	Easting:	920,816.10 usft
Position Uncertainty		0.00 ft	Wellhead Elevation:	ft
Grid Convergence:		0.68 °	Ground Level:	ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	12/7/2021	6.34	60.83	48,092.13418668

Design	Plan #1 BLM			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	179.26

Plan Survey Tool Program	Date	12/7/2021		
Depth From (ft)	Depth To (ft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	10,974.22	Plan #1 BLM (Wellbore #1)	MWD
			MWD - Standard	

Planning Report

Database:	EDM	Local Co-ordinate Reference:	Well Huell Fee 5H
Company:	Steward Energy II, LLC	TVD Reference:	Mean Sea Level (System)
Project:	Lea County, NM (NAD 83) NM East Zone	MD Reference:	Mean Sea Level (System)
Site:	Huell Fee 5H	North Reference:	Grid
Well:	Huell Fee 5H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 BLM		

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,660.00	17.00	55.00	1,640.13	114.88	164.06	1.25	1.25	0.00	55.00	
2,960.00	17.00	55.00	2,883.33	332.89	475.41	0.00	0.00	0.00	0.00	
4,320.00	0.00	0.00	4,223.46	447.76	639.47	1.25	-1.25	0.00	180.00	
4,624.53	0.00	0.00	4,527.99	447.76	639.47	0.00	0.00	0.00	0.00	
5,374.53	60.00	159.12	5,148.24	113.18	767.10	8.00	8.00	0.00	159.12	
5,624.53	60.00	159.12	5,273.24	-89.11	844.27	0.00	0.00	0.00	0.00	
5,924.53	90.00	159.12	5,350.00	-356.77	946.37	10.00	10.00	0.00	0.00	
6,931.58	90.00	179.26	5,350.00	-1,340.87	1,134.27	2.00	0.00	2.00	90.00	
10,974.22	90.00	179.26	5,350.00	-5,383.17	1,186.41	0.00	0.00	0.00	0.00	LTP Huell Fee 5H

Planning Report

Database:	EDM	Local Co-ordinate Reference:	Well Huell Fee 5H
Company:	Steward Energy II, LLC	TVD Reference:	Mean Sea Level (System)
Project:	Lea County, NM (NAD 83) NM East Zone	MD Reference:	Mean Sea Level (System)
Site:	Huell Fee 5H	North Reference:	Grid
Well:	Huell Fee 5H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 BLM		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Build 1.25 at 300 MD									
400.00	1.25	55.00	399.99	0.63	0.89	-0.61	1.25	1.25	0.00
500.00	2.50	55.00	499.94	2.50	3.57	-2.46	1.25	1.25	0.00
600.00	3.75	55.00	599.79	5.63	8.04	-5.52	1.25	1.25	0.00
700.00	5.00	55.00	699.49	10.00	14.29	-9.82	1.25	1.25	0.00
800.00	6.25	55.00	799.01	15.63	22.32	-15.34	1.25	1.25	0.00
900.00	7.50	55.00	898.29	22.49	32.12	-22.08	1.25	1.25	0.00
1,000.00	8.75	55.00	997.28	30.60	43.70	-30.03	1.25	1.25	0.00
1,100.00	10.00	55.00	1,095.94	39.94	57.04	-39.20	1.25	1.25	0.00
1,200.00	11.25	55.00	1,194.23	50.52	72.15	-49.58	1.25	1.25	0.00
1,300.00	12.50	55.00	1,292.09	62.32	89.00	-61.17	1.25	1.25	0.00
1,400.00	13.75	55.00	1,389.47	75.34	107.60	-73.95	1.25	1.25	0.00
1,500.00	15.00	55.00	1,486.34	89.58	127.94	-87.92	1.25	1.25	0.00
1,600.00	16.25	55.00	1,582.64	105.03	150.00	-103.09	1.25	1.25	0.00
1,660.00	17.00	55.00	1,640.13	114.88	164.06	-112.75	1.25	1.25	0.00
Start 1300.00 hold at 1660.00 MD									
1,700.00	17.00	55.00	1,678.39	121.59	173.64	-119.33	0.00	0.00	0.00
1,800.00	17.00	55.00	1,774.02	138.36	197.59	-135.79	0.00	0.00	0.00
1,900.00	17.00	55.00	1,869.65	155.13	221.54	-152.25	0.00	0.00	0.00
2,000.00	17.00	55.00	1,965.28	171.90	245.49	-168.71	0.00	0.00	0.00
2,100.00	17.00	55.00	2,060.91	188.67	269.44	-185.17	0.00	0.00	0.00
2,200.00	17.00	55.00	2,156.54	205.43	293.39	-201.63	0.00	0.00	0.00
2,300.00	17.00	55.00	2,252.17	222.20	317.34	-218.09	0.00	0.00	0.00
2,360.47	17.00	55.00	2,310.00	232.35	331.82	-228.04	0.00	0.00	0.00
9 5/8"									
2,400.00	17.00	55.00	2,347.80	238.97	341.29	-234.55	0.00	0.00	0.00
2,500.00	17.00	55.00	2,443.43	255.74	365.24	-251.01	0.00	0.00	0.00
2,600.00	17.00	55.00	2,539.06	272.51	389.19	-267.46	0.00	0.00	0.00
2,700.00	17.00	55.00	2,634.69	289.28	413.14	-283.92	0.00	0.00	0.00
2,800.00	17.00	55.00	2,730.32	306.05	437.09	-300.38	0.00	0.00	0.00
2,900.00	17.00	55.00	2,825.95	322.82	461.04	-316.84	0.00	0.00	0.00
2,960.00	17.00	55.00	2,883.33	332.89	475.41	-326.72	0.00	0.00	0.00
Start Drop -1.25 at 2960 MD									
3,000.00	16.50	55.00	2,921.63	339.50	484.85	-333.21	1.25	-1.25	0.00
3,100.00	15.25	55.00	3,017.82	355.19	507.26	-348.61	1.25	-1.25	0.00
3,200.00	14.00	55.00	3,114.57	369.67	527.94	-362.82	1.25	-1.25	0.00
3,300.00	12.75	55.00	3,211.86	382.94	546.89	-375.84	1.25	-1.25	0.00
3,400.00	11.50	55.00	3,309.63	394.98	564.10	-387.67	1.25	-1.25	0.00
3,500.00	10.25	55.00	3,407.83	405.81	579.55	-398.29	1.25	-1.25	0.00
3,600.00	9.00	55.00	3,506.42	415.40	593.25	-407.70	1.25	-1.25	0.00
3,700.00	7.75	55.00	3,605.35	423.75	605.18	-415.90	1.25	-1.25	0.00
3,800.00	6.50	55.00	3,704.58	430.86	615.34	-422.88	1.25	-1.25	0.00
3,900.00	5.25	55.00	3,804.05	436.73	623.72	-428.64	1.25	-1.25	0.00
4,000.00	4.00	55.00	3,903.72	441.36	630.33	-433.18	1.25	-1.25	0.00
4,100.00	2.75	55.00	4,003.55	444.74	635.15	-436.50	1.25	-1.25	0.00
4,200.00	1.50	55.00	4,103.48	446.86	638.19	-438.58	1.25	-1.25	0.00
4,300.00	0.25	55.00	4,203.46	447.74	639.44	-439.44	1.25	-1.25	0.00
4,320.00	0.00	0.00	4,223.46	447.76	639.47	-439.47	1.25	-1.25	0.00
Start 304.53 hold at 4320.00 MD									
4,400.00	0.00	0.00	4,303.46	447.76	639.47	-439.47	0.00	0.00	0.00

Planning Report

Database:	EDM	Local Co-ordinate Reference:	Well Huell Fee 5H
Company:	Steward Energy II, LLC	TVD Reference:	Mean Sea Level (System)
Project:	Lea County, NM (NAD 83) NM East Zone	MD Reference:	Mean Sea Level (System)
Site:	Huell Fee 5H	North Reference:	Grid
Well:	Huell Fee 5H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 BLM		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,500.00	0.00	0.00	4,403.46	447.76	639.47	-439.47	0.00	0.00	0.00
4,600.00	0.00	0.00	4,503.46	447.76	639.47	-439.47	0.00	0.00	0.00
4,624.53	0.00	0.00	4,527.99	447.76	639.47	-439.47	0.00	0.00	0.00
Start Build 8.00 at 4624.53 MD									
4,700.00	6.04	159.12	4,603.32	444.05	640.89	-435.74	8.00	8.00	0.00
4,800.00	14.04	159.12	4,701.71	427.78	647.10	-419.39	8.00	8.00	0.00
4,900.00	22.04	159.12	4,796.72	398.87	658.12	-390.34	8.00	8.00	0.00
5,000.00	30.04	159.12	4,886.50	357.89	673.76	-349.16	8.00	8.00	0.00
5,100.00	38.04	159.12	4,969.30	305.64	693.69	-296.65	8.00	8.00	0.00
5,200.00	46.04	159.12	5,043.51	243.12	717.54	-233.83	8.00	8.00	0.00
5,300.00	54.04	159.12	5,107.68	171.57	744.83	-161.93	8.00	8.00	0.00
5,374.53	60.00	159.12	5,148.24	113.18	767.10	-103.26	8.00	8.00	0.00
Start 250.00 hold at 5374.53 MD									
5,400.00	60.00	159.12	5,160.97	92.57	774.97	-82.55	0.00	0.00	0.00
5,500.00	60.00	159.12	5,210.97	11.66	805.83	-1.25	0.00	0.00	0.00
5,600.00	60.00	159.12	5,260.97	-69.26	836.70	80.06	0.00	0.00	0.00
5,624.53	60.00	159.12	5,273.24	-89.11	844.27	100.00	0.00	0.00	0.00
Start Build 10.00 at 5624.53 MD									
5,700.00	67.55	159.12	5,306.56	-152.32	868.38	163.52	10.00	10.00	0.00
5,800.00	77.55	159.12	5,336.52	-241.34	902.34	252.97	10.00	10.00	0.00
5,900.00	87.55	159.12	5,349.47	-333.86	937.63	345.94	10.00	10.00	0.00
5,924.53	90.00	159.12	5,350.00	-356.77	946.37	368.96	10.00	10.00	0.00
Start DLS 2.00 TFO 90.00 at 5924.53 MD									
6,000.00	90.00	160.63	5,350.00	-427.63	972.34	440.16	2.00	0.00	2.00
6,100.00	90.00	162.63	5,350.00	-522.53	1,003.85	535.45	2.00	0.00	2.00
6,200.00	90.00	164.63	5,350.00	-618.47	1,032.04	631.75	2.00	0.00	2.00
6,300.00	90.00	166.63	5,350.00	-715.34	1,056.86	728.93	2.00	0.00	2.00
6,400.00	90.00	168.63	5,350.00	-813.01	1,078.28	826.87	2.00	0.00	2.00
6,500.00	90.00	170.63	5,350.00	-911.38	1,096.28	925.46	2.00	0.00	2.00
6,600.00	90.00	172.63	5,350.00	-1,010.31	1,110.84	1,024.57	2.00	0.00	2.00
6,700.00	90.00	174.63	5,350.00	-1,109.68	1,121.93	1,124.08	2.00	0.00	2.00
6,800.00	90.00	176.63	5,350.00	-1,209.39	1,129.55	1,223.87	2.00	0.00	2.00
6,900.00	90.00	178.63	5,350.00	-1,309.30	1,133.69	1,323.83	2.00	0.00	2.00
6,931.58	90.00	179.26	5,350.00	-1,340.87	1,134.27	1,355.40	2.00	0.00	2.00
Start 4042.64 hold at 6931.58 MD									
7,000.00	90.00	179.26	5,350.00	-1,409.28	1,135.15	1,423.83	0.00	0.00	0.00
7,100.00	90.00	179.26	5,350.00	-1,509.28	1,136.44	1,523.83	0.00	0.00	0.00
7,200.00	90.00	179.26	5,350.00	-1,609.27	1,137.73	1,623.83	0.00	0.00	0.00
7,300.00	90.00	179.26	5,350.00	-1,709.26	1,139.02	1,723.83	0.00	0.00	0.00
7,400.00	90.00	179.26	5,350.00	-1,809.25	1,140.31	1,823.83	0.00	0.00	0.00
7,500.00	90.00	179.26	5,350.00	-1,909.24	1,141.60	1,923.83	0.00	0.00	0.00
7,600.00	90.00	179.26	5,350.00	-2,009.23	1,142.89	2,023.83	0.00	0.00	0.00
7,700.00	90.00	179.26	5,350.00	-2,109.23	1,144.18	2,123.83	0.00	0.00	0.00
7,800.00	90.00	179.26	5,350.00	-2,209.22	1,145.47	2,223.83	0.00	0.00	0.00
7,900.00	90.00	179.26	5,350.00	-2,309.21	1,146.76	2,323.83	0.00	0.00	0.00
8,000.00	90.00	179.26	5,350.00	-2,409.20	1,148.05	2,423.83	0.00	0.00	0.00
8,100.00	90.00	179.26	5,350.00	-2,509.19	1,149.34	2,523.83	0.00	0.00	0.00
8,200.00	90.00	179.26	5,350.00	-2,609.19	1,150.63	2,623.83	0.00	0.00	0.00
8,300.00	90.00	179.26	5,350.00	-2,709.18	1,151.92	2,723.83	0.00	0.00	0.00
8,400.00	90.00	179.26	5,350.00	-2,809.17	1,153.21	2,823.83	0.00	0.00	0.00
8,500.00	90.00	179.26	5,350.00	-2,909.16	1,154.50	2,923.83	0.00	0.00	0.00
8,600.00	90.00	179.26	5,350.00	-3,009.15	1,155.79	3,023.83	0.00	0.00	0.00
8,700.00	90.00	179.26	5,350.00	-3,109.14	1,157.08	3,123.83	0.00	0.00	0.00

Planning Report

Database:	EDM	Local Co-ordinate Reference:	Well Huell Fee 5H
Company:	Steward Energy II, LLC	TVD Reference:	Mean Sea Level (System)
Project:	Lea County, NM (NAD 83) NM East Zone	MD Reference:	Mean Sea Level (System)
Site:	Huell Fee 5H	North Reference:	Grid
Well:	Huell Fee 5H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 BLM		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
8,800.00	90.00	179.26	5,350.00	-3,209.14	1,158.37	3,223.83	0.00	0.00	0.00	
8,900.00	90.00	179.26	5,350.00	-3,309.13	1,159.66	3,323.83	0.00	0.00	0.00	
9,000.00	90.00	179.26	5,350.00	-3,409.12	1,160.95	3,423.83	0.00	0.00	0.00	
9,100.00	90.00	179.26	5,350.00	-3,509.11	1,162.24	3,523.83	0.00	0.00	0.00	
9,200.00	90.00	179.26	5,350.00	-3,609.10	1,163.53	3,623.83	0.00	0.00	0.00	
9,300.00	90.00	179.26	5,350.00	-3,709.09	1,164.82	3,723.83	0.00	0.00	0.00	
9,400.00	90.00	179.26	5,350.00	-3,809.09	1,166.11	3,823.83	0.00	0.00	0.00	
9,500.00	90.00	179.26	5,350.00	-3,909.08	1,167.40	3,923.83	0.00	0.00	0.00	
9,600.00	90.00	179.26	5,350.00	-4,009.07	1,168.69	4,023.83	0.00	0.00	0.00	
9,700.00	90.00	179.26	5,350.00	-4,109.06	1,169.98	4,123.83	0.00	0.00	0.00	
9,800.00	90.00	179.26	5,350.00	-4,209.05	1,171.27	4,223.83	0.00	0.00	0.00	
9,900.00	90.00	179.26	5,350.00	-4,309.04	1,172.56	4,323.83	0.00	0.00	0.00	
10,000.00	90.00	179.26	5,350.00	-4,409.04	1,173.85	4,423.83	0.00	0.00	0.00	
10,100.00	90.00	179.26	5,350.00	-4,509.03	1,175.14	4,523.83	0.00	0.00	0.00	
10,200.00	90.00	179.26	5,350.00	-4,609.02	1,176.43	4,623.83	0.00	0.00	0.00	
10,300.00	90.00	179.26	5,350.00	-4,709.01	1,177.72	4,723.83	0.00	0.00	0.00	
10,400.00	90.00	179.26	5,350.00	-4,809.00	1,179.01	4,823.83	0.00	0.00	0.00	
10,500.00	90.00	179.26	5,350.00	-4,908.99	1,180.30	4,923.83	0.00	0.00	0.00	
10,600.00	90.00	179.26	5,350.00	-5,008.99	1,181.58	5,023.83	0.00	0.00	0.00	
10,700.00	90.00	179.26	5,350.00	-5,108.98	1,182.87	5,123.83	0.00	0.00	0.00	
10,800.00	90.00	179.26	5,350.00	-5,208.97	1,184.16	5,223.83	0.00	0.00	0.00	
10,900.00	90.00	179.26	5,350.00	-5,308.96	1,185.45	5,323.83	0.00	0.00	0.00	
10,974.22	90.00	179.26	5,350.00	-5,383.17	1,186.41	5,398.05	0.00	0.00	0.00	
TD at 10974.22 MD										

Design Targets										
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
SHL Huell Fee 5H - plan hits target center - Point	0.00	0.00	0.00	0.00	0.00	802,383.23	920,816.10	33.200	-103.093	
LTP Huell Fee 5H - plan hits target center - Point	0.00	0.00	5,350.00	-5,383.17	1,186.41	797,000.06	922,002.51	33.185	-103.089	
FTP Huell Fee 5H - plan misses target center by 163.24ft at 5988.58ft MD (5350.00 TVD, -416.86 N, 968.53 E) - Point	0.00	0.00	5,350.00	-360.70	1,121.80	802,022.53	921,937.90	33.199	-103.089	

Casing Points						
Measured Depth (ft)	Vertical Depth (ft)	Name			Casing Diameter (in)	Hole Diameter (in)
2,360.47	2,310.00	9 5/8"			9.625	12.250

Planning Report

Database:	EDM	Local Co-ordinate Reference:	Well Huell Fee 5H
Company:	Steward Energy II, LLC	TVD Reference:	Mean Sea Level (System)
Project:	Lea County, NM (NAD 83) NM East Zone	MD Reference:	Mean Sea Level (System)
Site:	Huell Fee 5H	North Reference:	Grid
Well:	Huell Fee 5H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 BLM		

Plan Annotations				
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
300.00	300.00	0.00	0.00	Start Build 1.25 at 300 MD
1,660.00	1,640.13	114.88	164.06	Start 1300.00 hold at 1660.00 MD
2,960.00	2,883.33	332.89	475.41	Start Drop -1.25 at 2960 MD
4,320.00	4,223.46	447.76	639.47	Start 304.53 hold at 4320.00 MD
4,624.53	4,527.99	447.76	639.47	Start Build 8.00 at 4624.53 MD
5,374.53	5,148.24	113.18	767.10	Start 250.00 hold at 5374.53 MD
5,624.53	5,273.24	-89.11	844.27	Start Build 10.00 at 5624.53 MD
5,924.53	5,350.00	-356.77	946.37	Start DLS 2.00 TFO 90.00 at 5924.53 MD
6,931.58	5,350.00	-1,340.87	1,134.27	Start 4042.64 hold at 6931.58 MD
10,974.22	5,350.00	-5,383.17	1,186.41	TD at 10974.22 MD

Steward Energy II, LLC

Lea County, NM (NAD 83) NM East Zone

Huell Fee 5H

Huell Fee 5H

Wellbore #1

Plan: Plan #1 BLM

Standard Planning Report - Geographic

07 December, 2021

Planning Report - Geographic

Database:	EDM	Local Co-ordinate Reference:	Well Huell Fee 5H
Company:	Steward Energy II, LLC	TVD Reference:	Mean Sea Level (System)
Project:	Lea County, NM (NAD 83) NM East Zone	MD Reference:	Mean Sea Level (System)
Site:	Huell Fee 5H	North Reference:	Grid
Well:	Huell Fee 5H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 BLM		

Project	Lea County, NM (NAD 83) NM East Zone		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		Huell Fee 5H			
Site Position:		Northing:	802,383.23 usft	Latitude:	33.200
From:	Lat/Long	Easting:	920,816.10 usft	Longitude:	-103.093
Position Uncertainty:		0.00 ft	Slot Radius:	13.200 in	

Well	Huell Fee 5H					
Well Position	+N/-S	0.00 ft	Northing:	802,383.23 usft	Latitude:	33.200
	+E/-W	0.00 ft	Easting:	920,816.10 usft	Longitude:	-103.093
Position Uncertainty		0.00 ft	Wellhead Elevation:	ft	Ground Level:	ft
Grid Convergence:		0.68 °				

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	12/7/2021	6.34	60.83	48,092.13418668

Design	Plan #1 BLM			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	179.26

Plan Survey Tool Program	Date	12/7/2021		
Depth From (ft)	Depth To (ft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	10,974.22 Plan #1 BLM (Wellbore #1)	MWD	
			MWD - Standard	

Planning Report - Geographic

Database:	EDM	Local Co-ordinate Reference:	Well Huell Fee 5H
Company:	Steward Energy II, LLC	TVD Reference:	Mean Sea Level (System)
Project:	Lea County, NM (NAD 83) NM East Zone	MD Reference:	Mean Sea Level (System)
Site:	Huell Fee 5H	North Reference:	Grid
Well:	Huell Fee 5H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 BLM		

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,660.00	17.00	55.00	1,640.13	114.88	164.06	1.25	1.25	0.00	55.00	
2,960.00	17.00	55.00	2,883.33	332.89	475.41	0.00	0.00	0.00	0.00	
4,320.00	0.00	0.00	4,223.46	447.76	639.47	1.25	-1.25	0.00	180.00	
4,624.53	0.00	0.00	4,527.99	447.76	639.47	0.00	0.00	0.00	0.00	
5,374.53	60.00	159.12	5,148.24	113.18	767.10	8.00	8.00	0.00	159.12	
5,624.53	60.00	159.12	5,273.24	-89.11	844.27	0.00	0.00	0.00	0.00	
5,924.53	90.00	159.12	5,350.00	-356.77	946.37	10.00	10.00	0.00	0.00	
6,931.58	90.00	179.26	5,350.00	-1,340.87	1,134.27	2.00	0.00	2.00	90.00	
10,974.22	90.00	179.26	5,350.00	-5,383.17	1,186.41	0.00	0.00	0.00	0.00	LTP Huell Fee 5H

Planning Report - Geographic

Database:	EDM	Local Co-ordinate Reference:	Well Huell Fee 5H
Company:	Steward Energy II, LLC	TVD Reference:	Mean Sea Level (System)
Project:	Lea County, NM (NAD 83) NM East Zone	MD Reference:	Mean Sea Level (System)
Site:	Huell Fee 5H	North Reference:	Grid
Well:	Huell Fee 5H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 BLM		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.00	0.00	0.00	0.00	0.00	0.00	802,383.23	920,816.10	33.200	-103.093
100.00	0.00	0.00	100.00	0.00	0.00	802,383.23	920,816.10	33.200	-103.093
200.00	0.00	0.00	200.00	0.00	0.00	802,383.23	920,816.10	33.200	-103.093
300.00	0.00	0.00	300.00	0.00	0.00	802,383.23	920,816.10	33.200	-103.093
Start Build 1.25 at 300 MD									
400.00	1.25	55.00	399.99	0.63	0.89	802,383.85	920,816.99	33.200	-103.093
500.00	2.50	55.00	499.94	2.50	3.57	802,385.73	920,819.67	33.200	-103.093
600.00	3.75	55.00	599.79	5.63	8.04	802,388.85	920,824.14	33.200	-103.093
700.00	5.00	55.00	699.49	10.00	14.29	802,393.23	920,830.39	33.200	-103.093
800.00	6.25	55.00	799.01	15.63	22.32	802,398.85	920,838.42	33.200	-103.093
900.00	7.50	55.00	898.29	22.49	32.12	802,405.72	920,848.22	33.200	-103.093
1,000.00	8.75	55.00	997.28	30.60	43.70	802,413.82	920,859.80	33.200	-103.093
1,100.00	10.00	55.00	1,095.94	39.94	57.04	802,423.17	920,873.14	33.200	-103.093
1,200.00	11.25	55.00	1,194.23	50.52	72.15	802,433.74	920,888.25	33.200	-103.093
1,300.00	12.50	55.00	1,292.09	62.32	89.00	802,445.54	920,905.10	33.200	-103.092
1,400.00	13.75	55.00	1,389.47	75.34	107.60	802,458.57	920,923.70	33.200	-103.092
1,500.00	15.00	55.00	1,486.34	89.58	127.94	802,472.81	920,944.04	33.200	-103.092
1,600.00	16.25	55.00	1,582.64	105.03	150.00	802,488.26	920,966.10	33.200	-103.092
1,660.00	17.00	55.00	1,640.13	114.88	164.06	802,498.10	920,980.16	33.200	-103.092
Start 1300.00 hold at 1660.00 MD									
1,700.00	17.00	55.00	1,678.39	121.59	173.64	802,504.81	920,989.74	33.200	-103.092
1,800.00	17.00	55.00	1,774.02	138.36	197.59	802,521.58	921,013.69	33.200	-103.092
1,900.00	17.00	55.00	1,869.65	155.13	221.54	802,538.35	921,037.64	33.200	-103.092
2,000.00	17.00	55.00	1,965.28	171.90	245.49	802,555.12	921,061.59	33.200	-103.092
2,100.00	17.00	55.00	2,060.91	188.67	269.44	802,571.89	921,085.54	33.200	-103.092
2,200.00	17.00	55.00	2,156.54	205.43	293.39	802,588.66	921,109.49	33.200	-103.092
2,300.00	17.00	55.00	2,252.17	222.20	317.34	802,605.43	921,133.44	33.200	-103.092
2,360.47	17.00	55.00	2,310.00	232.35	331.82	802,615.57	921,147.92	33.200	-103.092
9 5/8"									
2,400.00	17.00	55.00	2,347.80	238.97	341.29	802,622.20	921,157.39	33.200	-103.092
2,500.00	17.00	55.00	2,443.43	255.74	365.24	802,638.97	921,181.34	33.200	-103.092
2,600.00	17.00	55.00	2,539.06	272.51	389.19	802,655.74	921,205.29	33.200	-103.091
2,700.00	17.00	55.00	2,634.69	289.28	413.14	802,672.51	921,229.24	33.200	-103.091
2,800.00	17.00	55.00	2,730.32	306.05	437.09	802,689.28	921,253.19	33.200	-103.091
2,900.00	17.00	55.00	2,825.95	322.82	461.04	802,706.05	921,277.14	33.200	-103.091
2,960.00	17.00	55.00	2,883.33	332.89	475.41	802,716.11	921,291.51	33.200	-103.091
Start Drop -1.25 at 2960 MD									
3,000.00	16.50	55.00	2,921.63	339.50	484.85	802,722.72	921,300.95	33.200	-103.091
3,100.00	15.25	55.00	3,017.82	355.19	507.26	802,738.41	921,323.36	33.200	-103.091
3,200.00	14.00	55.00	3,114.57	369.67	527.94	802,752.89	921,344.04	33.201	-103.091
3,300.00	12.75	55.00	3,211.86	382.94	546.89	802,766.16	921,362.99	33.201	-103.091
3,400.00	11.50	55.00	3,309.63	394.98	564.10	802,778.21	921,380.19	33.201	-103.091
3,500.00	10.25	55.00	3,407.83	405.81	579.55	802,789.03	921,395.65	33.201	-103.091
3,600.00	9.00	55.00	3,506.42	415.40	593.25	802,798.62	921,409.34	33.201	-103.091
3,700.00	7.75	55.00	3,605.35	423.75	605.18	802,806.97	921,421.28	33.201	-103.091
3,800.00	6.50	55.00	3,704.58	430.86	615.34	802,814.09	921,431.44	33.201	-103.091
3,900.00	5.25	55.00	3,804.05	436.73	623.72	802,819.96	921,439.82	33.201	-103.091
4,000.00	4.00	55.00	3,903.72	441.36	630.33	802,824.58	921,446.43	33.201	-103.091
4,100.00	2.75	55.00	4,003.55	444.74	635.15	802,827.96	921,451.25	33.201	-103.091
4,200.00	1.50	55.00	4,103.48	446.86	638.19	802,830.09	921,454.28	33.201	-103.091
4,300.00	0.25	55.00	4,203.46	447.74	639.44	802,830.96	921,455.54	33.201	-103.091
4,320.00	0.00	0.00	4,223.46	447.76	639.47	802,830.99	921,455.57	33.201	-103.091
Start 304.53 hold at 4320.00 MD									
4,400.00	0.00	0.00	4,303.46	447.76	639.47	802,830.99	921,455.57	33.201	-103.091

Planning Report - Geographic

Database:	EDM	Local Co-ordinate Reference:	Well Huell Fee 5H
Company:	Steward Energy II, LLC	TVD Reference:	Mean Sea Level (System)
Project:	Lea County, NM (NAD 83) NM East Zone	MD Reference:	Mean Sea Level (System)
Site:	Huell Fee 5H	North Reference:	Grid
Well:	Huell Fee 5H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 BLM		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
4,500.00	0.00	0.00	4,403.46	447.76	639.47	802,830.99	921,455.57	33.201	-103.091	
4,600.00	0.00	0.00	4,503.46	447.76	639.47	802,830.99	921,455.57	33.201	-103.091	
4,624.53	0.00	0.00	4,527.99	447.76	639.47	802,830.99	921,455.57	33.201	-103.091	
Start Build 8.00 at 4624.53 MD										
4,700.00	6.04	159.12	4,603.32	444.05	640.89	802,827.28	921,456.99	33.201	-103.091	
4,800.00	14.04	159.12	4,701.71	427.78	647.10	802,811.00	921,463.19	33.201	-103.091	
4,900.00	22.04	159.12	4,796.72	398.87	658.12	802,782.10	921,474.22	33.201	-103.091	
5,000.00	30.04	159.12	4,886.50	357.89	673.76	802,741.12	921,489.85	33.200	-103.091	
5,100.00	38.04	159.12	4,969.30	305.64	693.69	802,688.86	921,509.79	33.200	-103.090	
5,200.00	46.04	159.12	5,043.51	243.12	717.54	802,626.35	921,533.63	33.200	-103.090	
5,300.00	54.04	159.12	5,107.68	171.57	744.83	802,554.79	921,560.93	33.200	-103.090	
5,374.53	60.00	159.12	5,148.24	113.18	767.10	802,496.41	921,583.20	33.200	-103.090	
Start 250.00 hold at 5374.53 MD										
5,400.00	60.00	159.12	5,160.97	92.57	774.97	802,475.80	921,591.06	33.200	-103.090	
5,500.00	60.00	159.12	5,210.97	11.66	805.83	802,394.88	921,621.93	33.200	-103.090	
5,600.00	60.00	159.12	5,260.97	-69.26	836.70	802,313.97	921,652.80	33.199	-103.090	
5,624.53	60.00	159.12	5,273.24	-89.11	844.27	802,294.12	921,660.37	33.199	-103.090	
Start Build 10.00 at 5624.53 MD										
5,700.00	67.55	159.12	5,306.56	-152.32	868.38	802,230.91	921,684.48	33.199	-103.090	
5,800.00	77.55	159.12	5,336.52	-241.34	902.34	802,141.89	921,718.44	33.199	-103.090	
5,900.00	87.55	159.12	5,349.47	-333.86	937.63	802,049.36	921,753.73	33.199	-103.090	
5,924.53	90.00	159.12	5,350.00	-356.77	946.37	802,026.45	921,762.47	33.199	-103.090	
Start DLS 2.00 TFO 90.00 at 5924.53 MD										
6,000.00	90.00	160.63	5,350.00	-427.63	972.34	801,955.59	921,788.44	33.198	-103.090	
6,100.00	90.00	162.63	5,350.00	-522.53	1,003.85	801,860.69	921,819.95	33.198	-103.090	
6,200.00	90.00	164.63	5,350.00	-618.47	1,032.04	801,764.75	921,848.14	33.198	-103.089	
6,300.00	90.00	166.63	5,350.00	-715.34	1,056.86	801,667.89	921,872.95	33.198	-103.089	
6,400.00	90.00	168.63	5,350.00	-813.01	1,078.28	801,570.21	921,894.38	33.197	-103.089	
6,500.00	90.00	170.63	5,350.00	-911.38	1,096.28	801,471.85	921,912.38	33.197	-103.089	
6,600.00	90.00	172.63	5,350.00	-1,010.31	1,110.84	801,372.92	921,926.93	33.197	-103.089	
6,700.00	90.00	174.63	5,350.00	-1,109.68	1,121.93	801,273.54	921,938.03	33.196	-103.089	
6,800.00	90.00	176.63	5,350.00	-1,209.39	1,129.55	801,173.84	921,945.65	33.196	-103.089	
6,900.00	90.00	178.63	5,350.00	-1,309.30	1,133.69	801,073.93	921,949.79	33.196	-103.089	
6,931.58	90.00	179.26	5,350.00	-1,340.87	1,134.27	801,042.36	921,950.37	33.196	-103.089	
Start 4042.64 hold at 6931.58 MD										
7,000.00	90.00	179.26	5,350.00	-1,409.28	1,135.15	800,973.94	921,951.25	33.196	-103.089	
7,100.00	90.00	179.26	5,350.00	-1,509.28	1,136.44	800,873.95	921,952.54	33.195	-103.089	
7,200.00	90.00	179.26	5,350.00	-1,609.27	1,137.73	800,773.96	921,953.83	33.195	-103.089	
7,300.00	90.00	179.26	5,350.00	-1,709.26	1,139.02	800,673.97	921,955.12	33.195	-103.089	
7,400.00	90.00	179.26	5,350.00	-1,809.25	1,140.31	800,573.98	921,956.41	33.195	-103.089	
7,500.00	90.00	179.26	5,350.00	-1,909.24	1,141.60	800,473.99	921,957.70	33.194	-103.089	
7,600.00	90.00	179.26	5,350.00	-2,009.23	1,142.89	800,373.99	921,958.99	33.194	-103.089	
7,700.00	90.00	179.26	5,350.00	-2,109.23	1,144.18	800,274.00	921,960.28	33.194	-103.089	
7,800.00	90.00	179.26	5,350.00	-2,209.22	1,145.47	800,174.01	921,961.57	33.193	-103.089	
7,900.00	90.00	179.26	5,350.00	-2,309.21	1,146.76	800,074.02	921,962.86	33.193	-103.089	
8,000.00	90.00	179.26	5,350.00	-2,409.20	1,148.05	799,974.03	921,964.15	33.193	-103.089	
8,100.00	90.00	179.26	5,350.00	-2,509.19	1,149.34	799,874.04	921,965.44	33.193	-103.089	
8,200.00	90.00	179.26	5,350.00	-2,609.19	1,150.63	799,774.05	921,966.73	33.192	-103.089	
8,300.00	90.00	179.26	5,350.00	-2,709.18	1,151.92	799,674.05	921,968.02	33.192	-103.089	
8,400.00	90.00	179.26	5,350.00	-2,809.17	1,153.21	799,574.06	921,969.31	33.192	-103.089	
8,500.00	90.00	179.26	5,350.00	-2,909.16	1,154.50	799,474.07	921,970.60	33.192	-103.089	
8,600.00	90.00	179.26	5,350.00	-3,009.15	1,155.79	799,374.08	921,971.89	33.191	-103.089	
8,700.00	90.00	179.26	5,350.00	-3,109.14	1,157.08	799,274.09	921,973.18	33.191	-103.089	
8,800.00	90.00	179.26	5,350.00	-3,209.14	1,158.37	799,174.10	921,974.47	33.191	-103.089	

Planning Report - Geographic

Database:	EDM	Local Co-ordinate Reference:	Well Huell Fee 5H
Company:	Steward Energy II, LLC	TVD Reference:	Mean Sea Level (System)
Project:	Lea County, NM (NAD 83) NM East Zone	MD Reference:	Mean Sea Level (System)
Site:	Huell Fee 5H	North Reference:	Grid
Well:	Huell Fee 5H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 BLM		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
8,900.00	90.00	179.26	5,350.00	-3,309.13	1,159.66	799,074.11	921,975.76	33.190	-103.089	
9,000.00	90.00	179.26	5,350.00	-3,409.12	1,160.95	798,974.11	921,977.05	33.190	-103.089	
9,100.00	90.00	179.26	5,350.00	-3,509.11	1,162.24	798,874.12	921,978.34	33.190	-103.089	
9,200.00	90.00	179.26	5,350.00	-3,609.10	1,163.53	798,774.13	921,979.63	33.190	-103.089	
9,300.00	90.00	179.26	5,350.00	-3,709.09	1,164.82	798,674.14	921,980.91	33.189	-103.089	
9,400.00	90.00	179.26	5,350.00	-3,809.09	1,166.11	798,574.15	921,982.20	33.189	-103.089	
9,500.00	90.00	179.26	5,350.00	-3,909.08	1,167.40	798,474.16	921,983.49	33.189	-103.089	
9,600.00	90.00	179.26	5,350.00	-4,009.07	1,168.69	798,374.16	921,984.78	33.188	-103.089	
9,700.00	90.00	179.26	5,350.00	-4,109.06	1,169.98	798,274.17	921,986.07	33.188	-103.089	
9,800.00	90.00	179.26	5,350.00	-4,209.05	1,171.27	798,174.18	921,987.36	33.188	-103.089	
9,900.00	90.00	179.26	5,350.00	-4,309.04	1,172.56	798,074.19	921,988.65	33.188	-103.089	
10,000.00	90.00	179.26	5,350.00	-4,409.04	1,173.85	797,974.20	921,989.94	33.187	-103.089	
10,100.00	90.00	179.26	5,350.00	-4,509.03	1,175.14	797,874.21	921,991.23	33.187	-103.089	
10,200.00	90.00	179.26	5,350.00	-4,609.02	1,176.43	797,774.22	921,992.52	33.187	-103.089	
10,300.00	90.00	179.26	5,350.00	-4,709.01	1,177.72	797,674.22	921,993.81	33.187	-103.089	
10,400.00	90.00	179.26	5,350.00	-4,809.00	1,179.01	797,574.23	921,995.10	33.186	-103.089	
10,500.00	90.00	179.26	5,350.00	-4,908.99	1,180.30	797,474.24	921,996.39	33.186	-103.089	
10,600.00	90.00	179.26	5,350.00	-5,008.99	1,181.58	797,374.25	921,997.68	33.186	-103.089	
10,700.00	90.00	179.26	5,350.00	-5,108.98	1,182.87	797,274.26	921,998.97	33.185	-103.089	
10,800.00	90.00	179.26	5,350.00	-5,208.97	1,184.16	797,174.27	922,000.26	33.185	-103.089	
10,900.00	90.00	179.26	5,350.00	-5,308.96	1,185.45	797,074.28	922,001.55	33.185	-103.089	
10,974.22	90.00	179.26	5,350.00	-5,383.17	1,186.41	797,000.06	922,002.51	33.185	-103.089	
TD at 10974.22 MD										

Design Targets										
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
SHL Huell Fee 5H - plan hits target center - Point	0.00	0.00	0.00	0.00	0.00	802,383.23	920,816.10	33.200	-103.093	
LTP Huell Fee 5H - plan hits target center - Point	0.00	0.00	5,350.00	-5,383.17	1,186.41	797,000.06	922,002.51	33.185	-103.089	
FTP Huell Fee 5H - plan misses target center by 163.24ft at 5988.58ft MD (5350.00 TVD, -416.86 N, 968.53 E) - Point	0.00	0.00	5,350.00	-360.70	1,121.80	802,022.53	921,937.90	33.199	-103.089	

Casing Points					
Measured Depth (ft)	Vertical Depth (ft)	Name		Casing Diameter (in)	Hole Diameter (in)
2,360.47	2,310.00	9 5/8"		9.625	12.250

Planning Report - Geographic

Database:	EDM	Local Co-ordinate Reference:	Well Huell Fee 5H
Company:	Steward Energy II, LLC	TVD Reference:	Mean Sea Level (System)
Project:	Lea County, NM (NAD 83) NM East Zone	MD Reference:	Mean Sea Level (System)
Site:	Huell Fee 5H	North Reference:	Grid
Well:	Huell Fee 5H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1 BLM		

Plan Annotations					
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates			
		+N/-S (ft)	+E/-W (ft)		Comment
300.00	300.00	0.00	0.00		Start Build 1.25 at 300 MD
1,660.00	1,640.13	114.88	164.06		Start 1300.00 hold at 1660.00 MD
2,960.00	2,883.33	332.89	475.41		Start Drop -1.25 at 2960 MD
4,320.00	4,223.46	447.76	639.47		Start 304.53 hold at 4320.00 MD
4,624.53	4,527.99	447.76	639.47		Start Build 8.00 at 4624.53 MD
5,374.53	5,148.24	113.18	767.10		Start 250.00 hold at 5374.53 MD
5,624.53	5,273.24	-89.11	844.27		Start Build 10.00 at 5624.53 MD
5,924.53	5,350.00	-356.77	946.37		Start DLS 2.00 TFO 90.00 at 5924.53 MD
6,931.58	5,350.00	-1,340.87	1,134.27		Start 4042.64 hold at 6931.58 MD
10,974.22	5,350.00	-5,383.17	1,186.41		TD at 10974.22 MD

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Steward Energy II LLC **OGRID:** 371682 **Date:** 2/10/22

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
HUELL FEE 5H		N-10-13S-38E	381 FSL	300	300	3000
			2479 FWL			

IV. Central Delivery Point Name: _____ [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
HUELL FEE 5H		4/2/2022	4/14/2022	04/21/2022	n/a (no flowback)	5/12/2022

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan
EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications**Effective May 25, 2021**

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:



Printed Name: Vanessa Lopez

Title: Senior Regulatory & Environmental Analyst

E-mail Address: vanessa.lopez@stewardenergy.net

Date: 2/10/22

Phone: 214-297-0533

OIL CONSERVATION DIVISION**(Only applicable when submitted as a standalone form)**

Approved By:

Title:

Approval Date:

Conditions of Approval:

Natural Gas Management Plan - Attachment

- VI. Separation equipment will be sized by engineering staff based on stated manufacturer daily throughput capacities and anticipated daily production rates to ensure adequate capacity. Closed vent system piping, compression needs, and VRUs will be sized utilizing modelling software to ensure adequate capacity for anticipated production volumes and conditions.
- VII. Steward Energy II, LLC (SEII) will take the following actions to comply with the regulations listed in 19.15.27.8:
- A. SEII will maximize the recovery of natural gas by minimizing the waste, as defined by 19.15.2 NMAC, of natural gas through venting and flaring. SEII will ensure that well(s) will be connected to a natural gas gathering system with sufficient capacity to transport natural gas. If there is no adequate takeaway for the gas, well(s) will be shut in until the natural gas gathering system is available.
 - B. All drilling operations will be equipped with a rig flare located at least 100' from the nearest surface hole. Rig flare will be utilized to combust any natural gas that is brought to surface during normal drilling operations. In the case of emergency venting or flaring the volumes will be estimated and reported appropriately.
 - C. During completion, SEII does not allow the well to flow during CO so there will be nothing to flare. Immediately following the finish of completion operations. Produced natural gas from separation equipment will be sent to sales. It is not anticipated that gas will not meet pipeline standards. However, if natural gas does not meet gathering pipeline quality specifications, SEII will flare the natural gas for 60 days or until the natural gas meets the pipeline quality specifications, whichever is sooner. SEII will ensure that the flare is sized properly and is equipped with automatic igniter or continuous pilot. The gas sample will be analyzed twice per week and the gas will be routed into a gathering system as soon as pipeline specifications are met.
 - D. Natural gas will not be flared with the exceptions and provisions listed in the 19.15.27.8 D.(I) through (4). If there is no adequate takeaway for the separator gas, well(s) will be shut in until the natural gas gathering system is available with exception of emergency or malfunction situations. Venting and/or flaring volumes will be estimated and reported appropriately.
 - E. SEII will comply with the performance standards requirements and provisions listed in 19.15.27.8 E.(I) through (8). All equipment will be designed and sized to handle maximum anticipated pressures and throughputs to minimize the waste. Production storage tanks constructed after May 25, 2021, will be equipped with automatic gauging system. Flares constructed after May 25, 2021, will be equipped with automatic igniter or continuous pilot. Flares will be located at least 100' from the well and storage tanks unless otherwise approved by the division. SEII will conduct AVO (LDAR) inspections as described in 19.15.27.8 E (5) (a) with frequencies specified in 19.15.27.8 E (5) (b) and (c). All emergencies will be resolved as quickly and safely as feasible to minimize waste.
 - F. The volume of natural gas that is vented or flared as the result of malfunction or emergency during drilling and completions operations will be estimated. The volume of natural gas that is vented, flared, or beneficially used during production operations, will be measured, or estimated. SEII will install equipment to measure the volume of natural gas flared from existing process piping, or a flowline piped from

equipment such as high-pressure separators, heater treaters, or vapor recovery units associated with a well or facility associated with a well authorized by an APD issued after May 25, 2021, that has an average daily production greater than 60 Mcf/day. If metering is not practicable due to circumstances such as low flow rate or low pressure venting and flaring, SEII will estimate the volume of vented or flared natural gas. Measuring equipment will conform to industry standards and will not be designed or equipped with a manifold that allows the diversion of natural gas around the metering element except for the sole purpose of inspecting and servicing the measurement equipment.

- VIII. For maintenance activities involving production equipment and compression, venting will be limited to the depressurization of the subject equipment to ensure safe working conditions. For maintenance of production and compression equipment the associated producing wells will be shut in to eliminate venting. For maintenance of VRUs all gas normally routed to the VRU will be routed to flare to eliminate venting.