

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPLICATE*
(Other instructions on re-
verse side)Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

14-20-603-5019

Navajo Contract #

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Navajo

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

Toito-Pennsylvanian "D"

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

SW SW

Sec 9-T26N-R18W

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐

2. NAME OF OPERATOR

MOBIL OIL CORPORATION

3. ADDRESS OF OPERATOR

BOX 1652 CASPER, WYOMING 82601

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*

See also space 17 below.)

At surface

660' East of West line and 660' North of South line
Sec 9-T26N-R18W San Juan County, New Mexico

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

GR 5750'

12. COUNTY OR PARISH

San Juan

13. STATE

N. Mexico

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other) 6/18 thru 6/24/66 Weekly Drilg

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

Report

X

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

6/18/66 Spudded well at 1:30 a.m. Drilled 9" hole to 115', reamed out 17" to 112', cemented 13 3/8 csg at 99' w/150 sax regular cement containing 2% cc. Plug down at 2:15 p.m.

6/19/66 Drilled out at 2:30


6/20/66 Drilled sand and shale at 1046'. Deviation 1 degree at 510'

6/21/66 Depth 1755'. Tripping. Deviation 1 degrees at 1755'.

6/22/66 TD 1755'. Reaming 10 5/8" hole at 1583'.

6/23/66 Cemented 8-5/8" csg at 1660' in 10-5/8" hole w/360 sax 50-50 possiz containing 4% Gel and 2% cc. WOC

6/24/66 TD 1755' WOC Drilling out cement.

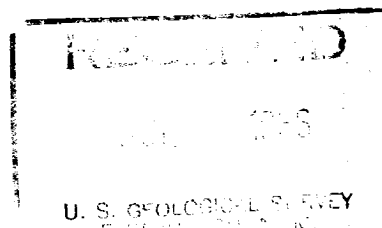

18. I hereby certify that the foregoing is true and correct

SIGNED Original Signed By

J. M. McLaughlin

TITLE PRODUCING MANAGER

DATE 6/28/66

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local, Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local, Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.