| Form 3160-3 (June 2015) UNITED STATE | SS. | | | FORM A OMB No Expires: Ja | . 1004-0 | 137 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------------------------------------------------|--------------|---------------------------------|------------|--------------------|
| DEPARTMENT OF THE I BUREAU OF LAND MAN | | 5. Lease Serial No. | | | | |
| APPLICATION FOR PERMIT TO D | | 6. If Indian, Allotee | or Tribe | Name | | |
| 1a. Type of work: DRILL F | 7. If Unit or CA Agr | eement, | Name and No. | | | |
| | Other Single Zone | e Multiple Zone | | 8. Lease Name and V | Well No. | |
| 2. Name of Operator | | | | 9. API Well No. 30-015-499 | 933 | |
| 3a. Address | 3b. Phor | ne No. (include area cod | de) | 10. Field and Pool, o | or Explor | atory Cotton Dr |
| Location of Well (Report location clearly and in accordance At surface At proposed prod. zone | with any S | tate requirements.*) | | 11. Sec., T. R. M. or | Blk. and | Survey or Area |
| 14. Distance in miles and direction from nearest town or post of | • | | | | l | 13. State |
| 15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) | 16. No o | of acres in lease | 17. Spaci | ng Unit dedicated to th | nis well | |
| 18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. | 19. Prop | Proposed Depth 20. BLN | | /BIA Bond No. in file | | |
| 21. Elevations (Show whether DF, KDB, RT, GL, etc.) | 22. App | Approximate date work will start* 23. Estimated duration | | | | |
| | 24. A | ttachments | | | | |
| The following, completed in accordance with the requirements of (as applicable) | of Onshore | Oil and Gas Order No. | 1, and the I | Hydraulic Fracturing ru | ale per 43 | 3 CFR 3162.3-3 |
| Well plat certified by a registered surveyor. A Drilling Plan. A Surface Use Plan (if the location is on National Forest Syste SUPO must be filed with the appropriate Forest Service Office | | Item 20 above). the 5. Operator certifi | cation. | ns unless covered by an | | ` |
| 25. Signature | | ame (Printed/Typed) | | | Date | |
| Title | | | | | | |
| Approved by (Signature) | Na | ame (Printed/Typed) | | | Date | |
| Title | Of | ffice | | | | |
| Application approval does not warrant or certify that the application applicant to conduct operations thereon. Conditions of approval, if any, are attached. | ant holds le | gal or equitable title to t | hose rights | in the subject lease wh | nich wou | ld entitle the |
| Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, of the United States any false, fictitious or fraudulent statements | | | | | ny depar | tment or agency |



*(Instructions on page 2)

<u>District 1</u>
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
<u>District 11</u>
811 S. First St., Artesia, NM 88210

Phone: (575) 748-1283 Fax: (575) 748-9720 <u>District III</u> 1000 Rio Brazos Road, Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170 <u>District IV</u>

1220 S. St. Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3460 Fax: (505) 476-3462 State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505


Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

■ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

| 20.101 | | | | | | | | | | | | |
|--------------------------------|------------------------------------------------|-----------------|---------------------------------------------------------------------------------------------|-----------------|------------------|----------|---------------|------------------|---------------|-----------|-----------|------------------------|
| ¹ API Number | | | ² Pool Code 53800 13367 Cotton Draw; Bone Spring Name Sand Dunes; Bone Spr | | | ne | | | | | | |
| | | | | 538 | 300 1 | <u> </u> | / | - S | and Dunes; Bo | ne Spring | | |
| ⁴ Proper | • | | | | | 5 P | roperty Name | | | | 6 - | Well Number |
| 332905 | | | | | | JAV | ELINA UNIT | | | | | 411H |
| ⁷ OGRI | ID No. | | | | | 8 O | perator Name | | | | | ⁹ Elevation |
| 433 | 23 | | CHEVRON U.S.A. INC. 3462' | | | | 3462' | | | | | |
| ¹⁰ Surface Location | | | | | | | | | | | | |
| UL or lot no. | Sect | ion Township | | Range | I | ot Idn | Feet from the | North/South line | Feet from the | East/ | West line | County |
| C | 10 | 24 SOUT | H 31 I | EAST, N.M.P.M | ī. | | 510' | NORTH | 1761' | WE | ST | EDDY |
| | Bottom Hole Location If Different From Surface | | | | | | | | | | | |
| UL or lot no. | Secti | ion Townshi | , | Range | L | ot Idn | Feet from the | North/South line | Feet from the | East/V | West line | County |
| N | 15 | 24 SOUT | SOUTH 31 EAST, N.M.P.M. | | | 25' | SOUTH | 1650' | WE | ST | EDDY | |
| 12 Dedicated A | cres 13 | Joint or Infill | 14 Con | solidation Code | 15 Order 1 | No. | | | | | | |
| 640 | | | | | | | | | | | | |

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

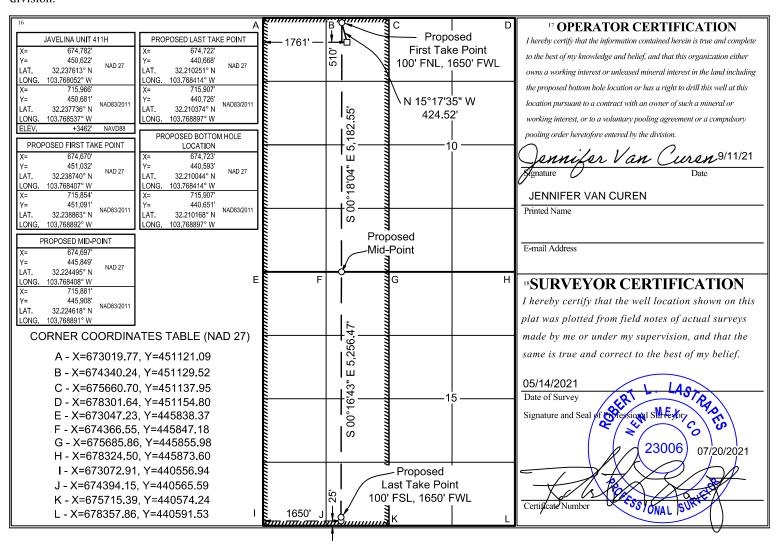

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Electronically Via E-permitting

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

| | | | 1 – Plan De ective May 25, | | | | | |
|---------------------------------------------------------|-----------|----------------------------|-------------------------------|----------------------------|-----------|-------------------|----------------|--------------------------------|
| I. Operator: Che | vron USA | | OGRID: _ | 4323 | | | Date: | 7 / 8 / 21 |
| II. Type: ⊠ Original □ A | Amendment | due to □ 19.15.27.9 | 9.D(6)(a) NMA | C □ 19.15.27.9.D | (6)(b) N | NMAC □ | Other. | |
| If Other, please describe: _ | | | | | | | | |
| III. Well(s): Provide the forbe recompleted from a sing | | | | | wells pi | coposed to | be dril | led or proposed to |
| Well Name | API | ULSTR | Footages | Anticipated Oil BBL/D | | icipated MCF/D | | Anticipated oduced Water BBL/D |
| JAVELINA UNIT 409H | Pending | UL:C, Sec 10, T24S-R31E | 510' FNL, 1711' FWL | | 2305 | MCF/D | D 2800 BBL/D | |
| JAVELINA UNIT 410H | Pending | UL:C,Sec10, T24S R31E | 5- 510' FNL, 1736' FWL | | 2305 | MCF/D | 2800 | BBL/D |
| JAVELINA UNIT 411H | Pending | UL:C,Sec10, T248 R31E | 5- 510' FNL, 1761' FWL | | 2305 | MCF/D | 2800 | BBL/D |
| JAVELINA UNIT 412H | Pending | UL:C,Sec10, T248 R31E | 5- 510' FNL, 1786' FWL | | 2305 | MCF/D | F/D 2800 BBL/D | |
| IV. Central Delivery Poin | t Name: _ | Sand Dunes CT | B 10 | | | [See | 19.15.2 | 7.9(D)(1) NMAC] |
| V. Anticipated Schedule: proposed to be recompleted | | | | | vell or s | et of well | s propo | sed to be drilled or |
| Well Name | API | Spud Date | TD Reached Date | Completion Commencement | | Initial Back I | | First Production Date |

| | Well Name | API | Spud Date | TD Reached | Completion | Initial Flow | First Production |
|---|--------------------|---------|--------------|------------|-------------------|--------------|------------------|
| l | W CH I valle | 7 11 1 | Space Date | | 1 | | |
| l | | | | Date | Commencement Date | Back Date | Date |
| l | | | | | | | |
| l | JAVELINA UNIT 409H | Pending | January 2025 | N/A | N/A | N/A | N/A |
| l | JAVELINA UNIT 410H | Pending | January 2025 | N/A | N/A | N/A | N/A |
| l | JAVELINA UNIT 411H | Pending | January 2025 | N/A | N/A | N/A | N/A |
| ١ | JAVELINA UNIT 412H | Pending | January 2025 | N/A | N/A | N/A | N/A |

VI. Separation Equipment:
☐ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☐ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices:

Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Page 1 of 4

Section 2 – Enhanced Plan EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

Departor certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

| Well | API | Anticipated Average Natural Gas Rate MCF/D | Anticipated Volume of Natural Gas for the First Year MCF |
|------|-----|-----------------------------------------------|----------------------------------------------------------|
| | | | |

X. Natural Gas Gathering System (NGGS):

| Operator | System | ULSTR of Tie-in | Anticipated Gathering Start Date | Available Maximum Daily Capacity of System Segment Tie-in |
|----------|--------|-----------------|----------------------------------|-----------------------------------------------------------|
| | | | | - |
| | | | | |

| XI. Map. \square Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the |
|-----------------------------------------------------------------------------------------------------------------------------------------------|
| production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of |
| the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected. |

| XII. Line Capacity. The natural gas g | gathering system 🗆 will 🗆 will no | ot have capacity to gather | 100% of the anticipate | d natural gas |
|---------------------------------------|-----------------------------------|----------------------------|------------------------|---------------|
| production volume from the well prior | to the date of first production. | | | |

| XIII. Line Pressure. Operator \square does \square does not anticipate that its existing well(s) connected to the same segment, | or portion, | of the |
|-------------------------------------------------------------------------------------------------------------------------------------|-------------|---------|
| natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by | the new wo | ell(s). |

| | A 44 = = 1= O-= = | | . | | : | 4 - 41 - 1 | sed line pressure |
|-----|-------------------|--------------|--------------|-----------|-------------|----------------|--------------------|
| 1 1 | Апаси Опе | rator's blan | to manage ni | oduction. | in response | to the increas | sea iine pressiire |

| XIV. Confidentiality | y : \square Operator asserts | confidentiality p | oursuant to Se | ection 71-2-8 N | NMSA 1978 for | r the information | provided in |
|-----------------------|----------------------------------|--------------------|----------------|-----------------|--------------------|---------------------|-------------|
| Section 2 as provided | in Paragraph (2) of Su | bsection D of 19. | .15.27.9 NMA | C, and attaches | s a full descripti | ion of the specific | information |
| for which confidentia | lity is asserted and the | basis for such ass | sertion. | | | | |

Section 3 - Certifications <u>Effective May 25, 2021</u>

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal: 🖂 Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or ☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. If Operator checks this box, Operator will select one of the following: Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or Venting and Flaring Plan.

Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including: power generation on lease; (a) **(b)** power generation for grid; compression on lease; (c) (d) liquids removal on lease; reinjection for underground storage; (e)

- **(f)** reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

- 1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:
- (a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or
- (b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.
- 2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

| Signature: Cindy Herrera-Murillo |
|---------------------------------------------------------------------------------|
| Printed Name: Cindy Herrera-Murillo |
| Title: Sr HSE Regulatory affairs Coordinator |
| E-mail Address: eeof@chevron.com |
| Date: 07/08/2021 |
| Phone: 575-263-0431 |
| OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form) |
| Approved By: |
| Title: |
| Approval Date: |
| Conditions of Approval: |
| |
| |
| |
| |

VI. Separation Equipment:

Separation equipment installed at each Chevron facility is designed for maximum anticipated throughput and pressure to minimize waste. Separation equipment is designed and built according to ASME Sec VIII Div I to ensure gas is separated from liquid streams according to projected production.

VII./VIII. Operational & Best Management Practices:

- 1. General Requirements for Venting and Flaring of Natural Gas:
 - In all circumstances, Chevron will flare rather than vent unless flaring is technically infeasible and venting of natural gas will avoid a risk of an immediate and substantial adverse impact on safety, public health, or the environment.
 - Chevron installs and operates vapor recovery units (VRUs) in new facilities to minimize venting and flaring.
 If a VRU experiences operating issues, it is quickly assessed so that action can be taken to return the VRU to operation or, if necessary, facilities are shut-in to reduce the venting or flaring of natural gas.

2. During Drilling Operations:

- Flare stacks will be located a minimum of 110 feet from the nearest surface hole location.
- If an emergency or malfunction occurs, gas will be flared or vented to avoid a risk of an immediate and substantial adverse impact on public health, safety or the environment and be properly reported to the NMOCD pursuant to 19.15.27.8.G.
- Natural gas is captured or combusted if technically feasible using best industry practices and control technologies, such as the use of separators (e.g., Sand Commanders) during normal drilling and completions operations.

3. During Completions:

- Chevron typically does not complete traditional flowback, instead Chevron will flow produced oil, water, and gas to a centralized tank battery and continuously recover salable quality gas. If Chevron completes traditional flowback, Chevron conducts reduced emission completions as required by 40 CFR 60.5375a by routing gas to a gas flow line as soon as practicable once there is enough gas to operate a separator.
 Venting does not occur once there is enough gas to operate a separator
- Normally, during completions a flare is not on-site. A Snubbing Unit will have a flare on-site, and the flare volume will be estimated.
- If natural gas does not meet pipeline quality specification, the gas is sampled twice per week until the gas meets the specifications.

4. During Production:

- An audio, visual and olfactory (AVO) inspection will be performed daily (at minimum) for active wells and
 facilities to confirm that all production equipment is operating properly and there are no leaks or releases
 except as allowed in Subsection D of 19.15.27.8 NMAC. Inactive, temporarily abandoned, or shut-in wells
 and facilities will be inspected weekly. Inspection records will be kept for a minimum of five years and will
 be available upon request by the division.
- Monitor manual liquid unloading for wells on-site, takes all reasonable actions to achieve a stabilized rate
 and pressure at the earliest practical time and takes reasonable actions to minimize venting to the
 maximum extent practicable.
- In all circumstances, Chevron will flare rather than vent unless flaring is technically infeasible and venting
 of natural gas will avoid a risk of an immediate and substantial adverse impact on safety, public health, or
 the environment.
- Chevron's design for new facilities utilizes air-activated pneumatic controllers and pumps.
- If natural gas does not meet pipeline quality specification, the gas is sampled twice per week until the gas meets the specifications.
- Chevron does not produce oil or gas until all flowlines, tank batteries, and oil/gas takeaway are installed, tested, and determined operational.

5. Performance Standards

- Equipment installed at each facility is designed for maximum anticipated throughput and pressure to minimize waste. Tank pressure relief systems utilize a soft seated or metal seated PSVs, as appropriate, which are both designed to not leak.
- Flare stack has been designed for proper size and combustion efficiency. New flares will have a continuous pilot and will be located at least 100 feet from the well and storage tanks and will be securely anchored.
- New tanks will be equipped with an automatic gauging system.
- An audio, visual and olfactory (AVO) inspection will be performed daily (at minimum) for active wells and
 facilities to confirm that all production equipment is operating properly and there are no leaks or releases
 except as allowed in Subsection D of 19.15.27.8 NMAC. Inactive, temporarily abandoned, or shut-in wells
 and facilities will be inspected weekly. Inspection records will be kept for a minimum of five years and will
 be available upon request by the division.

6. Measurement or Estimation of Vented and Flared Natural Gas

- Chevron estimates or measures the volume of natural gas that is vented, flared, or beneficially used during drilling, operations, regardless of the reason or authorization for such venting or flaring.
- Where technically practicable, Chevron will install meters on flares installed after May 25, 2021. Meters
 will conform to industry standards. Bypassing the meter will only occur for inspecting and servicing of the
 meter.

Well Name: JAVELINA UNIT Well Number: 411H

Variance request: - Chevron respectfully request to vary from the Onshore Order 2 where it states: "(A full BOP Test) shall be performed: when initially installed and whenever any seal subject to test pressure is broken." We propose to break test if able to finish the next hole section within 21 days of the previous full BOP test. No BOP components nor any break will ever surpass 21 days between testing. A break test will consist of a 250 psi low / 5,000 psi high for 10 min each test against the connection that was broken when skidding the rig. Upon the first nipple up of the pad a full BOP test will be performed. A full BOP test will be completed prior to drilling the production liner hole sections, unless the BOP connection was not broken prior to drilling that hole section (example: drilling straight from production into production liner hole section). A break test will only be performed on operations where BLM documentation states a 5M or less BOP can be utilized. Break Tests will not be performed on Production hole sections. - Chevron requests a variance to use a FMC Technologies UH-S Multibowl wellhead, which will be run through the rig floor on surface casing. BOPE will be nippled up and tested after cementing surface casing. Subsequent tests will be performed as needed, not to exceed 30 days. The field report from FMC Technologies and BOP test information will be provided in a subsequent report at the end of the well. Please see the attached wellhead schematic. An installation manual has been placed on file with the BLM office and remains unchanged from previous submittal. All tests performed by third party. - Chevron also requests a variance to use a CoFlex hose with a metal protective covering that will be utilized between the BOP and Choke manifold. Please refer to the attached testing and specification documents.

Testing Procedure: Stack will be tested as specified in the attached testing requirements, upon NU and not to exceed 30 days. Test BOP from 250 psi to 5000 psi in Ram and 250 psi to 3500 psi in annular. BOP/BOPE will be tested by an independent service company to 250 psi low and a minimum of the high pressure indicated above. Batch drilling of the surface, intermediate, and production will take place. A full BOP test will be performed each hole section unless approval from the BLM is received otherwise. Flex choke hose will be used for all wells on the pad (see attached specs). BOP test will be conducted by a third party.

Choke Diagram Attachment:

D2.1a_BLM_5M_Choke_Manifold_Diagram_20210823122058.pdf

D2.2a_BLM_Choke_Hose_Test_Specs_and_Pressure_Test_Continental_20210823122144.pdf

BOP Diagram Attachment:

D2.1b_NM_Slim_Hole_Wellhead_6650_psi_UH_S_20210823122152.pdf

D2.3a_BLM_5M_Annular_10M_Rams_Stackup_and_Test_Plan_20210823122216.pdf

D2.2b_Break_Testing_and_WOC_500_psi_SND_Pad_417_20210916211335.pdf

Section 3 - Casing

| Casing ID | String Type | Hole Size | Csg Size | Condition | Standard | Tapered String | Top Set MD | Bottom Set MD | Top Set TVD | Bottom Set TVD | Top Set MSL | Bottom Set MSL | Calculated casing length MD | Grade | Weight | Joint Type | Collapse SF | Burst SF | Joint SF Type | Joint SF | Body SF Type | Body SF |
|-----------|------------------|-----------|----------|-----------|----------|----------------|------------|---------------|-------------|----------------|-------------|----------------|--------------------------------|-----------|--------|-----------------|-------------|----------|---------------|----------|--------------|---------|
| 1 | SURFACE | 16 | 13.375 | NEW | API | N | 0 | 837 | 0 | 837 | 3462 | 2625 | 837 | J-55 | 54.4 | ST&C | 2.13 | 1.43 | DRY | 4.07 | DRY | 1.53 |
| | INTERMED IATE | 12.2 5 | 9.625 | NEW | API | N | 0 | 4367 | 0 | 4357 | 3462 | -895 | 4367 | L-80 | 40 | BUTT | 1.24 | 1.64 | DRY | 2.78 | DRY | 1.99 |
| 3 | PRODUCTI ON | 8.75 | 7.0 | NEW | API | N | 0 | 9736 | 0 | 9713 | 3462 | -6251 | 9736 | P- 110 | | OTHER - BLUE | 1.63 | 1.15 | DRY | 2.39 | DRY | 1.18 |

Well Name: JAVELINA UNIT Well Number: 411H

| Casing ID | String Type | Hole Size | Csg Size | Condition | Standard | Tapered String | Top Set MD | Bottom Set MD | Top Set TVD | Bottom Set TVD | Top Set MSL | Bottom Set MSL | Calculated casing length MD | Grade | Weight | Joint Type | Collapse SF | Burst SF | Joint SF Type | Joint SF | Body SF Type | Body SF |
|-----------|----------------|-----------|----------|-----------|----------|----------------|------------|---------------|-------------|----------------|-------------|----------------|--------------------------------|-----------|--------|-----------------|-------------|----------|---------------|----------|--------------|---------|
| 4 | PRODUCTI ON | 6.12 5 | 5.0 | NEW | API | N | 9436 | 10236 | 9436 | 9636 | -5974 | -6174 | 800 | P- 110 | _ | OTHER - W513 | 1.39 | 1.1 | DRY | 1.32 | DRY | 1.16 |
| 5 | PRODUCTI ON | 6.12 5 | 4.5 | NEW | API | N | 10236 | 20553 | 9636 | 10326 | -6174 | -6864 | 10317 | P- 110 | _ | OTHER - W521 | 1.1 | 1.39 | DRY | 1.32 | DRY | 1.32 |

| Casing A | Attachments |
|----------|-------------|
|----------|-------------|

| Casing ID: 1 | String | SURFACE |
|--------------|--------|---------|
|--------------|--------|---------|

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

D3_13.375_54.5ppf_J55_STC_20210823123505.pdf

Casing ID: 2 String INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

9.625_40.0lb_L80IC_BTC_20210916211424.pdf

Well Name: JAVELINA UNIT Well Number: 411H

| 1.0 | cin | ~ A | ++ へん | hm | nantc |
|-----|-------|--------|-------|----|-------|
| Ua. | 311 I | u A | แลน | | ents |
| | , | IJ · · | | | |

Casing ID: 3

String

PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

7_29ppf_TN110SS_TSH_Blue_20210916211448.pdf

Casing ID: 4

String

PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

5_18ppf_P110_Flush_W513_20210916211543.pdf

Casing ID: 5

String

PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

4.5_11.6ppf_P110_TSH_W521_20210916211743.pdf

Section 4 - Cement

Well Name: JAVELINA UNIT Well Number: 411H

| String Type | Lead/Tail | Stage Tool Depth | Top MD | Bottom MD | Quantity(sx) | Yield | Density | Cu Ft | Excess% | Cement type | Additives |
|--------------|-----------|---------------------|--------|-----------|--------------|-------|---------|-------|---------|-------------|----------------------------------------------|
| SURFACE | Lead | | 0 | 837 | 0 | 0 | 0 | 0 | 0 | С | NONE |
| SURFACE | Tail | | 0 | 837 | 391 | 1.34 | 14.8 | 524 | 100 | С | EXTENDER, ANTIFOAM, RETARDER |
| INTERMEDIATE | Lead | | 0 | 3367 | 1055 | 2 | 13.2 | 2109 | 100 | С | Extender, Antifoam, Retarder |
| INTERMEDIATE | Tail | | 3367 | 4367 | 336 | 1.4 | 13.2 | 470 | 50 | CLASS C | Extender, Antifoam, Retarder |
| PRODUCTION | Lead | | 3867 | 8736 | 549 | 2 | 13.2 | 1098 | 50 | CLASS C | Extender, Antifoam, Retarder, Viscosifier |
| PRODUCTION | Tail | | 8736 | 9736 | 134 | 1.4 | 14.8 | 188 | 25 | С | Extender, Antifoam, Retarder, Viscosifier |
| PRODUCTION | Lead | | 9436 | 2055 3 | 711 | 1.84 | 13.2 | 1309 | 25 | Class C | Extender, Antifoam, Retarder, Viscosifier |

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: An open loop system will be used. All wastes accumulated during drilling operations will be contained in a portable trash cage and removed from location and deposited in an approved sanitary landfill. Sanitary wastes will be contained in a chemical porta-toilet and then hauled to an approved sanitary landfill. All fluids and cuttings will be disposed of in accordance with New Mexico Oil Conservation Division rules and regulations. And transporting of E&P waste will follow EPA regulations and accompanying manifests.

Describe the mud monitoring system utilized: A mud test shall be performed every 24 hours after muddling up to determine, as applicable: density, viscosity, gel strength, filtration, and pH. Visual mud monitoring equipment shall be in place to detect volume changes indicating loss or gain of circulating fluid volume. When abnormal pressures are anticipated a PVT, stroke counter, flow sensor will be used to detect volume changes indicating loss or gain of circulating fluid volume in compliance with Onshore Order #2. A weighting agent and lost circulating material (LCM) will be onsite to mitigate pressure or lost circulation as hole conditions dictate.

Circulating Medium Table

Well Name: JAVELINA UNIT Well Number: 411H

| Top Depth | Bottom Depth | Mud Type | Min Weight (lbs/gal) | Max Weight (lbs/gal) | Density (lbs/cu ft) | Gel Strength (lbs/100 sqft) | ЬН | Viscosity (CP) | Salinity (ppm) | Filtration (cc) | Additional Characteristics |
|-----------|--------------|---------------------------------|----------------------|----------------------|---------------------|-----------------------------|----|----------------|----------------|-----------------|-------------------------------------|
| 9736 | 2055 3 | OIL-BASED MUD | 8.7 | 10.5 | | | | | | | Viscosity 50-70 Filtrate 5-10 |
| 4367 | 9736 | OTHER: WBM/SALT- STURATED | 8.7 | 10.6 | | | | | | | Viscosity: 26-36 Filtrate: 15-25 |
| 0 | 837 | SPUD MUD | 8.3 | 8.9 | | | | | | | Viscosity: 26-36 Filtrate: 15-25 |
| 0 | 4367 | SALT SATURATED | 8.3 | 10.6 | | | | | | | Viscosity: 26-36 Filtrate: 15-25 |

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Drill stem tests are not planned

The logging program will be as follows:

Type: Mudlogs Logs: 2 man mudlog Interval: Surf csg shoe through Prod hole TD Timing: While drilling or circulating

Type: LWD Logs: MWD gamma Interval: Int. and Prod. Hole Timing: While drilling

List of open and cased hole logs run in the well:

GAMMA RAY LOG, MUD LOG/GEOLOGIC LITHOLOGY LOG, MUD LOG/GEOLOGICAL LITHOLOGY LOG, DIRECTIONAL SURVEY.

Coring operation description for the well:

Conventional whole core samples are not planned; direction survey will be run - will send log(s) when run.

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 5155 Anticipated Surface Pressure: 2883

Anticipated Bottom Hole Temperature(F): 150

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geoharzards description:

Contingency Plans geohazards

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations

Well Name: JAVELINA UNIT Well Number: 411H

D8.1_H2S_Contingency_Plan_20210823132430.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

JavelinaUnit411H_Directional_20210916212331.pdf

Other proposed operations facets description:

- Authorization to use the spudder rig to spud the well and set surface casing. The drilling rig will move in less than 90 days to continue drilling operations. Rig layouts attached.
- ***Drilling plan attached contains a contingency cement program.

Other proposed operations facets attachment:

D8.2_Rig_layout_20210823132532.pdf

Javelina_Unit_411H_20210916212552.pdf

Operational_Best_Management_Practices_V2_20210916212609.pdf

Javelina_Unit_Pad_409_Gas_Management_Plan___NMOCD__1_20210916212609.pdf

CUSA_Spudder_Rig_Data_20210916212627.pdf

Other Variance attachment:

Longitude

Schlumberger

Javelina Unit 411H R0 mdv 22Jul21 Proposal Geodetic Report



(Def Plan)

VSEC

Report Date: Client: Field: July 23, 2021 - 05:13 PM Chevron NM, Eddy County (NAD 27 EZ) Structure / Slot:

Chevron Javelina Unit Pad 409 / Javelina Unit 411H Javelina Unit 411H Javelina Unit 411H

Well: Well:
Borehole:
UWI / API#:
Survey Name:
Survey Date:
Tort / AHD / DDI / ERD Ratio:
Coordinate Reference System:
Location Lat / Long:
Location Grid N/E Y/X:
CRS Grid Convergence Angle:
Grid Scale Factor:

Javelina Unit 411H
Unknown / Unknown
Javelina Unit 411H R0 mdv 22Jul21
July 22, 2021
101.781 ° / 10962.744 ft / 6.347 / 1.062
NAD27 New Mexico State Plane, Eastern Zone, US Feet
N 32° 14' 15.40525', W 103° 46' 4.98788'
N 450622.000 ftUS, E 674782.000 ftUS
0.3015 °
0.99994408

MD

Incl

Azim Grid

TVD

2.10.825.0 Version / Patch:

Survey / DLS Computation: Minimum Curvature / Lubinski Vertical Vertical TVD Ref TVD Ref Seabed Magneti Total Gr

EW

DLS

Northing

Easting

Gravity I Total Ma Magneti Declinat Magnetic North Re Grid Cor Total Co

NS

| 179.710 ° (Grid North) |
|-----------------------------|
| 0.000 ft, 0.000 ft |
| KB 28ft (TBD) |
| 3490.000 ft above MSL |
| 3462.000 ft above MSL |
| 6.547 ° |
| 998.4397mgn (9.80665 Based) |
| GARM |
| 47701.664 nT |
| 59.883 ° |
| July 22, 2021 |
| HDGM 2021 |
| Grid North |
| 0.3015 ° |
| 6.2452 ° |
| Well Head |
| |

| Comments | MD | Incl | Azim Grid | TVD | VSEC | NS | EW | DLS | Northing | Easting | Latitude | Longitude |
|----------------------|--------------------|--------------|------------------|--------------------|--------------------|------------------|--------------------|------------------|------------------------|------------------------|--------------------------------|--------------------------------|
| Surface | (ft) 0.00 | (°) 0.00 | (°) | 0.00 | (ft) 0.00 | 0.00 | (ft) 0.00 | (°/100ft) N/A | (ftUS) 450622.00 | (ftUS) 674782.00 | (N/S ° ' ") N 32 14 15.41 | (E/W ° ' ") W 103 46 4.99 |
| Guilacc | 100.00 | 0.00 | 346.30 | 100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 450622.00 | 674782.00 | | W 103 46 4.99 |
| | 200.00 | 0.00 | 346.30 | 200.00 | 0.00 | 0.00 | 0.00 | 0.00 | 450622.00 | 674782.00 | N 32 14 15.41 | |
| | 300.00 | 0.00 | 346.30 | 300.00 | 0.00 | 0.00 | 0.00 | 0.00 | 450622.00 | 674782.00 | N 32 14 15.41 | |
| | 400.00 | 0.00 | 346.30 | 400.00 | 0.00 | 0.00 | 0.00 | 0.00 | 450622.00 | 674782.00 | N 32 14 15.41 | W 103 46 4.99 |
| Build 1.5°/100ft | 500.00 | 0.00 | 346.30 | 500.00 | 0.00 | 0.00 | 0.00 | 0.00 | 450622.00 | 674782.00 | N 32 14 15.41 | W 103 46 4.99 |
| Rustler (RSLR) | 579.14 | 1.19 | 346.30 | 579.13 | -0.80 | 0.80 | -0.19 | 1.50 | 450622.80 | | N 32 14 15.41 | |
| | 600.00 | 1.50 | 346.30 | 599.99 | -1.27 | 1.27 | -0.31 | 1.50 | 450623.27 | 674781.69 | N 32 14 15.42 | |
| | 700.00 | 3.00 | 346.30 | 699.91 | -5.09 | 5.09 | -1.24 | 1.50 | 450627.09 | 674780.76 | N 32 14 15.46 | |
| | 800.00 | 4.50 | 346.30 | 799.69 | -11.45 | 11.44 | -2.79 | 1.50 | 450633.44 | 674779.21 | | W 103 46 5.02 |
| Hold | 900.00 | 6.00 6.00 | 346.30 | 899.27 | -20.35 | 20.33 | -4.96 -4.96 | 1.50 | 450642.33 | 674777.04 674777.04 | | W 103 46 5.04 |
| Hold | 900.02 1000.00 | 6.00 | 346.30 346.30 | 899.29 998.72 | -20.36 -30.52 | 20.33 | -4.96 -7.43 | 1.50 0.00 | 450642.33 450652.48 | 674777.04 | N 32 14 15.61 | W 103 46 5.04 W 103 46 5.07 |
| Saldo (SLDO) | 1008.05 | 6.00 | 346.30 | 1006.73 | -31.34 | 31.30 | -7.63 | 0.00 | 450653.30 | 674774.37 | N 32 14 15.71 | |
| Galab (GEDC) | 1100.00 | 6.00 | 346.30 | 1098.17 | -40.69 | 40.64 | -9.91 | 0.00 | 450662.64 | 674772.09 | N 32 14 15.81 | |
| | 1200.00 | 6.00 | 346.30 | 1197.63 | -50.86 | 50.80 | -12.38 | 0.00 | 450672.79 | 674769.62 | | W 103 46 5.13 |
| | 1300.00 | 6.00 | 346.30 | 1297.08 | -61.03 | 60.95 | -14.86 | 0.00 | 450682.95 | 674767.14 | N 32 14 16.01 | W 103 46 5.16 |
| | 1400.00 | 6.00 | 346.30 | 1396.53 | -71.20 | 71.11 | -17.34 | 0.00 | 450693.10 | 674764.66 | N 32 14 16.11 | W 103 46 5.19 |
| | 1500.00 | 6.00 | 346.30 | 1495.98 | -81.36 | 81.26 | -19.81 | 0.00 | 450703.26 | 674762.19 | N 32 14 16.21 | W 103 46 5.21 |
| | 1600.00 | 6.00 | 346.30 | 1595.43 | -91.53 | 91.42 | -22.29 | 0.00 | 450713.41 | 674759.71 | | W 103 46 5.24 |
| | 1700.00 | 6.00 | 346.30 | 1694.89 | -101.70 | 101.58 | -24.77 | 0.00 | 450723.57 | 674757.24 | | W 103 46 5.27 |
| | 1800.00 | 6.00 | 346.30 | 1794.34 | -111.87 | 111.73 | -27.24 | 0.00 | 450733.72 | 674754.76 | N 32 14 16.51 | |
| | 1900.00 | 6.00 | 346.30 | 1893.79 | -122.04 | 121.89 | -29.72 | 0.00 | 450743.88 | 674752.28 | | W 103 46 5.33 |
| | 2000.00 | 6.00 | 346.30 | 1993.24 | -132.20 | 132.04 | -32.19 | 0.00 | 450754.04 | 674749.81 | N 32 14 16.71 | |
| | 2100.00 2200.00 | 6.00 6.00 | 346.30 346.30 | 2092.70 | -142.37 -152.54 | 142.20 152.35 | -34.67 -37.15 | 0.00 | 450764.19 | 674747.33 674744.86 | N 32 14 16.81 N 32 14 16.91 | |
| | 2200.00 | 6.00 | 346.30 346.30 | 2192.15 2291.60 | -152.54 -162.71 | 152.35 162.51 | -37.15 -39.62 | 0.00 | 450774.35 450784.50 | 674742.38 | | W 103 46 5.41 W 103 46 5.44 |
| | 2400.00 | 6.00 | 346.30 | 2391.05 | -162.71 | 172.67 | -39.62 -42.10 | 0.00 | 450784.50 450794.66 | 674742.38 | N 32 14 17.02 N 32 14 17.12 | |
| | 2500.00 | 6.00 | 346.30 | 2490.50 | -183.05 | 182.82 | -44.57 | 0.00 | 450804.81 | 674737.43 | N 32 14 17.12 | |
| | 2600.00 | 6.00 | 346.30 | 2589.96 | -193.21 | 192.98 | -47.05 | 0.00 | 450814.97 | 674734.95 | | W 103 46 5.52 |
| | 2700.00 | 6.00 | 346.30 | 2689.41 | -203.38 | 203.13 | -49.53 | 0.00 | 450825.12 | 674732.48 | N 32 14 17.42 | |
| | 2800.00 | 6.00 | 346.30 | 2788.86 | -213.55 | 213.29 | -52.00 | 0.00 | 450835.28 | 674730.00 | | W 103 46 5.58 |
| Castile (CSTL) | 2843.80 | 6.00 | 346.30 | 2832.42 | -218.00 | 217.74 | -53.09 | 0.00 | 450839.72 | 674728.92 | N 32 14 17.56 | |
| | 2900.00 | 6.00 | 346.30 | 2888.31 | -223.72 | 223.45 | -54.48 | 0.00 | 450845.43 | 674727.52 | N 32 14 17.62 | W 103 46 5.61 |
| | 3000.00 | 6.00 | 346.30 | 2987.76 | -233.89 | 233.60 | -56.95 | 0.00 | 450855.59 | 674725.05 | N 32 14 17.72 | |
| | 3100.00 | 6.00 | 346.30 | 3087.22 | -244.05 | 243.76 | -59.43 | 0.00 | 450865.74 | 674722.57 | N 32 14 17.82 | |
| | 3200.00 | 6.00 | 346.30 | 3186.67 | -254.22 | 253.91 | -61.91 | 0.00 | 450875.90 | 674720.10 | N 32 14 17.92 | |
| | 3300.00 | 6.00 | 346.30 | 3286.12 | -264.39 | 264.07 | -64.38 | 0.00 | 450886.05 | 674717.62 | N 32 14 18.02 | |
| | 3400.00 3500.00 | 6.00 | 346.30 346.30 | 3385.57 3485.03 | -274.56 -284.73 | 274.22 284.38 | -66.86 -69.34 | 0.00 | 450896.21 | 674715.14 674712.67 | N 32 14 18.12 N 32 14 18.22 | |
| | 3600.00 | 6.00 | 346.30 | 3584.48 | -294.90 | 294.54 | -09.34 -71.81 | 0.00 | 450906.36 450916.52 | 674710.19 | | W 103 46 5.76 W 103 46 5.81 |
| | 3700.00 | 6.00 | 346.30 | 3683.93 | -305.06 | 304.69 | -71.01 | 0.00 | 450916.52 | 674710.19 | N 32 14 18.42 | |
| | 3800.00 | 6.00 | 346.30 | 3783.38 | -315.23 | 314.85 | -76.76 | 0.00 | 450936.83 | 674705.24 | | W 103 46 5.86 |
| | 3900.00 | 6.00 | 346.30 | 3882.83 | -325.40 | 325.00 | -79.24 | 0.00 | 450946.98 | 674702.76 | N 32 14 18.63 | |
| | 4000.00 | 6.00 | 346.30 | 3982.29 | -335.57 | 335.16 | -81.72 | 0.00 | 450957.14 | 674700.29 | | W 103 46 5.92 |
| | 4100.00 | 6.00 | 346.30 | 4081.74 | -345.74 | 345.31 | -84.19 | 0.00 | 450967.29 | 674697.81 | N 32 14 18.83 | W 103 46 5.95 |
| | 4200.00 | 6.00 | 346.30 | 4181.19 | -355.90 | 355.47 | -86.67 | 0.00 | 450977.45 | 674695.34 | N 32 14 18.93 | W 103 46 5.97 |
| | 4300.00 | 6.00 | 346.30 | 4280.64 | -366.07 | 365.63 | -89.14 | 0.00 | 450987.61 | 674692.86 | N 32 14 19.03 | |
| Lamar (LMAR) | 4376.65 | 6.00 | 346.30 | 4356.87 | -373.87 | 373.41 | -91.04 | 0.00 | 450995.39 | | N 32 14 19.10 | |
| | 4400.00 | 6.00 | 346.30 | 4380.09 | -376.24 | 375.78 | -91.62 | 0.00 | 450997.76 | 674690.39 | N 32 14 19.13 | |
| Bell Canyon (BLCN) | 4418.36 | 6.00 6.00 | 346.30 346.30 | 4398.35 | -378.11 | 377.65 | -92.07 | 0.00 | 450999.62 | | N 32 14 19.15 | |
| | 4500.00 | | | 4479.55 | -386.41 | 385.94 | -94.10 | 0.00 | 451007.92 | 674687.91 | N 32 14 19.23 | |
| | 4600.00 4700.00 | 6.00 6.00 | 346.30 346.30 | 4579.00 4678.45 | -396.58 -406.75 | 396.09 406.25 | -96.57 -99.05 | 0.00 | 451018.07 451028.23 | 674685.43 674682.96 | N 32 14 19.33 N 32 14 19.43 | W 103 46 6.09 W 103 46 6.12 |
| | 4700.00 | 6.00 | 346.30 | 4678.45 4777.90 | -406.75 -416.91 | 406.25 | -99.05 -101.52 | 0.00 | 451028.23 451038.38 | | N 32 14 19.43 N 32 14 19.53 | |
| Drop .75°/100ft | 4826.71 | 6.00 | 346.30 | 4804.47 | -419.63 | 419.12 | -102.19 | 0.00 | 451041.09 | 674679.82 | | W 103 46 6.15 |
| | 4900.00 | 5.45 | 346.30 | 4877.39 | -426.74 | 426.22 | -103.92 | 0.75 | 451048.20 | 674678.09 | N 32 14 19.63 | |
| | 5000.00 | 4.70 | 346.30 | 4977.00 | -435.35 | 434.82 | -106.01 | 0.75 | 451056.79 | 674675.99 | N 32 14 19.71 | |
| | 5100.00 | 3.95 | 346.30 | 5076.71 | -442.68 | 442.14 | -107.80 | 0.75 | 451064.12 | 674674.21 | N 32 14 19.79 | |
| | 5200.00 | 3.20 | 346.30 | 5176.52 | -448.75 | 448.20 | -109.28 | 0.75 | 451070.18 | 674672.73 | N 32 14 19.85 | W 103 46 6.23 |
| | 5300.00 | 2.45 | 346.30 | 5276.39 | -453.55 | 452.99 | -110.45 | 0.75 | 451074.97 | | N 32 14 19.89 | |
| Cherry Canyon (CRCN) | 5316.45 | 2.33 | 346.30 | 5292.83 | -454.21 | 453.66 | -110.61 | 0.75 | 451075.63 | | N 32 14 19.90 | |
| | 5400.00 | 1.70 | 346.30 | 5376.33 | -457.07 | 456.51 | -111.30 | 0.75 | 451078.48 | 674670.70 | N 32 14 19.93 | |
| | 5500.00 | 0.95 | 346.30 | 5476.30 | -459.32 | 458.76 | -111.85 | 0.75 | 451080.73 | 674670.16 | N 32 14 19.95 | |
| 11-14 | 5600.00 | 0.20 | 346.30 | 5576.30 | -460.30 | 459.73 | -112.09 | 0.75 | 451081.71 | 674669.92 | N 32 14 19.96 | |
| Hold | 5626.74 5700.00 | 0.00 | 346.30 346.30 | 5603.04 5676.30 | -460.34 -460.34 | 459.78 459.78 | -112.10 -112.10 | 0.75 0.00 | 451081.75 451081.75 | 674669.91 674669.91 | N 32 14 19.96 N 32 14 19.96 | |
| | 5700.00 | 0.00 | 346.30 | 5776.30 | -460.34 -460.34 | 459.78 459.78 | -112.10 -112.10 | 0.00 | 451081.75 451081.75 | 674669.91 | N 32 14 19.96 N 32 14 19.96 | |
| | 5900.00 | 0.00 | 346.30 | 5876.30 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | 674669.91 | N 32 14 19.96 N 32 14 19.96 | |
| | 6000.00 | 0.00 | 346.30 | 5976.30 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | 674669.91 | N 32 14 19.96 | |
| | 6100.00 | 0.00 | 346.30 | 6076.30 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | 674669.91 | N 32 14 19.96 | |
| | 6200.00 | 0.00 | 346.30 | 6176.30 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | 674669.91 | N 32 14 19.96 | |
| | 6300.00 | 0.00 | 346.30 | 6276.30 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | 674669.91 | | W 103 46 6.26 |
| | 6400.00 | 0.00 | 346.30 | 6376.30 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | 674669.91 | | W 103 46 6.26 |
| | 6500.00 | 0.00 | 346.30 | 6476.30 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | 674669.91 | N 32 14 19.96 | W 103 46 6.26 |
| Brushy Canyon (BCN) | 6557.63 | 0.00 | 346.30 | 6533.93 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | 674669.91 | N 32 14 19.96 | W 103 46 6.26 |
| | 6600.00 | 0.00 | 346.30 | 6576.30 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | | N 32 14 19.96 | |
| | 6700.00 | 0.00 | 346.30 | 6676.30 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | | N 32 14 19.96 | |
| | 6800.00 | 0.00 | 346.30 | 6776.30 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | | N 32 14 19.96 | |
| | 6900.00 | 0.00 | 346.30 | 6876.30 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | 674669.91 | N 32 14 19.96 | W 103 46 6.26 |
| | | | | | | | | | | | | |

...Javelina Unit 411H\Javelina Unit 411H\Javelina Unit 411H R0 mdv 22Jul21

| Comments | MD (ft) | Incl (°) | Azim Grid (°) | TVD (ft) | VSEC (ft) | NS (ft) | EW (ft) | DLS (°/100ft) | Northing (ftUS) | Easting Latitude Longitude (ftUS) (N/S ° ' ") (E/W ° ' ") |
|--------------------------------|----------------------|----------------|------------------|----------------------|--------------------|----------------------|--------------------|------------------|------------------------|--------------------------------------------------------------------------------|
| | 7000.00 7100.00 | 0.00 | 346.30 346.30 | 6976.30 7076.30 | -460.34 -460.34 | 459.78 459.78 | -112.10 -112.10 | 0.00 | 451081.75 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 674669.91 N 32 14 19.96 W 103 46 6.26 |
| | 7200.00 | 0.00 | 346.30 | 7176.30 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 |
| | 7300.00 7400.00 | 0.00 | 346.30 346.30 | 7276.30 7376.30 | -460.34 -460.34 | 459.78 459.78 | -112.10 -112.10 | 0.00 | 451081.75 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 674669.91 N 32 14 19.96 W 103 46 6.26 |
| | 7500.00 | 0.00 | 346.30 | 7476.30 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 |
| | 7600.00 7700.00 | 0.00 | 346.30 346.30 | 7576.30 7676.30 | -460.34 -460.34 | 459.78 459.78 | -112.10 -112.10 | 0.00 | 451081.75 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 674669.91 N 32 14 19.96 W 103 46 6.26 |
| | 7800.00 | 0.00 | 346.30 | 7776.30 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 |
| | 7900.00 8000.00 | 0.00 | 346.30 346.30 | 7876.30 7976.30 | -460.34 -460.34 | 459.78 459.78 | -112.10 -112.10 | 0.00 | 451081.75 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 674669.91 N 32 14 19.96 W 103 46 6.26 |
| | 8100.00 8200.00 | 0.00 | 346.30 346.30 | 8076.30 8176.30 | -460.34 -460.34 | 459.78 459.78 | -112.10 -112.10 | 0.00 | 451081.75 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 674669.91 N 32 14 19.96 W 103 46 6.26 |
| Bone Spring (BSGL) | 8275.35 | 0.00 | 346.30 | 8251.65 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 |
| Upper Avalon (AVN) | 8300.00 8338.20 | 0.00 0.00 | 346.30 346.30 | 8276.30 8314.50 | -460.34 -460.34 | 459.78 459.78 | -112.10 -112.10 | 0.00 0.00 | 451081.75 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 674669.91 N 32 14 19.96 W 103 46 6.26 |
| | 8400.00 | 0.00 | 346.30 | 8376.30 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 |
| | 8500.00 8600.00 | 0.00 | 346.30 346.30 | 8476.30 8576.30 | -460.34 -460.34 | 459.78 459.78 | -112.10 -112.10 | 0.00 | 451081.75 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 674669.91 N 32 14 19.96 W 103 46 6.26 |
| Lower Avalon (AVL) | 8700.00 8764.03 | 0.00 0.00 | 346.30 346.30 | 8676.30 8740.33 | -460.34 -460.34 | 459.78 459.78 | -112.10 -112.10 | 0.00 0.00 | 451081.75 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 674669.91 N 32 14 19.96 W 103 46 6.26 |
| Lower Avaior (AVL) | 8800.00 | 0.00 | 346.30 | 8776.30 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 |
| | 8900.00 9000.00 | 0.00 | 346.30 346.30 | 8876.30 8976.30 | -460.34 -460.34 | 459.78 459.78 | -112.10 -112.10 | 0.00 | 451081.75 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 674669.91 N 32 14 19.96 W 103 46 6.26 |
| | 9100.00 | 0.00 | 346.30 | 9076.30 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 |
| First Bone Spring Upper (FBS) | 9200.00 9297.07 | 0.00 0.00 | 346.30 346.30 | 9176.30 9273.37 | -460.34 -460.34 | 459.78 459.78 | -112.10 -112.10 | 0.00 0.00 | 451081.75 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 674669.91 N 32 14 19.96 W 103 46 6.26 |
| | 9300.00 9400.00 | 0.00 | 346.30 346.30 | 9276.30 9376.30 | -460.34 -460.34 | 459.78 459.78 | -112.10 -112.10 | 0.00 | 451081.75 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 674669.91 N 32 14 19.96 W 103 46 6.26 |
| | 9500.00 | 0.00 | 346.30 | 9476.30 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 |
| First Bone Spring Lower (FBL) | 9588.58 9600.00 | 0.00 0.00 | 346.30 346.30 | 9564.88 9576.30 | -460.34 -460.34 | 459.78 459.78 | -112.10 -112.10 | 0.00 0.00 | 451081.75 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 674669.91 N 32 14 19.96 W 103 46 6.26 |
| | 9700.00 | 0.00 | 346.30 | 9676.30 | -460.34 | 459.78 | -112.10 | 0.00 | 451081.75 | 674669.91 N 32 14 19.96 W 103 46 6.26 |
| Build 10°/100ft | 9736.74 9800.00 | 0.00 6.33 | 346.30 179.70 | 9713.04 9776.17 | -460.34 -456.85 | 459.78 456.29 | -112.10 -112.08 | 0.00 10.00 | 451081.75 451078.27 | 674669.91 N 32 14 19.96 W 103 46 6.26 674669.92 N 32 14 19.93 W 103 46 6.26 |
| Second Bone Spring Upper (SBU) | 9870.53 | 13.38 | 179.70 | 9845.61 | -444.79 | 444.23 | -112.02 | 10.00 | 451066.21 | 674669.99 N 32 14 19.81 W 103 46 6.26 |
| FTP Cross | 9900.00 9977.35 | 16.33 24.06 | 179.70 179.70 | 9874.09 9946.64 | -437.24 -410.56 | 436.68 410.00 | -111.98 -111.84 | 10.00 10.00 | 451058.65 451031.98 | 674670.03 N 32 14 19.73 W 103 46 6.26 674670.16 N 32 14 19.47 W 103 46 6.26 |
| Rono Caring 2 Torrest 2 | 10000.00 10002.70 | 26.33 | 179.70 | 9967.13 | -400.92 | 400.36 | -111.79 | 10.00 | 451022.34 | 674670.21 N 32 14 19.37 W 103 46 6.26 674670.22 N 32 14 19.36 W 103 46 6.26 |
| Bone Spring 2 Target 2 | 10100.00 | 26.60 36.33 | 179.70 179.70 | 9969.55 10052.44 | -399.71 -349.00 | 399.15 348.44 | -111.79 -111.52 | 10.00 10.00 | 451021.13 450970.42 | 674670.22 N 32 14 19.36 W 103 46 6.26 674670.48 N 32 14 18.86 W 103 46 6.26 |
| | 10200.00 10300.00 | 46.33 56.33 | 179.70 179.70 | 10127.45 10189.86 | -283.05 -205.07 | 282.49 204.52 | -111.18 -110.78 | 10.00 10.00 | 450904.47 450826.50 | 674670.82 N 32 14 18.21 W 103 46 6.26 674671.23 N 32 14 17.43 W 103 46 6.26 |
| | 10400.00 | 66.33 | 179.70 | 10237.78 | -117.45 | 116.89 | -110.32 | 10.00 | 450738.89 | 674671.68 N 32 14 16.57 W 103 46 6.26 |
| | 10500.00 10600.00 | 76.33 86.33 | 179.70 179.70 | 10269.76 10284.82 | -22.83 75.90 | 22.28 -76.45 | -109.83 -109.32 | 10.00 10.00 | 450644.28 450545.55 | 674672.17 N 32 14 15.63 W 103 46 6.27 674672.68 N 32 14 14.65 W 103 46 6.27 |
| Landing Point | 10634.41 | 89.77 | 179.70 | 10285.99 | 110.28 | -110.83 | -109.15 | 10.00 | 450511.17 | 674672.86 N 32 14 14.31 W 103 46 6.27 |
| | 10700.00 10800.00 | 89.77 89.77 | 179.70 179.70 | 10286.26 10286.67 | 175.87 275.87 | -176.42 -276.42 | -108.81 -108.29 | 0.00 | 450445.59 450345.59 | 674673.20 N 32 14 13.67 W 103 46 6.27 674673.72 N 32 14 12.68 W 103 46 6.27 |
| | 10900.00 11000.00 | 89.77 89.77 | 179.70 179.70 | 10287.08 10287.48 | 375.87 475.87 | -376.42 -476.42 | -107.77 -107.25 | 0.00 | 450245.60 450145.61 | 674674.24 N 32 14 11.69 W 103 46 6.27 674674.75 N 32 14 10.70 W 103 46 6.27 |
| | 11100.00 | 89.77 | 179.70 | 10287.89 | 575.87 | -576.42 | -106.73 | 0.00 | 450045.62 | 674675.27 N 32 14 9.71 W 103 46 6.27 |
| | 11200.00 11300.00 | 89.77 89.77 | 179.70 179.70 | 10288.30 10288.71 | 675.87 775.87 | -676.41 -776.41 | -106.22 -105.70 | 0.00 | 449945.63 449845.63 | 674675.79 N 32 14 8.72 W 103 46 6.27 674676.31 N 32 14 7.73 W 103 46 6.27 |
| | 11400.00 | 89.77 | 179.70 | 10289.11 | 875.86 | -876.41 | -105.18 | 0.00 | 449745.64 | 674676.82 N 32 14 6.74 W 103 46 6.27 |
| | 11500.00 11600.00 | 89.77 89.77 | 179.70 179.70 | 10289.52 10289.93 | 975.86 1075.86 | -976.41 -1076.40 | -104.66 -104.15 | 0.00 | 449645.65 449545.66 | 674677.34 N 32 14 5.75 W 103 46 6.27 674677.86 N 32 14 4.76 W 103 46 6.27 |
| | 11700.00 11800.00 | 89.77 89.77 | 179.70 179.70 | 10290.34 10290.74 | 1175.86 1275.86 | -1176.40 -1276.40 | -103.63 -103.11 | 0.00 | 449445.67 449345.67 | 674678.38 N 32 14 3.77 W 103 46 6.27 674678.90 N 32 14 2.78 W 103 46 6.27 |
| | 11900.00 | 89.77 | 179.70 | 10291.15 | 1375.86 | -1376.40 | -102.59 | 0.00 | 449245.68 | 674679.41 N 32 14 1.79 W 103 46 6.27 |
| | 12000.00 12100.00 | 89.77 89.77 | 179.70 179.70 | 10291.56 10291.97 | 1475.86 1575.86 | -1476.40 -1576.39 | -102.08 -101.56 | 0.00 | 449145.69 449045.70 | 674679.93 N 32 14 0.80 W 103 46 6.27 674680.45 N 32 13 59.81 W 103 46 6.27 |
| | 12200.00 | 89.77 | 179.70 | 10292.38 | 1675.86 | -1676.39 | -101.04 | 0.00 | 448945.71 | 674680.97 N 32 13 58.82 W 103 46 6.27 |
| | 12300.00 12400.00 | 89.77 89.77 | 179.70 179.70 | 10292.78 10293.19 | 1775.86 1875.86 | -1776.39 -1876.39 | -100.52 -100.00 | 0.00 | 448845.71 448745.72 | 674681.48 N 32 13 57.83 W 103 46 6.27 674682.00 N 32 13 56.84 W 103 46 6.27 |
| | 12500.00 12600.00 | 89.77 89.77 | 179.70 179.70 | 10293.60 10294.01 | 1975.86 2075.85 | -1976.38 -2076.38 | -99.49 -98.97 | 0.00 | 448645.73 448545.74 | 674682.52 N 32 13 55.85 W 103 46 6.27 674683.04 N 32 13 54.86 W 103 46 6.27 |
| | 12700.00 | 89.77 | 179.70 | 10294.41 | 2175.85 | -2176.38 | -98.45 | 0.00 | 448445.75 | 674683.55 N 32 13 53.87 W 103 46 6.27 |
| | 12800.00 12900.00 | 89.77 89.77 | 179.70 179.70 | 10294.82 10295.23 | 2275.85 2375.85 | -2276.38 -2376.38 | -97.93 -97.42 | 0.00 | 448345.75 448245.76 | 674684.07 N 32 13 52.88 W 103 46 6.27 674684.59 N 32 13 51.90 W 103 46 6.27 |
| | 13000.00 | 89.77 | 179.70 | 10295.64 | 2475.85 | -2476.37 | -96.90 | 0.00 | 448145.77 | 674685.11 N 32 13 50.91 W 103 46 6.27 |
| | 13100.00 13200.00 | 89.77 89.77 | 179.70 179.70 | 10296.04 10296.45 | 2575.85 2675.85 | -2576.37 -2676.37 | -96.38 -95.86 | 0.00 | 448045.78 447945.79 | 674685.63 N 32 13 49.92 W 103 46 6.27 674686.14 N 32 13 48.93 W 103 46 6.27 |
| | 13300.00 13400.00 | 89.77 89.77 | 179.70 179.70 | 10296.86 10297.27 | 2775.85 2875.85 | -2776.37 -2876.37 | -95.34 -94.83 | 0.00 | 447845.79 447745.80 | 674686.66 N 32 13 47.94 W 103 46 6.27 674687.18 N 32 13 46.95 W 103 46 6.27 |
| | 13500.00 | 89.77 | 179.70 | 10297.67 | 2975.85 | -2976.36 | -94.31 | 0.00 | 447645.81 | 674687.70 N 32 13 45.96 W 103 46 6.27 |
| | 13600.00 13700.00 | 89.77 89.77 | 179.70 179.70 | 10298.08 10298.49 | 3075.85 3175.85 | -3076.36 -3176.36 | -93.79 -93.27 | 0.00 | 447545.82 447445.83 | 674688.21 N 32 13 44.97 W 103 46 6.27 674688.73 N 32 13 43.98 W 103 46 6.27 |
| | 13800.00 | 89.77 | 179.70 | 10298.90 | 3275.84 | -3276.36 | -92.76 | 0.00 | 447345.83 | 674689.25 N 32 13 42.99 W 103 46 6.27 |
| | 13900.00 14000.00 | 89.77 89.77 | 179.70 179.70 | 10299.31 10299.71 | 3375.84 3475.84 | -3376.35 -3476.35 | -92.24 -91.72 | 0.00 | 447245.84 447145.85 | 674689.77 N 32 13 42.00 W 103 46 6.27 674690.29 N 32 13 41.01 W 103 46 6.27 |
| | 14100.00 14200.00 | 89.77 89.77 | 179.70 179.70 | 10300.12 10300.53 | 3575.84 3675.84 | -3576.35 -3676.35 | -91.20 -90.68 | 0.00 | 447045.86 446945.87 | 674690.80 N 32 13 40.02 W 103 46 6.27 674691.32 N 32 13 39.03 W 103 46 6.27 |
| | 14300.00 | 89.77 | 179.70 | 10300.94 | 3775.84 | -3776.35 | -90.17 | 0.00 | 446845.87 | 674691.84 N 32 13 38.04 W 103 46 6.27 |
| | 14400.00 14500.00 | 89.77 89.77 | 179.70 179.70 | 10301.34 10301.75 | 3875.84 3975.84 | -3876.34 -3976.34 | -89.65 -89.13 | 0.00 | 446745.88 446645.89 | 674692.36 N 32 13 37.05 W 103 46 6.27 674692.87 N 32 13 36.06 W 103 46 6.27 |
| | 14600.00 | 89.77 | 179.70 | 10302.16 | 4075.84 | -4076.34 | -88.61 | 0.00 | 446545.90 | 674693.39 N 32 13 35.07 W 103 46 6.27 |
| | 14700.00 14800.00 | 89.77 89.77 | 179.70 179.70 | 10302.57 10302.97 | 4175.84 4275.84 | -4176.34 -4276.33 | -88.10 -87.58 | 0.00 | 446445.91 446345.91 | 674693.91 N 32 13 34.08 W 103 46 6.27 674694.43 N 32 13 33.09 W 103 46 6.27 |
| | 14900.00 15000.00 | 89.77 89.77 | 179.70 179.70 | 10303.38 10303.79 | 4375.84 4475.84 | -4376.33 -4476.33 | -87.06 -86.54 | 0.00 | 446245.92 446145.93 | 674694.94 N 32 13 32.10 W 103 46 6.27 674695.46 N 32 13 31.12 W 103 46 6.27 |
| | 15100.00 | 89.77 | 179.70 | 10304.20 | 4575.83 | -4576.33 | -86.02 | 0.00 | 446045.94 | 674695.98 N 32 13 30.13 W 103 46 6.27 |
| MP, Turn 2°/100ft | 15200.00 15296.95 | 89.77 89.77 | 179.70 179.70 | 10304.60 10305.00 | 4675.83 4772.79 | -4676.33 -4773.28 | -85.51 -85.00 | 0.00 | 445945.94 445849.00 | 674696.50 N 32 13 29.14 W 103 46 6.27 674697.00 N 32 13 28.18 W 103 46 6.27 |
| Hold | 15297.65 | 89.77 | 179.72 | 10305.00 | 4773.49 | -4773.98 | -85.00 | 2.00 | 445848.30 | 674697.00 N 32 13 28.17 W 103 46 6.27 |
| | 15300.00 15400.00 | 89.77 89.77 | 179.72 179.72 | 10305.01 10305.41 | 4775.83 4875.83 | -4776.32 -4876.32 | -84.99 -84.50 | 0.00 | 445845.95 445745.96 | 674697.02 N 32 13 28.15 W 103 46 6.27 674697.51 N 32 13 27.16 W 103 46 6.27 |
| | 15500.00 15600.00 | 89.77 89.77 | 179.72 179.72 | 10305.81 10306.21 | 4975.83 5075.83 | -4976.32 -5076.32 | -84.00 -83.51 | 0.00 | 445645.97 445545.98 | 674698.00 N 32 13 26.17 W 103 46 6.27 674698.50 N 32 13 25.18 W 103 46 6.27 |
| | 15700.00 | 89.77 | 179.72 | 10306.61 | 5175.83 | -5176.32 | -83.01 | 0.00 | 445445.98 | 674698.99 N 32 13 24.19 W 103 46 6.27 |
| | 15800.00 15900.00 | 89.77 89.77 | 179.72 179.72 | 10307.01 10307.41 | 5275.83 5375.83 | -5276.31 -5376.31 | -82.52 -82.02 | 0.00 | 445345.99 445246.00 | 674699.49 N 32 13 23.20 W 103 46 6.27 674699.98 N 32 13 22.21 W 103 46 6.27 |
| | 16000.00 | 89.77 | 179.72 | 10307.81 | 5475.83 | -5476.31 | -81.53 | 0.00 | 445146.01 | 674700.48 N 32 13 21.22 W 103 46 6.27 |
| | 16100.00 16200.00 | 89.77 89.77 | 179.72 179.72 | 10308.21 10308.61 | 5575.83 5675.83 | -5576.31 -5676.31 | -81.03 -80.54 | 0.00 | 445046.02 444946.02 | 674700.97 N 32 13 20.23 W 103 46 6.27 674701.47 N 32 13 19.24 W 103 46 6.27 |
| | 16300.00 16400.00 | 89.77 89.77 | 179.72 179.72 | 10309.01 10309.41 | 5775.82 5875.82 | -5776.30 -5876.30 | -80.04 -79.55 | 0.00 | 444846.03 444746.04 | 674701.96 N 32 13 18.25 W 103 46 6.27 674702.46 N 32 13 17.26 W 103 46 6.27 |
| | .5.55.00 | 55.11 | | .0000.71 | 00.0.02 | 00.0.00 | . 3.33 | 0.00 | | 5 52.10 1. 52.10 17.20 W 100 40 U.21 |

| Comments | MD | Incl | Azim Grid | TVD | VSEC | NS | EW | DLS | Northing | Easting | Latitude | Longitude |
|------------------------|----------------------|----------------|------------------|----------------------|--------------------|----------------------|------------------|-----------|------------------------|-----------|--------------------------------|---------------|
| _ | (ft) 16500.00 | (°) | (°) 179.72 | (ft) | (ft) | (ft) | (ft) | (°/100ft) | (ftUS) 444646.05 | (ftUS) | (N/S ° ' ") | (E/W ° ' ") |
| | 16600.00 | 89.77 89.77 | 179.72 | 10309.81 10310.21 | 5975.82 6075.82 | -5976.30 -6076.30 | -79.05 -78.56 | 0.00 | 444546.05 | | N 32 13 16.27 N 32 13 15.28 | |
| | 16700.00 | 89.77 | 179.72 | 10310.21 | 6175.82 | -6176.30 | -78.06 | 0.00 | 444446.06 | | N 32 13 14.29 | |
| | 16800.00 | 89.77 | 179.72 | 10310.01 | 6275.82 | -6276.29 | -77.57 | 0.00 | 444346.07 | | N 32 13 14.29 N 32 13 13.30 | |
| | 16900.00 | 89.77 | 179.72 | 10311.40 | 6375.82 | -6376.29 | -77.08 | 0.00 | 444246.08 | | N 32 13 12.31 | |
| | 17000.00 | 89.77 | 179.72 | 10311.80 | 6475.82 | -6476.29 | -76.58 | 0.00 | 444146.09 | | N 32 13 11.32 | |
| | 17100.00 | 89.77 | 179.72 | 10311.00 | 6575.82 | -6576.29 | -76.09 | 0.00 | 444046.09 | | N 32 13 10.33 | |
| | 17200.00 | 89.77 | 179.72 | 10312.60 | 6675.82 | -6676.29 | -75.59 | 0.00 | 443946.10 | | N 32 13 9.35 | |
| | 17300.00 | 89.77 | 179.72 | 10313.00 | 6775.82 | -6776.28 | -75.10 | 0.00 | 443846.11 | | N 32 13 8.36 | |
| | 17400.00 | 89.77 | 179.72 | 10313.40 | 6875.82 | -6876.28 | -74.60 | 0.00 | 443746.12 | | N 32 13 7.37 | |
| | 17500.00 | 89.77 | 179.72 | 10313.80 | 6975.81 | -6976.28 | -74.11 | 0.00 | 443646.12 | | N 32 13 6.38 | |
| | 17600.00 | 89.77 | 179.72 | 10314.20 | 7075.81 | -7076.28 | -73.61 | 0.00 | 443546.13 | | N 32 13 5.39 | |
| | 17700.00 | 89.77 | 179.72 | 10314.60 | 7175.81 | -7176.28 | -73.12 | 0.00 | 443446.14 | | N 32 13 4.40 | |
| | 17800.00 | 89.77 | 179.72 | 10315.00 | 7275.81 | -7276.27 | -72.62 | 0.00 | 443346.15 | | N 32 13 3.41 | |
| | 17900.00 | 89.77 | 179.72 | 10315.40 | 7375.81 | -7376.27 | -72.13 | 0.00 | 443246.16 | 674709.88 | N 32 13 2.42 | W 103 46 6.28 |
| | 18000.00 | 89.77 | 179.72 | 10315.80 | 7475.81 | -7476.27 | -71.63 | 0.00 | 443146.16 | 674710.37 | N 32 13 1.43 | W 103 46 6.28 |
| | 18100.00 | 89.77 | 179.72 | 10316.20 | 7575.81 | -7576.27 | -71.14 | 0.00 | 443046.17 | 674710.86 | N 32 13 0.44 | W 103 46 6.28 |
| | 18200.00 | 89.77 | 179.72 | 10316.60 | 7675.81 | -7676.27 | -70.64 | 0.00 | 442946.18 | 674711.36 | N 32 12 59.45 | W 103 46 6.28 |
| | 18300.00 | 89.77 | 179.72 | 10317.00 | 7775.81 | -7776.26 | -70.15 | 0.00 | 442846.19 | 674711.85 | N 32 12 58.46 | W 103 46 6.28 |
| | 18400.00 | 89.77 | 179.72 | 10317.40 | 7875.81 | -7876.26 | -69.66 | 0.00 | 442746.20 | 674712.35 | N 32 12 57.47 | W 103 46 6.28 |
| | 18500.00 | 89.77 | 179.72 | 10317.80 | 7975.81 | -7976.26 | -69.16 | 0.00 | 442646.20 | 674712.84 | N 32 12 56.48 | W 103 46 6.28 |
| | 18600.00 | 89.77 | 179.72 | 10318.20 | 8075.81 | -8076.26 | -68.67 | 0.00 | 442546.21 | 674713.34 | N 32 12 55.49 | W 103 46 6.28 |
| | 18700.00 | 89.77 | 179.72 | 10318.60 | 8175.81 | -8176.26 | -68.17 | 0.00 | 442446.22 | | N 32 12 54.50 | |
| | 18800.00 | 89.77 | 179.72 | 10319.00 | 8275.80 | -8276.25 | -67.68 | 0.00 | 442346.23 | | N 32 12 53.51 | |
| | 18900.00 | 89.77 | 179.72 | 10319.39 | 8375.80 | -8376.25 | -67.18 | 0.00 | 442246.23 | 674714.82 | N 32 12 52.52 | W 103 46 6.28 |
| | 19000.00 | 89.77 | 179.72 | 10319.79 | 8475.80 | -8476.25 | -66.69 | 0.00 | 442146.24 | | N 32 12 51.53 | |
| | 19100.00 | 89.77 | 179.72 | 10320.19 | 8575.80 | -8576.25 | -66.19 | 0.00 | 442046.25 | | N 32 12 50.54 | |
| | 19200.00 | 89.77 | 179.72 | 10320.59 | 8675.80 | -8676.25 | -65.70 | 0.00 | 441946.26 | | N 32 12 49.55 | |
| | 19300.00 | 89.77 | 179.72 | 10320.99 | 8775.80 | -8776.24 | -65.20 | 0.00 | 441846.27 | | N 32 12 48.56 | |
| | 19400.00 | 89.77 | 179.72 | 10321.39 | 8875.80 | -8876.24 | -64.71 | 0.00 | 441746.27 | | N 32 12 47.58 | |
| | 19500.00 | 89.77 | 179.72 | 10321.79 | 8975.80 | -8976.24 | -64.21 | 0.00 | 441646.28 | | N 32 12 46.59 | |
| | 19600.00 | 89.77 | 179.72 | 10322.19 | 9075.80 | -9076.24 | -63.72 | 0.00 | 441546.29 | | N 32 12 45.60 | |
| | 19700.00 | 89.77 | 179.72 | 10322.59 | 9175.80 | -9176.23 | -63.22 | 0.00 | 441446.30 | | N 32 12 44.61 | |
| | 19800.00 | 89.77 | 179.72 | 10322.99 | 9275.80 | -9276.23 | -62.73 | 0.00 | 441346.30 | | N 32 12 43.62 | |
| | 19900.00 | 89.77 | 179.72 | 10323.39 | 9375.80 | -9376.23 | -62.24 | 0.00 | 441246.31 | | N 32 12 42.63 | |
| | 20000.00 | 89.77 | 179.72 | 10323.79 | 9475.79 | -9476.23 | -61.74 | 0.00 | 441146.32 | | N 32 12 41.64 | |
| | 20100.00 20200.00 | 89.77 89.77 | 179.72 179.72 | 10324.19 10324.59 | 9575.79 9675.79 | -9576.23 -9676.22 | -61.25 -60.75 | 0.00 | 441046.33 | | N 32 12 40.65 N 32 12 39.66 | |
| | 20200.00 | 89.77 89.77 | 179.72 | 10324.59 | 9675.79 | -9676.22 -9776.22 | -60.75 -60.26 | 0.00 | 440946.34 440846.34 | | N 32 12 39.66 N 32 12 38.67 | |
| | 20400.00 | 89.77 89.77 | 179.72 | 10324.99 | 9875.79 | -9776.22 -9876.22 | -50.26 | 0.00 | 440746.35 | | N 32 12 38.67 N 32 12 37.68 | |
| LTP Cross | 20478.38 | 89.77 | 179.72 | 10325.70 | 9954.17 | -9076.22 -9954.60 | -59.37 | 0.00 | 440667.98 | | N 32 12 37.00 N 32 12 36.90 | |
| LIF GIUSS | 20478.38 | 89.77 89.77 | 179.72 | 10325.70 | 9954.17 | -9954.60 -9976.22 | -59.37 -59.27 | 0.00 | 440667.98 | | N 32 12 36.90 N 32 12 36.69 | |
| Javelina Unit 411H BHL | 20553.36 | 89.77 | 179.72 | 10326.00 | 10029.15 | -10029.58 | -59.00 | 0.00 | 440593.00 | | N 32 12 36.16 | |

Survey Type:

Def Plan

Survey Error Model: Survey Program: ISCWSA Rev 3 *** 3-D 97.071% Confidence 3.0000 sigma

| _ | Description | Part | MD From (ft) | MD To (ft) | EOU Freq (ft) | Hole Size Cas (in) | ing Diameter (in) | Expected Max Inclination (deg) | Survey Tool Type | Borehole / Survey |
|---|-------------|------|-----------------|---------------|------------------|-----------------------|----------------------|--------------------------------------|-------------------------------|-----------------------------------------------------------|
| | | 1 | 0.000 | 28.000 | 1/100.000 | 30.000 | 30.000 | | B001Mb_MWD+HRGM-Depth Only | Javelina Unit 411H / Javelina Unit 411H R0 mdv 22Jul21 |
| | | 1 | 28.000 | 20553.363 | 1/100.000 | 30.000 | 30.000 | | B001Mb_MWD+HRGM | Javelina Unit 411H / Javelina Unit 411H R0 mdv 22Jul21 |

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME: | Chevron

LEASE NO.: | NMNM70895

WELL NAME & NO.: Javelina Unit 411H SURFACE HOLE FOOTAGE: 510'/N & 1761'/W

BOTTOM HOLE FOOTAGE 25'/S & 1650'/W

LOCATION: | Section 10, T.24 S., R.31 E., NMPM

COUNTY: Eddy County, New Mexico

COA

| H2S | O Yes | ⊙ No | |
|----------------------|------------------|------------------|------------------|
| Potash | O None | Secretary | ⊙ R-111-P |
| Cave/Karst Potential | • Low | © Medium | C High |
| Cave/Karst Potential | Critical | | |
| Variance | O None | • Flex Hose | Other |
| Wellhead | Conventional | • Multibowl | © Both |
| Other | ☐4 String Area | ☐ Capitan Reef | □WIPP |
| Other | ☐ Fluid Filled | ☐ Cement Squeeze | ☐ Pilot Hole |
| Special Requirements | ☐ Water Disposal | □ СОМ | ✓ Unit |
| | | | |
| Break Testing | • Yes | O No | |

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H2S) monitors shall be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

- 1. The 13-3/8 inch surface casing shall be set at approximately 877 feet (a minimum of 70 feet (Eddy County) into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **24 hours in the Potash Area** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.
- 2. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above.

Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

- ❖ In <u>R111 Potash Areas</u> if cement does not circulate to surface on the first two salt protection casing strings, the cement on the 3rd casing string must come to surface.
- 3. The minimum required fill of cement behind the **7-5/8** inch production casing is:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office. Excess calculates to 14%. Additional cement maybe requried.
- 4. The minimum required fill of cement behind the $5 \times 4-1/2$ inch production liner is:
 - Cement should tie-back **100 feet** into the previous casing. Operator shall provide method of verification.

C. PRESSURE CONTROL

- 1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
- 2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000** (**5M**) psi. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - a. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - b. Manufacturer representative shall install the test plug for the initial BOP test.
 - c. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.

d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Unit Wells

The well sign for a unit well shall include the unit number in addition to the surface and bottom hole lease numbers. This also applies to participating area numbers. If a participating area has not been established, the operator can use the general unit designation, but will replace the unit number with the participating area number when the sign is replaced.

Commercial Well Determination

A commercial well determination shall be submitted after production has been established for at least six months. (This is not necessary for secondary recovery unit wells)

BOPE Break Testing Variance (Note: For 5M BOPE or less)

- BOPE Break Testing is ONLY permitted for 5M BOPE or less.
- BOPE Break Testing is NOT permitted to drilling the production hole section.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required.
- The BLM is to be contacted (575-361-2822 Eddy County) 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per Onshore Oil and Gas Order No. 2.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)
 - ☑ Eddy CountyCall the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, (575) 361-2822

Page 3 of 8

- 1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
- 2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
- 3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

- 1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
- 2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive

- strength of 500 psi for all cement blends, 2) until cement has been in place at least $\underline{24}$ hours. WOC time will be recorded in the driller's log. The casing intergrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- 3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing intergrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- 4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
- 5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
- 6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
- 7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
- 8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

- 1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
- 2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic

- pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
- 3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
- 4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- 5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).

- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

ZS080922

ONSHORE ORDER NO. 1 Chevron SD 24 13 FED P415 13H Lea County, NM CONFIDENTIAL -- TIGHT HOLE DRILLING PLAN PAGE: 4

6. MUD PROGRAM

| From | То | TVD Top | TVD Btm | Type | Weight | F. Vis | Filtrate |
|---------|---------|---------|---------|---------------|-----------|---------|----------|
| 0' | 850' | 0' | 850' | Spud Mud | 8.3-8.7 | 32 - 34 | NC - NC |
| 850' | 4600' | 850' | 4,587' | Brine | 9.4-10.6 | 28 - 30 | 25-30 |
| 4600' | 10,820' | 4,587' | 10,808' | Cut Brine | 8.8-10.0 | 70 - 75 | 25-30 |
| 10,820' | 22,257' | 10,808' | 11,786' | Oil Based Mud | 12.0-14.8 | 70 - 75 | 25-30 |

A closed system will by utilized consisting of above ground steel tanks. All wastes accumulated during drilling operations will be contained in a portable trash cage and removed from location and deposited in an approved sanitary landfill. Sanitary wastes will be contained in a chemical porta-toilet and then hauled to an approved sanitary landfill.

All fluids and cuttings will be disposed of in accordance with New Mexico Oil Conservation Division rules and regulations.

A mud test shall be performed every 24 hours after mudding up to determine, as applicable: density, viscosity, gel strength, filtration, and pH.

Visual mud monitoring equipment shall be in place to detect volume changes indicating loss or gain of circulating fluid volume. When abnormal pressures are anticipated -- a pit volume totalizer (PVT), stroke counter, and flow sensor will be used to detect volume changes indicating loss or gain of circulating fluid volume.

A weighting agent and lost circulating material (LCM) will be onsite to mitigate pressure or lost circulation as hole conditions dictate.

7. TESTING, LOGGING, AND CORING

The anticipated type and amount of testing, logging, and coring are as follows:

- a. Drill stem tests are not planned.
- b. The logging program will be as follows:

| TYPE | Logs | Interval | Timing | Vendor |
|---------|--------------|---------------------|---------------------|--------|
| Mudlogs | 2 man mudlog | Int Csg to TD | Drillout of Int Csg | TBD |
| LWD | MWD Gamma | Int. and Prod. Hole | While Drilling | TBD |

- c. Conventional whole core samples are not planned.
- d. A Directional Survey will be run.

8. ABNORMAL PRESSURES AND HYDROGEN SULFIDE

a. No abnormal pressures or temperatures are expected. Estimated BHP at intermediate TD is:
 5750 psi
 No abnormal pressures or temperatures are expected. Estimated BHP at production TD is:
 8650 psi

b. Hydrogen sulfide gas is not anticipated. An H2S Contingency plan is attached with this APD in the event that H2S is encountered



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

08/29/2022

APD ID: 10400080141

Well Type: OIL WELL

Submission Date: 09/16/2021

Highlighted data reflects the most recent changes

Operator Name: CHEVRON USA INCORPORATED

Well Number: 411H

Well Name: JAVELINA UNIT

Well Work Type: Drill

Show Final Text

Section 1 - Geologic Formations

| Formation | Formation Name | Elevation | True Vertical | Measured Depth | Lithologies | Mineral Resources | Producing Formatio |
|-----------|--------------------|-----------|---------------|-------------------|------------------------------|-------------------|-----------------------|
| 6950509 | RUSTLER | 3462 | 572 | 572 | DOLOMITE | NONE | N |
| 6998872 | TOP SALT | 2650 | 812 | 812 | MUDSTONE, SALT, SANDSTONE | NONE | N |
| 6998873 | SALADO | 2544 | 918 | 918 | HALITE | NONE | N |
| 6950526 | CASTILE | 630 | 2832 | 2842 | ANHYDRITE | NONE | N |
| 6950528 | LAMAR | -895 | 4357 | 4367 | LIMESTONE | NONE | N |
| 6950510 | BELL CANYON | -936 | 4398 | 4408 | SANDSTONE | NONE | N |
| 6950512 | CHERRY CANYON | -1831 | 5293 | 5393 | SANDSTONE | NONE | N |
| 6950513 | BRUSHY CANYON | -3072 | 6534 | 6689 | SANDSTONE | NONE | N |
| 6950514 | BONE SPRING | -4790 | 8252 | 8407 | LIMESTONE | NATURAL GAS, OIL | N |
| 6950524 | UPPER AVALON SHALE | -4853 | 8315 | 8470 | LIMESTONE, SHALE | NATURAL GAS, OIL | N |
| 6950516 | BONE SPRING 1ST | -5811 | 9273 | 9394 | SANDSTONE | NATURAL GAS, OIL | N |
| 6950517 | BONE SPRING 2ND | -6384 | 9846 | 20553 | SANDSTONE | NATURAL GAS, OIL | Y |

Section 2 - Blowout Prevention

Pressure Rating (PSI): 5M Rating Depth: 10604

Equipment: Chevron will have a minimum of a 5,000 psi rig stack for drill out below surface casing. The stack will be tested as specified in the attached testing requirements. Batch drilling of the surface, intermediate, and production will take place. A full BOP test will be performed per hole section, unless approval from BLM is received otherwise. Flex choke hose will be used for all wells on the pad (see attached specs and variance). BOP test will be conducted by a third party.

Requesting Variance? YES

BLOWOUT PREVENTER SCHEMATIC

Operation: Intermediate & Production Drilling Operations

BOP Stack Pressure Part Size Description Rating 13-5/8" N/A Rotating Head/Bell nipple 13-5/8" 5,000 Annular В 13-5/8" 10,000 Blind Ram

Minimum System operation pressure


 D
 13-5/8"
 10,000
 Pipe Ram


 E
 13-5/8"
 10,000
 Mud Cross

 F
 13-5/8"
 10,000
 Pipe Ram

 Kill Line

| Part | Size | Pressure | Description | |
|------|------|----------|------------------------------|--|
| | Size | Rating | Description | |
| , | 2" | 10.000 | Inside Kill Line Valve (gate | |
| G | 2 | 10,000 | valve) | |
| ш | H 2" | 10,000 | Outside Kill Line Valve | |
| П | | | (gate valve) | |
| _ | 2" | 10,000 | Kill Line Check valve | |
| | | | | |





Flow Line

| Choke line | | | | | | |
|------------|-----------------|--------------------|-------------------------|--|--|--|
| Dort | Size | Pressure | Description | | | |
| Part Size | Size | Rating | Description | | | |
| J | 3" | 10,000 | HCR (gate valve) | | | |
| K | 3" | 10,000 | Manual HCR (gate valve) | | | |
| | <u>Wellhead</u> | | | | | |
| Part | Size | Pressure Rating | Description | | | |
| L | 13-5/8" | 5.000 | FMC Multibowl wellhead | | | |



BOP Installation Checklist: The following items must be verified and checked off prior to pressure testing BOP equipment

The installed BOP equipment meets at least the minimum requirements (rating, type, size, configuration) as shown on this schematic. Components may be substituted for equivalent equipment rated to higher pressures. Additional components may be put into place as long as they meet or exceed the minimum pressure rating of the system.

All valves on the kill line and choke line will be full opening and will allow straight flow through.

Manual (hand wheels) or automatic locking devices will be installed on all ram preventers. Hand wheels will also be install on all manual valves on the choke and kill line.

A valve will be installed in the closing line as close as possible to the annular preventer to act as a locking device. This valve will remain open unless accumulator is inoperative.

Upper kelly cock valve with handle will be available on rig floor along with saved valve and subs to fit all drill string connections in use.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 139732

CONDITIONS

| Operator: | OGRID: |
|---------------------|-------------------------------------------------------|
| CHEVRON U S A INC | 4323 |
| 6301 Deauville Blvd | Action Number: |
| Midland, TX 79706 | 139732 |
| | Action Type: |
| | [C-101] BLM - Federal/Indian Land Lease (Form 3160-3) |

CONDITIONS

| Created By | Condition | Condition Date |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
| kpickford | Will require administrative order for non-standard spacing unit | 9/1/2022 |
| kpickford | The pool assignment for this well has been corrected on the C-102. Subsequent sundries must reflect the correct pool. | 9/1/2022 |
| kpickford | Notify OCD 24 hours prior to casing & cement | 9/1/2022 |
| kpickford | Will require a File As Drilled C-102 and a Directional Survey with the C-104 | 9/1/2022 |
| kpickford | Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string | 9/1/2022 |
| kpickford | Cement is required to circulate on both surface and intermediate1 strings of casing | 9/1/2022 |
| kpickford | Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system | 9/1/2022 |