

Well Name: BURCH KEELY UNIT	Well Location: T17S / R29E / SEC 26 / SWSW /	County or Parish/State: EDDY / NM
Well Number: 209	Type of Well: INJECTION - ENHANCED RECOVERY	Allottee or Tribe Name:
Lease Number: NMLC028784C	Unit or CA Name: BURCH KEELY UNIT	Unit or CA Number: NMNM88525X
US Well Number: 3001503113	Well Status: Water Injection Well	Operator: SPUR ENERGY PARTNERS LLC

Accepted for record – NMOCD gc9/2/2022

Notice of Intent

Sundry ID: 2688192

Type of Submission: Notice of Intent	Type of Action: Plug and Abandonment
Date Sundry Submitted: 08/19/2022	Time Sundry Submitted: 07:49
Date proposed operation will begin: 09/01/2022	

Procedure Description: Please find proposed P&A procedure and WBDs attached for your review. Thank you.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

- BKU_209_WBD_20220819074929.pdf
- BKU_209_PA_Procedure_20220819074929.pdf

Well Name: BURCH KEELY UNIT	Well Location: T17S / R29E / SEC 26 / SWSW /	County or Parish/State: EDDY / NM
Well Number: 209	Type of Well: INJECTION - ENHANCED RECOVERY	Allottee or Tribe Name:
Lease Number: NMLC028784C	Unit or CA Name: BURCH KEELY UNIT	Unit or CA Number: NMNM88525X
US Well Number: 3001503113	Well Status: Water Injection Well	Operator: SPUR ENERGY PARTNERS LLC

Conditions of Approval

Specialist Review

BURCH_KEELY_UNIT_209__2688192__COA_AND_PROCEDURE_20220827092352.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SARAH CHAPMAN

Signed on: AUG 19, 2022 07:49 AM

Name: SPUR ENERGY PARTNERS LLC

Title: Regulatory Directory

Street Address: 9655 KATY FREEWAY, SUITE 500

City: Houston

State: TX

Phone: (832) 930-8613

Email address: SCHAPMAN@SPUREPLLC.COM

Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: KEITH P IMMATTY

BLM POC Title: ENGINEER

BLM POC Phone: 5759884722

BLM POC Email Address: KIMMATTY@BLM.GOV

Disposition: Approved

Disposition Date: 08/27/2022

Signature: Keith Immatty


Burch Keely Unit #209
Eddy County, NM
API# 30-015-03113

P&A Procedure

1. Unset Packer @ 2,309' & POOH w/ Tbg.
2. Perf & Sqz 60 sx Class C cmt @ 2,900'-2,750'. WOC & Tag. (Liner Top / 7" Shoe)
3. Set CIBP @ 2,309' (**Pressure test 500psi, 30mins**)w/ 100' Class C cmt. WOC & Tag
4. **Yates + BOS : Perf and sqz from 1,010' to 7,66'. WOC and Tag**
5. Perf & Sqz 45 sx Class C cmt @ 450'-**266'**(**Including TOS**). WOC & Tag. (8-5/8" Shoe)
6. Perf & Sqz 45 sx Class C cmt @ 100'-Surf.
7. Cut off wellhead, verify cmt to surface, weld on dry hole marker.

Eddy County, NM
API# 30-015-03113

SPUD DATE: 10/1/1949
CONVERT TO INJ: 8/27/1986

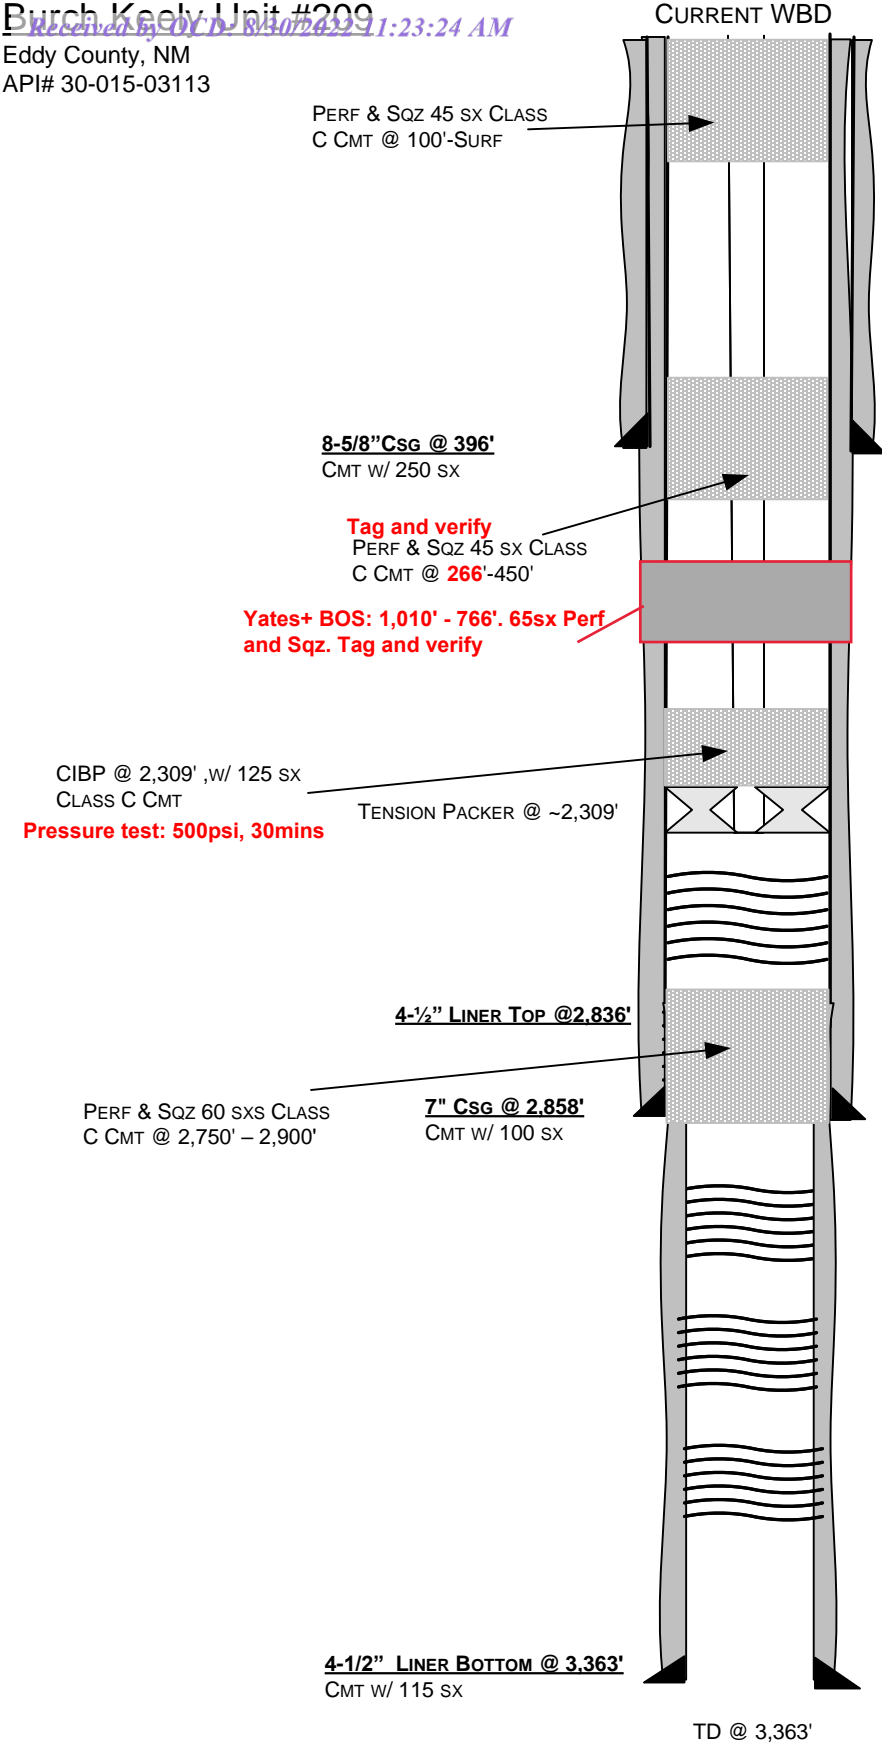

12-19-86 thru
12-21-86: MI & RU DDU. COOH w/rods & pmp. Installed BOP. COOH w/tbg. Cleaned out well to top of liner @ 2836'. Well SI 48 hrs.
12-22-86: WIH w/7" XTIS-type pkr on tbg. Set pkr @ 2315'. Started tst'g annulus to 500 psi to verify csg integrity. Tst'd to 1000#. Released pkr, COOH. WIH w/tension pkr, located & isolated hole & csg between 1153' & 1182'.
12-23-86: thru
12-28-86: Well SI.
12-29-86: Pmpd 100 sx "H" cmt w/5% salt. Displaced cmt from csg. WOC 3 hrs. Pmpd 50 sx "H" cmt & pressure increased to 1200#. Displaced cmt below pkr. Staged in cmt. Sqzd to 950#, 40' of cmt inside of 7" csg.
12-30-86 thru
1-8-87: Tag'd cmt @ 1070', drld out to 1180'. WIH to 1400' ck for stringers. Pressured up on 7" csg to test, press'd to 500 psi, bled back slowly. Pmpd 75 sx of Class "H" cmt w/5% salt. Squeezed pressure of 1700 psi was reached w/140' of cmt left inside of 7" csg. Tagged cmt @ 1005', drld out to 2115'. Ran gamma ray/collar locator log from 2200' to TD. Perf'd 2350'-2828' (34'-68 shots) acidized SA perfs 2792'-3256' w/4000 gals of 15% NEFE HCL. Acidized Grayburg perfs 2350'-2828' w/5200 gals of 7 1/2% NEFE HCL acid containing clay stabilizer & fines suspension agent. Swbd back load & acid wr. WIH w/7" Brown Oil Tool plastic coated pkr on 2-3/8" plastic coated tbg.
5/5/00 MIRU WOU. RELEASE PKR. POOH W/ 71 JTS PC TBG & PKR. MADE SCRAPER RUN DOWN TOP OF LINER. RIH W/ 7" PKR & 2 7/8" WORKSTRING. FOUND HOLE BETWEEN 1676-1707. SQZ HOLE W/75 SX PREM PLUS. DRILL OUT CMT. TST SQZ TO 450# - HELD OK. RIH W/HALLIBURTON 7" R-4 TENSION PKR & 71 JTS 2 3/8" PC TBG, CIRC PKR FLUID. SET R-4 PKR @ 2309'. TSTD CSG TO 340# FOR 15 MINUTES - HELD OK.

PERFS: 2,350' - 3,256'

FRAC'D FROM 2,378' - 2,800'

ACIDIZED FROM 2,350' - 2,828' & 2,931' - 3,256'

Sundry ID 2688192

Plug Type	Top	Bottom	Length	Tag	Sacks	Notes
Surface Plug	0.00	100.00	100.00	Tag/Verify	45.00	Perf and sqz
Top of Salt @ 320	266.80	370.00	103.20	Tag/Verify	45.00	Same as shoe plug below
Shoe Plug	342.04	446.00	103.96	Tag/Verify	45.00	Perf and sqz
Base of Salt @ 825	766.75	875.00	108.25	Tag/Verify	65.00	Covered by Yates plug below
Yates @ 960	900.40	1010.00	109.60	If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforations	65.00	Perf and sqz
CIBP Plug	2274.00	2309.00	35.00	If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforations	25.00	Pressure test 500psi, 30min

No more than 2000' is to be allowed between plugs in open hole, and no more than 3000' between plugs in cased hole.

Class H >7500'

Class C <7500'

Fluid used to mix the cement in R111P shall be saturated with the salts common to the section penetrated, and in suitable proportions, but not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

Critical, High Cave Karst: Cave Karst depth to surface

R111P: Solid plug in all annuli - 50' from bottom of salt to surface.

Class C: 1.32 ft³/sx

Class H: 1.06 ft³/sx

Onshore Order 2.III.G Drilling Abandonment Requirements: "All formations bearing usable-quality water, oil, gas, or geothermal resources, and/or a prospectively valuable deposit of minerals shall be protected.

Cave Karst/Potash Cement	Low	500.00
---------------------------------	------------	--------

Shoe @ 396.00

Shoe @ 2858.00

Perforatons Top @ 2350.00 Perforations 3256.00

CIBP @ 2309.00

**BUREAU OF LAND MANAGEMENT
Carlsbad Field Office
620 East Greene Street
Carlsbad, New Mexico 88220
575-234-5972**

**Permanent Abandonment of Federal Wells
Conditions of Approval**

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within **ninety (90)** days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. **Notification:** Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-689-5981.

3. **Blowout Preventers:** A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. **Mud Requirement:** Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brine water. Minimum nine (9) pounds per gallon.

5. **Cement Requirement:** Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Dry Hole Marker: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). **The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.**

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds). A weep hole shall be left if a metal plate is welded in place.

7. Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**

8. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Carlsbad Field Office
620 E. Greene St.
Carlsbad, New Mexico 88220-6292
www.blm.gov/nm



In Reply Refer To: 1310

Reclamation Objectives and Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo “interim” reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo “final” reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its pre-disturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any/all contaminants, scrap/trash, equipment, pipelines and powerlines **(Contact service companies, allowing plenty of time to have the risers and power lines and poles removed prior to reclamation, don't wait till the last day and try to get them to remove infrastructure)**. Strip and remove caliche, contour the location to blend with the surrounding landscape, re-distribute the native soils, provide erosion control as needed, rip (across the slope and seed as specified in the original APD COA. **This will apply to well pads, facilities, and access roads.** Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

1. The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.
3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you

- have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.
5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos
Supervisory Petroleum Engineering Tech/Environmental Protection Specialist
575-234-5909 (Office), 575-361-2648 (Cell)

Arthur Arias
Environmental Protection Specialist
575-234-6230

Crisha Morgan
Environmental Protection Specialist
575-234-5987

Jose Martinez-Colon
Environmental Protection Specialist
575-234-5951

Mark Mattozzi
Environmental Protection Specialist
575-234-5713

Robert Duenas
Environmental Protection Specialist
575-234-2229

Trishia Bad Bear, Hobbs Field Station
Natural Resource Specialist
575-393-3612

SPUD DATE: 10/1/1949
CONVERT TO INJ: 8/27/1986

CURRENT WBD

8-5/8" Csg @ 396'
CMT W/ 250 SX

TENSION PACKER @ ~2,309'

4-1/2" LINER TOP @ 2,836'

7" Csg @ 2,858'
CMT W/ 100 SX

4-1/2" LINER BOTTOM @ 3,363'
CMT W/ 115 SX

TD @ 3,363'

12-19-86 thru
12-21-86: MI & RU DDU. COOH w/rods & pmp. Installed BOP. COOH w/tbg. Cleaned out well to top of liner @ 2836'. Well SI 48 hrs.
12-22-86: WIH w/7" XTIS-type pkr on tbg. Set pkr @ 2315'. Started tst'g annulus to 500 psi to verify csg integrity. Tst'd to 1000#. Released pkr, COOH. WIH w/tension pkr, located & isolated hole & csg between 1153' & 1182'.
12-23-86: thru
12-28-86: Well SI.
12-29-86: Pmpd 100 sx "H" cmt w/5% salt. Displaced cmt from csg. WOC 3 hrs. Pmpd 50 sx "H" cmt & pressure increased to 1200#. Displaced cmt below pkr. Staged in cmt. Sqzd to 950#, 40' of cmt inside of 7" csg.
12-30-86 thru
1-8-87: Tag'd cmt @ 1070', drld out to 1180'. WIH to 1400' ck for stringers. Pressured up on 7" csg to test, press'd to 500 psi, bled back slowly. Pmpd 75 sx of Class "H" cmt w/5% salt. Squeezed pressure of 1700 psi was reached w/140' of cmt left inside of 7" csg. Tagged cmt @ 1005', drld out to 2115'. Ran gamma ray/collar locator log from 2200' to TD. Perf'd 2350'-2828' (34'-68 shots) acidized SA perfs 2792'-3256' w/4000 gals of 15% NEFE HCL. Acidized Grayburg perfs 2350'-2828' w/5200 gals of 7 1/2% NEFE HCL acid containing clay stabilizer & fines suspension agent. Swbd back load & acid wr. WIH w/7" Brown Oil Tool plastic coated pkr on 2-3/8" plastic coated tbg.
5/5/00 MIRU WOU. RELEASE PKR. POOH W/ 71 JTS PC TBG & PKR. MADE SCRAPER RUN DOWN TOP OF LINER. RIH W/ 7" PKR & 2 7/8" WORKSTRING. FOUND HOLE BETWEEN 1676-1707. SQZ HOLE W/75 SX PREM PLUS. DRILL OUT CMT. TST SQZ TO 450# - HELD OK. RIH W/HALLIBURTON 7" R-4 TENSION PKR & 71 JTS 2 3/8" PC TBG, CIRC PKR FLUID. SET R-4 PKR @ 2309'. TSTD CSG TO 340# FOR 15 MINUTES - HELD OK.

PERFS: 2,350' – 3,256'

FRAC'D FROM 2,378' – 2,800'

ACIDIZED FROM 2,350' – 2,828' & 2,931' – 3,256'

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 139408

CONDITIONS

Operator: Spur Energy Partners LLC 9655 Katy Freeway Houston, TX 77024	OGRID: 328947
	Action Number: 139408
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
gcordero	None	9/2/2022