

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 340576

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address Franklin Mountain Energy 3, LLC 44 Cook Street Denver, CO 80206		2. OGRID Number 331595
		3. API Number 30-025-51481
4. Property Code 334044	5. Property Name ANNEX STATE COM	6. Well No. 801H

7. Surface Location

UL - Lot M	Section 36	Township 19S	Range 35E	Lot Idn M	Feet From 250	N/S Line S	Feet From 580	E/W Line W	County Lea
---------------	---------------	-----------------	--------------	--------------	------------------	---------------	------------------	---------------	---------------

8. Proposed Bottom Hole Location

UL - Lot D	Section 25	Township 19S	Range 35E	Lot Idn D	Feet From 130	N/S Line N	Feet From 360	E/W Line W	County Lea
---------------	---------------	-----------------	--------------	--------------	------------------	---------------	------------------	---------------	---------------

9. Pool Information

PEARL;WOLFCAMP, SOUTH	49870
-----------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3667
16. Multiple N	17. Proposed Depth 21638	18. Formation Wolfcamp	19. Contractor	20. Spud Date 6/15/2023
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	1900	1457	0
Int1	12.25	9.625	40	4000	841	0
Prod	8.75	7	32	10800	560	3000
Prod	8.75	5.5	20	21638	2705	10800

Casing/Cement Program: Additional Comments

Please see attached 14 point plan for additional details.

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Double Ram	10000	5000	Cactus

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief.
I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable.

Signature:

Printed Name: Electronically filed by Rachael A Overbey

Title: Project Manager

Email Address: roverbey@fmlc.com

Date: 5/16/2023

Phone: 303-570-4057

OIL CONSERVATION DIVISION

Approved By: Paul F Kautz

Title: Geologist

Approved Date: 5/19/2023

Expiration Date: 5/19/2025

Conditions of Approval Attached

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number		² Pool Code 49870		³ Pool Name PEARL; WOLFCAMP, SOUTH	
⁴ Property Code		⁵ Property Name ANNEX STATE COM			⁶ Well Number 801H
⁷ OGRID No. 331595		⁸ Operator Name FRANKLIN MOUNTAIN ENERGY 3, LLC			⁹ Elevation 3667.9'


¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	36	19S	35E		250	SOUTH	580	WEST	LEA

¹¹ Bottom Hole Location If Different From Surface

UL or lot no. D	Section 25	Township 19S	Range 35E	Lot Idn	Feet from the 130	North/South line NORTH	Feet from the 360	East/West line WEST	County LEA
¹² Dedicated Acres 640		¹³ Joint or Infill		¹⁴ Consolidation Code		¹⁵ Order No.			

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

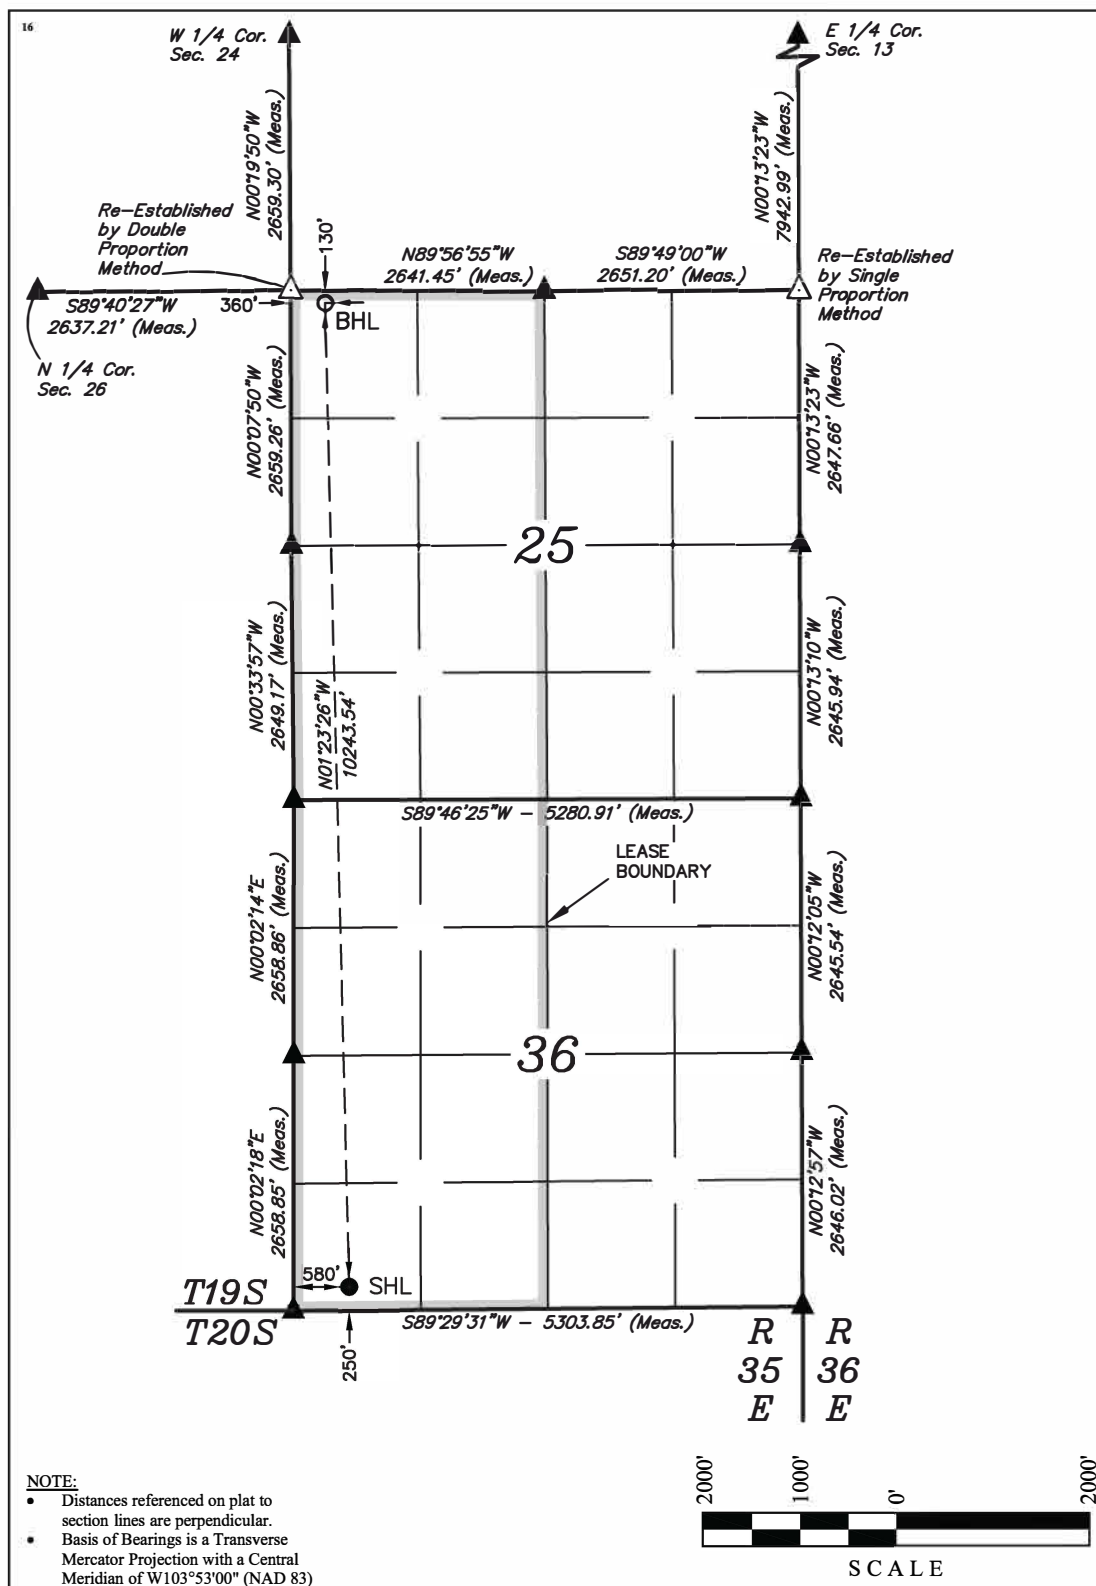

NOTE:

- Distances referenced on plat to section lines are perpendicular.
- Basis of Bearings is a Transverse Mercator Projection with a Central Meridian of W103°53'00" (NAD 83)

● = SURFACE HOLE LOCATION
○ = BOTTOM HOLE LOCATION
▲ = SECTION CORNER LOCATED
△ = SECTION CORNER
RE-ESTABLISHED.
(Not Set on Ground.)

NAD 83 (SURFACE HOLE LOCATION)	NAD 83 (BOTTOM HOLE LOCATION)
LATITUDE = 32°36'36.75" (32.610208°)	LATITUDE = 32°38'18.07" (32.638352°)
LONGITUDE = -103°25'02.96" (-103.417488°)	LONGITUDE = -103°25'05.34" (-103.418150°)
NAD 27 (SURFACE HOLE LOCATION)	NAD 27 (BOTTOM HOLE LOCATION)
LATITUDE = 32°36'36.31" (32.610085°)	LATITUDE = 32°38'17.63" (32.638229°)
LONGITUDE = -103°25'01.21" (-103.417002°)	LONGITUDE = -103°25'03.58" (-103.417662°)
STATE PLANE NAD 83 (N.M. EAST)	STATE PLANE NAD 83 (N.M. EAST)
N: 586939.15' E: 823347.30'	N: 597176.94' E: 823055.41'
STATE PLANE NAD 27 (N.M. EAST)	STATE PLANE NAD 27 (N.M. EAST)
N: 586876.39' E: 782166.03'	N: 597113.95' E: 781874.50'

17 OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature: Jacob Verby Date: 4/18/2023

Rachael Overbey

Printed Name _____

roverbey@fmellc.com

E-mail Address

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

April 5, 2023

Date of Survey _____
Signature and Seal of Professional Surveyor: _____



Certificate Number:

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Comments

Permit 340576

PERMIT COMMENTS

Operator Name and Address: Franklin Mountain Energy 3, LLC [331595] 44 Cook Street Denver, CO 80206		API Number: 30-025-51481
		Well: ANNEX STATE COM #801H
Created By	Comment	Comment Date
pkautz	HOLD NGMP INCOMPLETE	5/19/2023

District I

1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions

Permit 340576

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address: Franklin Mountain Energy 3, LLC [331595] 44 Cook Street Denver, CO 80206	API Number: 30-025-51481
	Well: ANNEX STATE COM #801H

OCD Reviewer	Condition
pkautz	Notify OCD 24 hours prior to casing & cement
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system
pkautz	Cement is required to circulate on both surface and intermediate1 strings of casing
pkautz	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud



Annex State Com 801H

1. Geologic name of surface location: Permian

2. Estimated tops of important geological markers:

Formations	PROG SS	PROG TVD	Picked TVD	delta	Potential/Issues
Cenozoic Alluvium (surface)	3,668'	30'	30'	0	Sand/Gravels/unconsolidated
Rustler	1,878'	1,819'			Carbonates
Salado	1,608'	2,089'			Salt, Carbonate & Clastics
Base Salt	450'	3,248'			Shaley Carbonate & Shale
Yates	186'	3,511'			Anhydrite/shale
Seven Rivers	-283'	3,981'			Interbedded shale/carbonate
Queen	-969'	4,667'			Sandstone & dolomite & anhydrite
Delaware Mtn Group	-2,341'	6,039'			Sandstone - oil/gas/water
Bone Spring Lime	-4,179'	7,877'			Shale/Carbonates - oil/gas
First Bone Spring Sand	-5,557'	9,255'			Sandstone - oil/gas/water
Second Bone Spring Carbonate	-5,804'	9,502'			Shale/Carbonates - oil/gas
Second Bone Spring Sand	-6,168'	9,866'			Sandstone - oil/gas/water
Third Bone Spring Carbonate	-6,719'	10,416'			Shale/Carbonates - oil/gas
Third Bone Spring Sand	-6,813'	10,511'			Sandstone - oil/gas/water
Wolfcamp	-6,913'	10,610'			Overpressure shale/sand- Oil/Gas
Wolfcamp B	-7,371'	11,069'			Overpressure Shale - Oil/Gas
HZ Target	-7,730'	11,428'			Overpressure Shale - Oil/Gas
Wolfcamp C	-7,889'	11,587'			Overpressure Shale - Oil/Gas

3. Estimated depth of anticipated fresh water, oil or gas:

Upper Permian Sands	0- 400'	Fresh Water
Delaware Sands	6,039'	Oil
1 st Bone Spring Sand	9,255'	Oil
2 nd Bone Spring Sand	9,866'	Oil
3 rd Bone Spring Sand	10,511'	Oil
Wolfcamp	10,610'	Oil
Wolfcamp B	11,069'	Oil

No other formations are expected to give up oil, gas or fresh water in measurable quantities. Surface freshwater sands will be protected by setting 13 3/8" casing at 1,900' and circulating cement back to surface.

4. Casing Program:

All casing strings will be run new.



Casing string	Weight	Grade	Burst	Collapse	Tension	Conn	Length	API design factor			
								Burst	Collapse	Tension	Coupling
Surface 13 3/8" 0-1,900'	54.5	J-55	2730	1130	853	BTC 909	1900	1.02	1.14	4.19	4.47
Intermediate 9 5/8" 0-4,000'	40	HCL-80	7430	4230	916	BTC 1042	4000	2.08	2.26	3.52	4.01
Production 7" 0-10,800'	32	HCP-110	12460	10760	1025	CDC-HTQ 1053	10800	1.85	2.13	2.30	2.36
Production 5 1/2" 10,800'-21,638'	20	HCP-110	12640	12200	641	CDC-HTQ 667 TVD	10838 11428	1.15	2.41	2.02	2.11 2.03

Tapered production string will be ran with a X-over installed at the KOP of 10,800'.

Cementing Program:

Cementing Stage tool can be placed in the 1st Intermediate string as a contingency to ensure required TOC to surface.

To increase efficiency of drilling operations and minimize disturbance of the area the batch-drilling approach will be used.

Off-line cementing may be utilized for Surface and Intermediate strings to further optimization of drilling process and reduction of disturbance.

String Type	Hole Size	Casing Size	Setting Depth	Sacks	Type of cmt	Lead Yield ft3/sk	Water gal/sk	TOC ft	Sacks	Type of cmt	Tail Yield ft3/sk	Water gal/sk	TOC	Excess
Surf	17.5	13.375	1900	1016	85:15 Compass Poz, 12.8 ppg Class C, 5%Gel, 3#/sk Kol Seal, 4.64#/sk Salt Lead, 11.3 ppg, HSLD 82	2.05	11.12	0	441	Tail, 14.8 ppg, 100% Class C, 1%CaCl2, 0.1%	1.34	6.35	1500	100%
Int	12.25	9.625	4000	640	10% Gel, 4% STE, 2#/sk, Gyp Seal HSLD 9420,	2.74	16.31	0	201	Econolite Tail, 14.8 ppg, 100% Class C, 0.08% C-51	1.33	6.33	3600	100%
Prod	8.75	7	0-10800	560	10.5 ppg, Class C, 1#/sk Salt, 4% STE 1% C-45	3.99	25.51	3000						100%
Prod	8.75	5.5	10800-21638						2705	HSLD 80, 13.ppg , 32#/sk Salt, 4% STE, 1#/sk Gyp Seal	1.52	7.59	10800	50%

**Contingency plan:**

If adverse drilling conditions are encountered the drilling will pivot to contingency plan to deepen Intermediate casing string and run 2-stage cement job on it.

4.a Contingency Casing Program

Casing string	Weight	Grade	Burst	Collapse	Tension	Conn	Length	API design factor			
								Burst	Collapse	Tension	Coupling
Surface 13 3/8" 0-1,900'	54.5	J-55	2730	1130	853	BTC 909	1900	1.02	1.14	4.19	4.47
Intermediate 9 5/8" 0-8,000'	40	HCL-80	7430	4230	916	BTC 1042	8000	1.31	1.13	2.18	2.48
Production 7" 0-10,800'	32	HCP-110	12460	10760	1025	CDC-HTQ 1053	10800	1.85	2.13	2.30	2.36
Production 5 1/2" 10,800'-21,638'	20	HCP-110	12640	12200	641	CDC-HTQ 667 TVD	10838 11428	1.15	2.41	2.02	2.11 2.03

Contingency Cementing Program:

String Type	Hole Size	Casing Size	Setting Depth	Sacks	Type of cmt	Lead Yield ft ³ /sk	Water gal/sk	TOC ft	Sacks	Type of cmt	Tail Yield ft ³ /sk	Water gal/sk	TOC	Excess
Surf	17.5	13.375	1900	1016	85:15 Compass Poz, 12.8 ppg Class C, 5%Gel, 3#/sk Kol Seal, 4.64#/sk Salt	2.05	11.12	0	441	Tail, 14.8 ppg, 100% Class C, 1%CaCl ₂ , 0.1%	1.34	6.35	1500	100%
Int St 1	12.25	9.625	8000	823	Lead, 11.3 ppg, HSLD 82 10% Gel, 4%STE, 2#/sk, Gyp Seal	2.74	16.31	4000	188	Econolite Tail, 14.8 ppg, 100% Class C, 0.08% C-51	1.33	6.33	7600	100%
Int St 2	12.25	9.625	4000	732	Lead, 11.3 ppg, HSLD 82 10% Gel, 4%STE, 2#/sk, Gyp Seal	2.74	16.31	0						100%
Prod	8.75	7	0-10800	251	HSLD 9420, 10.5 ppg, Class C, 1#/sk Salt, 4% STE 1% C-45	3.99	25.51	7000						100%
Prod	8.75	5.5	10800-21638						2705	HSLD 80, 13.ppg , 32#/sk Salt, 4% STE, 1#/sk Gyp Seal	1.52	7.59	10800	50%



5. Minimum Specifications for Pressure Control:

The minimum blowout preventer equipment (BOPE) shown in Exhibit #1 will consist of a single ram, mud cross and double ram-type (10,000 psi WP) preventer and an annular preventer (5,000-psi WP). Both units will be hydraulically operated, and the ram-type will be equipped with blind rams on bottom and 4 ½" x 7" variable pipe rams on top. All BOPE will be tested in accordance with Onshore Oil & Gas order No. 2.

Before drilling out of the surface casing, the ram-type BOP and accessory equipment will be tested to 5,000/250 psig and the annular preventer to 5,000/250 psig. The surface casing will be tested to 1500 psi for 30 minutes.

Before drilling out of the intermediate casing, the ram-type BOP and accessory equipment will be tested to 10,000/250 psig and the annular preventer to 5,000/250 psig.

Pipe rams will be operationally checked each 24-hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

A hydraulically operated choke will be installed prior to drilling out of the intermediate casing shoe.

6. Types and characteristics of the proposed mud system:

During this procedure we plan to use a Closed-Loop System and haul contents to the required disposal. The applicable depths and properties of the drilling fluid systems are as follows.

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 1,900'	Fresh - Gel	8.6-8.8	28-34	N/c
1,900' – 4,000'	Brine	8.8-10.2	28-34	N/c
4,000' – 21,638' Lateral	Oil Base	9.0-11.0	58-68	3 - 6

Contingency mud system:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 1,900'	Fresh - Gel	8.6-8.8	28-34	N/c
1,900' – 8,000'	Brine	8.8-10.2	28-34	N/c
8,000' – 21,638' Lateral	Oil Base	9.0-11.0	58-68	3 - 6

The highest mud weight needed to balance formation is expected to be 10-11 ppg. In order to maintain hole stability, mud weights up to 12 ppg may be utilized.

An electronic pit volume totalizer (PVT) will be utilized on the circulating system, to monitor pit volume, flow rate, pump pressure and stroke rate.

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the wellsite at all times.

7. Auxiliary well control and monitoring equipment:

(A) A kelly cock will be kept in the drill string at all times.

(B) A full opening drill pipe-stabbing valve (inside BOP) with proper drill pipe connections will be on the rig floor at all times.

(C) H₂S monitoring and detection equipment will be utilized from surface casing point to TD.

(D) A wear bushing will be installed in the wellhead prior to drilling out of the surface casing.

**8. Logging, testing and coring program:**

GR-CCL-CNL Will be run in cased hole during completions phase of operations.
Open-hole logs are not planned for this well.

9. Abnormal conditions, pressures, temperatures and potential hazards:

The estimated bottom-hole temperature at 11,428' TVD (deepest point of the well) is 165F with an estimated maximum bottom-hole pressure (BHP) at the same point of 7,131 psig (based on 12 ppg MW). Hydrogen Sulfide may be present in the area. All necessary precautions will be taken before drilling operations commence. See Hydrogen Sulfide Plan below:

10. Hydrogen Sulfide Plan:

- A. All personnel shall receive proper awareness H2S training.
- B. Briefing Area: two perpendicular areas will be designated by signs and readily accessible.
- C. Required Emergency Equipment
 - a. Well Control Equipment
 - i. Flare line 150' from wellhead to be ignited by auto ignition sparking system.
 - ii. Choke manifold with a remotely operated hydraulic choke.
 - iii. Mud/gas separator
 - b. Protective equipment for essential personnel
 - i. Breathing Apparatus
 - 1. Rescue packs (SCBA) – 1 unit shall be placed at each briefing area, 2 shall be stored in a safety trailer on site.
 - 2. Work/Escapes packs – 4 packs shall be stored on the rig floor with sufficient air hose not to restrict work activity
 - 3. Emergency Escape Packs – 4 packs shall be stored in the doghouse for emergency evacuation.
 - ii. Auxiliary Rescue Equipment
 - 1. Stretcher
 - 2. Two OSHA full body harnesses
 - 3. 100 feet of 5/8 inches OSHA approved rope
 - 4. 1-20# class ABC fire extinguisher
 - c. H2S Detection and Monitoring Equipment
 - i. A stationary detector with three sensors will be placed in the doghouse if equipped, set to visually alarm at 10 ppm and audible at 14 ppm. The detector will be calibrated a minimum of every 30 days or as needed. The sensors will be placed in the following places:
 - 1. Rig Floor
 - 2. Below Rig Floor / Near BOPs
 - 3. End of flow line or where well bore fluid is being discharged (near shakers)
 - ii. If H2S is encountered, measured values and formations will be provided to the BLM.
 - d. Visual Warning Systems
 - i. One color code condition sign will be placed at the entrance to the site reflecting the possible conditions at the site.
 - ii. A colored condition flag will be on display, reflecting the current condition at the site at the time.



- iii. Two windsocks will be placed in strategic locations, visible from all angles.
- e. Mud Program
 - i. The Mud program will be designed to minimize the volume of H₂S circulated to surface. The operator will have the necessary mud products to minimize hazards while drilling in H₂S bearing zones.
- f. Metallurgy
 - i. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H₂S service at the anticipated operating pressures to prevent sour sulfide stress cracking.
- g. Communication
 - i. Communication will be via cell phones and walkie talkies on location.

Based on concentrations of offset wells, proximity to main roads, and distance to populated areas, the radius of exposure created by a potential release was determined to be minimal and low enough to not necessitate an H₂S contingency plan. This will be reevaluated during wellbore construction if H₂S is observed and after the well is on production.

11. Anticipated starting date and duration of operations:

The drilling operations on the well should be finished in approximately one month. However, in order to minimize disturbance in the area and to improve efficiency Franklin Mountain is planning to drill all the wells on the pad prior to commence completion operations. To even further reduce the time heavy machinery is used the "batch drilling" method may be used. A batch drilling sequence sundry will be submitted for State approval prior to spud. A drilling rig with walking/skidding capabilities will be used.

12. Disposal/environmental concerns:

- (A) Drilled cuttings will be hauled to and disposed of in a state-certified disposal site.
- (B) Non-hazardous waste mud/cement from the drilling process will also be hauled to and disposed of in a state-certified disposal site.
- (C) Garbage will be hauled to the Pecos City Landfill.
- (D) Sewage (grey water) will be hauled to the Carlsbad City Landfill

13. Wellhead:

A multi-bowl wellhead system will be utilized.

After running the 13 3/8" surface casing, a 13-5/8" BOP/BOPE system with a minimum working pressure of 10,000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 5,000 psi pressure test. This pressure test will be repeated at least every 21 days.

The minimum working pressure of the BOP and related BOPE required for drilling below the surface casing shoe shall be 5,000 psi.

The wellhead will be installed by a third party welder while being monitored by WH vendor's representative.

All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type.

A solid steel body pack-off will be utilized after running and cementing the intermediate casing string. After installation of the first intermediate string the pack-off and lower flanges will be pressure tested to 5000 psi.



Both the surface and intermediate casing strings will be tested as per NMOCD Rules to the one-third of manufacture's rated yield pressure, no less than 600 psi, but not greater than 1,500 psi.

14. Additional variance requests

A. Casing.

1. Variance is requested to wave/reduce the centralizer requirements for the 7" and 5 ½" production casing due to the tight clearance with 8 ¾" hole.

State of New Mexico
Energy, Minerals and Natural Resources Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit Electronically
Via E-permitting

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Franklin Mountain Energy 3, LLC **OGRID:** 331595 **Date:** 5/13/2023

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
See Attached Well List						

IV. Central Delivery Point Name: Annex CTB [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
See Attached Well List						

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan

EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☒ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices


1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: 
Printed Name: Rachael Overbey
Title: Director Operations Planning & Regulatory
E-mail Address: roverbey@fmelle.com
Date: 5/13/2023
Phone: 720-414-7868
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

NATURAL GAS MANAGEMENT PLAN

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API 14 Digit	ULSTR	Surface Location FTG	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Annex State Com 301H	TBD	M-36-19S-35E	250 FSL 630 FWL	800 +/-	700 +/-	2500 +/-
Annex State Com 501H	TBD	M-36-19S-35E	250 FSL 505 FWL	800 +/-	700 +/-	2500 +/-
Annex State Com 701H	TBD	M-36-19S-35E	250 FSL 605 FWL	800 +/-	700 +/-	2500 +/-
Annex State Com 801H	TBD	M-36-19S-35E	250 FSL 580 FWL	800 +/-	700 +/-	2500 +/-
Annex State Com 302H	TBD	N-36-19S-35E	250 FSL 1825 FWL	800 +/-	700 +/-	2500 +/-
Annex State Com 502H	TBD	N-36-19S-35E	250 FSL 1700 FWL	800 +/-	700 +/-	2500 +/-
Annex State Com 702H	TBD	N-36-19S-35E	250 FSL 1800 FWL	800 +/-	700 +/-	2500 +/-
Annex State Com 802H	TBD	N-36-19S-35E	250 FSL 1775 FWL	800 +/-	700 +/-	2500 +/-
Annex State Com 303H	TBD	TBD	TBD	800 +/-	700 +/-	2500 +/-
Annex State Com 703H	TBD	TBD	TBD	800 +/-	700 +/-	2500 +/-
Annex State Com 803H	TBD	TBD	TBD	800 +/-	700 +/-	2500 +/-
Annex State Com 304H	TBD	TBD	TBD	800 +/-	700 +/-	2500 +/-
Annex State Com 504H	TBD	TBD	TBD	800 +/-	700 +/-	2500 +/-
Annex State Com 704H	TBD	TBD	TBD	800 +/-	700 +/-	2500 +/-
Annex State Com 804H	TBD	TBD	TBD	800 +/-	700 +/-	2500 +/-

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API 14 Digit	Spud Date (Batch Drilling)	TD Reached Date	Completion Commencement Date	Initial Flowback Date	First Production Date
Annex State Com 301H	TBD	7/1/2023	9/19/2023	11/18/2023	11/28/2023	11/30/2023
Annex State Com 501H	TBD	7/3/2023	9/21/2023	11/20/2023	11/30/2023	12/2/2023
Annex State Com 701H	TBD	7/5/2023	9/23/2023	11/22/2023	12/2/2023	12/4/2023
Annex State Com 801H	TBD	7/7/2023	9/25/2023	11/24/2023	12/4/2023	12/6/2023
Annex State Com 302H	TBD	7/1/2023	9/19/2023	11/18/2023	11/28/2023	11/30/2023
Annex State Com 502H	TBD	7/3/2023	9/21/2023	11/20/2023	11/30/2023	12/2/2023
Annex State Com 702H	TBD	7/5/2023	9/23/2023	11/22/2023	12/2/2023	12/4/2023
Annex State Com 802H	TBD	7/7/2023	9/25/2023	11/24/2023	12/4/2023	12/6/2023
Annex State Com 303H	TBD	7/1/2024	9/19/2024	11/18/2024	11/28/2024	11/30/2024
Annex State Com 703H	TBD	7/1/2024	9/19/2024	11/18/2024	11/28/2024	11/30/2024
Annex State Com 803H	TBD	7/1/2024	9/19/2024	11/18/2024	11/28/2024	11/30/2024
Annex State Com 304H	TBD	7/1/2024	9/19/2024	11/18/2024	11/28/2024	11/30/2024
Annex State Com 504H	TBD	7/1/2024	9/19/2024	11/18/2024	11/28/2024	11/30/2024
Annex State Com 704H	TBD	7/1/2024	9/19/2024	11/18/2024	11/28/2024	11/30/2024
Annex State Com 804H	TBD	7/1/2024	9/19/2024	11/18/2024	11/28/2024	11/30/2024



Natural Gas Management Plan

Items VI-VIII

VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.

- Data from surrounding wells is used to generate type curves which provides the basis for expected gas rates during initial production, peak production and then the natural decline.
- Separation equipment will be sized to provide adequate separation for peak production.
- Facility design includes multiple stages of separation to minimize gas waste. Wells flow through a 3-phase separator to remove gas. Gas from the 3 Phase separators are then sent through a gas scrubber before being route to treatment and/or sales.
- Industry standard sizing calculations are used for gas-liquid separation and liquid-liquid separation.

VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F 19.15.27.8 NMAC.


- Drilling, completion and production setup is designed to minimize the waste of natural gas and to flare instead of vent.
- *Drilling Operations:*
 - Natural gas encountered will be flared instead of vented unless there is an equipment malfunction and/or to avoid risking safety or the environment.
 - Flares will be properly sized and placed at least 100' from the nearest surface hole on the pad.
- *Completions/Recompletions Operations:*
 - Flowback operations will not commence until connected to a properly sized gas gathering system.
 - During initial flowback wells are routed to the separation equipment as soon as technically feasible to minimize gas waste.
 - During separation flowback wells are routed to the separation equipment to minimize gas waste.
 - Gas sales is maximized. Gas will be flared instead of vented during an emergency or malfunction to avoid posing a risk to operations or personnel safety.
 - Flares are properly sized with a continuous pilot.
- *Production Operations:*
 - Gas sales will be maximized. Gas will be flared instead of vented during an emergency or malfunction to avoid posing a risk to operations or personnel safety.
 - After a well is stabilized from liquid unloading, the well will be turned back into the collection system.
- *Performance Standards:*
 - The facility will be designed to handle peak production rates and pressures.
 - All tanks will have automatic gauging equipment.
 - Flares will be designed to ensure proper combustion and will have continuous pilots. Flares will be located 100' from nearest surface hole on the pad and storage tanks.
 - Weekly AVOs will be performed, and any leaking thief hatches will be cleaned and properly re-sealed.
- *Measurement and Calibration:*



- All volume that is flared and vented that is not measured will be estimated.
- When metering is not practical due to low pressure/rate, all vented or flared volumes will be estimated.
- Measurement will conform to industry standards. Measurement will not be bypassed except for purposes of inspection or calibration.

VIII. Best Management Practices: Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

- Venting will be minimized during active and planned maintenance.
- Systems and equipment requiring maintenance will be isolated and blown down to sales and then flare before any remaining gas is vented in an effort to minimize waste and venting.
- Downhole maintenance will use best management practices to minimize vent.

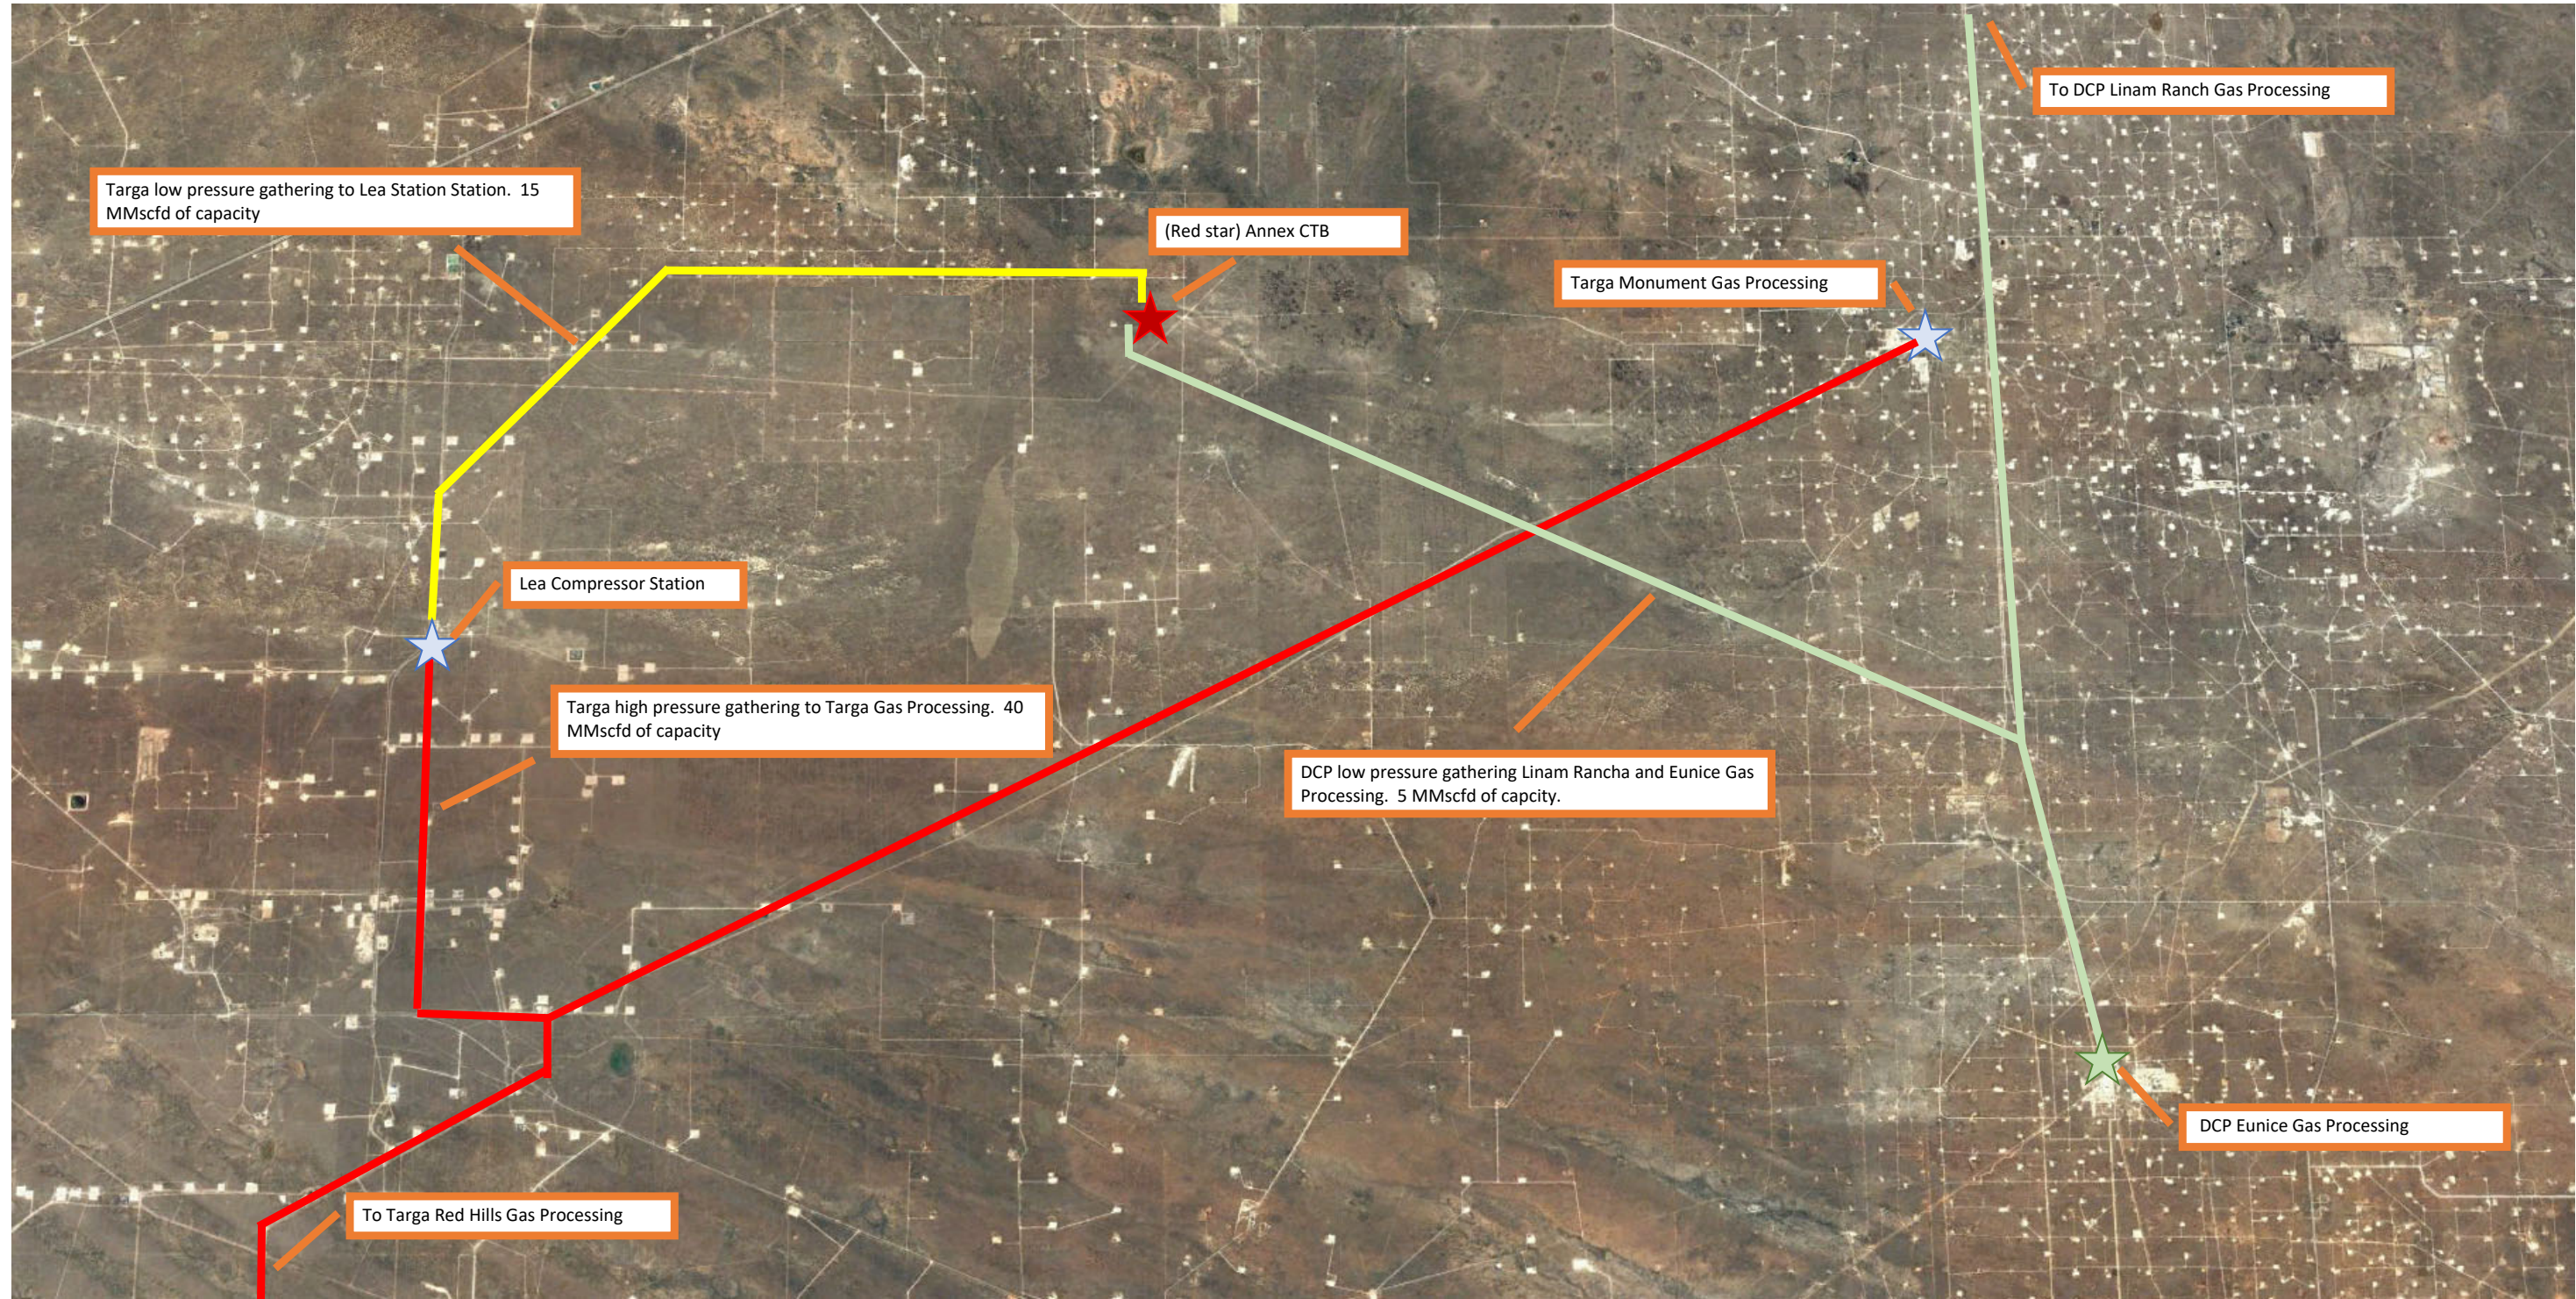



Franklin Mountain Energy

Lea Co., NM (NAD-83)
Annex State Com Pads
Annex State Com 801H

OH

Plan: Plan #2

Standard Planning Report

15 May, 2023





Project: Lea Co., NM (NAD-83)
 Site: Annex State Com Pads
 Well: Annex State Com 801H
 Wellbore: OH
 Design: Plan #2
 Lat: 32.610208
 Long: -103.417488
 GL: 3668.00
 KB: KB=30' @ 3698.00usft



WELL DETAILS: Annex State Com 801H



+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.00	0.00	586939.15	823347.30	32.610208	-103.417488

WELLBORE TARGET DETAILS (LAT/LONG)

Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape
Annex State Com 801H BB P2	6000.00	-202.85	-219.19	586736.30	823128.11	Point
Annex State Com 801H PBHL	11428.00	10237.79	-291.89	597176.94	823055.41	Point

SECTION DETAILS



MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect	Annotation
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2200.00	0.00	0.00	2200.00	0.00	0.00	0.00	0.00	0.00	Build 1.5°/100'
2533.32	5.00	210.60	2532.90	-12.51	-7.40	1.50	210.60	-12.46	2353' Hold
4886.48	5.00	210.60	4877.10	-189.03	-111.80	0.00	0.00	-188.25	Drop 1.5°/100'
5219.80	0.00	0.00	5210.00	-201.54	-119.20	1.50	180.00	-200.70	5645' Hold
10864.84	0.00	0.00	10855.04	-201.54	-119.20	0.00	0.00	-200.70	Build 10°/100'
11764.84	90.00	352.10	11428.00	365.98	-197.95	10.00	352.10	367.35	Turn 2°/100'
12139.69	90.00	359.60	11428.00	739.58	-225.07	2.00	90.00	741.13	9498' Hold
21638.13	90.00	359.60	11428.00	10237.79	-291.89	0.00	0.00	10239.58	TD at 21638.13

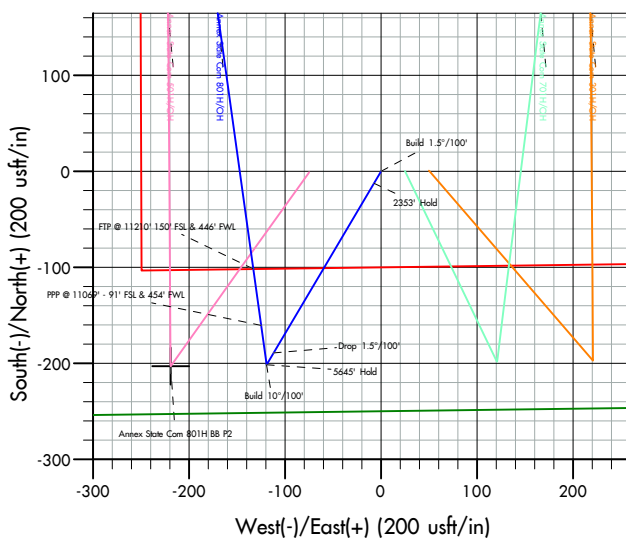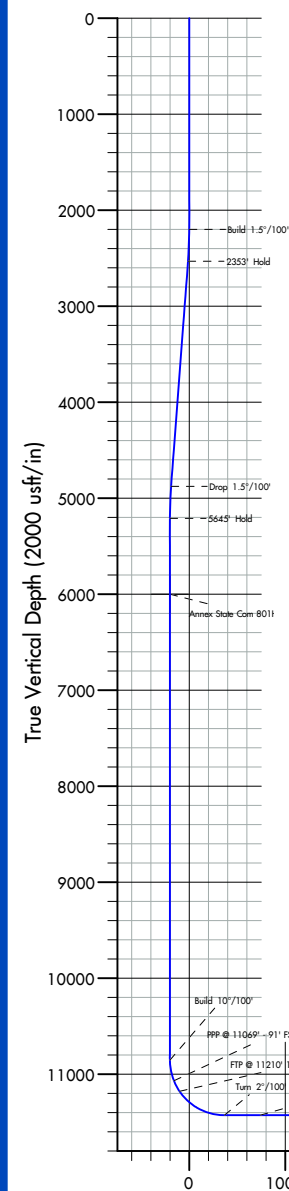

FORMATION TOPS

TVDPath	MDPath	Formation
30.00	30.00	Cenozoic Alluvium (surface)
1819.00	1819.00	Rustler
2089.00	2089.00	Salado
3248.00	3251.15	Base Salt
3511.00	3515.16	Yates
3981.00	3986.95	Seven Rivers
4667.00	4675.57	Queen
6039.00	6048.80	Delaware Mtn Group
7877.00	7886.80	Bone Spring Lime
9255.00	9264.80	First Bone Spring Sand
9502.00	9511.80	Second Bone Spring Carbonate
9866.00	9875.80	Second Bone Spring Sand
10416.00	10425.80	Third Bone Spring Carbonate
10511.00	10520.80	Third Bone Spring Sand
10610.00	10619.80	Wolfcamp
11069.00	11084.11	Wolfcamp B
11428.00	11764.84	HZ Target

Vertical Section at 359.60° (2000 usft/in)

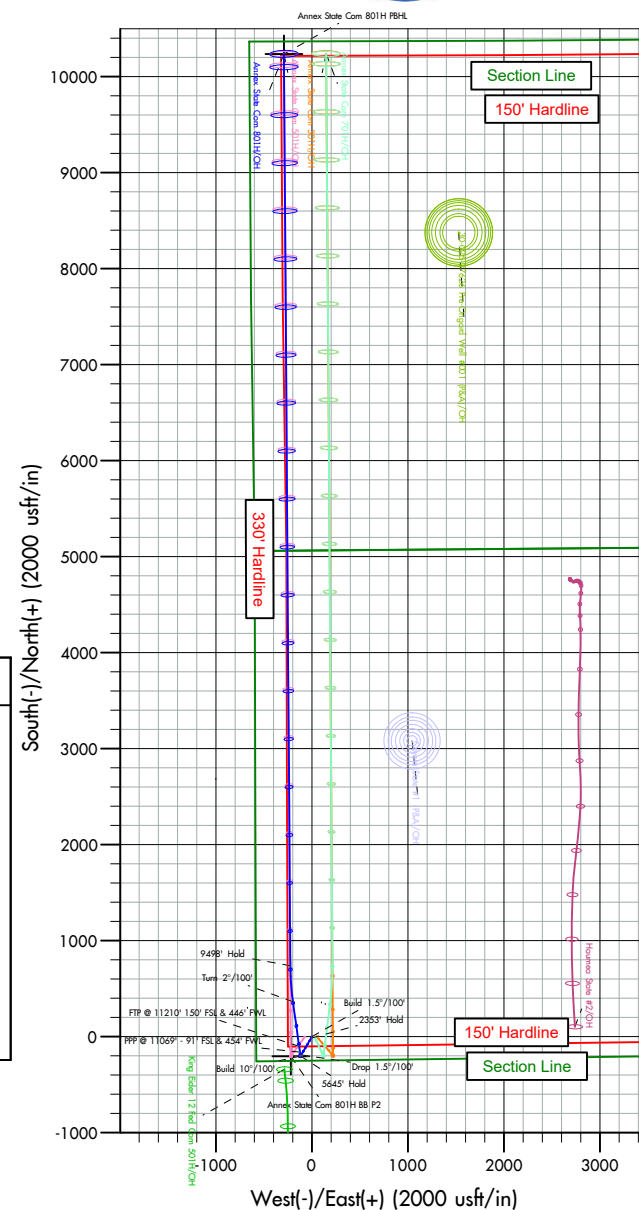

Azimuths to Grid North
 True North: -0.49°
 Magnetic North: 5.74°

Magnetic Field
 Strength: 47643.5nT
 Dip Angle: 60.42°
 Date: 5/9/2023
 Model: HRGM

Plan: Plan #2 (Annex State Com 801H/OH)

Created By: Dusty Mayer Date: 11:49, May 15 2023



Altitude Energy Partners

Planning Report



Database:	DM Local	Local Co-ordinate Reference:	Well Annex State Com 801H
Company:	Franklin Mountain Energy	TVD Reference:	KB=30' @ 3698.00usft
Project:	Lea Co., NM (NAD-83)	MD Reference:	KB=30' @ 3698.00usft
Site:	Annex State Com Pads	North Reference:	Grid
Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Project	Lea Co., NM (NAD-83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		Annex State Com Pads			
Site Position:		Northing:	586,939.80 usft	Latitude:	32.610209
From:	Map	Easting:	823,397.28 usft	Longitude:	-103.417326
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "		

Well	Annex State Com 801H					
Well Position	+N/-S	0.00 usft	Northing:	586,939.15 usft	Latitude:	32.610208
	+E/-W	0.00 usft	Easting:	823,347.30 usft	Longitude:	-103.417489
Position Uncertainty		0.00 usft	Wellhead Elevation:	usft	Ground Level:	3,668.00 usft
Grid Convergence:		0.49 °				

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HRGM	5/9/2023	6.23	60.42	47,643.48119709

Design	Plan #2			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	359.60

Plan Survey Tool Program	Date	5/15/2023		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	21,637.81 Plan #2 (OH)	MWD+HDGM	
			OWSG MWD + HRGM	



Altitude Energy Partners

Planning Report



Database:	DM Local	Local Co-ordinate Reference:	Well Annex State Com 801H
Company:	Franklin Mountain Energy	TVD Reference:	KB=30' @ 3698.00usft
Project:	Lea Co., NM (NAD-83)	MD Reference:	KB=30' @ 3698.00usft
Site:	Annex State Com Pads	North Reference:	Grid
Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,533.32	5.00	210.60	2,532.90	-12.51	-7.40	1.50	1.50	0.00	210.60	
4,886.48	5.00	210.60	4,877.10	-189.03	-111.80	0.00	0.00	0.00	0.00	
5,219.80	0.00	0.00	5,210.00	-201.54	-119.20	1.50	-1.50	0.00	180.00	
10,864.84	0.00	0.00	10,855.04	-201.54	-119.20	0.00	0.00	0.00	0.00	
11,764.84	90.00	352.10	11,428.00	365.98	-197.95	10.00	10.00	0.00	352.10	
12,139.69	90.00	359.60	11,428.00	739.58	-225.07	2.00	0.00	2.00	90.00	
21,638.14	90.00	359.60	11,428.00	10,237.79	-291.89	0.00	0.00	0.00	0.00	Annex State Com 8



Altitude Energy Partners

Planning Report



Database:	DM Local	Local Co-ordinate Reference:	Well Annex State Com 801H
Company:	Franklin Mountain Energy	TVD Reference:	KB=30' @ 3698.00usft
Project:	Lea Co., NM (NAD-83)	MD Reference:	KB=30' @ 3698.00usft
Site:	Annex State Com Pads	North Reference:	Grid
Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30.00	0.00	0.00	30.00	0.00	0.00	0.00	0.00	0.00	0.00
Cenozoic Alluvium (surface)									
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,819.00	0.00	0.00	1,819.00	0.00	0.00	0.00	0.00	0.00	0.00
Rustler									
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,089.00	0.00	0.00	2,089.00	0.00	0.00	0.00	0.00	0.00	0.00
Salado									
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
Build 1.5°/100'									
2,300.00	1.50	210.60	2,299.99	-1.13	-0.67	-1.12	1.50	1.50	0.00
2,400.00	3.00	210.60	2,399.91	-4.51	-2.66	-4.49	1.50	1.50	0.00
2,500.00	4.50	210.60	2,499.69	-10.13	-5.99	-10.09	1.50	1.50	0.00
2,533.32	5.00	210.60	2,532.90	-12.51	-7.40	-12.46	1.50	1.50	0.00
2353' Hold									
2,600.00	5.00	210.60	2,599.32	-17.51	-10.36	-17.44	0.00	0.00	0.00
2,700.00	5.00	210.60	2,698.94	-25.01	-14.79	-24.91	0.00	0.00	0.00
2,800.00	5.00	210.60	2,798.56	-32.51	-19.23	-32.38	0.00	0.00	0.00
2,900.00	5.00	210.60	2,898.18	-40.02	-23.67	-39.85	0.00	0.00	0.00
3,000.00	5.00	210.60	2,997.80	-47.52	-28.10	-47.32	0.00	0.00	0.00
3,100.00	5.00	210.60	3,097.42	-55.02	-32.54	-54.79	0.00	0.00	0.00
3,200.00	5.00	210.60	3,197.04	-62.52	-36.98	-62.26	0.00	0.00	0.00
3,251.15	5.00	210.60	3,248.00	-66.36	-39.25	-66.08	0.00	0.00	0.00
Base Salt									
3,300.00	5.00	210.60	3,296.66	-70.02	-41.41	-69.73	0.00	0.00	0.00
3,400.00	5.00	210.60	3,396.28	-77.52	-45.85	-77.20	0.00	0.00	0.00
3,500.00	5.00	210.60	3,495.90	-85.02	-50.29	-84.67	0.00	0.00	0.00
3,515.16	5.00	210.60	3,511.00	-86.16	-50.96	-85.80	0.00	0.00	0.00
Yates									
3,600.00	5.00	210.60	3,595.52	-92.53	-54.72	-92.14	0.00	0.00	0.00
3,700.00	5.00	210.60	3,695.14	-100.03	-59.16	-99.61	0.00	0.00	0.00
3,800.00	5.00	210.60	3,794.76	-107.53	-63.60	-107.08	0.00	0.00	0.00
3,900.00	5.00	210.60	3,894.38	-115.03	-68.03	-114.55	0.00	0.00	0.00



Altitude Energy Partners

Planning Report



Database:	DM Local	Local Co-ordinate Reference:	Well Annex State Com 801H
Company:	Franklin Mountain Energy	TVD Reference:	KB=30' @ 3698.00usft
Project:	Lea Co., NM (NAD-83)	MD Reference:	KB=30' @ 3698.00usft
Site:	Annex State Com Pads	North Reference:	Grid
Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
3,986.95	5.00	210.60	3,981.00	-121.55	-71.89	-121.05	0.00	0.00	0.00
Seven Rivers									
4,000.00	5.00	210.60	3,994.00	-122.53	-72.47	-122.02	0.00	0.00	0.00
4,100.00	5.00	210.60	4,093.62	-130.03	-76.91	-129.49	0.00	0.00	0.00
4,200.00	5.00	210.60	4,193.24	-137.53	-81.34	-136.96	0.00	0.00	0.00
4,300.00	5.00	210.60	4,292.85	-145.04	-85.78	-144.43	0.00	0.00	0.00
4,400.00	5.00	210.60	4,392.47	-152.54	-90.22	-151.90	0.00	0.00	0.00
4,500.00	5.00	210.60	4,492.09	-160.04	-94.65	-159.37	0.00	0.00	0.00
4,600.00	5.00	210.60	4,591.71	-167.54	-99.09	-166.84	0.00	0.00	0.00
4,675.57	5.00	210.60	4,667.00	-173.21	-102.44	-172.49	0.00	0.00	0.00
Queen									
4,700.00	5.00	210.60	4,691.33	-175.04	-103.53	-174.31	0.00	0.00	0.00
4,800.00	5.00	210.60	4,790.95	-182.54	-107.96	-181.78	0.00	0.00	0.00
4,886.48	5.00	210.60	4,877.10	-189.03	-111.80	-188.25	0.00	0.00	0.00
Drop 1.5°/100'									
4,900.00	4.80	210.60	4,890.57	-190.02	-112.39	-189.23	1.50	-1.50	0.00
5,000.00	3.30	210.60	4,990.32	-196.10	-115.98	-195.28	1.50	-1.50	0.00
5,100.00	1.80	210.60	5,090.22	-199.92	-118.24	-199.09	1.50	-1.50	0.00
5,200.00	0.30	210.60	5,190.20	-201.50	-119.17	-200.66	1.50	-1.50	0.00
5,219.80	0.00	0.00	5,210.00	-201.54	-119.20	-200.70	1.50	-1.50	0.00
5645' Hold									
5,300.00	0.00	0.00	5,290.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
5,400.00	0.00	0.00	5,390.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
5,500.00	0.00	0.00	5,490.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
5,600.00	0.00	0.00	5,590.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
5,700.00	0.00	0.00	5,690.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
5,800.00	0.00	0.00	5,790.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
5,900.00	0.00	0.00	5,890.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
6,000.00	0.00	0.00	5,990.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
6,048.80	0.00	0.00	6,039.00	-201.54	-119.20	-200.70	0.00	0.00	0.00
Delaware Mtn Group									
6,100.00	0.00	0.00	6,090.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
6,200.00	0.00	0.00	6,190.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
6,300.00	0.00	0.00	6,290.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
6,400.00	0.00	0.00	6,390.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
6,500.00	0.00	0.00	6,490.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
6,600.00	0.00	0.00	6,590.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
6,700.00	0.00	0.00	6,690.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
6,800.00	0.00	0.00	6,790.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
6,900.00	0.00	0.00	6,890.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
7,000.00	0.00	0.00	6,990.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
7,100.00	0.00	0.00	7,090.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
7,200.00	0.00	0.00	7,190.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
7,300.00	0.00	0.00	7,290.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
7,400.00	0.00	0.00	7,390.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
7,500.00	0.00	0.00	7,490.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
7,600.00	0.00	0.00	7,590.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
7,700.00	0.00	0.00	7,690.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
7,800.00	0.00	0.00	7,790.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
7,886.80	0.00	0.00	7,877.00	-201.54	-119.20	-200.70	0.00	0.00	0.00
Bone Spring Lime									
7,900.00	0.00	0.00	7,890.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
8,000.00	0.00	0.00	7,990.20	-201.54	-119.20	-200.70	0.00	0.00	0.00



Altitude Energy Partners

Planning Report



Database:	DM Local	Local Co-ordinate Reference:	Well Annex State Com 801H
Company:	Franklin Mountain Energy	TVD Reference:	KB=30' @ 3698.00usft
Project:	Lea Co., NM (NAD-83)	MD Reference:	KB=30' @ 3698.00usft
Site:	Annex State Com Pads	North Reference:	Grid
Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,100.00	0.00	0.00	8,090.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
8,200.00	0.00	0.00	8,190.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
8,300.00	0.00	0.00	8,290.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
8,400.00	0.00	0.00	8,390.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
8,500.00	0.00	0.00	8,490.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
8,600.00	0.00	0.00	8,590.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
8,700.00	0.00	0.00	8,690.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
8,800.00	0.00	0.00	8,790.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
8,900.00	0.00	0.00	8,890.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
9,000.00	0.00	0.00	8,990.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
9,100.00	0.00	0.00	9,090.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
9,200.00	0.00	0.00	9,190.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
9,264.80	0.00	0.00	9,255.00	-201.54	-119.20	-200.70	0.00	0.00	0.00
First Bone Spring Sand									
9,300.00	0.00	0.00	9,290.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
9,400.00	0.00	0.00	9,390.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
9,500.00	0.00	0.00	9,490.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
9,511.80	0.00	0.00	9,502.00	-201.54	-119.20	-200.70	0.00	0.00	0.00
Second Bone Spring Carbonate									
9,600.00	0.00	0.00	9,590.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
9,700.00	0.00	0.00	9,690.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
9,800.00	0.00	0.00	9,790.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
9,875.80	0.00	0.00	9,866.00	-201.54	-119.20	-200.70	0.00	0.00	0.00
Second Bone Spring Sand									
9,900.00	0.00	0.00	9,890.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
10,000.00	0.00	0.00	9,990.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
10,100.00	0.00	0.00	10,090.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
10,200.00	0.00	0.00	10,190.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
10,300.00	0.00	0.00	10,290.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
10,400.00	0.00	0.00	10,390.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
10,425.80	0.00	0.00	10,416.00	-201.54	-119.20	-200.70	0.00	0.00	0.00
Third Bone Spring Carbonate									
10,500.00	0.00	0.00	10,490.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
10,520.80	0.00	0.00	10,511.00	-201.54	-119.20	-200.70	0.00	0.00	0.00
Third Bone Spring Sand									
10,600.00	0.00	0.00	10,590.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
10,619.80	0.00	0.00	10,610.00	-201.54	-119.20	-200.70	0.00	0.00	0.00
Wolfcamp									
10,700.00	0.00	0.00	10,690.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
10,800.00	0.00	0.00	10,790.20	-201.54	-119.20	-200.70	0.00	0.00	0.00
10,864.84	0.00	0.00	10,855.04	-201.54	-119.20	-200.70	0.00	0.00	0.00
Build 10°/100'									
10,900.00	3.52	352.10	10,890.18	-200.47	-119.35	-199.63	10.00	10.00	0.00
10,950.00	8.52	352.10	10,939.89	-195.28	-120.07	-194.44	10.00	10.00	0.00
11,000.00	13.52	352.10	10,988.95	-185.82	-121.38	-184.97	10.00	10.00	0.00
11,050.00	18.52	352.10	11,036.99	-172.16	-123.28	-171.30	10.00	10.00	0.00
11,084.11	21.93	352.10	11,069.00	-160.48	-124.90	-159.61	10.00	10.00	0.00
PPP @ 11069' - 91' FSL & 454' FWL - Wolfcamp B									
11,100.00	23.52	352.10	11,083.65	-154.41	-125.74	-153.52	10.00	10.00	0.00
11,150.00	28.52	352.10	11,128.57	-132.69	-128.75	-131.79	10.00	10.00	0.00
11,200.00	33.52	352.10	11,171.41	-107.18	-132.29	-106.25	10.00	10.00	0.00
11,210.00	34.52	352.10	11,179.70	-101.64	-133.06	-100.71	10.00	10.00	0.00
FTP @ 11210' 150' FSL & 446' FWL									



Altitude Energy Partners

Planning Report



Database:	DM Local	Local Co-ordinate Reference:	Well Annex State Com 801H
Company:	Franklin Mountain Energy	TVD Reference:	KB=30' @ 3698.00usft
Project:	Lea Co., NM (NAD-83)	MD Reference:	KB=30' @ 3698.00usft
Site:	Annex State Com Pads	North Reference:	Grid
Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
11,250.00	38.52	352.10	11,211.84	-78.07	-136.33	-77.11	10.00	10.00	0.00
11,300.00	43.52	352.10	11,249.55	-45.58	-140.84	-44.59	10.00	10.00	0.00
11,350.00	48.52	352.10	11,284.27	-9.95	-145.79	-8.93	10.00	10.00	0.00
11,400.00	53.52	352.10	11,315.71	28.53	-151.13	29.59	10.00	10.00	0.00
11,450.00	58.52	352.10	11,343.65	69.59	-156.82	70.68	10.00	10.00	0.00
11,500.00	63.52	352.10	11,367.87	112.90	-162.83	114.03	10.00	10.00	0.00
11,550.00	68.52	352.10	11,388.19	158.13	-169.11	159.31	10.00	10.00	0.00
11,600.00	73.52	352.10	11,404.45	204.95	-175.60	206.17	10.00	10.00	0.00
11,650.00	78.52	352.10	11,416.53	252.99	-182.27	254.26	10.00	10.00	0.00
11,700.00	83.52	352.10	11,424.33	301.89	-189.06	303.21	10.00	10.00	0.00
11,750.00	88.52	352.10	11,427.81	351.28	-195.91	352.64	10.00	10.00	0.00
11,764.84	90.00	352.10	11,428.00	365.98	-197.95	367.35	10.00	10.00	0.00
Turn 2°/100' - HZ Target									
11,800.00	90.00	352.80	11,428.00	400.84	-202.57	402.24	2.00	0.00	2.00
11,900.00	90.00	354.80	11,428.00	500.25	-213.36	501.72	2.00	0.00	2.00
12,000.00	90.00	356.80	11,428.00	599.97	-220.68	601.50	2.00	0.00	2.00
12,100.00	90.00	358.80	11,428.00	699.89	-224.51	701.44	2.00	0.00	2.00
12,139.69	90.00	359.60	11,428.00	739.58	-225.07	741.13	2.00	0.00	2.00
9498' Hold									
12,200.00	90.00	359.60	11,428.00	799.89	-225.49	801.44	0.00	0.00	0.00
12,300.00	90.00	359.60	11,428.00	899.89	-226.20	901.44	0.00	0.00	0.00
12,400.00	90.00	359.60	11,428.00	999.88	-226.90	1,001.44	0.00	0.00	0.00
12,500.00	90.00	359.60	11,428.00	1,099.88	-227.60	1,101.44	0.00	0.00	0.00
12,600.00	90.00	359.60	11,428.00	1,199.88	-228.31	1,201.44	0.00	0.00	0.00
12,700.00	90.00	359.60	11,428.00	1,299.88	-229.01	1,301.44	0.00	0.00	0.00
12,800.00	90.00	359.60	11,428.00	1,399.87	-229.71	1,401.44	0.00	0.00	0.00
12,900.00	90.00	359.60	11,428.00	1,499.87	-230.42	1,501.44	0.00	0.00	0.00
13,000.00	90.00	359.60	11,428.00	1,599.87	-231.12	1,601.44	0.00	0.00	0.00
13,100.00	90.00	359.60	11,428.00	1,699.87	-231.82	1,701.44	0.00	0.00	0.00
13,200.00	90.00	359.60	11,428.00	1,799.86	-232.53	1,801.44	0.00	0.00	0.00
13,300.00	90.00	359.60	11,428.00	1,899.86	-233.23	1,901.44	0.00	0.00	0.00
13,400.00	90.00	359.60	11,428.00	1,999.86	-233.93	2,001.44	0.00	0.00	0.00
13,500.00	90.00	359.60	11,428.00	2,099.86	-234.64	2,101.44	0.00	0.00	0.00
13,600.00	90.00	359.60	11,428.00	2,199.85	-235.34	2,201.44	0.00	0.00	0.00
13,700.00	90.00	359.60	11,428.00	2,299.85	-236.04	2,301.44	0.00	0.00	0.00
13,800.00	90.00	359.60	11,428.00	2,399.85	-236.75	2,401.44	0.00	0.00	0.00
13,900.00	90.00	359.60	11,428.00	2,499.85	-237.45	2,501.44	0.00	0.00	0.00
14,000.00	90.00	359.60	11,428.00	2,599.84	-238.15	2,601.44	0.00	0.00	0.00
14,100.00	90.00	359.60	11,428.00	2,699.84	-238.86	2,701.44	0.00	0.00	0.00
14,200.00	90.00	359.60	11,428.00	2,799.84	-239.56	2,801.44	0.00	0.00	0.00
14,300.00	90.00	359.60	11,428.00	2,899.84	-240.27	2,901.44	0.00	0.00	0.00
14,400.00	90.00	359.60	11,428.00	2,999.83	-240.97	3,001.44	0.00	0.00	0.00
14,500.00	90.00	359.60	11,428.00	3,099.83	-241.67	3,101.44	0.00	0.00	0.00
14,600.00	90.00	359.60	11,428.00	3,199.83	-242.38	3,201.44	0.00	0.00	0.00
14,700.00	90.00	359.60	11,428.00	3,299.83	-243.08	3,301.44	0.00	0.00	0.00
14,800.00	90.00	359.60	11,428.00	3,399.82	-243.78	3,401.44	0.00	0.00	0.00
14,900.00	90.00	359.60	11,428.00	3,499.82	-244.49	3,501.44	0.00	0.00	0.00
15,000.00	90.00	359.60	11,428.00	3,599.82	-245.19	3,601.44	0.00	0.00	0.00
15,100.00	90.00	359.60	11,428.00	3,699.82	-245.89	3,701.44	0.00	0.00	0.00
15,200.00	90.00	359.60	11,428.00	3,799.81	-246.60	3,801.44	0.00	0.00	0.00
15,300.00	90.00	359.60	11,428.00	3,899.81	-247.30	3,901.44	0.00	0.00	0.00
15,400.00	90.00	359.60	11,428.00	3,999.81	-248.00	4,001.44	0.00	0.00	0.00
15,500.00	90.00	359.60	11,428.00	4,099.81	-248.71	4,101.44	0.00	0.00	0.00
15,600.00	90.00	359.60	11,428.00	4,199.80	-249.41	4,201.44	0.00	0.00	0.00



Altitude Energy Partners

Planning Report



Database:	DM Local	Local Co-ordinate Reference:	Well Annex State Com 801H
Company:	Franklin Mountain Energy	TVD Reference:	KB=30' @ 3698.00usft
Project:	Lea Co., NM (NAD-83)	MD Reference:	KB=30' @ 3698.00usft
Site:	Annex State Com Pads	North Reference:	Grid
Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
15,700.00	90.00	359.60	11,428.00	4,299.80	-250.11	4,301.44	0.00	0.00	0.00
15,800.00	90.00	359.60	11,428.00	4,399.80	-250.82	4,401.44	0.00	0.00	0.00
15,900.00	90.00	359.60	11,428.00	4,499.80	-251.52	4,501.44	0.00	0.00	0.00
16,000.00	90.00	359.60	11,428.00	4,599.79	-252.23	4,601.44	0.00	0.00	0.00
16,100.00	90.00	359.60	11,428.00	4,699.79	-252.93	4,701.44	0.00	0.00	0.00
16,200.00	90.00	359.60	11,428.00	4,799.79	-253.63	4,801.44	0.00	0.00	0.00
16,300.00	90.00	359.60	11,428.00	4,899.79	-254.34	4,901.44	0.00	0.00	0.00
16,400.00	90.00	359.60	11,428.00	4,999.79	-255.04	5,001.44	0.00	0.00	0.00
16,500.00	90.00	359.60	11,428.00	5,099.78	-255.74	5,101.44	0.00	0.00	0.00
16,600.00	90.00	359.60	11,428.00	5,199.78	-256.45	5,201.44	0.00	0.00	0.00
16,700.00	90.00	359.60	11,428.00	5,299.78	-257.15	5,301.44	0.00	0.00	0.00
16,800.00	90.00	359.60	11,428.00	5,399.78	-257.85	5,401.44	0.00	0.00	0.00
16,900.00	90.00	359.60	11,428.00	5,499.77	-258.56	5,501.44	0.00	0.00	0.00
17,000.00	90.00	359.60	11,428.00	5,599.77	-259.26	5,601.44	0.00	0.00	0.00
17,100.00	90.00	359.60	11,428.00	5,699.77	-259.96	5,701.44	0.00	0.00	0.00
17,200.00	90.00	359.60	11,428.00	5,799.77	-260.67	5,801.44	0.00	0.00	0.00
17,300.00	90.00	359.60	11,428.00	5,899.76	-261.37	5,901.44	0.00	0.00	0.00
17,400.00	90.00	359.60	11,428.00	5,999.76	-262.07	6,001.44	0.00	0.00	0.00
17,500.00	90.00	359.60	11,428.00	6,099.76	-262.78	6,101.44	0.00	0.00	0.00
17,600.00	90.00	359.60	11,428.00	6,199.76	-263.48	6,201.44	0.00	0.00	0.00
17,700.00	90.00	359.60	11,428.00	6,299.75	-264.18	6,301.44	0.00	0.00	0.00
17,800.00	90.00	359.60	11,428.00	6,399.75	-264.89	6,401.44	0.00	0.00	0.00
17,900.00	90.00	359.60	11,428.00	6,499.75	-265.59	6,501.44	0.00	0.00	0.00
18,000.00	90.00	359.60	11,428.00	6,599.75	-266.30	6,601.44	0.00	0.00	0.00
18,100.00	90.00	359.60	11,428.00	6,699.74	-267.00	6,701.44	0.00	0.00	0.00
18,200.00	90.00	359.60	11,428.00	6,799.74	-267.70	6,801.44	0.00	0.00	0.00
18,300.00	90.00	359.60	11,428.00	6,899.74	-268.41	6,901.44	0.00	0.00	0.00
18,400.00	90.00	359.60	11,428.00	6,999.74	-269.11	7,001.44	0.00	0.00	0.00
18,500.00	90.00	359.60	11,428.00	7,099.73	-269.81	7,101.44	0.00	0.00	0.00
18,600.00	90.00	359.60	11,428.00	7,199.73	-270.52	7,201.44	0.00	0.00	0.00
18,700.00	90.00	359.60	11,428.00	7,299.73	-271.22	7,301.44	0.00	0.00	0.00
18,800.00	90.00	359.60	11,428.00	7,399.73	-271.92	7,401.44	0.00	0.00	0.00
18,900.00	90.00	359.60	11,428.00	7,499.72	-272.63	7,501.44	0.00	0.00	0.00
19,000.00	90.00	359.60	11,428.00	7,599.72	-273.33	7,601.44	0.00	0.00	0.00
19,100.00	90.00	359.60	11,428.00	7,699.72	-274.03	7,701.44	0.00	0.00	0.00
19,200.00	90.00	359.60	11,428.00	7,799.72	-274.74	7,801.44	0.00	0.00	0.00
19,300.00	90.00	359.60	11,428.00	7,899.71	-275.44	7,901.44	0.00	0.00	0.00
19,400.00	90.00	359.60	11,428.00	7,999.71	-276.14	8,001.44	0.00	0.00	0.00
19,500.00	90.00	359.60	11,428.00	8,099.71	-276.85	8,101.44	0.00	0.00	0.00
19,600.00	90.00	359.60	11,428.00	8,199.71	-277.55	8,201.44	0.00	0.00	0.00
19,700.00	90.00	359.60	11,428.00	8,299.70	-278.26	8,301.44	0.00	0.00	0.00
19,800.00	90.00	359.60	11,428.00	8,399.70	-278.96	8,401.44	0.00	0.00	0.00
19,900.00	90.00	359.60	11,428.00	8,499.70	-279.66	8,501.44	0.00	0.00	0.00
20,000.00	90.00	359.60	11,428.00	8,599.70	-280.37	8,601.44	0.00	0.00	0.00
20,100.00	90.00	359.60	11,428.00	8,699.69	-281.07	8,701.44	0.00	0.00	0.00
20,200.00	90.00	359.60	11,428.00	8,799.69	-281.77	8,801.44	0.00	0.00	0.00
20,300.00	90.00	359.60	11,428.00	8,899.69	-282.48	8,901.44	0.00	0.00	0.00
20,400.00	90.00	359.60	11,428.00	8,999.69	-283.18	9,001.44	0.00	0.00	0.00
20,500.00	90.00	359.60	11,428.00	9,099.68	-283.88	9,101.44	0.00	0.00	0.00
20,600.00	90.00	359.60	11,428.00	9,199.68	-284.59	9,201.44	0.00	0.00	0.00
20,700.00	90.00	359.60	11,428.00	9,299.68	-285.29	9,301.44	0.00	0.00	0.00
20,800.00	90.00	359.60	11,428.00	9,399.68	-285.99	9,401.44	0.00	0.00	0.00
20,900.00	90.00	359.60	11,428.00	9,499.67	-286.70	9,501.44	0.00	0.00	0.00
21,000.00	90.00	359.60	11,428.00	9,599.67	-287.40	9,601.44	0.00	0.00	0.00



Altitude Energy Partners

Planning Report



Database:	DM Local	Local Co-ordinate Reference:	Well Annex State Com 801H
Company:	Franklin Mountain Energy	TVD Reference:	KB=30' @ 3698.00usft
Project:	Lea Co., NM (NAD-83)	MD Reference:	KB=30' @ 3698.00usft
Site:	Annex State Com Pads	North Reference:	Grid
Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
21,100.00	90.00	359.60	11,428.00	9,699.67	-288.10	9,701.44	0.00	0.00	0.00	
21,200.00	90.00	359.60	11,428.00	9,799.67	-288.81	9,801.44	0.00	0.00	0.00	
21,300.00	90.00	359.60	11,428.00	9,899.66	-289.51	9,901.44	0.00	0.00	0.00	
21,400.00	90.00	359.60	11,428.00	9,999.66	-290.21	10,001.44	0.00	0.00	0.00	
21,500.00	90.00	359.60	11,428.00	10,099.66	-290.92	10,101.44	0.00	0.00	0.00	
21,600.00	90.00	359.60	11,428.00	10,199.66	-291.62	10,201.44	0.00	0.00	0.00	
21,638.14	90.00	359.60	11,428.00	10,237.79	-291.89	10,239.58	0.00	0.00	0.00	
TD at 21638.13										

Design Targets										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
- hit/miss target										
- Shape										
Annex State Com 801	0.00	0.00	6,000.00	-202.85	-219.19	586,736.30	823,128.11	32.609656	-103.418206	
- plan misses target center by 100.00usft at 6009.80usft MD (6000.00 TVD, -201.54 N, -119.20 E)										
- Point										
Annex State Com 801	0.00	0.00	11,428.00	10,237.79	-291.89	597,176.94	823,055.41	32.638352	-103.418150	
- plan hits target center										
- Point										

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
30.00	30.00	Cenozoic Alluvium (surface)				
1,819.00	1,819.00	Rustler				
2,089.00	2,089.00	Salado				
3,251.15	3,248.00	Base Salt				
3,515.16	3,511.00	Yates				
3,986.95	3,981.00	Seven Rivers				
4,675.57	4,667.00	Queen				
6,048.80	6,039.00	Delaware Mtn Group				
7,886.80	7,877.00	Bone Spring Lime				
9,264.80	9,255.00	First Bone Spring Sand				
9,511.80	9,502.00	Second Bone Spring Carbonate				
9,875.80	9,866.00	Second Bone Spring Sand				
10,425.80	10,416.00	Third Bone Spring Carbonate				
10,520.80	10,511.00	Third Bone Spring Sand				
10,619.80	10,610.00	Wolfcamp				
11,084.11	11,069.00	Wolfcamp B				
11,764.84	11,428.00	HZ Target				



Altitude Energy Partners

Planning Report



Database:	DM Local	Local Co-ordinate Reference:	Well Annex State Com 801H
Company:	Franklin Mountain Energy	TVD Reference:	KB=30' @ 3698.00usft
Project:	Lea Co., NM (NAD-83)	MD Reference:	KB=30' @ 3698.00usft
Site:	Annex State Com Pads	North Reference:	Grid
Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
2,200.00	2,200.00	0.00	0.00	Build 1.5°/100'
2,533.32	2,532.90	-12.51	-7.40	2353' Hold
4,886.48	4,877.10	-189.03	-111.80	Drop 1.5°/100'
5,219.80	5,210.00	-201.54	-119.20	5645' Hold
10,864.84	10,855.04	-201.54	-119.20	Build 10°/100'
11,084.11	11,069.00	-160.48	-124.90	PPP @ 11069' - 91' FSL & 454' FWL
11,210.00	11,179.70	-101.64	-133.06	FTP @ 11210' 150' FSL & 446' FWL
11,764.84	11,428.00	365.98	-197.95	Turn 2°/100'
12,139.69	11,428.00	739.58	-225.07	9498' Hold
21,638.14	11,428.00	10,237.79	-291.89	TD at 21638.13



Franklin Mountain Energy

Lea Co., NM (NAD-83)
Annex State Com Pads
Annex State Com 801H

OH
Plan #2

Anticollision Report

15 May, 2023





Altitude Energy Partners

Anticollision Report



Company:	Franklin Mountain Energy	Local Co-ordinate Reference:	Well Annex State Com 801H
Project:	Lea Co., NM (NAD-83)	TVD Reference:	KB=30' @ 3698.00usft
Reference Site:	Annex State Com Pads	MD Reference:	KB=30' @ 3698.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	DM Local
Reference Design:	Plan #2	Offset TVD Reference:	Offset Datum

Reference	Plan #2
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria
Interpolation Method:	Stations
Depth Range:	Unlimited
Results Limited by:	Maximum centre distance of 1,000.00usft
Warning Levels Evaluated at:	2.00 Sigma
Error Model:	ISCWSA
Scan Method:	Closest Approach 3D
Error Surface:	Pedal Curve
Casing Method:	Not applied

Survey Tool Program		Date	5/15/2023		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
0.00	21,637.81	Plan #2 (OH)	MWD+HDGM	OWSG MWD + HRGM	

Summary						
Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Annex State Com Offsets						
30-025-27626 Pre-Ongard Well #001 (P&A) - OH - OH						Out of range
Amerada Record #2 - OH - OH						Out of range
Coyote State #1 (P&A) - OH - OH						Out of range
Haumea State #2 - OH - OH						Out of range
King Eider 12 Fed Com 501H - OH - OH	10,159.52	20,354.00	217.03	134.52	2.630	CC, ES, SF
Annex State Com Pads						
Annex State Com 301H - OH - Plan #2	2,000.00	2,000.00	49.98	38.86	4.495	CC, ES
Annex State Com 301H - OH - Plan #2	2,100.00	2,099.14	50.83	39.41	4.452	SF
Annex State Com 501H - OH - Plan #2	2,000.00	2,000.00	75.00	63.88	6.745	CC, ES
Annex State Com 501H - OH - Plan #2	9,673.41	9,675.90	100.00	72.12	3.587	SF
Annex State Com 701H - OH - Plan #2	2,200.00	2,200.00	24.99	13.27	2.131	CC, ES, SF

Offset Design: Annex State Com Offsets - King Eider 12 Fed Com 501H - OH - OH													Offset Site Error:	0.00 usft
Survey Program:		7-MWD+IFR1+MS		Semi Major Axis			Offset Wellbore Centre		Rule Assigned:		Offset Well Error:		0.00 usft	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
9,200.00	9,190.20	20,354.00	10,133.02	16.20	82.09	-129.49	-339.57	-286.68	983.76	882.24	101.52	9.690		
9,300.00	9,290.20	20,354.00	10,133.02	16.26	82.09	-129.49	-339.57	-286.68	886.50	784.82	101.67	8.719		
9,400.00	9,390.20	20,354.00	10,133.02	16.32	82.09	-129.49	-339.57	-286.68	789.92	688.15	101.77	7.762		
9,500.00	9,490.20	20,354.00	10,133.02	16.38	82.09	-129.49	-339.57	-286.68	694.31	592.56	101.75	6.823		
9,600.00	9,590.20	20,354.00	10,133.02	16.44	82.09	-129.49	-339.57	-286.68	600.14	498.58	101.56	5.909		
9,700.00	9,690.20	20,354.00	10,133.02	16.50	82.09	-129.49	-339.57	-286.68	508.19	407.17	101.03	5.030		
9,800.00	9,790.20	20,354.00	10,133.02	16.56	82.09	-129.49	-339.57	-286.68	419.95	320.10	99.85	4.206		
9,900.00	9,890.20	20,354.00	10,133.02	16.62	82.09	-129.49	-339.57	-286.68	338.31	240.92	97.39	3.474		
10,000.00	9,990.20	20,354.00	10,133.02	16.69	82.09	-129.49	-339.57	-286.68	269.35	176.82	92.53	2.911		
10,100.00	10,090.20	20,354.00	10,133.02	16.75	82.09	-129.49	-339.57	-286.68	225.04	139.72	85.32	2.638		
10,159.52	10,149.72	20,354.00	10,133.02	16.78	82.09	-129.49	-339.57	-286.68	217.03	134.52	82.51	2.630	CC, ES, SF	
10,200.00	10,190.20	20,354.00	10,133.02	16.81	82.09	-129.49	-339.57	-286.68	220.77	138.22	82.55	2.674		
10,300.00	10,290.20	20,354.00	10,133.02	16.87	82.09	-129.49	-339.57	-286.68	258.53	170.69	87.83	2.943		
10,400.00	10,390.20	20,354.00	10,133.02	16.93	82.09	-129.49	-339.57	-286.68	323.93	230.14	93.79	3.454		
10,500.00	10,490.20	20,354.00	10,133.02	17.00	82.09	-129.49	-339.57	-286.68	403.77	305.99	97.78	4.129		
10,600.00	10,590.20	20,354.00	10,133.02	17.06	82.09	-129.49	-339.57	-286.68	491.04	390.73	100.31	4.895		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Altitude Energy Partners

Anticollision Report



Company:	Franklin Mountain Energy	Local Co-ordinate Reference:	Well Annex State Com 801H
Project:	Lea Co., NM (NAD-83)	TVD Reference:	KB=30' @ 3698.00usft
Reference Site:	Annex State Com Pads	MD Reference:	KB=30' @ 3698.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	DM Local
Reference Design:	Plan #2	Offset TVD Reference:	Offset Datum

Offset Design: Annex State Com Offsets - King Eider 12 Fed Com 501H - OH - OH

Survey Program: 7-MWD+IFR1+MS													Offset Site Error: 0.00 usft
Reference													Offset Well Error: 0.00 usft
Measured Depth	Vertical Depth	Measured Depth	Vertical Depth	Semi Major Axis	Offset	Highside	Offset Wellbore Centre		Rule Assigned:				Warning
Depth	Depth	Depth	Depth	Reference	Offset	Toolface	+N/-S	+E/-W	Between	Between	Minimum	Separation	
(usft)	(usft)	(usft)	(usft)	(usft)	(usft)	(°)	(usft)	(usft)	Centres	Ellipses	Separation	Factor	
									(usft)	(usft)	(usft)		
10,700.00	10,690.20	20,354.00	10,133.02	17.12	82.09	-129.49	-339.57	-286.68	582.43	480.40	102.02	5.709	
10,800.00	10,790.20	20,354.00	10,133.02	17.18	82.09	-129.49	-339.57	-286.68	676.25	572.99	103.26	6.549	
10,864.84	10,855.04	20,354.00	10,133.02	17.21	82.09	-129.49	-339.57	-286.68	737.96	634.05	103.90	7.102	
10,900.00	10,890.18	20,354.00	10,133.02	17.20	82.09	-110.51	-339.57	-286.68	771.77	667.56	104.21	7.406	
10,950.00	10,939.89	20,354.00	10,133.02	17.16	82.09	-90.52	-339.57	-286.68	820.33	715.77	104.56	7.845	
11,000.00	10,988.95	20,354.00	10,133.02	17.11	82.09	-69.22	-339.57	-286.68	869.06	764.21	104.86	8.288	
11,050.00	11,036.99	20,354.00	10,133.02	17.05	82.09	-51.73	-339.57	-286.68	917.60	812.50	105.09	8.731	
11,100.00	11,083.65	20,354.00	10,133.02	16.98	82.09	-39.44	-339.57	-286.68	965.62	860.35	105.27	9.173	



Altitude Energy Partners

Anticollision Report



Company:	Franklin Mountain Energy	Local Co-ordinate Reference:	Well Annex State Com 801H
Project:	Lea Co., NM (NAD-83)	TVD Reference:	KB=30' @ 3698.00usft
Reference Site:	Annex State Com Pads	MD Reference:	KB=30' @ 3698.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	DM Local
Reference Design:	Plan #2	Offset TVD Reference:	Offset Datum

Offset Design:Annex State Com Pads - Annex State Com 301H - OH - Plan #2													Offset Site Error:	0.00 usft
Survey Program: 0-MWD+HDGM		Offset		Semi Major Axis			Offset Wellbore Centre		Rule Assigned: Distance				Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
0.00	0.00	0.00	0.00	0.00	0.00	89.25	0.65	49.98	49.98					
100.00	100.00	100.00	100.00	0.79	0.79	89.25	0.65	49.98	49.98	48.40	1.58	31.553		
200.00	200.00	200.00	200.00	1.45	1.45	89.25	0.65	49.98	49.98	47.08	2.90	17.240		
300.00	300.00	300.00	300.00	1.89	1.89	89.25	0.65	49.98	49.98	46.20	3.79	13.193		
400.00	400.00	400.00	400.00	2.26	2.26	89.25	0.65	49.98	49.98	45.47	4.51	11.078		
500.00	500.00	500.00	500.00	2.57	2.57	89.25	0.65	49.98	49.98	44.84	5.14	9.726		
600.00	600.00	600.00	600.00	2.85	2.85	89.25	0.65	49.98	49.98	44.28	5.70	8.765		
700.00	700.00	700.00	700.00	3.11	3.11	89.25	0.65	49.98	49.98	43.76	6.22	8.036		
800.00	800.00	800.00	800.00	3.35	3.35	89.25	0.65	49.98	49.98	43.28	6.70	7.459		
900.00	900.00	900.00	900.00	3.58	3.58	89.25	0.65	49.98	49.98	42.83	7.15	6.988		
1,000.00	1,000.00	1,000.00	1,000.00	3.79	3.79	89.25	0.65	49.98	49.98	42.40	7.58	6.592		
1,100.00	1,100.00	1,100.00	1,100.00	4.00	4.00	89.25	0.65	49.98	49.98	41.99	7.99	6.255		
1,200.00	1,200.00	1,200.00	1,200.00	4.19	4.19	89.25	0.65	49.98	49.98	41.60	8.38	5.962		
1,300.00	1,300.00	1,300.00	1,300.00	4.38	4.38	89.25	0.65	49.98	49.98	41.22	8.76	5.704		
1,400.00	1,400.00	1,400.00	1,400.00	4.56	4.56	89.25	0.65	49.98	49.98	40.86	9.13	5.476		
1,500.00	1,500.00	1,500.00	1,500.00	4.74	4.74	89.25	0.65	49.98	49.98	40.50	9.48	5.272		
1,600.00	1,600.00	1,600.00	1,600.00	4.91	4.91	89.25	0.65	49.98	49.98	40.16	9.83	5.087		
1,700.00	1,700.00	1,700.00	1,700.00	5.08	5.08	89.25	0.65	49.98	49.98	39.82	10.16	4.919		
1,800.00	1,800.00	1,800.00	1,800.00	5.24	5.24	89.25	0.65	49.98	49.98	39.50	10.49	4.766		
1,900.00	1,900.00	1,900.00	1,900.00	5.40	5.40	89.25	0.65	49.98	49.98	39.18	10.81	4.625		
2,000.00	2,000.00	2,000.00	2,000.00	5.56	5.56	89.25	0.65	49.98	49.98	38.86	11.12	4.495 CC, ES		
2,100.00	2,100.00	2,099.14	2,099.13	5.71	5.73	90.36	-0.32	50.82	50.83	39.41	11.42	4.452 SF		
2,200.00	2,200.00	2,198.15	2,198.06	5.86	5.89	93.47	-3.24	53.34	53.47	41.77	11.70	4.571		
2,300.00	2,299.99	2,296.92	2,296.62	6.02	6.06	-113.70	-8.08	57.52	58.70	46.73	11.97	4.903		
2,400.00	2,399.91	2,395.32	2,394.62	6.17	6.26	-111.48	-14.82	63.34	67.02	54.79	12.23	5.480		
2,500.00	2,499.69	2,494.72	2,493.47	6.34	6.44	-110.85	-22.67	70.13	77.40	64.90	12.50	6.193		
2,533.32	2,532.90	2,527.83	2,526.40	6.36	6.51	-111.05	-25.29	72.39	81.06	68.50	12.56	6.454		
2,600.00	2,599.32	2,594.09	2,592.30	6.43	6.65	-111.67	-30.53	76.91	88.51	75.80	12.71	6.963		
2,700.00	2,698.94	2,693.45	2,691.12	6.61	6.87	-112.43	-38.38	83.70	99.70	86.70	13.00	7.667		
2,800.00	2,798.56	2,792.82	2,789.94	6.80	7.11	-113.04	-46.23	90.48	110.90	97.59	13.31	8.332		
2,900.00	2,898.18	2,892.18	2,888.76	7.01	7.36	-113.53	-54.09	97.27	122.11	108.48	13.63	8.958		
3,000.00	2,997.80	2,991.55	2,987.58	7.23	7.62	-113.94	-61.94	104.05	133.33	119.37	13.96	9.548		
3,100.00	3,097.42	3,090.91	3,086.40	7.47	7.90	-114.29	-69.80	110.84	144.56	130.25	14.31	10.102		
3,200.00	3,197.04	3,190.28	3,185.22	7.72	8.19	-114.58	-77.65	117.62	155.78	141.12	14.67	10.622		
3,300.00	3,296.66	3,289.64	3,284.04	7.98	8.48	-114.84	-85.51	124.40	167.02	151.98	15.03	11.111		
3,400.00	3,396.28	3,389.01	3,382.87	8.25	8.79	-115.06	-93.36	131.19	178.25	162.84	15.41	11.568		
3,500.00	3,495.90	3,488.37	3,481.69	8.53	9.10	-115.26	-101.21	137.97	189.49	173.70	15.79	11.998		
3,600.00	3,595.52	3,587.74	3,580.51	8.82	9.42	-115.44	-109.07	144.76	200.73	184.54	16.19	12.400		
3,700.00	3,695.14	3,687.10	3,679.33	9.11	9.74	-115.59	-116.92	151.54	211.97	195.38	16.59	12.778		
3,800.00	3,794.76	3,786.46	3,778.15	9.41	10.08	-115.74	-124.78	158.33	223.21	206.22	17.00	13.133		
3,900.00	3,894.38	3,885.83	3,876.97	9.72	10.41	-115.86	-132.63	165.11	234.46	217.05	17.41	13.465		
4,000.00	3,994.00	3,985.19	3,975.79	10.03	10.75	-115.98	-140.48	171.90	245.70	227.87	17.83	13.778		
4,100.00	4,093.62	4,084.56	4,074.61	10.35	11.10	-116.09	-148.34	178.68	256.95	238.69	18.26	14.071		
4,200.00	4,193.24	4,183.92	4,173.43	10.68	11.45	-116.18	-156.19	185.47	268.19	249.50	18.69	14.347		
4,300.00	4,292.85	4,283.29	4,272.26	11.00	11.80	-116.27	-164.05	192.25	279.44	260.31	19.13	14.607		
4,400.00	4,392.47	4,382.65	4,371.08	11.33	12.15	-116.35	-171.90	199.04	290.69	271.12	19.57	14.852		
4,500.00	4,492.09	4,482.02	4,469.90	11.67	12.51	-116.43	-179.76	205.82	301.94	281.92	20.02	15.081		
4,600.00	4,591.71	4,586.27	4,573.67	12.01	12.89	-116.63	-187.28	212.32	312.56	292.07	20.49	15.254		
4,700.00	4,691.33	4,691.97	4,679.12	12.35	13.26	-117.18	-192.76	217.06	321.31	300.37	20.94	15.344		
4,800.00	4,790.95	4,797.83	4,784.89	12.69	13.59	-118.07	-196.03	219.88	328.18	306.82	21.36	15.367		
4,886.48	4,877.10	4,889.38	4,876.42	12.98	13.76	-119.11	-197.07	220.78	332.68	311.06	21.62	15.389		
4,900.00	4,890.57	4,903.69	4,890.73	13.02	13.78	-119.30	-197.09	220.79	333.26	311.60	21.65	15.391		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Altitude Energy Partners

Anticollision Report



Company:	Franklin Mountain Energy	Local Co-ordinate Reference:	Well Annex State Com 801H
Project:	Lea Co., NM (NAD-83)	TVD Reference:	KB=30' @ 3698.00usft
Reference Site:	Annex State Com Pads	MD Reference:	KB=30' @ 3698.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	DM Local
Reference Design:	Plan #2	Offset TVD Reference:	Offset Datum

Offset Design: Annex State Com Pads - Annex State Com 301H - OH - Plan #2													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+HDGM													Offset Well Error: 0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Distance Between Centres (usft)	Rule Assigned: Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
5,000.00	4,990.32	5,003.28	4,990.32	13.39	13.83	-120.39	-197.09	220.79	336.78	314.85	21.93	15.360	
5,100.00	5,090.22	5,103.17	5,090.22	13.71	13.88	-121.07	-197.09	220.79	339.05	316.88	22.16	15.297	
5,200.00	5,190.20	5,203.15	5,190.20	13.97	13.94	-121.34	-197.09	220.79	340.00	317.62	22.38	15.193	
5,219.80	5,210.00	5,222.95	5,210.00	13.98	13.95	89.25	-197.09	220.79	340.02	317.62	22.40	15.180	
5,300.00	5,290.20	5,303.15	5,290.20	14.02	13.99	89.25	-197.09	220.79	340.02	317.53	22.49	15.116	
5,400.00	5,390.20	5,403.15	5,390.20	14.07	14.05	89.25	-197.09	220.79	340.02	317.40	22.62	15.030	
5,500.00	5,490.20	5,503.15	5,490.20	14.12	14.10	89.25	-197.09	220.79	340.02	317.27	22.75	14.946	
5,600.00	5,590.20	5,603.15	5,590.20	14.17	14.15	89.25	-197.09	220.79	340.02	317.14	22.88	14.862	
5,700.00	5,690.20	5,703.15	5,690.20	14.22	14.21	89.25	-197.09	220.79	340.02	317.02	23.01	14.779	
5,800.00	5,790.20	5,803.15	5,790.20	14.28	14.26	89.25	-197.09	220.79	340.02	316.89	23.14	14.697	
5,900.00	5,890.20	5,903.15	5,890.20	14.33	14.32	89.25	-197.09	220.79	340.02	316.76	23.27	14.615	
6,000.00	5,990.20	6,003.15	5,990.20	14.38	14.38	89.25	-197.09	220.79	340.02	316.63	23.40	14.533	
6,100.00	6,090.20	6,103.15	6,090.20	14.44	14.43	89.25	-197.09	220.79	340.02	316.50	23.53	14.453	
6,200.00	6,190.20	6,203.15	6,190.20	14.49	14.49	89.25	-197.09	220.79	340.02	316.37	23.66	14.373	
6,300.00	6,290.20	6,303.15	6,290.20	14.54	14.54	89.25	-197.09	220.79	340.02	316.23	23.79	14.294	
6,400.00	6,390.20	6,403.15	6,390.20	14.60	14.60	89.25	-197.09	220.79	340.02	316.10	23.92	14.215	
6,500.00	6,490.20	6,503.15	6,490.20	14.65	14.66	89.25	-197.09	220.79	340.02	315.97	24.05	14.137	
6,600.00	6,590.20	6,603.15	6,590.20	14.70	14.71	89.25	-197.09	220.79	340.02	315.84	24.18	14.060	
6,700.00	6,690.20	6,703.15	6,690.20	14.76	14.77	89.25	-197.09	220.79	340.02	315.71	24.32	13.983	
6,800.00	6,790.20	6,803.15	6,790.20	14.81	14.83	89.25	-197.09	220.79	340.02	315.57	24.45	13.907	
6,900.00	6,890.20	6,903.15	6,890.20	14.87	14.89	89.25	-197.09	220.79	340.02	315.44	24.58	13.831	
7,000.00	6,990.20	7,003.15	6,990.20	14.92	14.94	89.25	-197.09	220.79	340.02	315.30	24.72	13.756	
7,100.00	7,090.20	7,103.15	7,090.20	14.98	15.00	89.25	-197.09	220.79	340.02	315.17	24.85	13.682	
7,200.00	7,190.20	7,203.15	7,190.20	15.04	15.06	89.25	-197.09	220.79	340.02	315.04	24.99	13.608	
7,300.00	7,290.20	7,303.15	7,290.20	15.09	15.12	89.25	-197.09	220.79	340.02	314.90	25.12	13.535	
7,400.00	7,390.20	7,403.15	7,390.20	15.15	15.18	89.25	-197.09	220.79	340.02	314.77	25.26	13.463	
7,500.00	7,490.20	7,503.15	7,490.20	15.20	15.24	89.25	-197.09	220.79	340.02	314.63	25.39	13.391	
7,600.00	7,590.20	7,603.15	7,590.20	15.26	15.30	89.25	-197.09	220.79	340.02	314.49	25.53	13.320	
7,700.00	7,690.20	7,703.15	7,690.20	15.32	15.36	89.25	-197.09	220.79	340.02	314.36	25.66	13.249	
7,800.00	7,790.20	7,803.15	7,790.20	15.38	15.42	89.25	-197.09	220.79	340.02	314.22	25.80	13.179	
7,900.00	7,890.20	7,903.15	7,890.20	15.43	15.48	89.25	-197.09	220.79	340.02	314.09	25.94	13.110	
8,000.00	7,990.20	8,003.15	7,990.20	15.49	15.54	89.25	-197.09	220.79	340.02	313.95	26.07	13.041	
8,100.00	8,090.20	8,103.15	8,090.20	15.55	15.60	89.25	-197.09	220.79	340.02	313.81	26.21	12.972	
8,200.00	8,190.20	8,203.15	8,190.20	15.61	15.66	89.25	-197.09	220.79	340.02	313.67	26.35	12.904	
8,300.00	8,290.20	8,303.15	8,290.20	15.66	15.72	89.25	-197.09	220.79	340.02	313.54	26.49	12.837	
8,400.00	8,390.20	8,403.15	8,390.20	15.72	15.78	89.25	-197.09	220.79	340.02	313.40	26.63	12.771	
8,500.00	8,490.20	8,503.15	8,490.20	15.78	15.84	89.25	-197.09	220.79	340.02	313.26	26.76	12.704	
8,600.00	8,590.20	8,603.15	8,590.20	15.84	15.90	89.25	-197.09	220.79	340.02	313.12	26.90	12.639	
8,700.00	8,690.20	8,703.15	8,690.20	15.90	15.96	89.25	-197.09	220.79	340.02	312.98	27.04	12.574	
8,710.00	8,700.20	8,713.15	8,700.20	15.91	15.96	89.25	-197.09	220.79	340.02	312.97	27.05	12.570	
8,800.00	8,790.20	8,802.70	8,789.64	15.96	15.95	88.71	-193.87	220.77	340.06	312.91	27.15	12.524	
8,900.00	8,890.20	8,898.55	8,883.66	16.02	15.84	85.67	-175.83	220.64	340.88	313.63	27.25	12.508	
9,000.00	8,990.20	8,986.25	8,965.97	16.08	15.72	80.68	-145.81	220.44	345.03	317.61	27.42	12.585	
9,100.00	9,090.20	9,063.31	9,033.78	16.14	15.61	74.80	-109.33	220.18	356.18	328.45	27.74	12.841	
9,200.00	9,190.20	9,129.28	9,087.50	16.20	15.53	68.96	-71.11	219.91	377.57	349.29	28.28	13.350	
9,300.00	9,290.20	9,185.00	9,129.20	16.26	15.47	63.72	-34.19	219.66	410.79	381.76	29.03	14.148	
9,400.00	9,390.20	9,231.85	9,161.36	16.32	15.44	59.26	-0.14	219.42	455.62	425.72	29.90	15.238	
9,500.00	9,490.20	9,271.29	9,186.20	16.38	15.42	55.56	30.49	219.21	510.66	479.87	30.78	16.589	
9,600.00	9,590.20	9,300.00	9,202.93	16.44	15.41	52.95	53.82	219.04	574.11	542.46	31.64	18.143	
9,700.00	9,690.20	9,333.08	9,220.72	16.50	15.41	50.04	81.70	218.85	644.14	611.74	32.39	19.885	
9,800.00	9,790.20	9,350.00	9,229.19	16.56	15.42	48.61	96.34	218.75	719.50	686.37	33.13	21.720	
9,900.00	9,890.20	9,378.54	9,242.49	16.62	15.43	46.27	121.59	218.57	798.77	765.03	33.74	23.674	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Altitude Energy Partners

Anticollision Report



Company:	Franklin Mountain Energy	Local Co-ordinate Reference:	Well Annex State Com 801H
Project:	Lea Co., NM (NAD-83)	TVD Reference:	KB=30' @ 3698.00usft
Reference Site:	Annex State Com Pads	MD Reference:	KB=30' @ 3698.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	DM Local
Reference Design:	Plan #2	Offset TVD Reference:	Offset Datum

Offset Design: Annex State Com Pads - Annex State Com 301H - OH - Plan #2													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+HDGM													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Rule Assigned:				Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
10,000.00	9,990.20	9,400.00	9,251.65	16.69	15.45	44.59	141.00	218.44	881.36	847.03	34.33	25.676	
10,100.00	10,090.20	9,400.00	9,251.65	16.75	15.45	44.59	141.00	218.44	966.69	931.77	34.92	27.683	



Altitude Energy Partners

Anticollision Report



Company:	Franklin Mountain Energy	Local Co-ordinate Reference:	Well Annex State Com 801H
Project:	Lea Co., NM (NAD-83)	TVD Reference:	KB=30' @ 3698.00usft
Reference Site:	Annex State Com Pads	MD Reference:	KB=30' @ 3698.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	DM Local
Reference Design:	Plan #2	Offset TVD Reference:	Offset Datum

Offset Design: Annex State Com Pads - Annex State Com 501H - OH - Plan #2													Offset Site Error:	0.00 usft
Survey Program: Reference		0-MWD+HDGM Offset		Semi Major Axis			Offset Wellbore Centre		Rule Assigned: Distance				Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
0.00	0.00	0.00	0.00	0.00	0.00	-90.75	-0.98	-74.99	75.00					
100.00	100.00	100.00	100.00	0.79	0.79	-90.75	-0.98	-74.99	75.00	73.41	1.58	47.341		
200.00	200.00	200.00	200.00	1.45	1.45	-90.75	-0.98	-74.99	75.00	72.10	2.90	25.867		
300.00	300.00	300.00	300.00	1.89	1.89	-90.75	-0.98	-74.99	75.00	71.21	3.79	19.794		
400.00	400.00	400.00	400.00	2.26	2.26	-90.75	-0.98	-74.99	75.00	70.48	4.51	16.622		
500.00	500.00	500.00	500.00	2.57	2.57	-90.75	-0.98	-74.99	75.00	69.86	5.14	14.592		
600.00	600.00	600.00	600.00	2.85	2.85	-90.75	-0.98	-74.99	75.00	69.29	5.70	13.151		
700.00	700.00	700.00	700.00	3.11	3.11	-90.75	-0.98	-74.99	75.00	68.78	6.22	12.058		
800.00	800.00	800.00	800.00	3.35	3.35	-90.75	-0.98	-74.99	75.00	68.30	6.70	11.192		
900.00	900.00	900.00	900.00	3.58	3.58	-90.75	-0.98	-74.99	75.00	67.84	7.15	10.484		
1,000.00	1,000.00	1,000.00	1,000.00	3.79	3.79	-90.75	-0.98	-74.99	75.00	67.41	7.58	9.891		
1,100.00	1,100.00	1,100.00	1,100.00	4.00	4.00	-90.75	-0.98	-74.99	75.00	67.00	7.99	9.384		
1,200.00	1,200.00	1,200.00	1,200.00	4.19	4.19	-90.75	-0.98	-74.99	75.00	66.61	8.38	8.945		
1,300.00	1,300.00	1,300.00	1,300.00	4.38	4.38	-90.75	-0.98	-74.99	75.00	66.23	8.76	8.559		
1,400.00	1,400.00	1,400.00	1,400.00	4.56	4.56	-90.75	-0.98	-74.99	75.00	65.87	9.13	8.216		
1,500.00	1,500.00	1,500.00	1,500.00	4.74	4.74	-90.75	-0.98	-74.99	75.00	65.51	9.48	7.910		
1,600.00	1,600.00	1,600.00	1,600.00	4.91	4.91	-90.75	-0.98	-74.99	75.00	65.17	9.83	7.633		
1,700.00	1,700.00	1,700.00	1,700.00	5.08	5.08	-90.75	-0.98	-74.99	75.00	64.84	10.16	7.381		
1,800.00	1,800.00	1,800.00	1,800.00	5.24	5.24	-90.75	-0.98	-74.99	75.00	64.51	10.49	7.151		
1,900.00	1,900.00	1,900.00	1,900.00	5.40	5.40	-90.75	-0.98	-74.99	75.00	64.19	10.81	6.940		
2,000.00	2,000.00	2,000.00	2,000.00	5.56	5.56	-90.75	-0.98	-74.99	75.00	63.88	11.12	6.745 CC, ES		
2,100.00	2,100.00	2,098.83	2,098.82	5.71	5.73	-91.53	-2.02	-75.73	75.77	64.35	11.41	6.638		
2,200.00	2,200.00	2,197.53	2,197.44	5.86	5.88	-93.77	-5.13	-77.96	78.17	66.48	11.69	6.687		
2,300.00	2,299.99	2,296.05	2,295.75	6.02	6.06	52.88	-10.31	-81.66	81.62	69.66	11.96	6.824		
2,400.00	2,399.91	2,394.44	2,393.74	6.17	6.25	50.47	-17.54	-86.82	85.38	73.15	12.23	6.983		
2,500.00	2,499.69	2,494.27	2,493.02	6.34	6.44	48.86	-26.03	-92.88	88.58	76.07	12.51	7.079		
2,533.32	2,532.90	2,527.58	2,526.15	6.36	6.51	48.64	-28.86	-94.91	89.28	76.70	12.58	7.097		
2,600.00	2,599.32	2,594.25	2,592.45	6.43	6.64	48.35	-34.54	-98.96	90.48	77.74	12.75	7.099		
2,700.00	2,698.94	2,694.23	2,691.89	6.61	6.86	47.92	-43.04	-105.04	92.30	79.23	13.06	7.066		
2,800.00	2,798.56	2,794.21	2,791.32	6.80	7.10	47.52	-51.55	-111.11	94.11	80.71	13.40	7.022		
2,900.00	2,898.18	2,894.19	2,890.75	7.01	7.36	47.13	-60.06	-117.19	95.93	82.17	13.76	6.969		
3,000.00	2,997.80	2,994.17	2,990.18	7.23	7.62	46.75	-68.56	-123.27	97.76	83.61	14.15	6.910		
3,100.00	3,097.42	3,094.15	3,089.62	7.47	7.90	46.39	-77.07	-129.34	99.59	85.04	14.55	6.845		
3,200.00	3,197.04	3,194.14	3,189.05	7.72	8.19	46.04	-85.58	-135.42	101.42	86.45	14.97	6.775		
3,300.00	3,296.66	3,294.12	3,288.48	7.98	8.49	45.70	-94.09	-141.50	103.26	87.85	15.41	6.702		
3,400.00	3,396.28	3,394.10	3,387.92	8.25	8.79	45.38	-102.59	-147.57	105.10	89.24	15.86	6.626		
3,500.00	3,495.90	3,494.08	3,487.35	8.53	9.11	45.06	-111.10	-153.65	106.94	90.61	16.33	6.549		
3,600.00	3,595.52	3,594.06	3,586.78	8.82	9.43	44.76	-119.61	-159.73	108.79	91.98	16.81	6.471		
3,700.00	3,695.14	3,694.04	3,686.22	9.11	9.76	44.47	-128.11	-165.80	110.64	93.33	17.31	6.392		
3,800.00	3,794.76	3,794.02	3,785.65	9.41	10.09	44.19	-136.62	-171.88	112.49	94.67	17.82	6.313		
3,900.00	3,894.38	3,894.00	3,885.08	9.72	10.43	43.91	-145.13	-177.96	114.35	96.01	18.34	6.235		
4,000.00	3,994.00	3,993.99	3,984.52	10.03	10.77	43.65	-153.64	-184.04	116.21	97.34	18.87	6.158		
4,100.00	4,093.62	4,093.97	4,083.95	10.35	11.12	43.39	-162.14	-190.11	118.07	98.65	19.41	6.082		
4,200.00	4,193.24	4,193.95	4,183.38	10.68	11.47	43.14	-170.65	-196.19	119.93	99.97	19.96	6.007		
4,300.00	4,292.85	4,293.93	4,282.82	11.00	11.82	42.90	-179.16	-202.27	121.79	101.27	20.52	5.934		
4,400.00	4,392.47	4,394.48	4,382.83	11.33	12.16	42.68	-187.66	-208.34	123.61	102.55	21.06	5.868		
4,500.00	4,492.09	4,497.11	4,485.07	11.67	12.53	43.01	-194.79	-213.43	123.96	102.37	21.58	5.743		
4,600.00	4,591.71	4,599.65	4,587.43	12.01	12.87	44.13	-199.68	-216.92	122.21	100.23	21.98	5.561		
4,700.00	4,691.33	4,701.96	4,689.69	12.35	13.17	46.14	-202.32	-218.81	118.48	96.28	22.20	5.337		
4,800.00	4,790.95	4,803.23	4,790.95	12.69	13.28	49.16	-202.85	-219.19	113.06	90.96	22.11	5.114		
4,886.48	4,877.10	4,889.38	4,877.10	12.98	13.33	52.17	-202.85	-219.19	108.27	86.34	21.93	4.937		
4,900.00	4,890.57	4,902.85	4,890.57	13.02	13.33	52.65	-202.85	-219.19	107.57	85.67	21.89	4.913		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Altitude Energy Partners

Anticollision Report



Company:	Franklin Mountain Energy	Local Co-ordinate Reference:	Well Annex State Com 801H
Project:	Lea Co., NM (NAD-83)	TVD Reference:	KB=30' @ 3698.00usft
Reference Site:	Annex State Com Pads	MD Reference:	KB=30' @ 3698.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	DM Local
Reference Design:	Plan #2	Offset TVD Reference:	Offset Datum

Offset Design: Annex State Com Pads - Annex State Com 501H - OH - Plan #2													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+HDGM							Rule Assigned:						Offset Well Error: 0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
5,000.00	4,990.32	5,002.60	4,990.32	13.39	13.39	55.70	-202.85	-219.19	103.43	81.67	21.76	4.754	
5,100.00	5,090.22	5,102.49	5,090.22	13.71	13.44	57.75	-202.85	-219.19	100.99	79.28	21.71	4.652	
5,200.00	5,190.20	5,202.47	5,190.20	13.97	13.50	58.62	-202.85	-219.19	100.03	78.23	21.80	4.589	
5,219.80	5,210.00	5,222.27	5,210.00	13.98	13.51	-90.75	-202.85	-219.19	100.00	78.18	21.81	4.584	
5,300.00	5,290.20	5,302.47	5,290.20	14.02	13.55	-90.75	-202.85	-219.19	100.00	78.09	21.91	4.564	
5,400.00	5,390.20	5,402.47	5,390.20	14.07	13.61	-90.75	-202.85	-219.19	100.00	77.96	22.04	4.537	
5,500.00	5,490.20	5,502.47	5,490.20	14.12	13.67	-90.75	-202.85	-219.19	100.00	77.83	22.17	4.510	
5,600.00	5,590.20	5,602.47	5,590.20	14.17	13.72	-90.75	-202.85	-219.19	100.00	77.69	22.30	4.483	
5,700.00	5,690.20	5,702.47	5,690.20	14.22	13.78	-90.75	-202.85	-219.19	100.00	77.56	22.44	4.457	
5,800.00	5,790.20	5,802.47	5,790.20	14.28	13.84	-90.75	-202.85	-219.19	100.00	77.43	22.57	4.431	
5,900.00	5,890.20	5,902.47	5,890.20	14.33	13.89	-90.75	-202.85	-219.19	100.00	77.30	22.70	4.405	
6,000.00	5,990.20	6,002.47	5,990.20	14.38	13.95	-90.75	-202.85	-219.19	100.00	77.16	22.83	4.379	
6,100.00	6,090.20	6,102.47	6,090.20	14.44	14.01	-90.75	-202.85	-219.19	100.00	77.03	22.97	4.354	
6,200.00	6,190.20	6,202.47	6,190.20	14.49	14.07	-90.75	-202.85	-219.19	100.00	76.90	23.10	4.329	
6,300.00	6,290.20	6,302.47	6,290.20	14.54	14.13	-90.75	-202.85	-219.19	100.00	76.76	23.24	4.304	
6,400.00	6,390.20	6,402.47	6,390.20	14.60	14.18	-90.75	-202.85	-219.19	100.00	76.63	23.37	4.279	
6,500.00	6,490.20	6,502.47	6,490.20	14.65	14.24	-90.75	-202.85	-219.19	100.00	76.49	23.51	4.254	
6,600.00	6,590.20	6,602.47	6,590.20	14.70	14.30	-90.75	-202.85	-219.19	100.00	76.36	23.64	4.230	
6,700.00	6,690.20	6,702.47	6,690.20	14.76	14.36	-90.75	-202.85	-219.19	100.00	76.22	23.78	4.206	
6,800.00	6,790.20	6,802.47	6,790.20	14.81	14.42	-90.75	-202.85	-219.19	100.00	76.09	23.91	4.182	
6,900.00	6,890.20	6,902.47	6,890.20	14.87	14.48	-90.75	-202.85	-219.19	100.00	75.95	24.05	4.158	
7,000.00	6,990.20	7,002.47	6,990.20	14.92	14.54	-90.75	-202.85	-219.19	100.00	75.81	24.18	4.135	
7,100.00	7,090.20	7,102.47	7,090.20	14.98	14.60	-90.75	-202.85	-219.19	100.00	75.68	24.32	4.111	
7,200.00	7,190.20	7,202.47	7,190.20	15.04	14.66	-90.75	-202.85	-219.19	100.00	75.54	24.46	4.088	
7,300.00	7,290.20	7,302.47	7,290.20	15.09	14.72	-90.75	-202.85	-219.19	100.00	75.40	24.60	4.066	
7,400.00	7,390.20	7,402.47	7,390.20	15.15	14.78	-90.75	-202.85	-219.19	100.00	75.26	24.73	4.043	
7,500.00	7,490.20	7,502.47	7,490.20	15.20	14.84	-90.75	-202.85	-219.19	100.00	75.13	24.87	4.020	
7,600.00	7,590.20	7,602.47	7,590.20	15.26	14.90	-90.75	-202.85	-219.19	100.00	74.99	25.01	3.998	
7,700.00	7,690.20	7,702.47	7,690.20	15.32	14.96	-90.75	-202.85	-219.19	100.00	74.85	25.15	3.976	
7,800.00	7,790.20	7,802.47	7,790.20	15.38	15.02	-90.75	-202.85	-219.19	100.00	74.71	25.29	3.954	
7,900.00	7,890.20	7,902.47	7,890.20	15.43	15.09	-90.75	-202.85	-219.19	100.00	74.57	25.43	3.933	
8,000.00	7,990.20	8,002.47	7,990.20	15.49	15.15	-90.75	-202.85	-219.19	100.00	74.43	25.57	3.911	
8,100.00	8,090.20	8,102.47	8,090.20	15.55	15.21	-90.75	-202.85	-219.19	100.00	74.29	25.71	3.890	
8,200.00	8,190.20	8,202.47	8,190.20	15.61	15.27	-90.75	-202.85	-219.19	100.00	74.15	25.85	3.869	
8,300.00	8,290.20	8,302.47	8,290.20	15.66	15.33	-90.75	-202.85	-219.19	100.00	74.01	25.99	3.848	
8,400.00	8,390.20	8,402.47	8,390.20	15.72	15.40	-90.75	-202.85	-219.19	100.00	73.87	26.13	3.827	
8,500.00	8,490.20	8,502.47	8,490.20	15.78	15.46	-90.75	-202.85	-219.19	100.00	73.73	26.27	3.806	
8,600.00	8,590.20	8,602.47	8,590.20	15.84	15.52	-90.75	-202.85	-219.19	100.00	73.59	26.41	3.786	
8,700.00	8,690.20	8,702.47	8,690.20	15.90	15.59	-90.75	-202.85	-219.19	100.00	73.45	26.55	3.766	
8,800.00	8,790.20	8,802.47	8,790.20	15.96	15.65	-90.75	-202.85	-219.19	100.00	73.30	26.70	3.746	
8,900.00	8,890.20	8,902.47	8,890.20	16.02	15.71	-90.75	-202.85	-219.19	100.00	73.16	26.84	3.726	
9,000.00	8,990.20	9,002.47	8,990.20	16.08	15.78	-90.75	-202.85	-219.19	100.00	73.02	26.98	3.706	
9,100.00	9,090.20	9,102.47	9,090.20	16.14	15.84	-90.75	-202.85	-219.19	100.00	72.88	27.12	3.687	
9,200.00	9,190.20	9,202.47	9,190.20	16.20	15.90	-90.75	-202.85	-219.19	100.00	72.73	27.26	3.668	
9,300.00	9,290.20	9,302.47	9,290.20	16.26	15.97	-90.75	-202.85	-219.19	100.00	72.59	27.41	3.649	
9,400.00	9,390.20	9,402.47	9,390.20	16.32	16.03	-90.75	-202.85	-219.19	100.00	72.45	27.55	3.630	
9,500.00	9,490.20	9,502.47	9,490.20	16.38	16.10	-90.75	-202.85	-219.19	100.00	72.30	27.69	3.611	
9,600.00	9,590.20	9,602.47	9,590.20	16.44	16.16	-90.75	-202.85	-219.19	100.00	72.16	27.84	3.592	
9,673.41	9,663.61	9,675.90	9,663.61	16.48	16.18	-90.40	-202.24	-219.19	100.00	72.12	27.88	3.587 SF	
9,700.00	9,690.20	9,702.38	9,690.03	16.50	16.19	-89.34	-200.40	-219.21	100.01	72.23	27.78	3.600	
9,800.00	9,790.20	9,799.13	9,785.15	16.56	16.09	-79.72	-183.38	-219.33	101.88	74.94	26.95	3.781	
9,900.00	9,890.20	9,887.92	9,868.81	16.62	15.98	-64.59	-153.88	-219.53	113.11	86.49	26.62	4.249	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Altitude Energy Partners

Anticollision Report



Company:	Franklin Mountain Energy	Local Co-ordinate Reference:	Well Annex State Com 801H
Project:	Lea Co., NM (NAD-83)	TVD Reference:	KB=30' @ 3698.00usft
Reference Site:	Annex State Com Pads	MD Reference:	KB=30' @ 3698.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	DM Local
Reference Design:	Plan #2	Offset TVD Reference:	Offset Datum

Offset Design: Annex State Com Pads - Annex State Com 501H - OH - Plan #2													Offset Site Error:	0.00 usft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 usft
Reference	Offset	Semi Major Axis		Highside		Offset Wellbore Centre		Rule Assigned:				Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
10,000.00	9,990.20	9,966.08	9,937.91	16.69	15.88	-50.12	-117.50	-219.78	141.12	112.99	28.13	5.017		
10,100.00	10,090.20	10,033.02	9,992.70	16.75	15.80	-39.48	-79.10	-220.05	186.19	155.78	30.41	6.123		
10,200.00	10,190.20	10,089.55	10,035.22	16.81	15.75	-32.35	-41.89	-220.31	244.40	211.97	32.43	7.537		
10,300.00	10,290.20	10,137.05	10,067.97	16.87	15.71	-27.58	-7.50	-220.55	311.95	277.91	34.04	9.165		
10,400.00	10,390.20	10,177.00	10,093.23	16.93	15.69	-24.30	23.44	-220.77	386.16	350.83	35.33	10.930		
10,500.00	10,490.20	10,200.00	10,106.77	17.00	15.68	-22.66	42.03	-220.90	465.49	428.89	36.61	12.716		
10,600.00	10,590.20	10,250.00	10,133.58	17.06	15.67	-19.64	84.21	-221.19	548.23	511.08	37.16	14.755		
10,700.00	10,690.20	10,264.10	10,140.46	17.12	15.68	-18.90	96.51	-221.27	633.61	595.49	38.12	16.619		
10,800.00	10,790.20	10,285.35	10,150.26	17.18	15.68	-17.87	115.37	-221.41	721.39	682.54	38.85	18.570		
10,864.84	10,855.04	10,300.00	10,156.61	17.21	15.69	-17.22	128.58	-221.50	779.26	740.01	39.25	19.852		
10,900.00	10,890.18	10,300.00	10,156.61	17.20	15.69	-8.28	128.58	-221.50	810.45	770.91	39.54	20.497		
10,950.00	10,939.89	10,300.00	10,156.61	17.16	15.69	-7.13	128.58	-221.50	853.64	813.69	39.95	21.368		
11,000.00	10,988.95	10,325.54	10,166.85	17.11	15.71	-5.69	151.96	-221.66	894.43	854.26	40.17	22.267		
11,050.00	11,036.99	10,350.00	10,175.68	17.05	15.73	-4.66	174.78	-221.82	933.78	893.36	40.42	23.102		
11,100.00	11,083.65	10,350.00	10,175.68	16.98	15.73	-4.24	174.78	-221.82	970.57	929.72	40.85	23.758		



Altitude Energy Partners

Anticollision Report



Company:	Franklin Mountain Energy	Local Co-ordinate Reference:	Well Annex State Com 801H
Project:	Lea Co., NM (NAD-83)	TVD Reference:	KB=30' @ 3698.00usft
Reference Site:	Annex State Com Pads	MD Reference:	KB=30' @ 3698.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	DM Local
Reference Design:	Plan #2	Offset TVD Reference:	Offset Datum

Offset Design: Annex State Com Pads - Annex State Com 701H - OH - Plan #2													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+HDCM													Offset Well Error: 0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Distance Between Centres (usft)	Rule Assigned: Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	89.24	0.33	24.99	24.99				
100.00	100.00	100.00	100.00	0.79	0.79	89.24	0.33	24.99	24.99	23.41	1.58	15.776	
200.00	200.00	200.00	200.00	1.45	1.45	89.24	0.33	24.99	24.99	22.09	2.90	8.620	
300.00	300.00	300.00	300.00	1.89	1.89	89.24	0.33	24.99	24.99	21.20	3.79	6.596	
400.00	400.00	400.00	400.00	2.26	2.26	89.24	0.33	24.99	24.99	20.48	4.51	5.539	
500.00	500.00	500.00	500.00	2.57	2.57	89.24	0.33	24.99	24.99	19.85	5.14	4.863	
600.00	600.00	600.00	600.00	2.85	2.85	89.24	0.33	24.99	24.99	19.29	5.70	4.382	
700.00	700.00	700.00	700.00	3.11	3.11	89.24	0.33	24.99	24.99	18.77	6.22	4.018	
800.00	800.00	800.00	800.00	3.35	3.35	89.24	0.33	24.99	24.99	18.29	6.70	3.730	
900.00	900.00	900.00	900.00	3.58	3.58	89.24	0.33	24.99	24.99	17.84	7.15	3.494	
1,000.00	1,000.00	1,000.00	1,000.00	3.79	3.79	89.24	0.33	24.99	24.99	17.41	7.58	3.296	
1,100.00	1,100.00	1,100.00	1,100.00	4.00	4.00	89.24	0.33	24.99	24.99	17.00	7.99	3.127	
1,200.00	1,200.00	1,200.00	1,200.00	4.19	4.19	89.24	0.33	24.99	24.99	16.61	8.38	2.981	
1,300.00	1,300.00	1,300.00	1,300.00	4.38	4.38	89.24	0.33	24.99	24.99	16.23	8.76	2.852	
1,400.00	1,400.00	1,400.00	1,400.00	4.56	4.56	89.24	0.33	24.99	24.99	15.86	9.13	2.738	
1,500.00	1,500.00	1,500.00	1,500.00	4.74	4.74	89.24	0.33	24.99	24.99	15.51	9.48	2.636	
1,600.00	1,600.00	1,600.00	1,600.00	4.91	4.91	89.24	0.33	24.99	24.99	15.17	9.83	2.544	
1,700.00	1,700.00	1,700.00	1,700.00	5.08	5.08	89.24	0.33	24.99	24.99	14.83	10.16	2.460	
1,800.00	1,800.00	1,800.00	1,800.00	5.24	5.24	89.24	0.33	24.99	24.99	14.50	10.49	2.383	
1,900.00	1,900.00	1,900.00	1,900.00	5.40	5.40	89.24	0.33	24.99	24.99	14.19	10.81	2.313	
2,000.00	2,000.00	2,000.00	2,000.00	5.56	5.56	89.24	0.33	24.99	24.99	13.87	11.12	2.248	
2,100.00	2,100.00	2,100.00	2,100.00	5.71	5.71	89.24	0.33	24.99	24.99	13.57	11.43	2.187	
2,200.00	2,200.00	2,200.00	2,200.00	5.86	5.86	89.24	0.33	24.99	24.99	13.27	11.73	2.131	CC, ES, SF
2,300.00	2,299.99	2,299.71	2,299.70	6.02	6.02	-121.20	-0.84	25.56	26.22	14.24	11.99	2.187	
2,400.00	2,399.91	2,399.33	2,399.24	6.17	6.17	-120.80	-4.35	27.25	29.92	17.71	12.21	2.451	
2,500.00	2,499.69	2,498.77	2,498.46	6.34	6.33	-120.31	-10.19	30.06	36.08	23.64	12.43	2.902	
2,533.32	2,532.90	2,531.84	2,531.43	6.36	6.36	-120.14	-12.65	31.25	38.67	26.22	12.45	3.106	
2,600.00	2,599.32	2,598.29	2,597.62	6.43	6.43	-119.88	-17.86	33.76	44.15	31.62	12.54	3.522	
2,700.00	2,698.94	2,697.95	2,696.90	6.61	6.60	-119.60	-25.69	37.53	52.37	39.60	12.77	4.100	
2,800.00	2,798.56	2,797.61	2,796.18	6.80	6.79	-119.39	-33.51	41.31	60.59	47.57	13.02	4.652	
2,900.00	2,898.18	2,897.27	2,895.47	7.01	7.00	-119.23	-41.34	45.08	68.81	55.53	13.29	5.179	
3,000.00	2,997.80	2,996.93	2,994.75	7.23	7.22	-119.11	-49.16	48.85	77.03	63.48	13.56	5.682	
3,100.00	3,097.42	3,096.60	3,094.03	7.47	7.45	-119.01	-56.99	52.62	85.26	71.41	13.84	6.160	
3,200.00	3,197.04	3,196.26	3,193.31	7.72	7.70	-118.93	-64.81	56.40	93.48	79.35	14.13	6.615	
3,300.00	3,296.66	3,295.92	3,292.59	7.98	7.96	-118.86	-72.64	60.17	101.70	87.27	14.43	7.047	
3,400.00	3,396.28	3,395.58	3,391.88	8.25	8.23	-118.80	-80.46	63.94	109.92	95.18	14.74	7.458	
3,500.00	3,495.90	3,495.24	3,491.16	8.53	8.51	-118.75	-88.29	67.71	118.14	103.09	15.05	7.848	
3,600.00	3,595.52	3,594.90	3,590.44	8.82	8.79	-118.71	-96.11	71.49	126.36	110.99	15.38	8.218	
3,700.00	3,695.14	3,694.56	3,689.72	9.11	9.09	-118.67	-103.94	75.26	134.59	118.88	15.71	8.570	
3,800.00	3,794.76	3,794.23	3,789.00	9.41	9.39	-118.63	-111.76	79.03	142.81	126.77	16.04	8.903	
3,900.00	3,894.38	3,893.89	3,888.29	9.72	9.69	-118.60	-119.59	82.81	151.03	134.65	16.38	9.220	
4,000.00	3,994.00	3,993.55	3,987.57	10.03	10.00	-118.57	-127.41	86.58	159.25	142.53	16.73	9.520	
4,100.00	4,093.62	4,093.21	4,086.85	10.35	10.32	-118.55	-135.24	90.35	167.48	150.40	17.08	9.805	
4,200.00	4,193.24	4,192.87	4,186.13	10.68	10.64	-118.53	-143.06	94.12	175.70	158.26	17.44	10.076	
4,300.00	4,292.85	4,292.53	4,285.41	11.00	10.97	-118.51	-150.89	97.90	183.92	166.12	17.80	10.334	
4,400.00	4,392.47	4,392.19	4,384.70	11.33	11.30	-118.49	-158.71	101.67	192.14	173.98	18.16	10.578	
4,500.00	4,492.09	4,491.86	4,483.98	11.67	11.63	-118.47	-166.54	105.44	200.37	181.83	18.53	10.811	
4,600.00	4,591.71	4,591.52	4,583.26	12.01	11.97	-118.46	-174.36	109.21	208.59	189.68	18.91	11.032	
4,700.00	4,691.33	4,691.18	4,682.54	12.35	12.31	-118.44	-182.19	112.99	216.81	197.53	19.28	11.243	
4,800.00	4,790.95	4,792.53	4,783.54	12.69	12.63	-118.54	-189.70	116.61	224.81	205.18	19.63	11.451	
4,886.48	4,877.10	4,881.20	4,872.06	12.98	12.92	-119.07	-194.45	118.90	230.82	210.87	19.95	11.572	
4,900.00	4,890.57	4,895.07	4,885.92	13.02	12.96	-119.19	-195.02	119.18	231.67	211.68	19.99	11.589	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Altitude Energy Partners

Anticollision Report



Company:	Franklin Mountain Energy	Local Co-ordinate Reference:	Well Annex State Com 801H
Project:	Lea Co., NM (NAD-83)	TVD Reference:	KB=30' @ 3698.00usft
Reference Site:	Annex State Com Pads	MD Reference:	KB=30' @ 3698.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	DM Local
Reference Design:	Plan #2	Offset TVD Reference:	Offset Datum

Offset Design: Annex State Com Pads - Annex State Com 701H - OH - Plan #2													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+HDGM													Offset Well Error: 0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Distance Between Centres (usft)	Rule Assigned: Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
5,000.00	4,990.32	4,997.71	4,988.51	13.39	13.26	-120.11	-197.88	120.55	236.55	216.17	20.37	11.610	
5,100.00	5,090.22	5,099.43	5,090.22	13.71	13.36	-120.96	-198.40	120.80	239.05	218.44	20.61	11.597	
5,200.00	5,190.20	5,199.41	5,190.20	13.97	13.41	-121.34	-198.40	120.80	240.00	219.16	20.84	11.517	
5,219.80	5,210.00	5,219.21	5,210.00	13.98	13.42	89.25	-198.40	120.80	240.02	219.16	20.86	11.506	
5,300.00	5,290.20	5,299.41	5,290.20	14.02	13.47	89.25	-198.40	120.80	240.02	219.06	20.96	11.451	
5,400.00	5,390.20	5,399.41	5,390.20	14.07	13.52	89.25	-198.40	120.80	240.02	218.93	21.09	11.378	
5,500.00	5,490.20	5,499.41	5,490.20	14.12	13.58	89.25	-198.40	120.80	240.02	218.79	21.23	11.306	
5,600.00	5,590.20	5,599.41	5,590.20	14.17	13.63	89.25	-198.40	120.80	240.02	218.66	21.36	11.235	
5,700.00	5,690.20	5,699.41	5,690.20	14.22	13.68	89.25	-198.40	120.80	240.02	218.52	21.50	11.164	
5,800.00	5,790.20	5,799.41	5,790.20	14.28	13.74	89.25	-198.40	120.80	240.02	218.39	21.64	11.094	
5,900.00	5,890.20	5,899.41	5,890.20	14.33	13.80	89.25	-198.40	120.80	240.02	218.25	21.77	11.025	
6,000.00	5,990.20	5,999.41	5,990.20	14.38	13.85	89.25	-198.40	120.80	240.02	218.11	21.91	10.956	
6,100.00	6,090.20	6,099.41	6,090.20	14.44	13.91	89.25	-198.40	120.80	240.02	217.98	22.04	10.888	
6,200.00	6,190.20	6,199.41	6,190.20	14.49	13.96	89.25	-198.40	120.80	240.02	217.84	22.18	10.821	
6,300.00	6,290.20	6,299.41	6,290.20	14.54	14.02	89.25	-198.40	120.80	240.02	217.70	22.32	10.754	
6,400.00	6,390.20	6,399.41	6,390.20	14.60	14.08	89.25	-198.40	120.80	240.02	217.57	22.46	10.688	
6,500.00	6,490.20	6,499.41	6,490.20	14.65	14.13	89.25	-198.40	120.80	240.02	217.43	22.59	10.623	
6,600.00	6,590.20	6,599.41	6,590.20	14.70	14.19	89.25	-198.40	120.80	240.02	217.29	22.73	10.558	
6,700.00	6,690.20	6,699.41	6,690.20	14.76	14.25	89.25	-198.40	120.80	240.02	217.15	22.87	10.494	
6,800.00	6,790.20	6,799.41	6,790.20	14.81	14.31	89.25	-198.40	120.80	240.02	217.01	23.01	10.431	
6,900.00	6,890.20	6,899.41	6,890.20	14.87	14.37	89.25	-198.40	120.80	240.02	216.87	23.15	10.368	
7,000.00	6,990.20	6,999.41	6,990.20	14.92	14.42	89.25	-198.40	120.80	240.02	216.73	23.29	10.306	
7,100.00	7,090.20	7,099.41	7,090.20	14.98	14.48	89.25	-198.40	120.80	240.02	216.59	23.43	10.244	
7,200.00	7,190.20	7,199.41	7,190.20	15.04	14.54	89.25	-198.40	120.80	240.02	216.45	23.57	10.183	
7,300.00	7,290.20	7,299.41	7,290.20	15.09	14.60	89.25	-198.40	120.80	240.02	216.31	23.71	10.123	
7,400.00	7,390.20	7,399.41	7,390.20	15.15	14.66	89.25	-198.40	120.80	240.02	216.17	23.85	10.063	
7,500.00	7,490.20	7,499.41	7,490.20	15.20	14.72	89.25	-198.40	120.80	240.02	216.03	23.99	10.004	
7,600.00	7,590.20	7,599.41	7,590.20	15.26	14.78	89.25	-198.40	120.80	240.02	215.89	24.13	9.945	
7,700.00	7,690.20	7,699.41	7,690.20	15.32	14.84	89.25	-198.40	120.80	240.02	215.75	24.28	9.887	
7,800.00	7,790.20	7,799.41	7,790.20	15.38	14.90	89.25	-198.40	120.80	240.02	215.60	24.42	9.830	
7,900.00	7,890.20	7,899.41	7,890.20	15.43	14.96	89.25	-198.40	120.80	240.02	215.46	24.56	9.773	
8,000.00	7,990.20	7,999.41	7,990.20	15.49	15.02	89.25	-198.40	120.80	240.02	215.32	24.70	9.716	
8,100.00	8,090.20	8,099.41	8,090.20	15.55	15.08	89.25	-198.40	120.80	240.02	215.18	24.85	9.660	
8,200.00	8,190.20	8,199.41	8,190.20	15.61	15.14	89.25	-198.40	120.80	240.02	215.03	24.99	9.605	
8,300.00	8,290.20	8,299.41	8,290.20	15.66	15.20	89.25	-198.40	120.80	240.02	214.89	25.13	9.550	
8,400.00	8,390.20	8,399.41	8,390.20	15.72	15.26	89.25	-198.40	120.80	240.02	214.75	25.28	9.496	
8,500.00	8,490.20	8,499.41	8,490.20	15.78	15.32	89.25	-198.40	120.80	240.02	214.60	25.42	9.442	
8,600.00	8,590.20	8,599.41	8,590.20	15.84	15.39	89.25	-198.40	120.80	240.02	214.46	25.56	9.389	
8,700.00	8,690.20	8,699.41	8,690.20	15.90	15.45	89.25	-198.40	120.80	240.02	214.31	25.71	9.337	
8,800.00	8,790.20	8,799.41	8,790.20	15.96	15.51	89.25	-198.40	120.80	240.02	214.17	25.85	9.285	
8,900.00	8,890.20	8,899.41	8,890.20	16.02	15.57	89.25	-198.40	120.80	240.02	214.03	26.00	9.233	
9,000.00	8,990.20	8,999.41	8,990.20	16.08	15.63	89.25	-198.40	120.80	240.02	213.88	26.14	9.182	
9,100.00	9,090.20	9,099.41	9,090.20	16.14	15.70	89.25	-198.40	120.80	240.02	213.74	26.29	9.131	
9,200.00	9,190.20	9,199.41	9,190.20	16.20	15.76	89.25	-198.40	120.80	240.02	213.59	26.43	9.081	
9,300.00	9,290.20	9,299.41	9,290.20	16.26	15.82	89.25	-198.40	120.80	240.02	213.45	26.58	9.031	
9,400.00	9,390.20	9,399.41	9,390.20	16.32	15.88	89.25	-198.40	120.80	240.02	213.30	26.72	8.982	
9,500.00	9,490.20	9,499.41	9,490.20	16.38	15.95	89.25	-198.40	120.80	240.02	213.15	26.87	8.933	
9,600.00	9,590.20	9,599.41	9,590.20	16.44	16.01	89.25	-198.40	120.80	240.02	213.01	27.01	8.885	
9,700.00	9,690.20	9,699.41	9,690.20	16.50	16.07	89.25	-198.40	120.80	240.02	212.86	27.16	8.837	
9,800.00	9,790.20	9,799.41	9,790.20	16.56	16.14	89.25	-198.40	120.80	240.02	212.71	27.31	8.790	
9,900.00	9,890.20	9,899.41	9,890.20	16.62	16.20	89.25	-198.40	120.80	240.02	212.57	27.45	8.743	
10,000.00	9,990.20	9,999.41	9,990.20	16.69	16.27	89.25	-198.40	120.80	240.02	212.42	27.60	8.696	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Altitude Energy Partners

Anticollision Report



Company:	Franklin Mountain Energy	Local Co-ordinate Reference:	Well Annex State Com 801H
Project:	Lea Co., NM (NAD-83)	TVD Reference:	KB=30' @ 3698.00usft
Reference Site:	Annex State Com Pads	MD Reference:	KB=30' @ 3698.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	DM Local
Reference Design:	Plan #2	Offset TVD Reference:	Offset Datum

Offset Design: Annex State Com Pads - Annex State Com 701H - OH - Plan #2													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+HDGM													Offset Well Error: 0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre		Distance Between Centres (usft)		Minimum Separation (usft)	Separation Factor	Warning
							+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
10,100.00	10,090.20	10,099.41	10,090.20	16.75	16.33	89.25	-198.40	120.80	240.02	212.27	27.75	8.650	
10,200.00	10,190.20	10,199.41	10,190.20	16.81	16.39	89.25	-198.40	120.80	240.02	212.13	27.90	8.604	
10,300.00	10,290.20	10,299.41	10,290.20	16.87	16.46	89.25	-198.40	120.80	240.02	211.98	28.04	8.559	
10,310.00	10,300.20	10,309.41	10,300.20	16.88	16.46	89.25	-198.40	120.80	240.02	211.97	28.05	8.556	
10,400.00	10,390.20	10,395.78	10,386.46	16.93	16.45	88.52	-195.33	121.18	240.49	212.32	28.17	8.536	
10,500.00	10,490.20	10,487.00	10,476.06	17.00	16.36	84.65	-178.83	123.24	243.91	215.51	28.40	8.589	
10,600.00	10,590.20	10,571.07	10,555.34	17.06	16.25	78.45	-151.31	126.67	253.35	224.43	28.93	8.759	
10,700.00	10,690.20	10,650.00	10,625.34	17.12	16.15	70.98	-115.26	131.16	272.63	242.70	29.93	9.109	
10,800.00	10,790.20	10,710.27	10,675.06	17.18	16.08	64.75	-81.50	135.36	304.09	272.42	31.67	9.601	
10,864.84	10,855.04	10,750.00	10,705.76	17.21	16.04	60.62	-56.48	138.48	331.25	298.41	32.84	10.088	
10,900.00	10,890.18	10,765.87	10,717.52	17.20	16.03	65.30	-45.91	139.79	347.64	314.07	33.58	10.354	
10,950.00	10,939.89	10,800.00	10,741.79	17.16	16.00	60.12	-22.11	142.76	371.90	337.64	34.27	10.853	
11,000.00	10,988.95	10,818.93	10,754.62	17.11	15.98	56.53	-8.30	144.48	396.37	361.09	35.28	11.235	
11,050.00	11,036.99	10,850.00	10,774.66	17.05	15.96	52.68	15.26	147.41	420.97	385.04	35.93	11.717	
11,100.00	11,083.65	10,871.29	10,787.64	16.98	15.95	49.72	32.01	149.50	445.12	408.36	36.76	12.110	
11,150.00	11,128.57	10,900.00	10,804.13	16.92	15.94	46.92	55.32	152.40	468.68	431.32	37.37	12.543	
11,200.00	11,171.41	10,923.08	10,816.52	16.86	15.94	44.65	74.65	154.81	491.36	453.31	38.05	12.914	
11,250.00	11,211.84	10,950.00	10,829.97	16.80	15.93	42.64	97.78	157.69	513.03	474.42	38.61	13.288	
11,300.00	11,249.55	10,974.39	10,841.19	16.75	15.94	40.98	119.27	160.37	533.54	494.36	39.17	13.620	
11,350.00	11,284.27	11,000.00	10,851.98	16.72	15.95	39.58	142.32	163.24	552.77	513.10	39.67	13.933	
11,400.00	11,315.71	11,025.31	10,861.60	16.69	15.97	38.42	165.54	166.13	570.65	530.51	40.14	14.218	
11,450.00	11,343.65	11,050.00	10,869.99	16.69	15.99	37.49	188.58	169.00	587.09	546.53	40.56	14.473	
11,500.00	11,367.87	11,075.92	10,877.71	16.71	16.02	36.76	213.13	172.06	602.04	561.11	40.94	14.707	
11,550.00	11,388.19	11,100.00	10,883.87	16.75	16.05	36.20	236.23	174.94	615.47	574.19	41.28	14.909	
11,600.00	11,404.45	11,126.29	10,889.48	16.83	16.10	35.84	261.72	178.11	627.32	585.76	41.56	15.093	
11,650.00	11,416.53	11,150.00	10,893.52	16.93	16.14	35.59	284.90	181.00	637.59	595.77	41.82	15.246	
11,700.00	11,424.33	11,176.52	10,896.89	17.07	16.21	35.54	311.00	184.25	646.25	604.23	42.02	15.381	
11,750.00	11,427.81	11,200.00	10,898.85	17.25	16.27	35.59	334.22	187.14	653.31	611.13	42.18	15.489	
11,764.84	11,428.00	11,209.05	10,899.35	17.31	16.30	35.67	343.19	188.26	655.09	612.89	42.20	15.523	
11,800.00	11,428.00	11,226.73	10,899.92	17.46	16.36	36.09	360.72	190.44	659.50	617.23	42.27	15.604	
11,900.00	11,428.00	11,328.74	10,900.00	18.00	16.79	37.81	462.12	201.57	672.61	630.06	42.55	15.809	
12,000.00	11,428.00	11,444.88	10,900.00	18.65	17.45	39.07	577.96	209.85	681.63	638.56	43.08	15.824	
12,100.00	11,428.00	11,562.49	10,900.00	19.38	18.29	39.66	695.50	213.44	686.01	642.18	43.83	15.653	
12,139.69	11,428.00	11,609.34	10,900.00	19.68	18.65	39.72	742.34	213.53	686.41	642.25	44.16	15.542	
12,200.00	11,428.00	11,669.91	10,900.00	20.17	19.15	39.72	802.91	213.11	686.42	641.68	44.74	15.343	
12,300.00	11,428.00	11,769.91	10,900.00	21.04	20.04	39.72	902.91	212.42	686.43	640.66	45.77	14.998	
12,400.00	11,428.00	11,869.91	10,900.00	21.98	21.00	39.72	1,002.91	211.73	686.43	639.56	46.88	14.644	
12,500.00	11,428.00	11,969.91	10,900.00	22.98	22.03	39.72	1,102.91	211.04	686.44	638.38	48.06	14.283	
12,600.00	11,428.00	12,069.91	10,900.00	24.04	23.10	39.72	1,202.90	210.35	686.45	637.14	49.32	13.920	
12,700.00	11,428.00	12,169.91	10,900.00	25.14	24.22	39.72	1,302.90	209.67	686.46	635.82	50.64	13.557	
12,800.00	11,428.00	12,269.91	10,900.00	26.27	25.38	39.72	1,402.90	208.98	686.47	634.45	52.02	13.197	
12,900.00	11,428.00	12,369.91	10,900.00	27.44	26.57	39.72	1,502.90	208.29	686.48	633.02	53.45	12.842	
13,000.00	11,428.00	12,469.91	10,900.00	28.64	27.78	39.72	1,602.89	207.60	686.49	631.55	54.94	12.495	
13,100.00	11,428.00	12,569.91	10,900.00	29.86	29.02	39.72	1,702.89	206.91	686.50	630.02	56.48	12.155	
13,200.00	11,428.00	12,669.91	10,900.00	31.10	30.28	39.73	1,802.89	206.22	686.51	628.45	58.06	11.825	
13,300.00	11,428.00	12,769.91	10,900.00	32.36	31.55	39.73	1,902.89	205.53	686.51	626.84	59.68	11.504	
13,400.00	11,428.00	12,869.91	10,900.00	33.63	32.84	39.73	2,002.89	204.84	686.52	625.19	61.33	11.194	
13,500.00	11,428.00	12,969.91	10,900.00	34.92	34.14	39.73	2,102.88	204.15	686.53	623.51	63.02	10.894	
13,600.00	11,428.00	13,069.91	10,900.00	36.22	35.46	39.73	2,202.88	203.46	686.54	621.80	64.74	10.604	
13,700.00	11,428.00	13,169.91	10,900.00	37.54	36.78	39.73	2,302.88	202.77	686.55	620.06	66.49	10.325	
13,800.00	11,428.00	13,269.91	10,900.00	38.86	38.12	39.73	2,402.88	202.08	686.56	618.29	68.27	10.056	
13,900.00	11,428.00	13,369.91	10,900.00	40.19	39.46	39.73	2,502.87	201.39	686.57	616.49	70.07	9.798	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Altitude Energy Partners

Anticollision Report



Company:	Franklin Mountain Energy	Local Co-ordinate Reference:	Well Annex State Com 801H
Project:	Lea Co., NM (NAD-83)	TVD Reference:	KB=30' @ 3698.00usft
Reference Site:	Annex State Com Pads	MD Reference:	KB=30' @ 3698.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	DM Local
Reference Design:	Plan #2	Offset TVD Reference:	Offset Datum

Offset Design: Annex State Com Pads - Annex State Com 701H - OH - Plan #2													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+HDGM													Offset Well Error: 0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre		Rule Assigned: Distance Between Centres (usft)		Minimum Separation (usft)	Separation Factor	Warning
							+N/-S (usft)	+E/-W (usft)					
14,000.00	11,428.00	13,469.91	10,900.00	41.53	40.81	39.73	2,602.87	200.70	686.58	614.68	71.90	9.549	
14,100.00	11,428.00	13,569.91	10,900.00	42.88	42.16	39.73	2,702.87	200.01	686.59	612.84	73.75	9.310	
14,200.00	11,428.00	13,669.91	10,900.00	44.23	43.53	39.73	2,802.87	199.32	686.59	610.98	75.61	9.081	
14,300.00	11,428.00	13,769.91	10,900.00	45.59	44.89	39.74	2,902.86	198.63	686.60	609.11	77.50	8.860	
14,400.00	11,428.00	13,869.91	10,900.00	46.95	46.27	39.74	3,002.86	197.94	686.61	607.22	79.40	8.648	
14,500.00	11,428.00	13,969.91	10,900.00	48.32	47.64	39.74	3,102.86	197.25	686.62	605.31	81.31	8.444	
14,600.00	11,428.00	14,069.91	10,900.00	49.70	49.02	39.74	3,202.86	196.56	686.63	603.38	83.25	8.248	
14,700.00	11,428.00	14,169.91	10,900.00	51.08	50.41	39.74	3,302.85	195.87	686.64	601.45	85.19	8.060	
14,800.00	11,428.00	14,269.91	10,900.00	52.46	51.80	39.74	3,402.85	195.18	686.65	599.50	87.15	7.879	
14,900.00	11,428.00	14,369.91	10,900.00	53.84	53.19	39.74	3,502.85	194.49	686.66	597.54	89.12	7.705	
15,000.00	11,428.00	14,469.91	10,900.00	55.23	54.58	39.74	3,602.85	193.80	686.67	595.57	91.10	7.537	
15,100.00	11,428.00	14,569.91	10,900.00	56.63	55.98	39.74	3,702.84	193.12	686.67	593.58	93.09	7.376	
15,200.00	11,428.00	14,669.91	10,900.00	58.02	57.38	39.74	3,802.84	192.43	686.68	591.59	95.09	7.221	
15,300.00	11,428.00	14,769.91	10,900.00	59.42	58.78	39.74	3,902.84	191.74	686.69	589.59	97.10	7.072	
15,400.00	11,428.00	14,869.91	10,900.00	60.82	60.19	39.75	4,002.84	191.05	686.70	587.58	99.12	6.928	
15,500.00	11,428.00	14,969.91	10,900.00	62.22	61.59	39.75	4,102.84	190.36	686.71	585.56	101.15	6.789	
15,600.00	11,428.00	15,069.91	10,900.00	63.62	63.00	39.75	4,202.83	189.67	686.72	583.53	103.18	6.655	
15,700.00	11,428.00	15,169.91	10,900.00	65.03	64.41	39.75	4,302.83	188.98	686.73	581.50	105.23	6.526	
15,800.00	11,428.00	15,269.91	10,900.00	66.44	65.82	39.75	4,402.83	188.29	686.74	579.46	107.28	6.402	
15,900.00	11,428.00	15,369.91	10,900.00	67.85	67.24	39.75	4,502.83	187.60	686.75	577.41	109.33	6.281	
16,000.00	11,428.00	15,469.91	10,900.00	69.26	68.65	39.75	4,602.82	186.91	686.75	575.36	111.39	6.165	
16,100.00	11,428.00	15,569.91	10,900.00	70.67	70.07	39.75	4,702.82	186.22	686.76	573.30	113.46	6.053	
16,200.00	11,428.00	15,669.91	10,900.00	72.08	71.48	39.75	4,802.82	185.53	686.77	571.24	115.53	5.944	
16,300.00	11,428.00	15,769.91	10,900.00	73.50	72.90	39.75	4,902.82	184.84	686.78	569.17	117.61	5.840	
16,400.00	11,428.00	15,869.91	10,900.00	74.91	74.32	39.75	5,002.81	184.15	686.79	567.10	119.69	5.738	
16,500.00	11,428.00	15,969.91	10,900.00	76.33	75.74	39.76	5,102.81	183.46	686.80	565.02	121.78	5.640	
16,600.00	11,428.00	16,069.91	10,900.00	77.75	77.16	39.76	5,202.81	182.77	686.81	562.94	123.87	5.545	
16,700.00	11,428.00	16,169.91	10,900.00	79.17	78.59	39.76	5,302.81	182.08	686.82	560.85	125.97	5.452	
16,800.00	11,428.00	16,269.91	10,900.00	80.59	80.01	39.76	5,402.80	181.39	686.83	558.76	128.07	5.363	
16,900.00	11,428.00	16,369.91	10,900.00	82.01	81.43	39.76	5,502.80	180.70	686.83	556.67	130.17	5.276	
17,000.00	11,428.00	16,469.91	10,900.00	83.44	82.86	39.76	5,602.80	180.01	686.84	554.57	132.28	5.193	
17,100.00	11,428.00	16,569.91	10,900.00	84.86	84.29	39.76	5,702.80	179.32	686.85	552.47	134.39	5.111	
17,200.00	11,428.00	16,669.91	10,900.00	86.28	85.71	39.76	5,802.79	178.63	686.86	550.36	136.50	5.032	
17,300.00	11,428.00	16,769.91	10,900.00	87.71	87.14	39.76	5,902.79	177.94	686.87	548.25	138.62	4.955	
17,400.00	11,428.00	16,869.91	10,900.00	89.14	88.57	39.76	6,002.79	177.25	686.88	546.14	140.74	4.881	
17,500.00	11,428.00	16,969.91	10,900.00	90.56	90.00	39.76	6,102.79	176.57	686.89	544.03	142.86	4.808	
17,600.00	11,428.00	17,069.91	10,900.00	91.99	91.43	39.77	6,202.79	175.88	686.90	541.91	144.98	4.738	
17,700.00	11,428.00	17,169.91	10,900.00	93.42	92.86	39.77	6,302.78	175.19	686.91	539.79	147.11	4.669	
17,800.00	11,428.00	17,269.91	10,900.00	94.85	94.29	39.77	6,402.78	174.50	686.91	537.67	149.24	4.603	
17,900.00	11,428.00	17,369.91	10,900.00	96.27	95.72	39.77	6,502.78	173.81	686.92	535.55	151.38	4.538	
18,000.00	11,428.00	17,469.91	10,900.00	97.70	97.15	39.77	6,602.78	173.12	686.93	533.42	153.51	4.475	
18,100.00	11,428.00	17,569.91	10,900.00	99.13	98.58	39.77	6,702.77	172.43	686.94	531.29	155.65	4.413	
18,200.00	11,428.00	17,669.91	10,900.00	100.56	100.01	39.77	6,802.77	171.74	686.95	529.16	157.79	4.354	
18,300.00	11,428.00	17,769.91	10,900.00	102.00	101.45	39.77	6,902.77	171.05	686.96	527.03	159.93	4.295	
18,400.00	11,428.00	17,869.91	10,900.00	103.43	102.88	39.77	7,002.77	170.36	686.97	524.90	162.07	4.239	
18,500.00	11,428.00	17,969.91	10,900.00	104.86	104.31	39.77	7,102.76	169.67	686.98	522.76	164.22	4.183	
18,600.00	11,428.00	18,069.91	10,900.00	106.29	105.75	39.77	7,202.76	168.98	686.99	520.62	166.37	4.129	
18,700.00	11,428.00	18,169.91	10,900.00	107.72	107.18	39.77	7,302.76	168.29	687.00	518.48	168.51	4.077	
18,800.00	11,428.00	18,269.91	10,900.00	109.16	108.62	39.78	7,402.76	167.60	687.00	516.34	170.67	4.025	
18,900.00	11,428.00	18,369.91	10,900.00	110.59	110.05	39.78	7,502.75	166.91	687.01	514.20	172.82	3.975	
19,000.00	11,428.00	18,469.91	10,900.00	112.02	111.49	39.78	7,602.75	166.22	687.02	512.05	174.97	3.926	
19,100.00	11,428.00	18,569.91	10,900.00	113.46	112.92	39.78	7,702.75	165.53	687.03	509.90	177.13	3.879	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Altitude Energy Partners

Anticollision Report



Company:	Franklin Mountain Energy	Local Co-ordinate Reference:	Well Annex State Com 801H
Project:	Lea Co., NM (NAD-83)	TVD Reference:	KB=30' @ 3698.00usft
Reference Site:	Annex State Com Pads	MD Reference:	KB=30' @ 3698.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	DM Local
Reference Design:	Plan #2	Offset TVD Reference:	Offset Datum

Offset Design: Annex State Com Pads - Annex State Com 701H - OH - Plan #2

Survey Program:		0-MWD+HDGM							Rule Assigned:				Offset Well Error:	
Reference	Vertical	Offset	Reference	Major Axis	Highside	Wellbore Centre		Distance	Between	Minimum	Separation	Warning		
Measured Depth (usft)	Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Toolface (°)	+N/-S (usft)	+E/-W (usft)	Centres (usft)	Ellipses (usft)	Separation (usft)	Factor		
19,200.00	11,428.00	18,669.91	10,900.00	114.89	114.36	39.78	7,802.75	164.84	687.04	507.76	179.28	3.832		
19,300.00	11,428.00	18,769.91	10,900.00	116.33	115.79	39.78	7,902.74	164.15	687.05	505.61	181.44	3.787		
19,400.00	11,428.00	18,869.91	10,900.00	117.76	117.23	39.78	8,002.74	163.46	687.06	503.46	183.60	3.742		
19,500.00	11,428.00	18,969.91	10,900.00	119.20	118.67	39.78	8,102.74	162.77	687.07	501.30	185.76	3.699		
19,600.00	11,428.00	19,069.91	10,900.00	120.64	120.10	39.78	8,202.74	162.08	687.08	499.15	187.92	3.656		
19,700.00	11,428.00	19,169.91	10,900.00	122.07	121.54	39.78	8,302.74	161.39	687.08	497.00	190.09	3.615		
19,800.00	11,428.00	19,269.91	10,900.00	123.51	122.98	39.78	8,402.73	160.70	687.09	494.84	192.25	3.574		
19,900.00	11,428.00	19,369.91	10,900.00	124.94	124.42	39.79	8,502.73	160.02	687.10	492.68	194.42	3.534		
20,000.00	11,428.00	19,469.91	10,900.00	126.38	125.85	39.79	8,602.73	159.33	687.11	490.53	196.58	3.495		
20,100.00	11,428.00	19,569.91	10,900.00	127.82	127.29	39.79	8,702.73	158.64	687.12	488.37	198.75	3.457		
20,200.00	11,428.00	19,669.91	10,900.00	129.26	128.73	39.79	8,802.72	157.95	687.13	486.21	200.92	3.420		
20,300.00	11,428.00	19,769.91	10,900.00	130.69	130.17	39.79	8,902.72	157.26	687.14	484.05	203.09	3.383		
20,400.00	11,428.00	19,869.91	10,900.00	132.13	131.61	39.79	9,002.72	156.57	687.15	481.89	205.26	3.348		
20,500.00	11,428.00	19,969.91	10,900.00	133.57	133.05	39.79	9,102.72	155.88	687.16	479.72	207.43	3.313		
20,600.00	11,428.00	20,069.91	10,900.00	135.01	134.49	39.79	9,202.71	155.19	687.16	477.56	209.61	3.278		
20,700.00	11,428.00	20,169.91	10,900.00	136.45	135.93	39.79	9,302.71	154.50	687.17	475.39	211.78	3.245		
20,800.00	11,428.00	20,269.91	10,900.00	137.88	137.37	39.79	9,402.71	153.81	687.18	473.23	213.95	3.212		
20,900.00	11,428.00	20,369.91	10,900.00	139.32	138.81	39.79	9,502.71	153.12	687.19	471.06	216.13	3.180		
21,000.00	11,428.00	20,469.91	10,900.00	140.76	140.25	39.80	9,602.70	152.43	687.20	468.90	218.31	3.148		
21,100.00	11,428.00	20,569.91	10,900.00	142.20	141.69	39.80	9,702.70	151.74	687.21	466.73	220.48	3.117		
21,200.00	11,428.00	20,669.91	10,900.00	143.64	143.13	39.80	9,802.70	151.05	687.22	464.56	222.66	3.086		
21,300.00	11,428.00	20,769.91	10,900.00	145.08	144.57	39.80	9,902.70	150.36	687.23	462.39	224.84	3.057		
21,400.00	11,428.00	20,869.91	10,900.00	146.52	146.01	39.80	10,002.69	149.67	687.24	460.22	227.02	3.027		
21,500.00	11,428.00	20,969.91	10,900.00	147.96	147.45	39.80	10,102.69	148.98	687.24	458.05	229.20	2.998		
21,600.00	11,428.00	21,069.91	10,900.00	149.40	148.89	39.80	10,202.69	148.29	687.25	455.88	231.38	2.970		
21,602.89	11,428.00	21,072.80	10,900.00	149.44	148.93	39.80	10,205.58	148.27	687.25	455.82	231.43	2.970		
21,638.14	11,428.00	21,106.48	10,900.00	149.87	149.41	39.80	10,239.26	148.04	687.26	455.15	232.11	2.961		



Altitude Energy Partners

Anticollision Report



Company:	Franklin Mountain Energy	Local Co-ordinate Reference:	Well Annex State Com 801H
Project:	Lea Co., NM (NAD-83)	TVD Reference:	KB=30' @ 3698.00usft
Reference Site:	Annex State Com Pads	MD Reference:	KB=30' @ 3698.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	DM Local
Reference Design:	Plan #2	Offset TVD Reference:	Offset Datum

Reference Depths are relative to KB=30' @ 3698.00usft

Offset Depths are relative to Offset Datum


Central Meridian is -104.333334

Coordinates are relative to: Annex State Com 801H

Coordinate System is US State Plane 1983, New Mexico Eastern Zone

Grid Convergence at Surface is: 0.49°

Ladder Plot

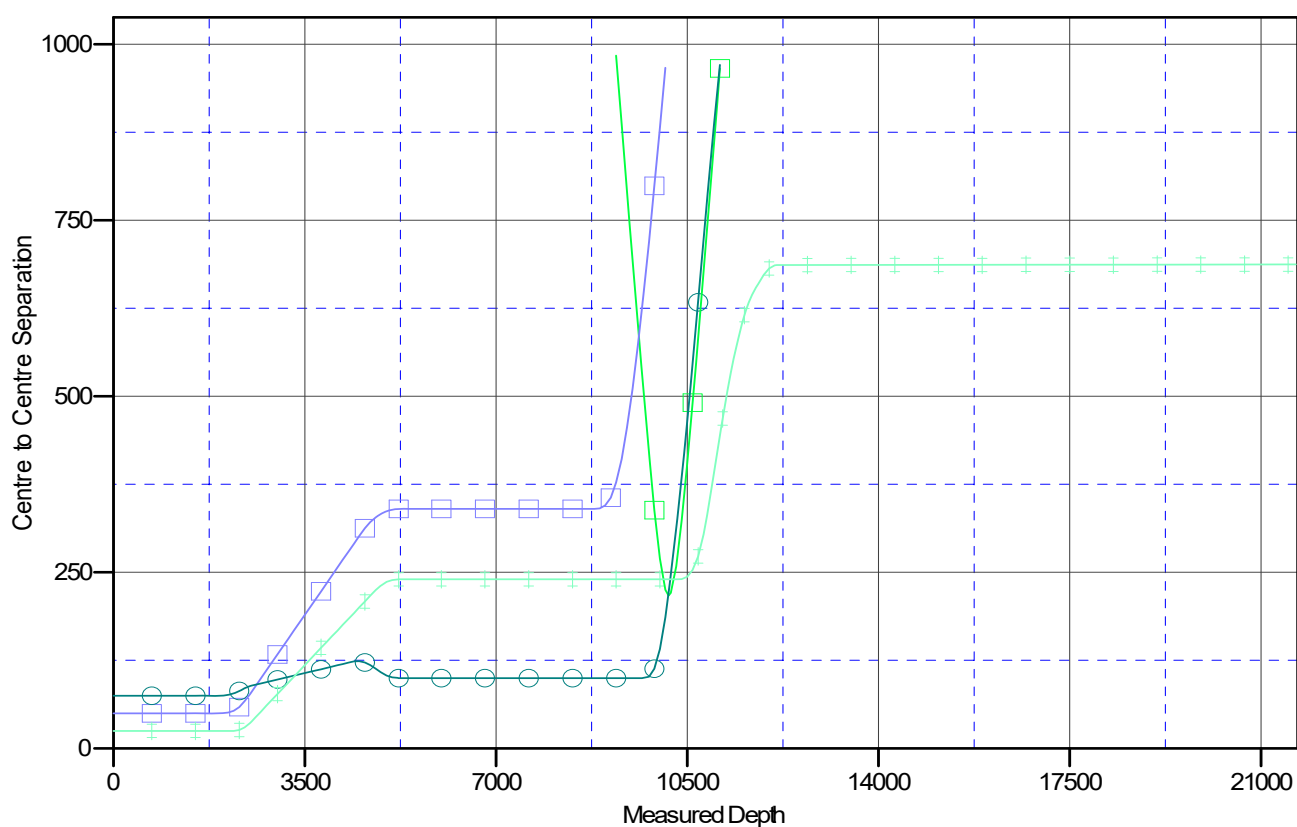

LEGEND

■ King Eider 12' Fed Com 501H, OH, OH V0
 ● Annex State Qm 501H, OH, Plan #2 V0
■ Annex State Qm 301H, OH, Plan #2 V0
 + Annex State Qm 701H, OH, Plan #2 V0



Altitude Energy Partners

Anticollision Report




Company:	Franklin Mountain Energy	Local Co-ordinate Reference:	Well Annex State Com 801H
Project:	Lea Co., NM (NAD-83)	TVD Reference:	KB=30' @ 3698.00usft
Reference Site:	Annex State Com Pads	MD Reference:	KB=30' @ 3698.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Annex State Com 801H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	DM Local
Reference Design:	Plan #2	Offset TVD Reference:	Offset Datum

Reference Depths are relative to KB=30' @ 3698.00usft
 Offset Depths are relative to Offset Datum
 Central Meridian is -104.333334

Coordinates are relative to: Annex State Com 801H
 Coordinate System is US State Plane 1983, New Mexico Eastern Zone
 Grid Convergence at Surface is: 0.49°

Separation Factor Plot

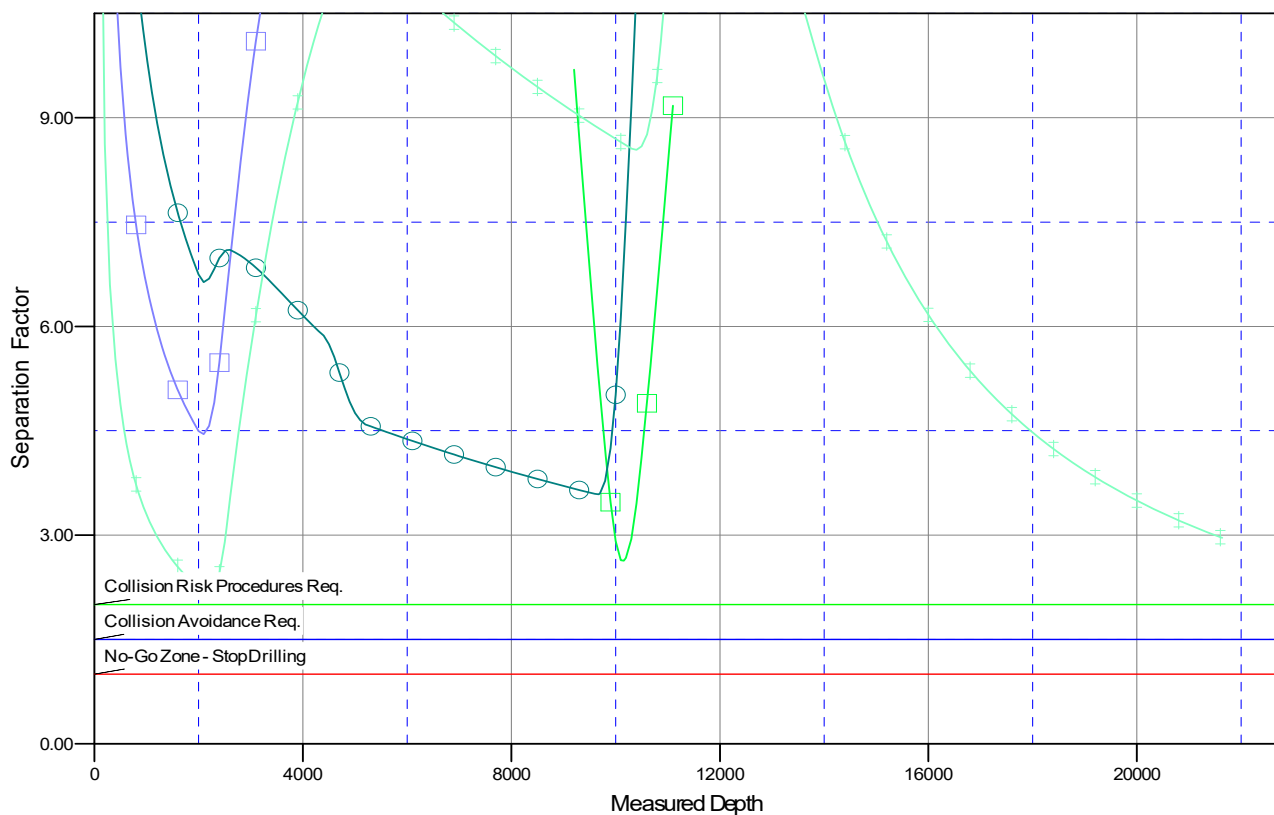

LEGEND

■ King Elder 12' ed Com 501H, OH, OH V0
 ● Annex State Qm 501H, OH, Plan#2 V0
▲ Annex State Qm 301H, OH, Plan#2 V0
 ▲ Annex State Qm 701H, OH, Plan#2 V0