

Form 3160-3
(June 2015)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

1a. Type of work: ☒ DRILL ☐ REENTER		5. Lease Serial No. NMNM18726
1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other		6. If Indian, Allottee or Tribe Name
1c. Type of Completion: ☐ Hydraulic Fracturing ☒ Single Zone ☐ Multiple Zone		7. If Unit or CA Agreement, Name and No.
2. Name of Operator MEWBOURNE OIL COMPANY		8. Lease Name and Well No. TOUGH OMBRES 4/5 W0PO FED COM
3a. Address P O BOX 5270, HOBBS, NM 88241	3b. Phone No. (include area code) (575) 393-5905	9. API Well No. 30-015-53891
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NESE / 1390 FSL / 260 FEL / LAT 32.5057482 / LONG -104.1870164 At proposed prod. zone LOT 15 / 3200 FSL / 2552 FEL / LAT 32.5107494 / LONG -104.2115497		10. Field and Pool, or Exploratory ALACRAN HILLS/Wolfcamp Oil
11. Sec., T. R. M. or Blk. and Survey or Area SEC 4/T21S/R27E/NMP		
14. Distance in miles and direction from nearest town or post office* 8.5 miles		12. County or Parish EDDY
13. State NM		
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 100 feet	16. No of acres in lease 480.0	17. Spacing Unit dedicated to this well 480.0
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 30 feet	19. Proposed Depth 8870 feet / 16705 feet	20. BLM/BIA Bond No. in file FED: NM 1693
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3194 feet	22. Approximate date work will start* 06/22/2022	23. Estimated duration 60 days
24. Attachments		
The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)		
1. Well plat certified by a registered surveyor.		4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
2. A Drilling Plan.		5. Operator certification.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).		6. Such other site specific information and/or plans as may be requested by the BLM.
25. Signature (Electronic Submission)	Name (Printed/Typed) BRADLEY BISHOP / Ph: (575) 393-5905	Date 08/15/2022
Title Regulatory		
Approved by (Signature) (Electronic Submission)	Name (Printed/Typed) CODY LAYTON / Ph: (575) 234-5959	Date 06/13/2023
Title Assistant Field Manager Lands & Minerals		
Office Carlsbad Field Office		
Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		
Conditions of approval, if any, are attached.		
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.		

(Continued on page 2)

*(Instructions on page 2)

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-53891	² Pool Code 98314	³ Pool Name ALACRAN HILLS UPPER WOLFCAMP
⁴ Property Code 334164	⁵ Property Name TOUGH OMBRES 4/5 WOP0 FED COM	⁶ Well Number 1H
⁷ OGRID NO. 14744	⁸ Operator Name MEWBOURNE OIL COMPANY	⁹ Elevation 3194'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet From the	East/West line	County
Q	4	21S	27E		1390	SOUTH	260	EAST	EDDY

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
15	5	21S	27E		3200	SOUTH	2552	EAST	EDDY

¹² Dedicated Acres 480	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
---	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interest have been consolidated or a non-standard unit has been approved by the division.

16 CORNER DATA NAD 83 GRID - NM EAST				17 OPERATOR CERTIFICATION			
A: FOUND BRASS CAP "1943" N: 546339.7 - E: 576102.5	E: FOUND BRASS CAP "1942" N: 553879.0 - E: 578817.7	I: FOUND BRASS CAP "1943" N: 551626.8 - E: 586761.3	M: FOUND BRASS CAP "1943" N: 546385.9 - E: 581390.6	I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. Signature: <u>Bradley C Bishop</u> Date: <u>8/10/22</u> Printed Name: <u>BRADLEY BISHOP</u> E-mail Address: <u>BBISHOP@MEWBOURNE.COM</u>			
B: FOUND BRASS CAP "1943" N: 548955.5 - E: 576116.6	F: FOUND BRASS CAP "1942" N: 553889.2 - E: 581479.6	J: FOUND BRASS CAP "1943" N: 548993.0 - E: 586720.7	N: FOUND BRASS CAP "1943" N: 546362.9 - E: 578749.0				
C: FOUND BRASS CAP "1943" N: 551574.1 - E: 576132.4	G: FOUND BRASS CAP "1942" N: 553902.0 - E: 584134.3	K: FOUND BRASS CAP "ILLEGIBLE" N: 546357.0 - E: 586683.7	O: FOUND BRASS CAP "1943" N: 548994.9 - E: 581422.2				
D: FOUND BRASS CAP "1942" N: 553870.6 - E: 576153.7	H: FOUND BRASS CAP "1942" N: 553913 - E: 586791.0	L: FOUND BRASS CAP "1943" N: 546421.2 - E: 584022.5	P: FOUND BRASS CAP "1943" N: 551608.3 - E: 581452.9				
LOT 4 LOT 3 LOT 2 LOT 1 LOT 5 LOT 6 LOT 7 LOT 8 LOT 11 LOT 10 LOT 12 LOT 13 LOT 14 LOT 15 LOT 16 LOT 13 LOT 14 LOT 15 LOT 16				18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. 07/22/2022 Date of Survey Signature and Seal of Professional Surveyor 19680 Certificate Number			

Page 5

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description Effective May 25, 2021

I. Operator: Mewbourne Oil Co. **OGRID:** 14744 **Date:** 5/2/22

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Tough Ombres 4/5 W0PO Fed Com 1H		Q 4 21S 27E	1390' FSL x 260' FEL	1500	3500	4500

IV. Central Delivery Point Name: Tough Ombres 4/5 W0PO Fed Com 1H [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Tough Ombres 4/5 W0PO Fed Com 1H		7/2/22	8/2/22	9/2/22	9/17/22	9/17/22

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan
EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

Page 8

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:	<i>Bradley Bishop</i>
Printed Name:	BRADLEY BISHOP
Title:	REGULATORY MANAGER
E-mail Address:	BBISHOP@MEWBOURNE.COM
Date:	5/2/22
Phone:	575-393-5905
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)	
Approved By:	
Title:	
Approval Date:	
Conditions of Approval:	

Mewbourne Oil Company

Natural Gas Management Plan – Attachment

- VI. Separation equipment will be sized by construction engineering staff based on stated manufacturer daily throughput capacities and anticipated daily production rates to ensure adequate capacity. Closed vent system piping, compression needs, and VRUs will be sized utilizing ProMax modelling software to ensure adequate capacity for anticipated production volumes and conditions.
- VII. Mewbourne Oil Company (MOC) will take following actions to comply with the regulations listed in 19.15.27.8 :
- A. MOC will maximize the recovery of natural gas by minimizing the waste, as defined by 19.15.2 NMAC, of natural gas through venting and flaring. MOC will ensure that well(s) will be connected to a natural gas gathering system with sufficient capacity to transport natural gas. If there is no adequate takeaway for the gas, well(s) will be shut in until the natural gas gathering system is available.
 - B. All drilling operations will be equipped with a rig flare located at least 100 ft from the nearest surface hole. Rig flare will be utilized to combust any natural gas that is brought to surface during normal drilling operations. In the case of emergency venting or flaring the volumes will be estimated and reported appropriately.
 - C. During completion operations any natural gas brought to surface will be flared. Immediately following the finish of completion operations, all well flow will be directed to permanent separation equipment. Produced natural gas from separation equipment will be sent to sales. It is not anticipated that gas will not meet pipeline standards. However, if natural gas does not meet gathering pipeline quality specifications, MOC will flare the natural gas for 60 days or until the natural gas meets the pipeline quality specifications, whichever is sooner. MOC will ensure that the flare is sized properly and is equipped with automatic igniter or continuous pilot. The gas sample will analyzed twice per week and the gas will be routed into a gathering system as soon as pipeline specifications are met.
 - D. Natural gas will not be flared with the exceptions and provisions listed in the 19.15.27.8 D.(1) through (4). If there is no adequate takeaway for the separator gas, well(s) will be shut in until the natural gas gathering system is available with exception of emergency or malfunction situations. Venting and/or flaring volumes will be estimated and reported appropriately.
 - E. MOC will comply with the performance standards requirements and provisions listed in 19.15.27.8 E.(1) through (8). All equipment will be designed and sized to handle maximum anticipated pressures and throughputs in order to minimize the waste. Production storage tanks constructed after May 25, 2021 will be equipped with automatic gauging system. Flares constructed after May 25, 2021 will be equipped with automatic igniter or continuous pilot. Flares will be located at least 100' from the well and storage tanks unless otherwise approved by the division. MOC will conduct AVO inspections as described in 19.15.27.8 E (5) (a) with frequencies specified in 19.15.27.8 E (5) (b) and (c). All emergencies will be resolved as quickly and safely as feasible to minimize waste.
 - F. The volume of natural gas that is vented or flared as the result of malfunction or emergency during drilling and completions operations will be estimated. The volume of natural gas that is vented, flared or beneficially used during production operations, will be measured or estimated. MOC will install equipment to measure

the volume of natural gas flared from existing process piping or a flowline piped from equipment such as high pressure separators, heater treaters, or vapor recovery units associated with a well or facility associated with a well authorized by an APD issued after May 25, 2021 that has an average daily production greater than 60 Mcf/day. If metering is not practicable due to circumstances such as low flow rate or low pressure venting and flaring, MOC will estimate the volume of vented or flared natural gas. Measuring equipment will conform to industry standards and will not be designed or equipped with a manifold that allows the diversion of natural gas around the metering element except for the sole purpose of inspecting and servicing the measurement equipment.

- VIII. For maintenance activities involving production equipment and compression, venting will be limited to the depressurization of the subject equipment to ensure safe working conditions. For maintenance of production and compression equipment the associated producing wells will be shut in to eliminate venting. For maintenance of VRUs all gas normally routed to the VRU will be routed to flare to eliminate venting.



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

06/14/2023

APD ID: 10400087297

Submission Date: 08/15/2022

Highlighted data
reflects the most
recent changes

Operator Name: MEWBOURNE OIL COMPANY

Well Name: TOUGH OMBRES 4/5 W0PO FED COM

Well Number: 1H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical	Measured Depth	Lithologies	Mineral Resources	Producing Formatio
9025885	UNKNOWN	3194	28	28	OTHER : Topsoil	NONE	N
9025886	TOP SALT	2827	367	367	SALT	NONE	N
9025878	BOTTOM SALT	2705	489	489	SALT	NONE	N
9025880	YATES	2624	570	570	SANDSTONE	NATURAL GAS, OIL	N
9025881	CAPITAN REEF	2388	806	806	DOLOMITE, Limestone	USEABLE WATER	N
9025882	LAMAR	501	2693	2693	Limestone	NATURAL GAS, OIL	N
9025883	BONE SPRING	-1881	5075	5075	Limestone, SANDSTONE, SHALE	NATURAL GAS, OIL	N
9025884	BONE SPRING 1ST	-3122	6316	6316	SANDSTONE	NATURAL GAS, OIL	N
9027334	BONE SPRING 2ND	-3868	7062	7062	SANDSTONE	NATURAL GAS, OIL	N
9027335	BONE SPRING 3RD	-5313	8507	8507	SANDSTONE	NATURAL GAS, OIL	N
9027336	WOLFCAMP	-5548	8742	8742	Limestone, SANDSTONE, SHALE	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Pressure Rating (PSI): 5M

Rating Depth: 16705

Equipment: Annular, Blind Ram, Pipe Ram

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. Anchors are not required by manufacturer. A multi-bowl wellhead is being used. See attached schematic.

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Order 2023-2023 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** TOUGH OMBRES 4/5 W0PO FED COM**Well Number:** 1H

components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

Choke Diagram Attachment:

Tough_Ombres_4_5_W0PO_Fed_Com_1H_5M_BOPE_Choke_Diagram_20220811153902.pdf

Tough_Ombres_4_5_W0PO_Fed_Com_1H_Flex_Line_Specs_API_16C_20220811153902.pdf

Tough_Ombres_4_5_W0PO_Fed_Com_1H_Flex_Line_Specs_20220811153903.pdf

BOP Diagram Attachment:

Tough_Ombres_4_5_W0PO_Fed_Com_1H_5M_BOPE_Schematic_20220811153947.pdf

Tough_Ombres_4_5_W0PO_Fed_Com_1H_5M_Mutli_Bowl_WH_20220811153947.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	26	20.0	NEW	API	N	0	300	0	300	3194	2894	300	J-55	94	BUTT	3.79	15.37	DRY	49.72	DRY	52.48
2	INTERMEDIATE	17.5	13.375	NEW	API	N	0	700	0	700	2982	2494	700	H-40	48	ST&C	2.12	4.75	DRY	9.58	DRY	16.1
3	INTERMEDIATE	12.25	9.625	NEW	API	N	0	2600	0	2600	3192	594	2600	J-55	36	LT&C	1.54	2.68	DRY	4.84	DRY	6.03
4	PRODUCTION	8.75	7.0	NEW	API	N	0	8475	0	8475	3194	-5281	8475	P-110	26	LT&C	1.5	2.39	DRY	2.9	DRY	3.77
5	LINER	6.125	4.5	NEW	API	N	8275	16705	8275	8870	-5081	-5676	8430	P-110	13.5	LT&C	1.93	2.24	DRY	2.97	DRY	3.71

Casing Attachments

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** TOUGH OMBRES 4/5 W0PO FED COM**Well Number:** 1H**Casing Attachments****Casing ID:** 1 **String** SURFACE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

Tough_Ombres_4_5_W0PO_Fed_Com_1H_Csg_Assumptions_20220811154443.pdf

Casing ID: 2 **String** INTERMEDIATE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

Tough_Ombres_4_5_W0PO_Fed_Com_1H_Csg_Assumptions_20220811154615.pdf

Casing ID: 3 **String** INTERMEDIATE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

Tough_Ombres_4_5_W0PO_Fed_Com_1H_Csg_Assumptions_20220811154755.pdf

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** TOUGH OMBRES 4/5 W0PO FED COM**Well Number:** 1H**Casing Attachments****Casing ID:** 4 **String** PRODUCTION**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

Tough_Ombres_4_5_W0PO_Fed_Com_1H_Csg_Assumptions_20220811154938.pdf

Casing ID: 5 **String** LINER**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

Tough_Ombres_4_5_W0PO_Fed_Com_1H_Csg_Assumptions_20220811155129.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	211	300	2.12	12.5	636	100	Class C	Salt, Gel, Extender, LCM
SURFACE	Tail		211	300	200	1.34	14.8	268	100	Class C	Retarder
INTERMEDIATE	Lead	780	0	436	80	2.12	12.5	170	25	Class C	Salt, Gel, Extender, LCM
INTERMEDIATE	Tail		436	780	100	1.34	14.8	134	25	Class C	Retarder
INTERMEDIATE	Lead		0	482	280	2.12	12.5	594	100	Class C	Salt, Gel, Extender, LCM

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** TOUGH OMBRES 4/5 W0PO FED COM**Well Number:** 1H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
INTERMEDIATE	Tail		482	700	200	1.34	14.8	268	100	Class C	Retarder
INTERMEDIATE	Lead	780	780	1916	210	2.12	12.5	445	25	Class C	Salt, Gel, Extender, LCM
INTERMEDIATE	Tail		1916	2600	200	1.34	14.8	268	25	Class C	Retarder
PRODUCTION	Lead		2100	5952	340	2.12	12.5	721	25	Class C	Salt, Gel, Extender, LCM, Defoamer
PRODUCTION	Tail		5952	8475	400	1.18	15.6	472	25	Class H	Retarder, Fluid Loss, Defoamer
LINER	Lead		8275	16705	340	1.85	13.5	1010	25	Class H	Salt, Gel, Fluid Loss, Retarder, Dispersant, Defoamer, Anti-settling Agent

Section 5 - Circulating Medium

Mud System Type: Closed**Will an air or gas system be Used?** NO**Description of the equipment for the circulating system in accordance with Onshore Order #2:****Diagram of the equipment for the circulating system in accordance with Onshore Order #2:****Describe what will be on location to control well or mitigate other conditions:** Sufficient mud materials to maintain mud properties & meet minimum lost circulation and weight increase requirements will be kept on location at all times.**Describe the mud monitoring system utilized:** Pason/PVT/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
2600	8475	WATER-BASED	8.6	9.7							

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** TOUGH OMBRES 4/5 W0PO FED COM**Well Number:** 1H

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	300	SPUD MUD	8.4	8.8							
300	700	SALT SATURATED	10	10							
700	2600	WATER-BASED MUD	8.4	9.7							
8475	16705	OIL-BASED MUD	8.8	12							

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Will run GR/CNL from KOP to surface (vertical portion of hole) in offset well Tough Ombres 4/5 W0QR Fed Com #1H.

List of open and cased hole logs run in the well:

MEASUREMENT WHILE DRILLING, MUD LOG/GEOLOGIC LITHOLOGY LOG, DIRECTIONAL SURVEY, MUD LOG/GEOLOGICAL LITHOLOGY LOG,

Coring operation description for the well:

None

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 5535

Anticipated Surface Pressure: 3582

Anticipated Bottom Hole Temperature(F): 170

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations

Tough_Ombres_4_5_W0PO_Fed_Com_1H_H2S_Plan_20220811162359.pdf

Operator Name: MEWBOURNE OIL COMPANY

Well Name: TOUGH OMBRES 4/5 W0PO FED COM

Well Number: 1H

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

Tough_Ombres_4_5_W0PO_Fed_Com_1H_MOC_Dir_Plan_20220811162442.pdf

Tough_Ombres_4_5_W0PO_Fed_Com_1H_MOC_Dir_Plot_20220811162442.pdf


Other proposed operations facets description:

Other proposed operations facets attachment:

Tough_Ombres_4_5_W0PO_Fed_Com_1H_Add_Info___Permitting_20220811162457.pdf

Other Variance attachment:

5M BOPE & Closed Loop Equipment Schematic

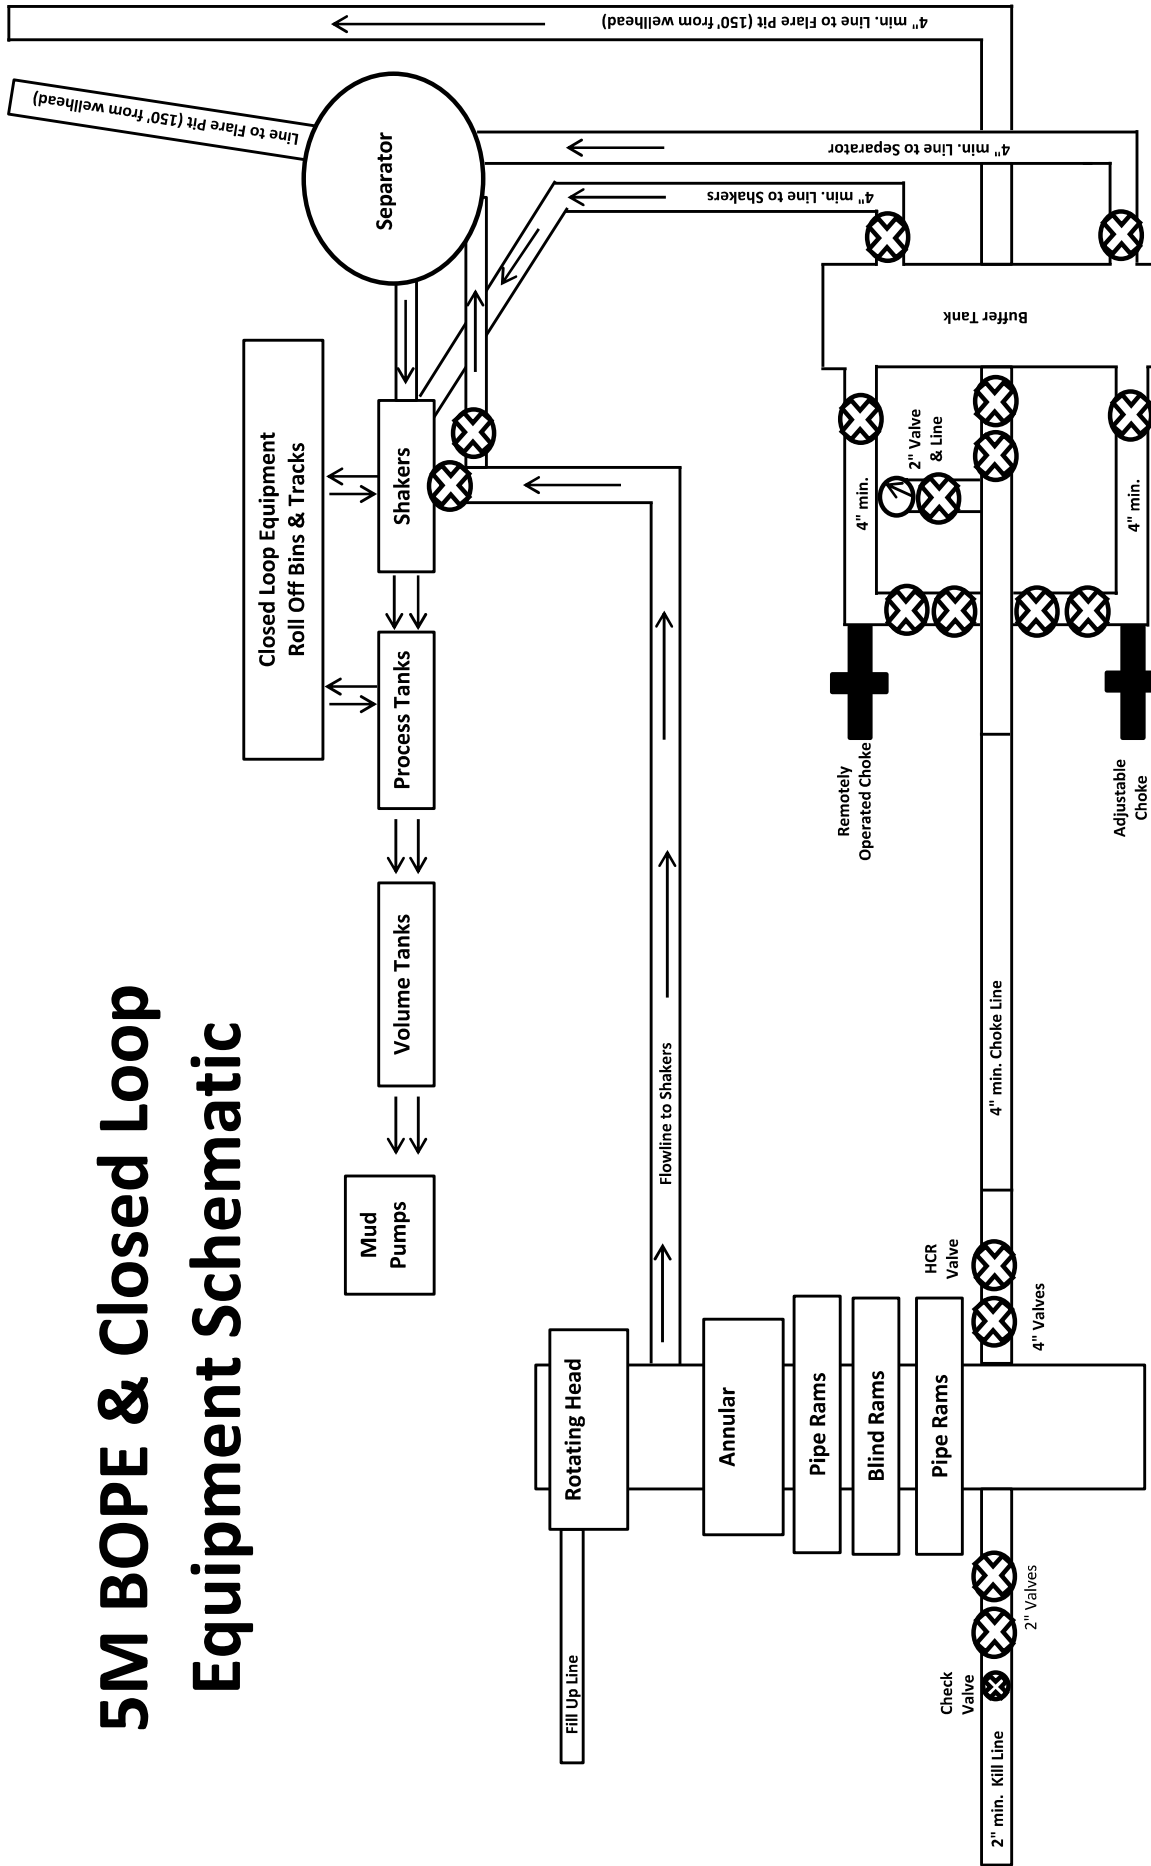

Drawing not to scale



GATES E & S NORTH AMERICA, INC.
134 44TH STREET
CORPUS CHRISTI, TEXAS 78405

PHONE: 361-887-9807
FAX: 361-887-0812
EMAIL: Tim.Cantu@gates.com
WEB: www.gates.com

10K CEMENTING ASSEMBLY PRESSURE TEST CERTIFICATE

Customer :	AUSTIN DISTRIBUTING	Test Date:	4/30/2015
Customer Ref. :	4060578	Hose Serial No.:	D-043015-7
Invoice No. :	500506	Created By:	JUSTIN CROPPER

Product Description: 10K3.548.0CK4.1/1610KFLGE/E LE


End Fitting 1 :	4 1/16 10K FLG	End Fitting 2 :	4 1/16 10K FLG
Gates Part No. :	4773-6290	Assembly Code :	L36554102914D-043015-7
Working Pressure :	10,000 PSI	Test Pressure :	15,000 PSI

Gates E & S North America, Inc. certifies that the following hose assembly has been tested to the Gates Oilfield Roughneck Agreement/Specification requirements and passed the 15 minute hydrostatic test per API Spec 7K/Q1, Fifth Edition, June 2010, Test pressure 9.6.7 and per Table 9 to 15,000 psi in accordance with this product number. Hose burst pressure 9.6.7.2 exceeds the minimum of 2.5 times the working pressure per Table 9.

Quality Manager :	QUALITY	Production:	PRODUCTION
Date :	4/30/2015	Date :	4/30/2015
Signature :	<i>Justin Cropper</i>	Signature :	<i>Justin Cropper</i>

Form PTC - 01 Rev.02



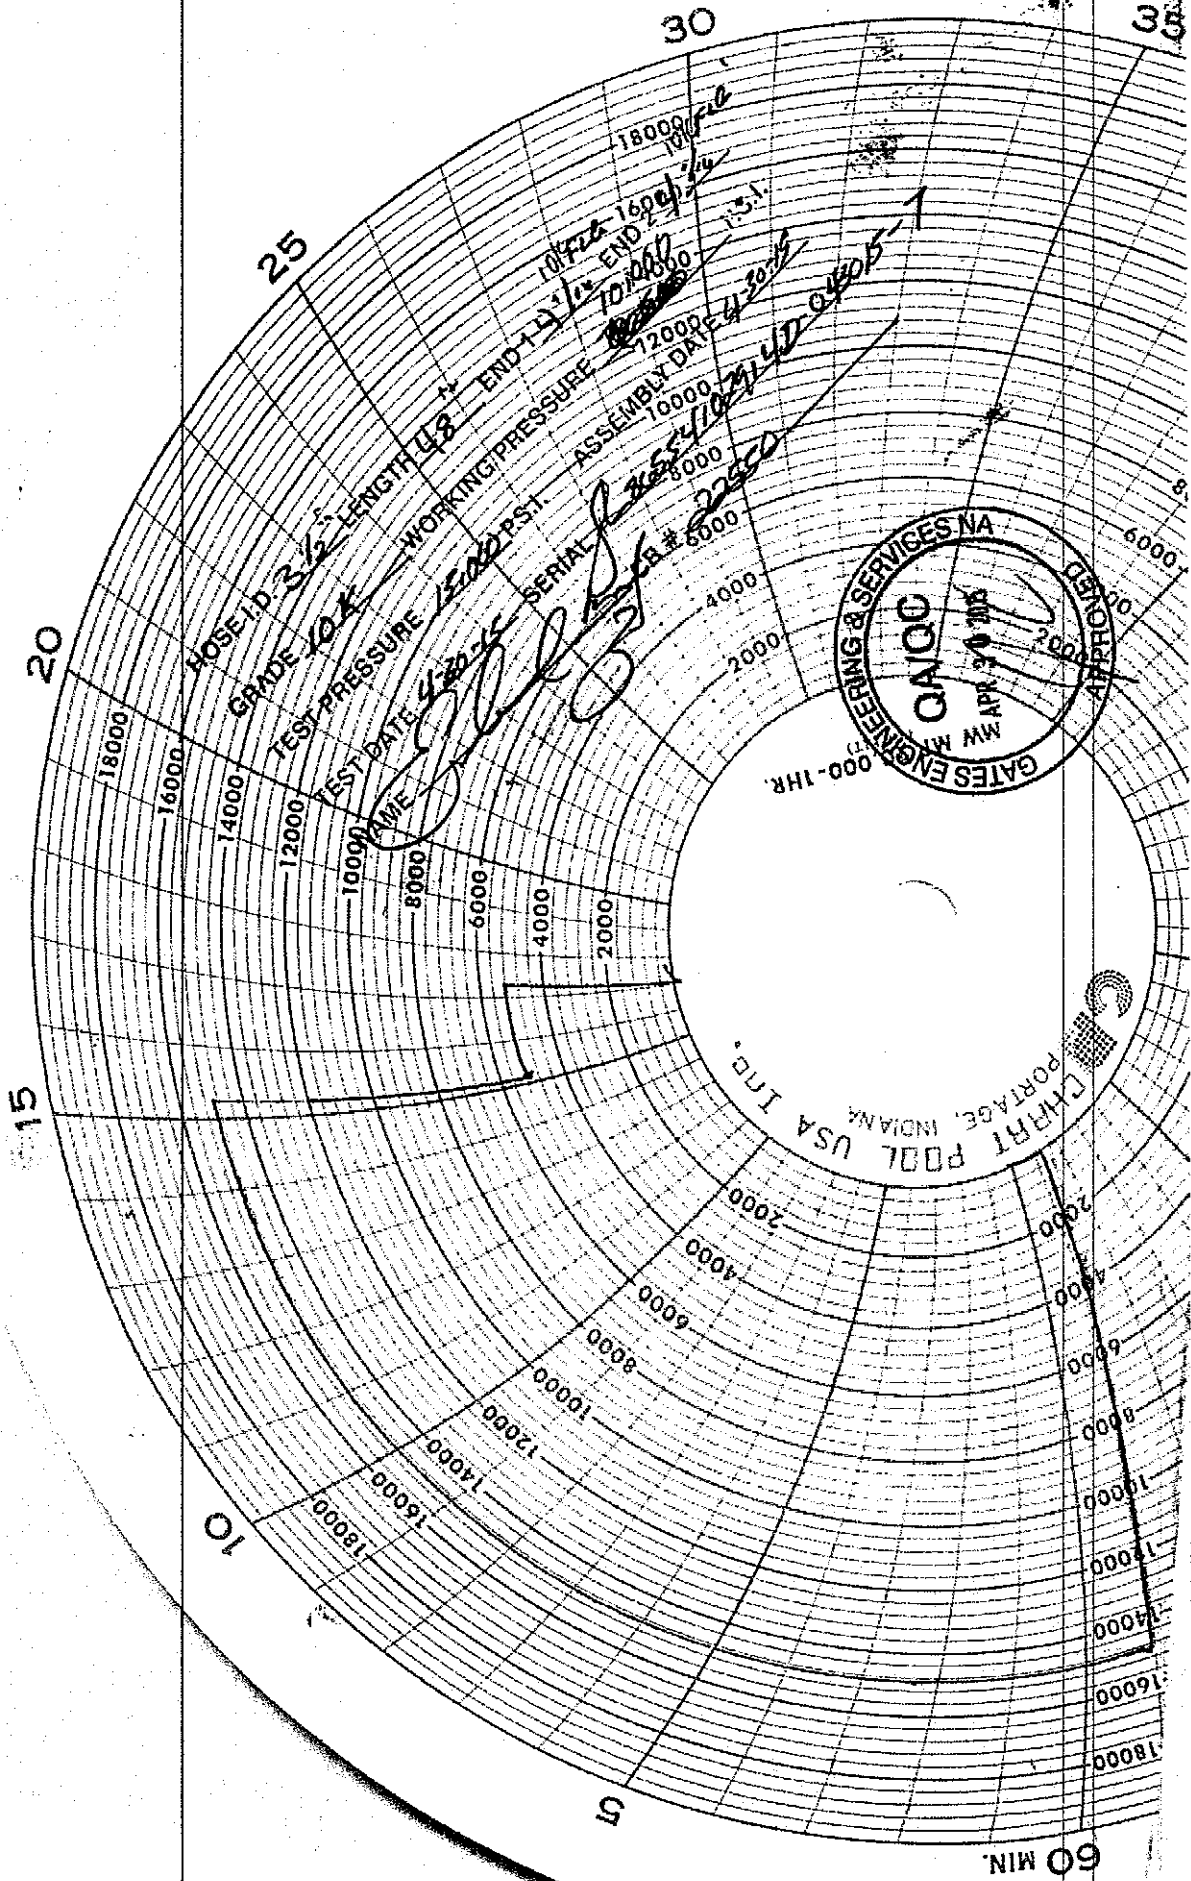



GATES E & S NORTH AMERICA, INC.
134 44TH STREET
CORPUS CHRISTI, TEXAS 78405

PHONE: 361-887-9807
FAX: 361-887-0812
EMAIL: Tim.Cantu@gates.com
WEB: www.gates.com

10K CEMENTING ASSEMBLY PRESSURE TEST CERTIFICATE

Customer :	AUSTIN DISTRIBUTING	Test Date:	4/30/2015
Customer Ref. :	4060578	Hose Serial No.:	D-043015-7
Invoice No. :	500506	Created By:	JUSTIN CROPPER

Product Description: 10K3.548.0CK4.1/1610KFLGE/E LE


End Fitting 1 :	4 1/16 10K FLG	End Fitting 2 :	4 1/16 10K FLG
Gates Part No. :	4773-6290	Assembly Code :	L36554102914D-043015-7
Working Pressure :	10,000 PSI	Test Pressure :	15,000 PSI

Gates E & S North America, Inc. certifies that the following hose assembly has been tested to the Gates Oilfield Roughneck Agreement/Specification requirements and passed the 15 minute hydrostatic test per API Spec 7K/Q1, Fifth Edition, June 2010, Test pressure 9.6.7 and per Table 9 to 15,000 psi in accordance with this product number. Hose burst pressure 9.6.7.2 exceeds the minimum of 2.5 times the working pressure per Table 9.


Quality Manager :	QUALITY	Production:	PRODUCTION
Date :	4/30/2015	Date :	4/30/2015
Signature :	<i>Justin Cropper</i>	Signature :	<i>Justin Cropper</i>

Form PTC - 01 Rev.02



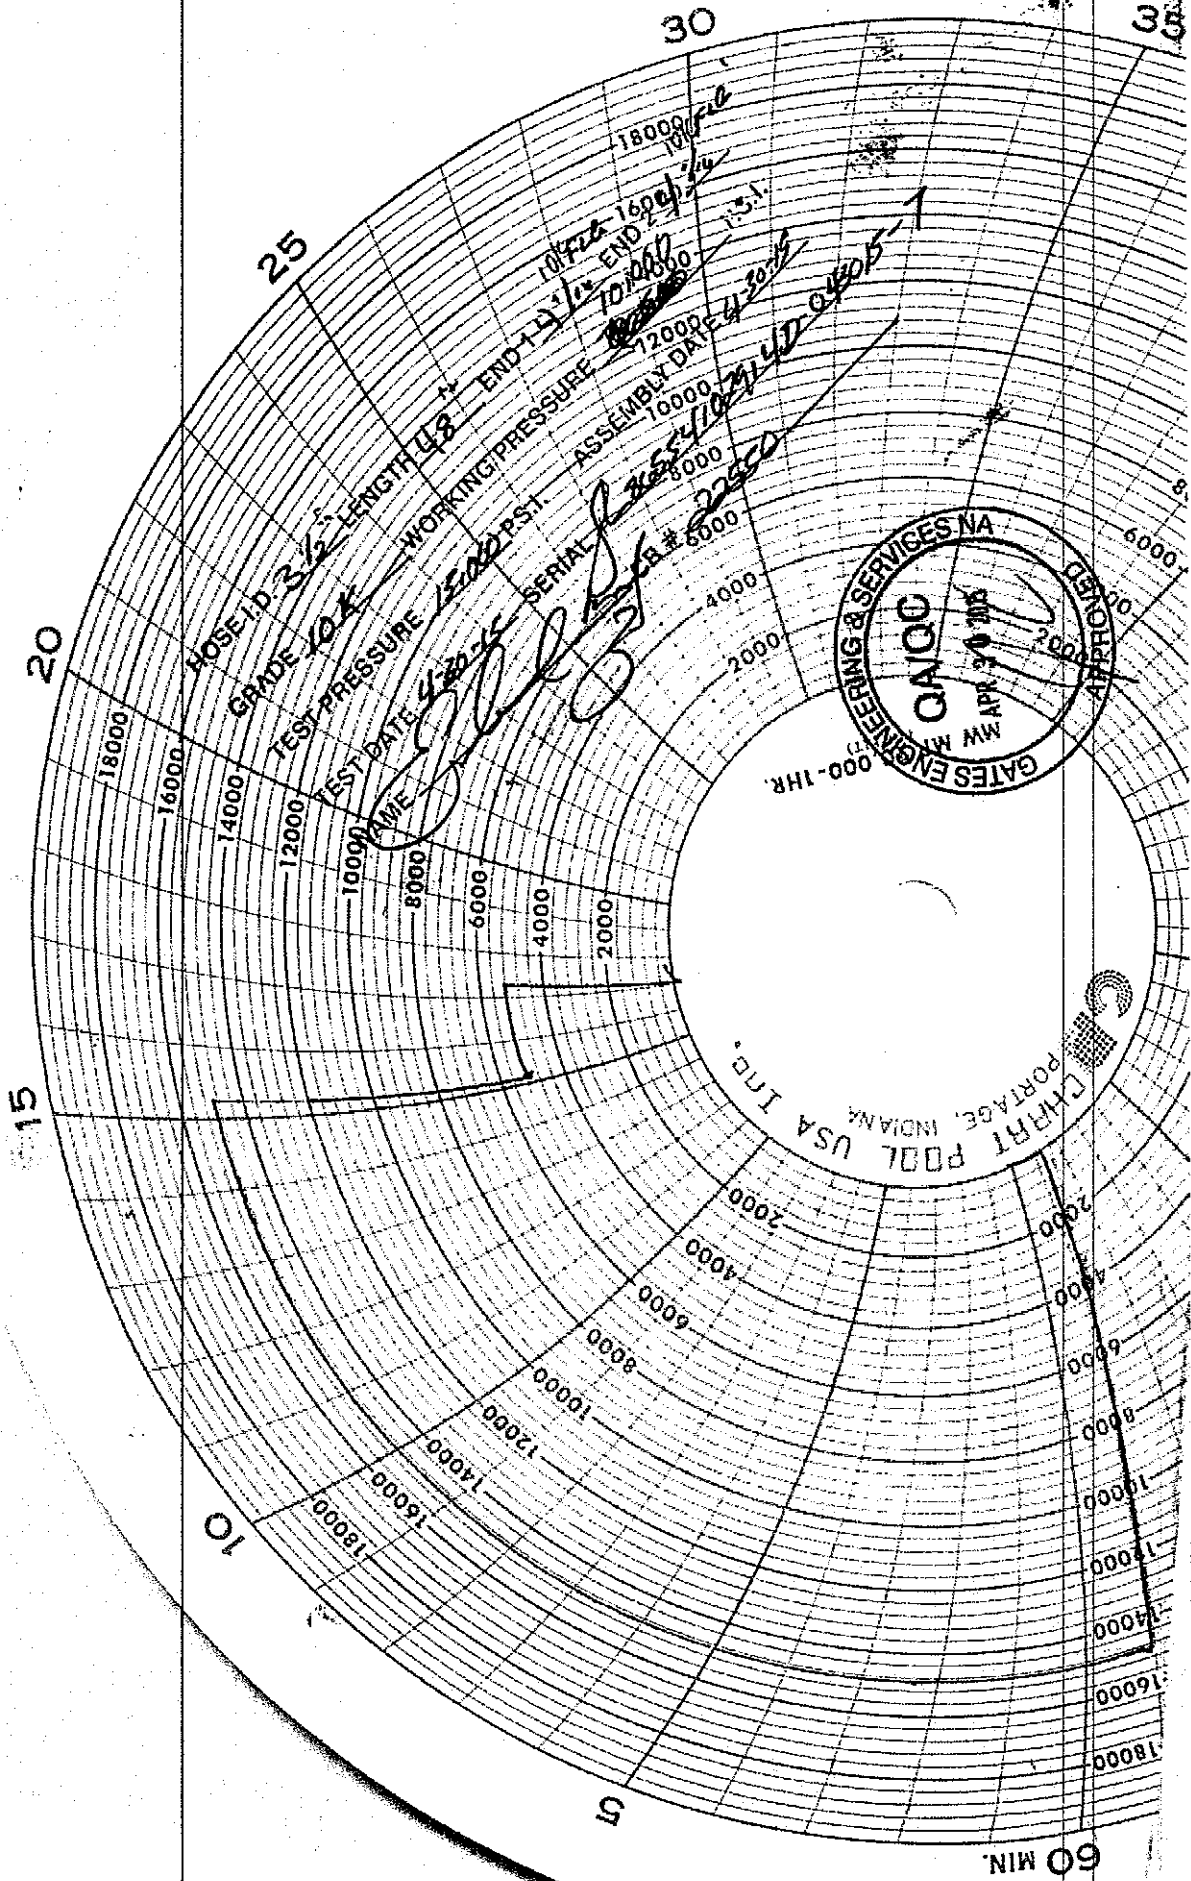

5M BOPE & Closed Loop Equipment Schematic

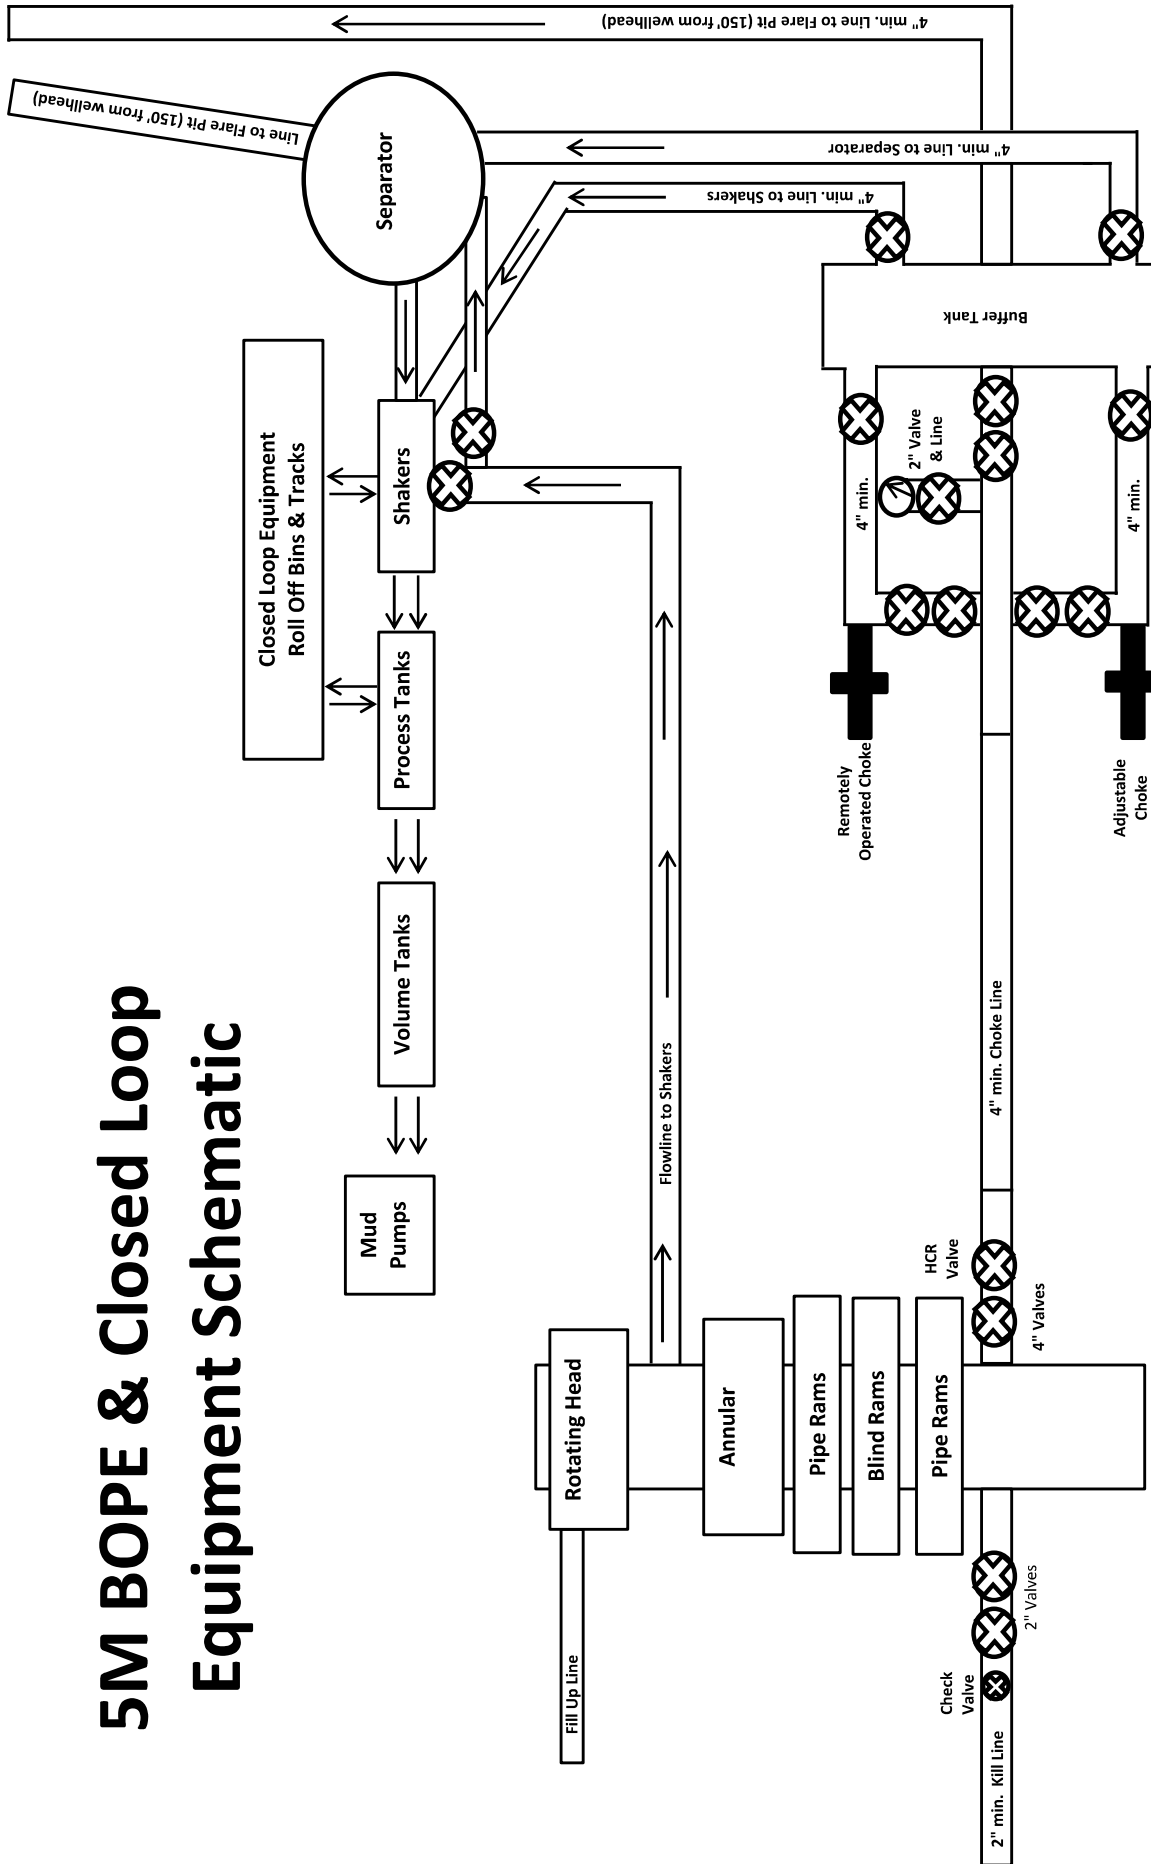

Drawing not to scale



GATES E & S NORTH AMERICA, INC.
134 44TH STREET
CORPUS CHRISTI, TEXAS 78405

PHONE: 361-887-9807
FAX: 361-887-0812
EMAIL: Tim.Cantu@gates.com
WEB: www.gates.com

10K CEMENTING ASSEMBLY PRESSURE TEST CERTIFICATE

Customer :	AUSTIN DISTRIBUTING	Test Date:	4/30/2015
Customer Ref. :	4060578	Hose Serial No.:	D-043015-7
Invoice No. :	500506	Created By:	JUSTIN CROPPER

Product Description: 10K3.548.0CK4.1/1610KFLGE/E LE

End Fitting 1 :	4 1/16 10K FLG	End Fitting 2 :	4 1/16 10K FLG
Gates Part No. :	4773-6290	Assembly Code :	L36554102914D-043015-7
Working Pressure :	10,000 PSI	Test Pressure :	15,000 PSI

Gates E & S North America, Inc. certifies that the following hose assembly has been tested to the Gates Oilfield Roughneck Agreement/Specification requirements and passed the 15 minute hydrostatic test per API Spec 7K/Q1, Fifth Edition, June 2010, Test pressure 9.6.7 and per Table 9 to 15,000 psi in accordance with this product number. Hose burst pressure 9.6.7.2 exceeds the minimum of 2.5 times the working pressure per Table 9.


Quality Manager :	QUALITY	Production:	PRODUCTION
Date :	4/30/2015	Date :	4/30/2015
Signature :	<i>Justin Cropper</i>	Signature :	<i>Justin Cropper</i>

Form PTC - 01 Rev.02






5M BOPE & Closed Loop Equipment Schematic

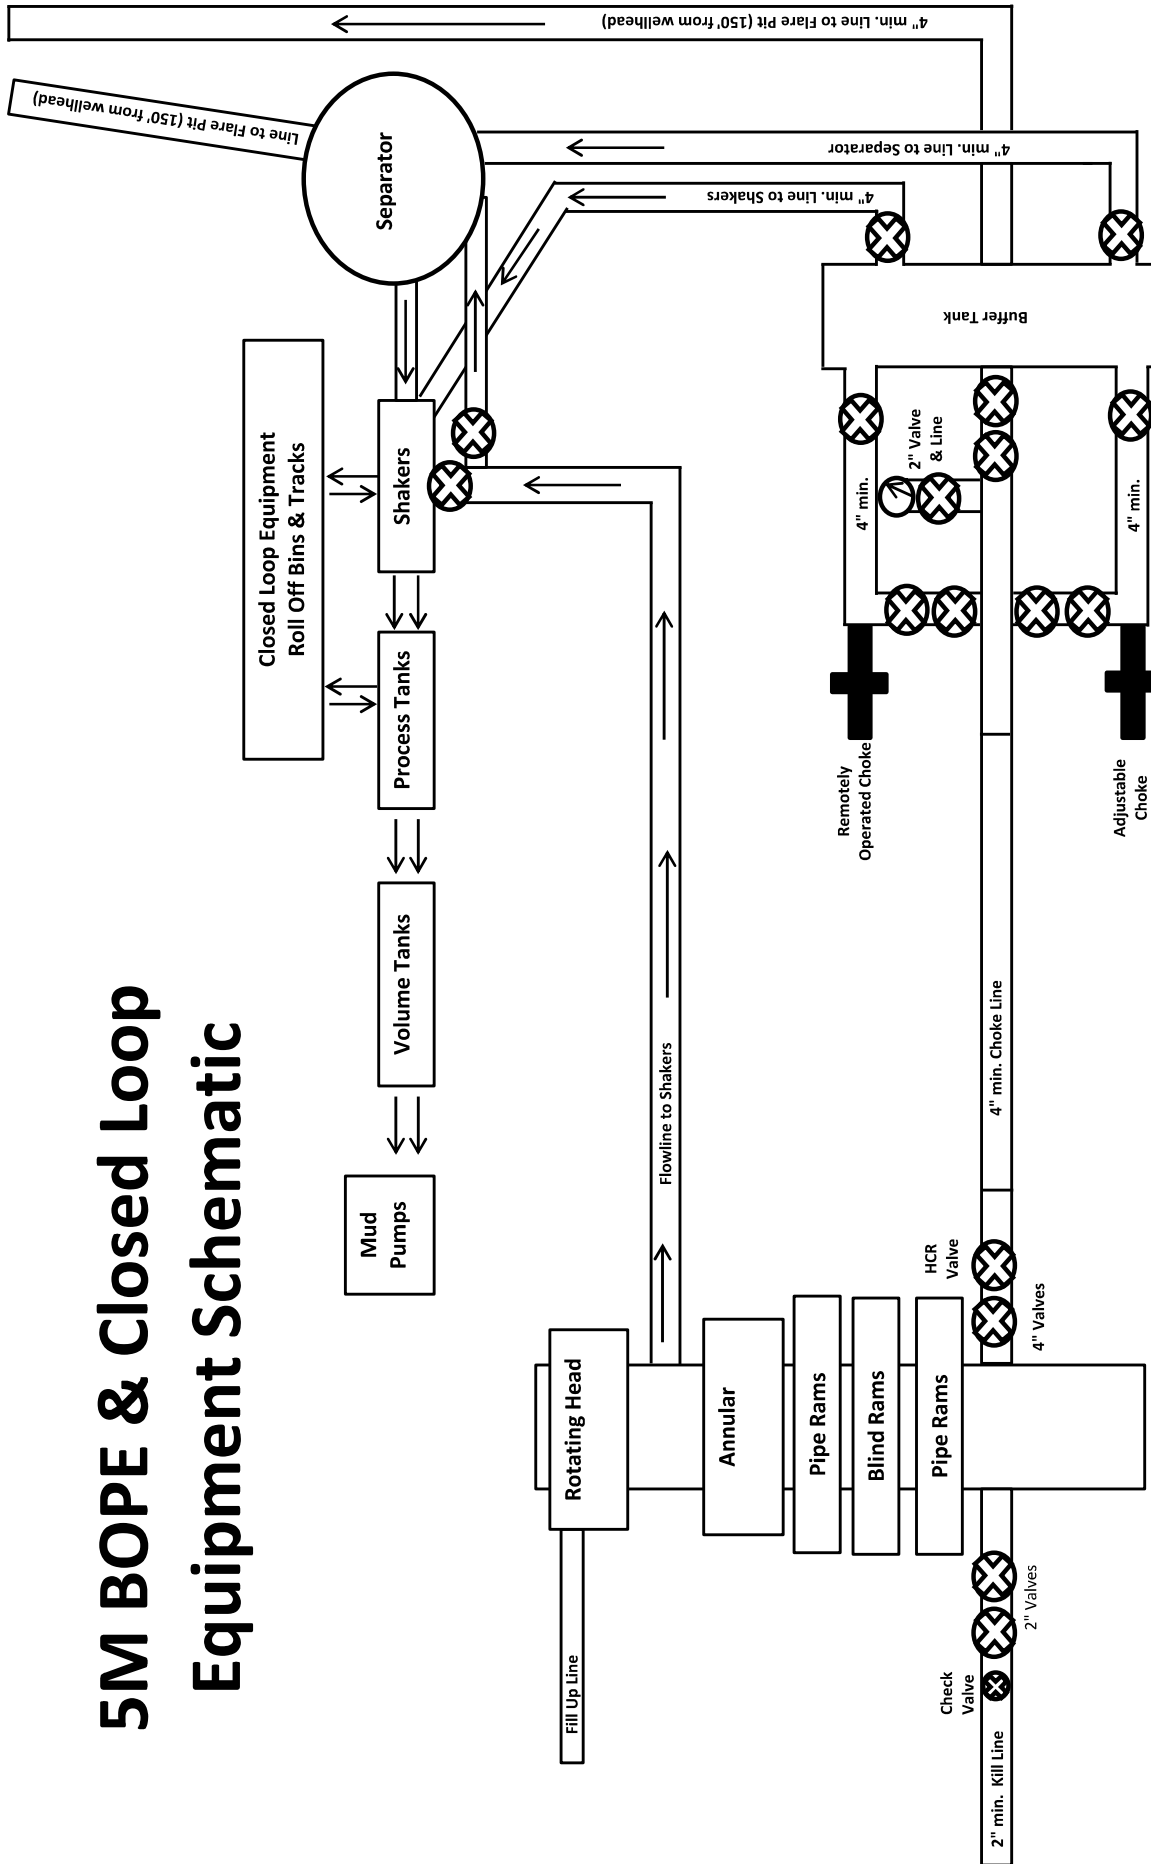

Note: All valves & lines on choke manifold are 4" unless otherwise noted. Exact manifold configuration may vary.

Drawing not to scale

5M BOPE & Closed Loop Equipment Schematic

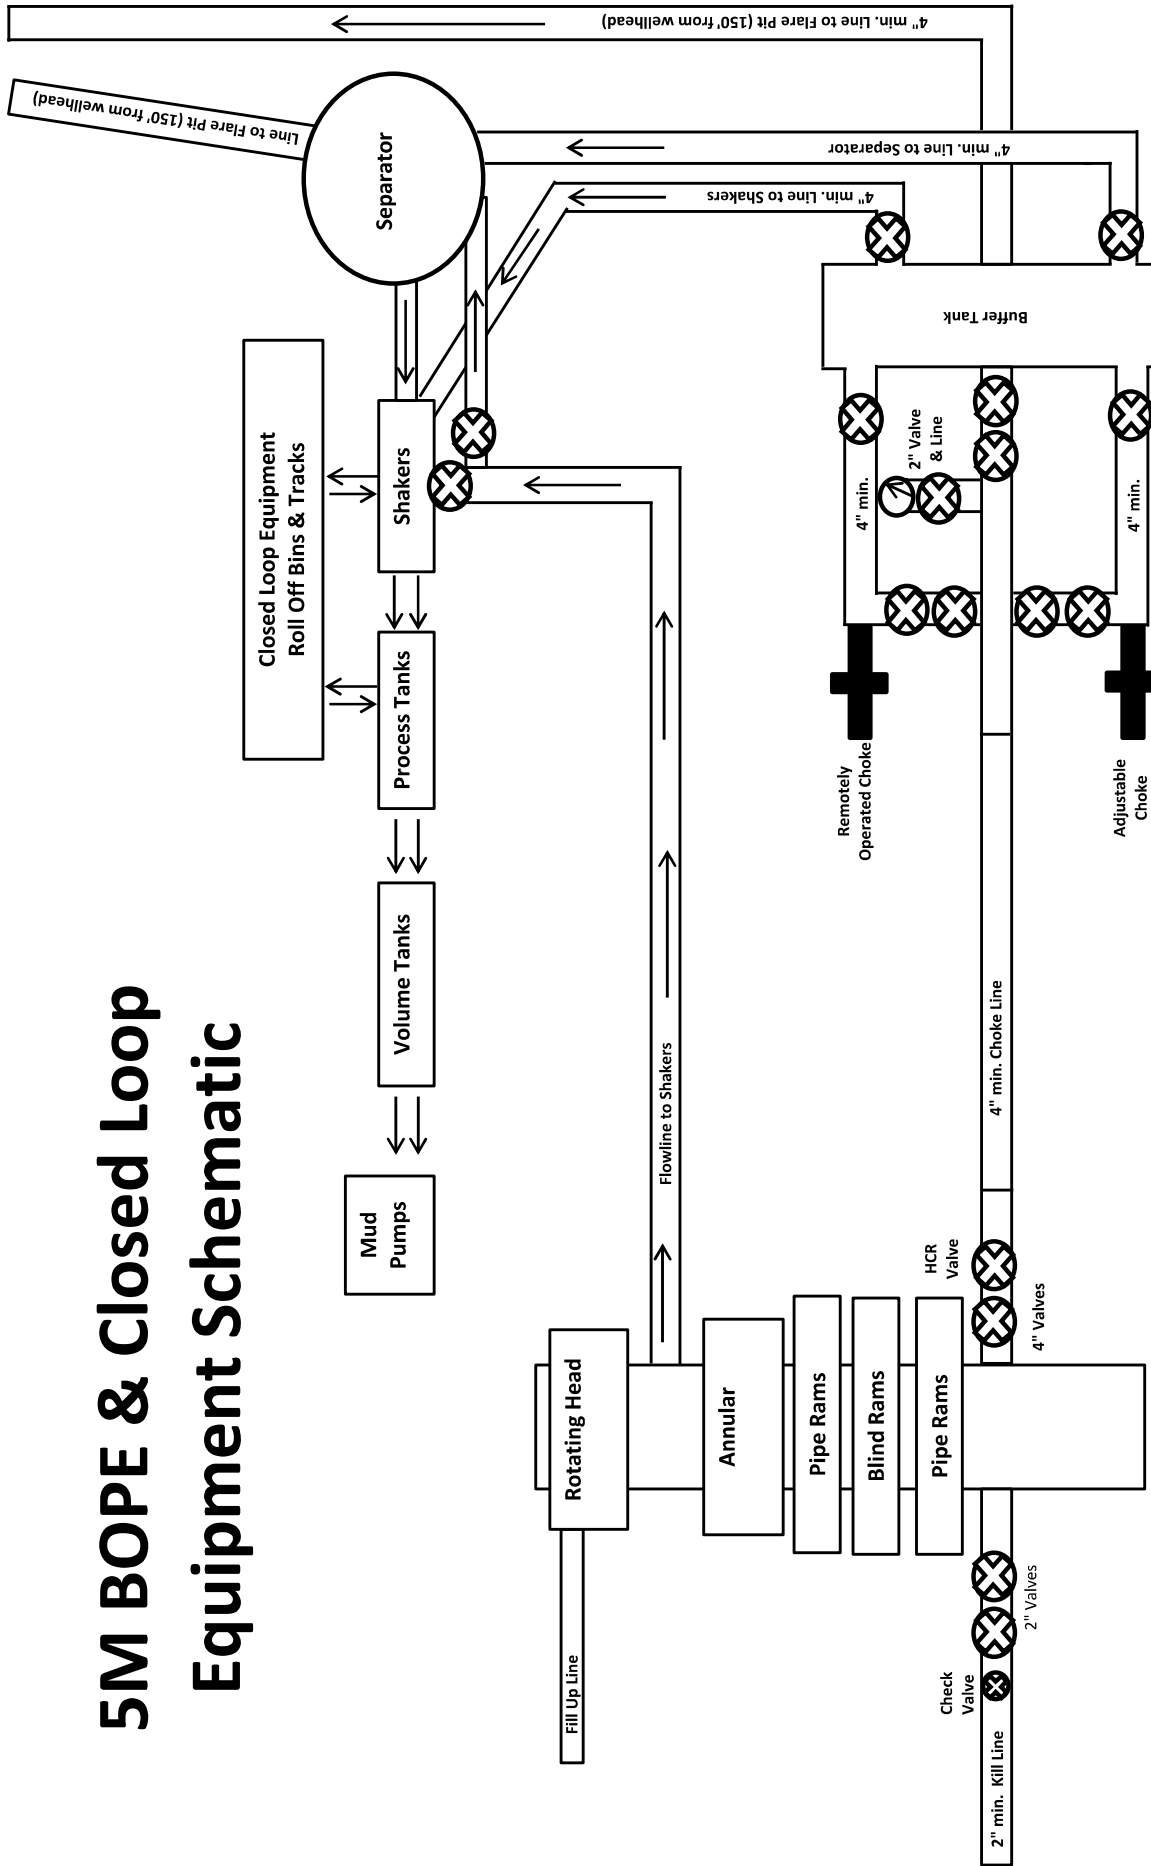

Drawing not to scale



GATES ENGINEERING & SERVICES NORTH AMERICA
7603 Prairie Oak Dr.
Houston, TX 77086

PHONE: (281) 602 - 4119
FAX:
EMAIL: Troy.Schmidt@gates.com
WEB: www.gates.com

10K CHOKE & KILL ASSEMBLY PRESSURE TEST CERTIFICATE

Customer:	A-7 AUSTIN INC DBA AUSTIN HOSE	Test Date:	8/20/2018
Customer Ref.:	4101901	Hose Serial No.:	H-082018-10
Invoice No.:	511956	Created By:	Moosa Naqvi
Product Description:	10KF3.035.0CK41/1610KFLGFXDxFLT L/E		
End Fitting 1:	4 1/16 in. Fixed Flange	End Fitting 2:	4 1/16 in. Float Flange
Gates Part No.:	68503010-9721632	Assembly Code:	L40695052218H-082018-10
Working Pressure:	10,000 psi.	Test Pressure:	15,000 psi.

Gates Engineering & Services North America certifies that the following hose assembly has successfully passed all pressure testing requirements set forth in Gates specifications: GTS-04-052 (for 5K assemblies) or GTS-04-053 (10K assemblies), which include reference to Specification API 16C (2nd Edition); sections 7.5.4, 7.5.9, and 10.8.7. A test graph will accompany this test certificate to illustrate conformity to test requirements.

Quality: QUALITY
Date : 8/20/2018
Signature : *Moosa Naqvi*

Production: PRODUCTION
Date : 8/20/2018
Signature : *[Signature]*

Form PTC - 01 Rev.0 2





GATES E & S NORTH AMERICA, INC.
134 44TH STREET
CORPUS CHRISTI, TEXAS 78405

PHONE: 361-887-9807
FAX: 361-887-0812
EMAIL: Tim.Cantu@gates.com
WEB: www.gates.com

10K CEMENTING ASSEMBLY PRESSURE TEST CERTIFICATE

Customer :	AUSTIN DISTRIBUTING	Test Date:	4/30/2015
Customer Ref. :	4060578	Hose Serial No.:	D-043015-7
Invoice No. :	500506	Created By:	JUSTIN CROPPER

Product Description: 10K3.548.0CK4.1/1610KFLGE/E LE

End Fitting 1 :	4 1/16 10K FLG	End Fitting 2 :	4 1/16 10K FLG
Gates Part No. :	4773-6290	Assembly Code :	L36554102914D-043015-7
Working Pressure :	10,000 PSI	Test Pressure :	15,000 PSI

Gates E & S North America, Inc. certifies that the following hose assembly has been tested to the Gates Oilfield Roughneck Agreement/Specification requirements and passed the 15 minute hydrostatic test per API Spec 7K/Q1, Fifth Edition, June 2010, Test pressure 9.6.7 and per Table 9 to 15,000 psi in accordance with this product number. Hose burst pressure 9.6.7.2 exceeds the minimum of 2.5 times the working pressure per Table 9.



Quality Manager :	QUALITY	Production:	PRODUCTION
Date :	4/30/2015	Date :	4/30/2015
Signature :	<i>Justin Cropper</i>	Signature :	<i>Justin Cropper</i>

Form PTC - 01 Rev.02






Hydril "GK"
13 5/8" 5M

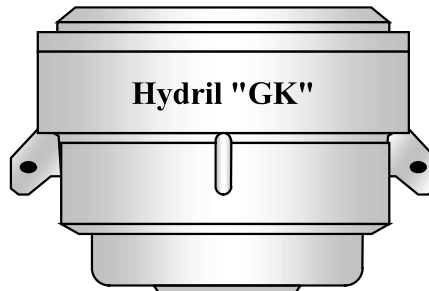


Hydril "GK"


Cameron Type U
13 5/8" 5M

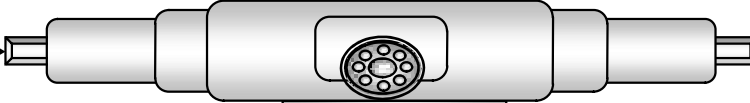

4 1/2" x 5 7/8" VBR

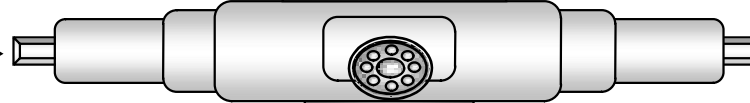


BLIND RAMS

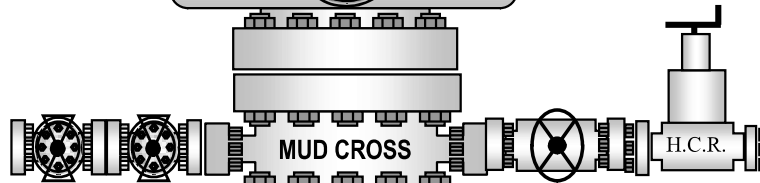

MUD CROSS

H.C.R.

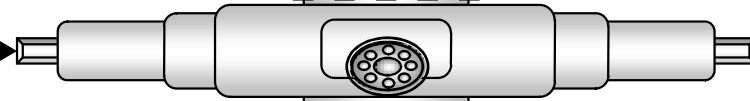


7" RAMS



13 5/8" 5M


13 5/8" 5M

13 5/8" 5M

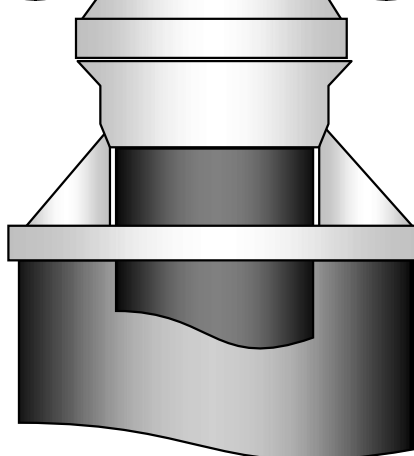



13-5/8" MN-DS Wellhead System

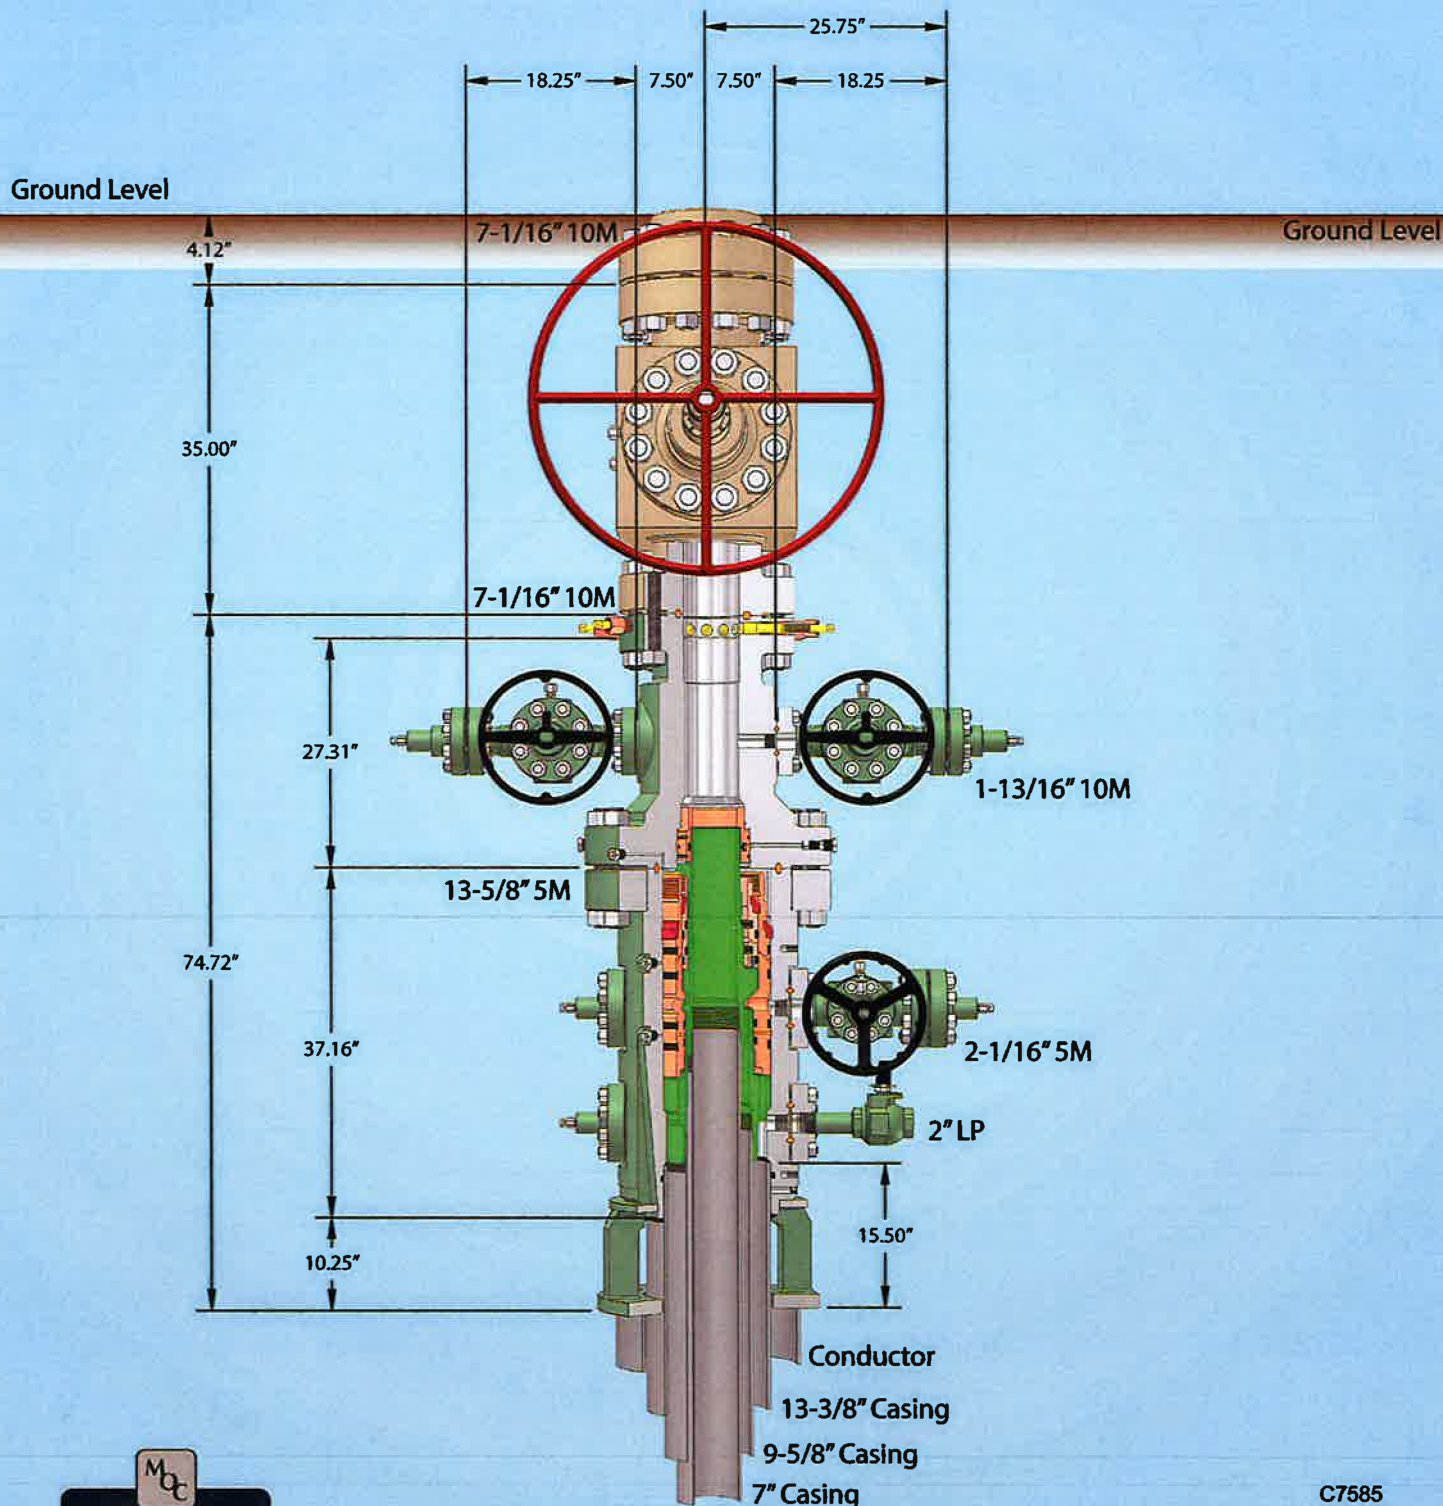

MEWBOURNE
OIL COMPANY


C7585
Rev. 02

NOTE: All dimensions on this drawing are estimated measurements and should be evaluated by engineering.

Cuffing Hanger 57" conductor cut-off



13-5/8" MN-DS Wellhead System

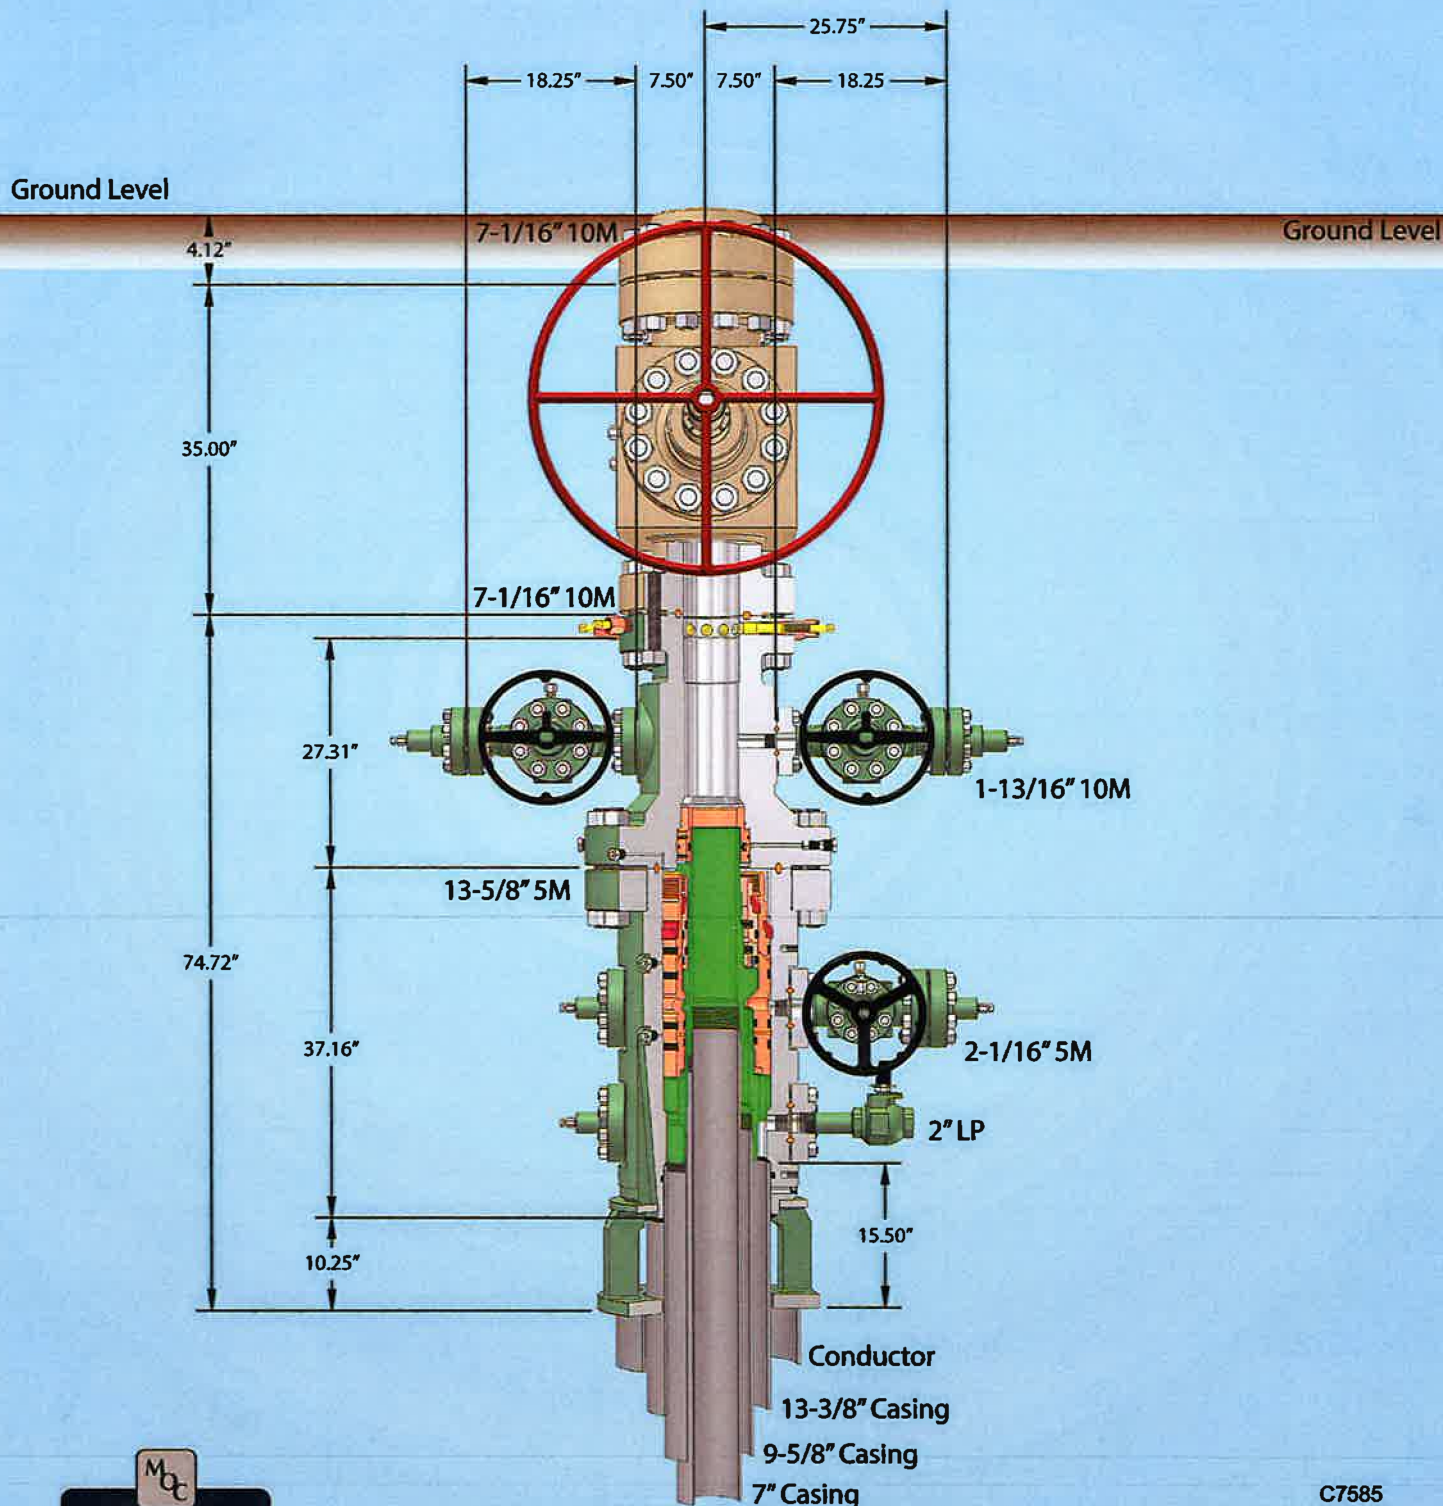



MEWBOURNE
OIL COMPANY

C7585
Rev. 02

NOTE: All dimensions on this drawing are estimated measurements and should be evaluated by engineering.


Cuffing Hanger 57" conductor cut-off

Hydril "GK"
13 5/8" 5M




Hydril "GK"


Cameron Type U
13 5/8" 5M



4 1/2" x 5 7/8" VBR




BLIND RAMS

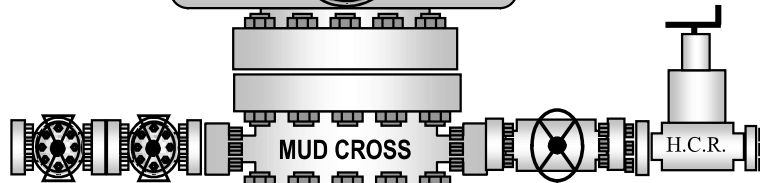

MUD CROSS

H.C.R.




7" RAMS




13 5/8" 5M

13 5/8" 5M

13 5/8" 5M

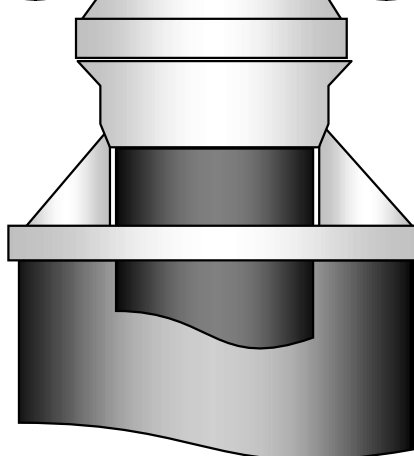


Hydril "GK"
13 5/8" 5M




Hydril "GK"


Cameron Type U
13 5/8" 5M



4 1/2" x 5 7/8" VBR




BLIND RAMS

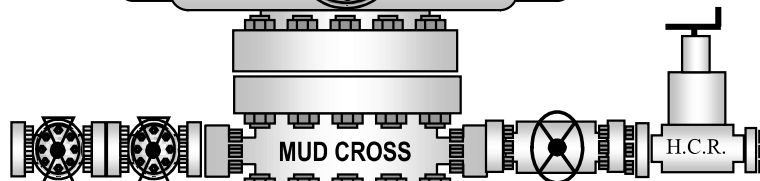

MUD CROSS

H.C.R.




7" RAMS



13 5/8" 5M


13 5/8" 5M

13 5/8" 5M

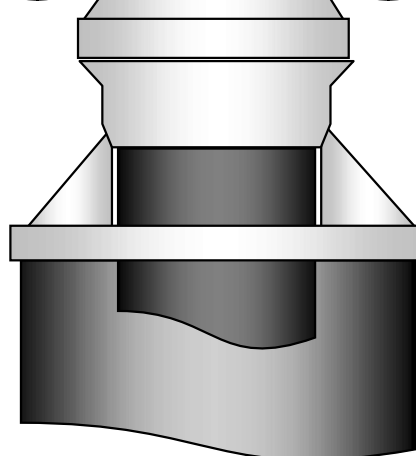



13-5/8" MN-DS Wellhead System


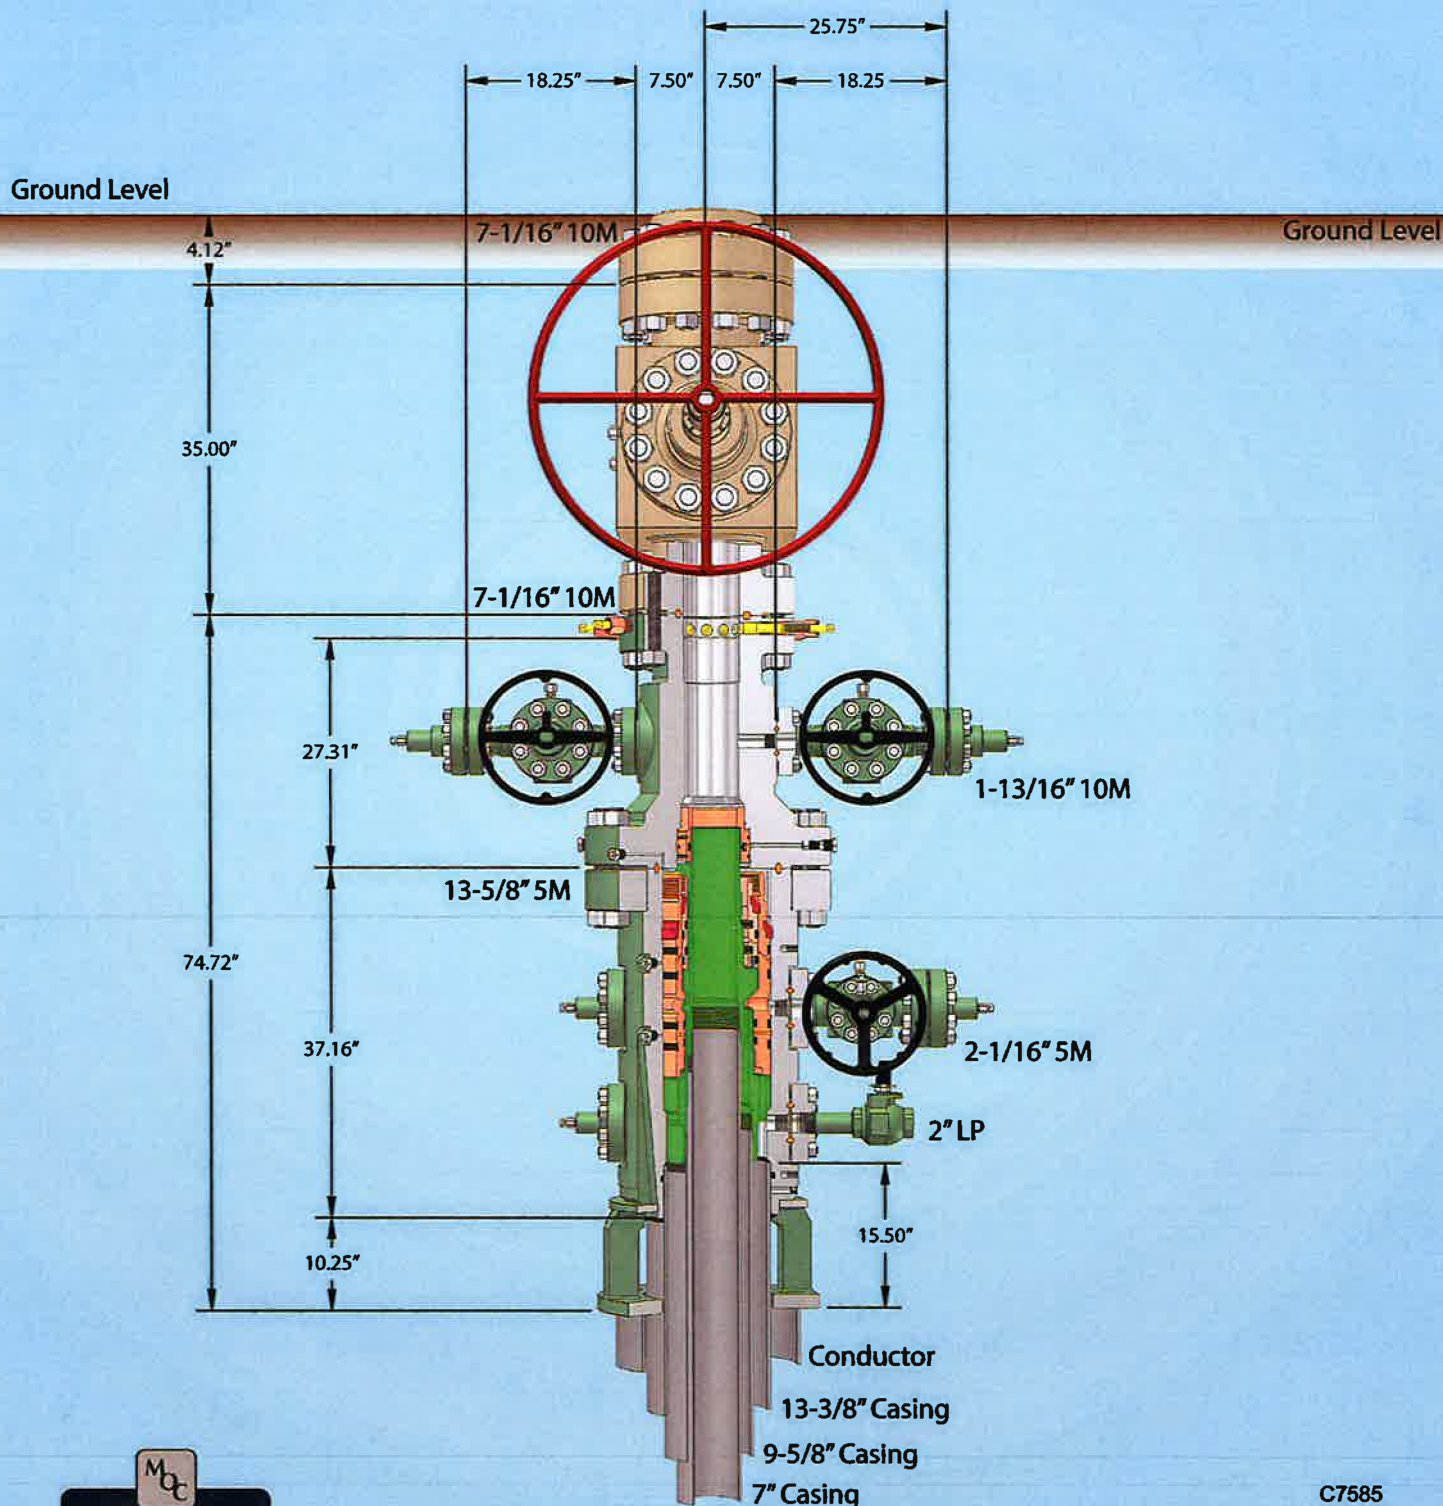


C7585
Rev. 02

NOTE: All dimensions on this drawing are estimated measurements and should be evaluated by engineering.


Cuffing Hanger 57" conductor cut-off

Hydril "GK"
13 5/8" 5M

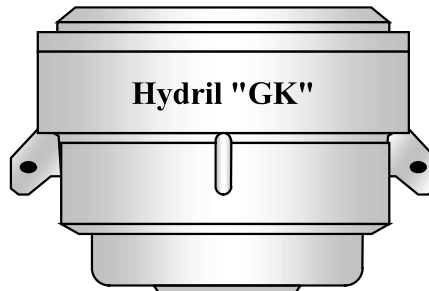


Hydril "GK"


Cameron Type U
13 5/8" 5M

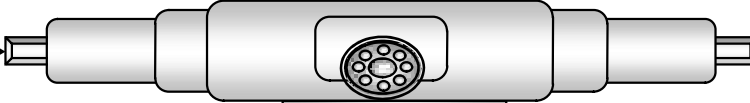

4 1/2" x 5 7/8" VBR




BLIND RAMS

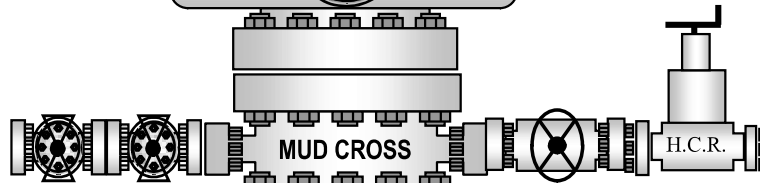

MUD CROSS

H.C.R.

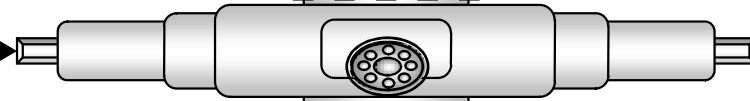


7" RAMS



13 5/8" 5M


13 5/8" 5M

13 5/8" 5M

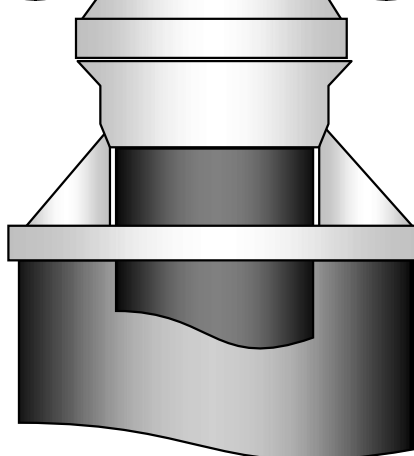



13-5/8" MN-DS Wellhead System

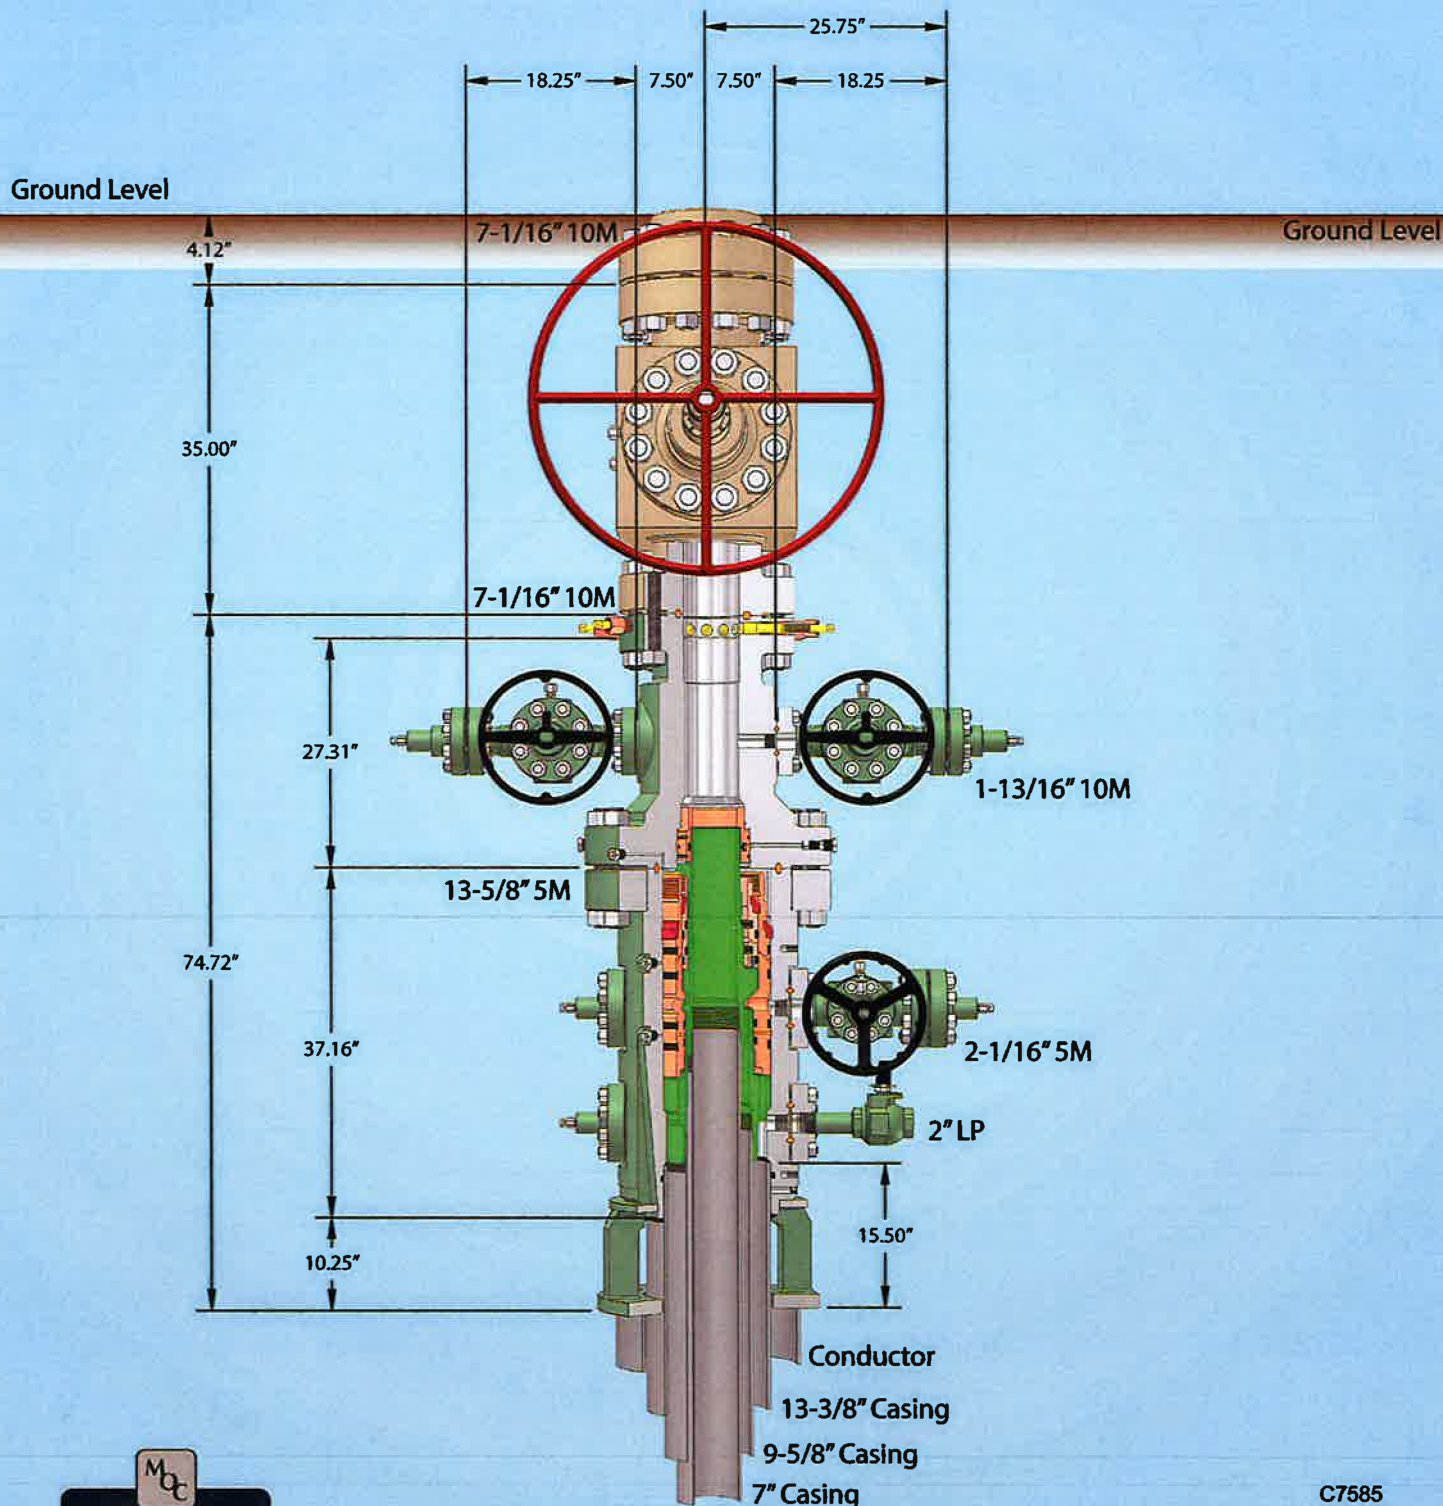

MEWBOURNE
OIL COMPANY

C7585
Rev. 02

NOTE: All dimensions on this drawing are estimated measurements and should be evaluated by engineering.

Cuffing Hanger 57" conductor cut-off

Mewbourne Oil Company, Tough Ombres 4/5 W0PO Fed Com #1H**Sec 4, T21S, R27E****SHL: 1390' FSL & 260' FEL, Sec 4****BHL: 3200' FSL & 2552' FEL, Sec 5****Casing Program**

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
	From	To								
26"	0'	300'	20"	94	J55	BTC	3.79	15.37	49.72	52.48
17.5"	0'	700'	13.375"	48	H40	STC	2.12	4.75	9.58	16.10
12.25"	0'	2600'	9.625"	36	J55	LTC	1.54	2.68	4.84	6.03
8.75"	0'	8475'	7"	26	P110	LTC	1.50	2.39	2.90	3.77
6.125"	8275'	16705'	4.5"	13.5	P110	LTC	1.93	2.24	2.97	3.71
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Must have table for contingency casing

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	Y
If yes, does production casing cement tie back a minimum of 50' above the Reef?	Y
Is well within the designated 4 string boundary.	Y
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	Y
If yes, are there two strings cemented to surface?	Y
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Mewbourne Oil Company, Tough Ombres 4/5 W0PO Fed Com #1H**Sec 4, T21S, R27E****SHL: 1390' FSL & 260' FEL, Sec 4****BHL: 3200' FSL & 2552' FEL, Sec 5****Casing Program**

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
	From	To								
26"	0'	300'	20"	94	J55	BTC	3.79	15.37	49.72	52.48
17.5"	0'	700'	13.375"	48	H40	STC	2.12	4.75	9.58	16.10
12.25"	0'	2600'	9.625"	36	J55	LTC	1.54	2.68	4.84	6.03
8.75"	0'	8475'	7"	26	P110	LTC	1.50	2.39	2.90	3.77
6.125"	8275'	16705'	4.5"	13.5	P110	LTC	1.93	2.24	2.97	3.71
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Must have table for contingency casing

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	Y
If yes, does production casing cement tie back a minimum of 50' above the Reef?	Y
Is well within the designated 4 string boundary.	Y
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	Y
If yes, are there two strings cemented to surface?	Y
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Mewbourne Oil Company, Tough Ombres 4/5 W0PO Fed Com #1H**Sec 4, T21S, R27E****SHL: 1390' FSL & 260' FEL, Sec 4****BHL: 3200' FSL & 2552' FEL, Sec 5****Casing Program**

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
	From	To								
26"	0'	300'	20"	94	J55	BTC	3.79	15.37	49.72	52.48
17.5"	0'	700'	13.375"	48	H40	STC	2.12	4.75	9.58	16.10
12.25"	0'	2600'	9.625"	36	J55	LTC	1.54	2.68	4.84	6.03
8.75"	0'	8475'	7"	26	P110	LTC	1.50	2.39	2.90	3.77
6.125"	8275'	16705'	4.5"	13.5	P110	LTC	1.93	2.24	2.97	3.71
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Must have table for contingency casing

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	Y
If yes, does production casing cement tie back a minimum of 50' above the Reef?	Y
Is well within the designated 4 string boundary.	Y
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	Y
If yes, are there two strings cemented to surface?	Y
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Mewbourne Oil Company, Tough Ombres 4/5 W0PO Fed Com #1H**Sec 4, T21S, R27E****SHL: 1390' FSL & 260' FEL, Sec 4****BHL: 3200' FSL & 2552' FEL, Sec 5****Casing Program**

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
	From	To								
26"	0'	300'	20"	94	J55	BTC	3.79	15.37	49.72	52.48
17.5"	0'	700'	13.375"	48	H40	STC	2.12	4.75	9.58	16.10
12.25"	0'	2600'	9.625"	36	J55	LTC	1.54	2.68	4.84	6.03
8.75"	0'	8475'	7"	26	P110	LTC	1.50	2.39	2.90	3.77
6.125"	8275'	16705'	4.5"	13.5	P110	LTC	1.93	2.24	2.97	3.71
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Must have table for contingency casing

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	Y
If yes, does production casing cement tie back a minimum of 50' above the Reef?	Y
Is well within the designated 4 string boundary.	Y
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	Y
If yes, are there two strings cemented to surface?	Y
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Mewbourne Oil Company, Tough Ombres 4/5 W0PO Fed Com #1H**Sec 4, T21S, R27E****SHL: 1390' FSL & 260' FEL, Sec 4****BHL: 3200' FSL & 2552' FEL, Sec 5****Casing Program**

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
	From	To								
26"	0'	300'	20"	94	J55	BTC	3.79	15.37	49.72	52.48
17.5"	0'	700'	13.375"	48	H40	STC	2.12	4.75	9.58	16.10
12.25"	0'	2600'	9.625"	36	J55	LTC	1.54	2.68	4.84	6.03
8.75"	0'	8475'	7"	26	P110	LTC	1.50	2.39	2.90	3.77
6.125"	8275'	16705'	4.5"	13.5	P110	LTC	1.93	2.24	2.97	3.71
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Must have table for contingency casing

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	Y
If yes, does production casing cement tie back a minimum of 50' above the Reef?	Y
Is well within the designated 4 string boundary.	Y
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	Y
If yes, are there two strings cemented to surface?	Y
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Mewbourne Oil Company

Eddy County, New Mexico NAD 83

Tough Ombres 4/5 W0PO Fed Com #1H

Sec 4, T21S, R27E

SHL: 1390' FSL & 260' FEL (Sec 4)

BHL: 3200' FSL & 2552' FEL (Sec 5)

Plan: Design #1

Standard Planning Report

09 August, 2022

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Tough Ombres 4/5 W0PO Fed Com #1H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3222.0usft (Original Well Elev)
Project:	Eddy County, New Mexico NAD 83	MD Reference:	WELL @ 3222.0usft (Original Well Elev)
Site:	Tough Ombres 4/5 W0PO Fed Com #1H	North Reference:	Grid
Well:	Sec 4, T21S, R27E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 3200' FSL & 2552' FEL (Sec 5)		
Design:	Design #1		

Project	Eddy County, New Mexico NAD 83		
Map System:	US State Plane 1983	System Datum:	Ground Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Tough Ombres 4/5 W0PO Fed Com #1H				
Site Position:		Northing:	547,752.90 usft	Latitude:	32.5057482
From:	Map	Easting:	586,443.30 usft	Longitude:	-104.1870164
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "		

Well	Sec 4, T21S, R27E					
Well Position	+N/-S	0.0 usft	Northing:	547,752.90 usft	Latitude:	32.5057482
	+E/-W	0.0 usft	Easting:	586,443.30 usft	Longitude:	-104.1870164
Position Uncertainty		0.0 usft	Wellhead Elevation:	3,222.0 usft	Ground Level:	3,194.0 usft
Grid Convergence:		0.08 °				

Wellbore	BHL: 3200' FSL & 2552' FEL (Sec 5)				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	12/31/2014	7.45	60.26	48,341.02214313

Design	Design #1				
Audit Notes:					
Version:		Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.0	0.0	0.0	283.45	

Plan Survey Tool Program	Date	8/9/2022			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.0	16,705.3	Design #1 (BHL: 3200' FSL & 255		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
750.0	0.00	0.00	750.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,501.3	15.03	8.70	1,492.7	96.8	14.8	2.00	2.00	0.00	8.70	
7,785.7	15.03	8.70	7,562.3	1,707.3	261.3	0.00	0.00	0.00	0.00	
8,537.0	0.00	0.00	8,305.0	1,804.2	276.1	2.00	-2.00	0.00	180.00	KOP: 3200' FSL & 10'
9,437.7	90.06	270.04	8,878.0	1,804.6	-297.5	10.00	10.00	0.00	-89.96	
16,705.3	90.06	270.04	8,870.0	1,809.9	-7,565.1	0.00	0.00	0.00	0.00	BHL: 3200' FSL & 255

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Tough Ombres 4/5 W0PO Fed Com #1H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3222.0usft (Original Well Elev)
Project:	Eddy County, New Mexico NAD 83	MD Reference:	WELL @ 3222.0usft (Original Well Elev)
Site:	Tough Ombres 4/5 W0PO Fed Com #1H	North Reference:	Grid
Well:	Sec 4, T21S, R27E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 3200' FSL & 2552' FEL (Sec 5)		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
SHL: 1390' FSL & 260' FEL (Sec 4)									
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
750.0	0.00	0.00	750.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	1.00	8.70	800.0	0.4	0.1	0.0	2.00	2.00	0.00
900.0	3.00	8.70	899.9	3.9	0.6	0.3	2.00	2.00	0.00
1,000.0	5.00	8.70	999.7	10.8	1.6	0.9	2.00	2.00	0.00
1,100.0	7.00	8.70	1,099.1	21.1	3.2	1.8	2.00	2.00	0.00
1,200.0	9.00	8.70	1,198.2	34.9	5.3	2.9	2.00	2.00	0.00
1,300.0	11.00	8.70	1,296.6	52.0	8.0	4.4	2.00	2.00	0.00
1,400.0	13.00	8.70	1,394.4	72.6	11.1	6.1	2.00	2.00	0.00
1,501.3	15.03	8.70	1,492.7	96.8	14.8	8.1	2.00	2.00	0.00
1,600.0	15.03	8.70	1,588.0	122.1	18.7	10.2	0.00	0.00	0.00
1,700.0	15.03	8.70	1,684.6	147.7	22.6	12.4	0.00	0.00	0.00
1,800.0	15.03	8.70	1,781.2	173.4	26.5	14.5	0.00	0.00	0.00
1,900.0	15.03	8.70	1,877.8	199.0	30.5	16.7	0.00	0.00	0.00
2,000.0	15.03	8.70	1,974.4	224.6	34.4	18.8	0.00	0.00	0.00
2,100.0	15.03	8.70	2,070.9	250.3	38.3	21.0	0.00	0.00	0.00
2,200.0	15.03	8.70	2,167.5	275.9	42.2	23.1	0.00	0.00	0.00
2,300.0	15.03	8.70	2,264.1	301.5	46.1	25.3	0.00	0.00	0.00
2,400.0	15.03	8.70	2,360.7	327.1	50.1	27.4	0.00	0.00	0.00
2,500.0	15.03	8.70	2,457.3	352.8	54.0	29.6	0.00	0.00	0.00
2,600.0	15.03	8.70	2,553.9	378.4	57.9	31.7	0.00	0.00	0.00
2,700.0	15.03	8.70	2,650.4	404.0	61.8	33.9	0.00	0.00	0.00
2,800.0	15.03	8.70	2,747.0	429.6	65.7	36.0	0.00	0.00	0.00
2,900.0	15.03	8.70	2,843.6	455.3	69.7	38.2	0.00	0.00	0.00
3,000.0	15.03	8.70	2,940.2	480.9	73.6	40.3	0.00	0.00	0.00
3,100.0	15.03	8.70	3,036.8	506.5	77.5	42.5	0.00	0.00	0.00
3,200.0	15.03	8.70	3,133.3	532.2	81.4	44.6	0.00	0.00	0.00
3,300.0	15.03	8.70	3,229.9	557.8	85.4	46.8	0.00	0.00	0.00
3,400.0	15.03	8.70	3,326.5	583.4	89.3	48.9	0.00	0.00	0.00
3,500.0	15.03	8.70	3,423.1	609.0	93.2	51.1	0.00	0.00	0.00
3,600.0	15.03	8.70	3,519.7	634.7	97.1	53.2	0.00	0.00	0.00
3,700.0	15.03	8.70	3,616.2	660.3	101.0	55.4	0.00	0.00	0.00
3,800.0	15.03	8.70	3,712.8	685.9	105.0	57.5	0.00	0.00	0.00
3,900.0	15.03	8.70	3,809.4	711.5	108.9	59.7	0.00	0.00	0.00
4,000.0	15.03	8.70	3,906.0	737.2	112.8	61.8	0.00	0.00	0.00
4,100.0	15.03	8.70	4,002.6	762.8	116.7	64.0	0.00	0.00	0.00
4,200.0	15.03	8.70	4,099.1	788.4	120.7	66.1	0.00	0.00	0.00
4,300.0	15.03	8.70	4,195.7	814.1	124.6	68.3	0.00	0.00	0.00
4,400.0	15.03	8.70	4,292.3	839.7	128.5	70.4	0.00	0.00	0.00
4,500.0	15.03	8.70	4,388.9	865.3	132.4	72.6	0.00	0.00	0.00
4,600.0	15.03	8.70	4,485.5	890.9	136.3	74.7	0.00	0.00	0.00
4,700.0	15.03	8.70	4,582.1	916.6	140.3	76.9	0.00	0.00	0.00
4,800.0	15.03	8.70	4,678.6	942.2	144.2	79.0	0.00	0.00	0.00
4,900.0	15.03	8.70	4,775.2	967.8	148.1	81.1	0.00	0.00	0.00
5,000.0	15.03	8.70	4,871.8	993.4	152.0	83.3	0.00	0.00	0.00
5,100.0	15.03	8.70	4,968.4	1,019.1	155.9	85.4	0.00	0.00	0.00

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Tough Ombres 4/5 W0PO Fed Com #1H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3222.0usft (Original Well Elev)
Project:	Eddy County, New Mexico NAD 83	MD Reference:	WELL @ 3222.0usft (Original Well Elev)
Site:	Tough Ombres 4/5 W0PO Fed Com #1H	North Reference:	Grid
Well:	Sec 4, T21S, R27E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 3200' FSL & 2552' FEL (Sec 5)		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,200.0	15.03	8.70	5,065.0	1,044.7	159.9	87.6	0.00	0.00	0.00
5,300.0	15.03	8.70	5,161.5	1,070.3	163.8	89.7	0.00	0.00	0.00
5,400.0	15.03	8.70	5,258.1	1,095.9	167.7	91.9	0.00	0.00	0.00
5,500.0	15.03	8.70	5,354.7	1,121.6	171.6	94.0	0.00	0.00	0.00
5,600.0	15.03	8.70	5,451.3	1,147.2	175.6	96.2	0.00	0.00	0.00
5,700.0	15.03	8.70	5,547.9	1,172.8	179.5	98.3	0.00	0.00	0.00
5,800.0	15.03	8.70	5,644.4	1,198.5	183.4	100.5	0.00	0.00	0.00
5,900.0	15.03	8.70	5,741.0	1,224.1	187.3	102.6	0.00	0.00	0.00
6,000.0	15.03	8.70	5,837.6	1,249.7	191.2	104.8	0.00	0.00	0.00
6,100.0	15.03	8.70	5,934.2	1,275.3	195.2	106.9	0.00	0.00	0.00
6,200.0	15.03	8.70	6,030.8	1,301.0	199.1	109.1	0.00	0.00	0.00
6,300.0	15.03	8.70	6,127.3	1,326.6	203.0	111.2	0.00	0.00	0.00
6,400.0	15.03	8.70	6,223.9	1,352.2	206.9	113.4	0.00	0.00	0.00
6,500.0	15.03	8.70	6,320.5	1,377.8	210.9	115.5	0.00	0.00	0.00
6,600.0	15.03	8.70	6,417.1	1,403.5	214.8	117.7	0.00	0.00	0.00
6,700.0	15.03	8.70	6,513.7	1,429.1	218.7	119.8	0.00	0.00	0.00
6,800.0	15.03	8.70	6,610.2	1,454.7	222.6	122.0	0.00	0.00	0.00
6,900.0	15.03	8.70	6,706.8	1,480.4	226.5	124.1	0.00	0.00	0.00
7,000.0	15.03	8.70	6,803.4	1,506.0	230.5	126.3	0.00	0.00	0.00
7,100.0	15.03	8.70	6,900.0	1,531.6	234.4	128.4	0.00	0.00	0.00
7,200.0	15.03	8.70	6,996.6	1,557.2	238.3	130.6	0.00	0.00	0.00
7,300.0	15.03	8.70	7,093.2	1,582.9	242.2	132.7	0.00	0.00	0.00
7,400.0	15.03	8.70	7,189.7	1,608.5	246.1	134.9	0.00	0.00	0.00
7,500.0	15.03	8.70	7,286.3	1,634.1	250.1	137.0	0.00	0.00	0.00
7,600.0	15.03	8.70	7,382.9	1,659.7	254.0	139.2	0.00	0.00	0.00
7,700.0	15.03	8.70	7,479.5	1,685.4	257.9	141.3	0.00	0.00	0.00
7,785.7	15.03	8.70	7,562.3	1,707.3	261.3	143.2	0.00	0.00	0.00
7,800.0	14.74	8.70	7,576.1	1,711.0	261.8	143.5	2.00	-2.00	0.00
7,900.0	12.74	8.70	7,673.2	1,734.4	265.4	145.4	2.00	-2.00	0.00
8,000.0	10.74	8.70	7,771.1	1,754.6	268.5	147.1	2.00	-2.00	0.00
8,100.0	8.74	8.70	7,869.7	1,771.3	271.1	148.5	2.00	-2.00	0.00
8,200.0	6.74	8.70	7,968.7	1,784.6	273.1	149.6	2.00	-2.00	0.00
8,300.0	4.74	8.70	8,068.2	1,794.5	274.6	150.5	2.00	-2.00	0.00
8,400.0	2.74	8.70	8,168.0	1,800.9	275.6	151.0	2.00	-2.00	0.00
8,500.0	0.74	8.70	8,268.0	1,803.9	276.1	151.3	2.00	-2.00	0.00
8,537.0	0.00	0.00	8,305.0	1,804.2	276.1	151.3	2.00	-2.00	0.00
KOP: 3200' FSL & 10' FEL (Sec 4)									
8,550.0	1.30	270.04	8,318.0	1,804.2	275.9	151.4	10.00	10.00	0.00
8,600.0	6.30	270.04	8,367.8	1,804.2	272.6	154.6	10.00	10.00	0.00
8,650.0	11.30	270.04	8,417.2	1,804.2	265.0	162.1	10.00	10.00	0.00
8,700.0	16.30	270.04	8,465.8	1,804.2	253.1	173.7	10.00	10.00	0.00
8,750.0	21.29	270.04	8,513.1	1,804.2	237.0	189.3	10.00	10.00	0.00
8,800.0	26.29	270.04	8,558.8	1,804.2	216.8	208.9	10.00	10.00	0.00
8,850.0	31.29	270.04	8,602.6	1,804.2	192.7	232.4	10.00	10.00	0.00
8,862.6	32.55	270.04	8,613.3	1,804.2	186.1	238.8	10.00	10.00	0.00
FTP: 3200' FSL & 100' FEL (Sec 4)									
8,900.0	36.29	270.04	8,644.2	1,804.3	164.9	259.4	10.00	10.00	0.00
8,950.0	41.29	270.04	8,683.1	1,804.3	133.6	289.9	10.00	10.00	0.00
9,000.0	46.29	270.04	8,719.2	1,804.3	99.0	323.5	10.00	10.00	0.00
9,050.0	51.29	270.04	8,752.1	1,804.3	61.4	360.1	10.00	10.00	0.00
9,100.0	56.29	270.04	8,781.7	1,804.4	21.1	399.3	10.00	10.00	0.00
9,150.0	61.29	270.04	8,807.6	1,804.4	-21.7	440.9	10.00	10.00	0.00
9,200.0	66.29	270.04	8,829.6	1,804.4	-66.5	484.5	10.00	10.00	0.00
9,250.0	71.29	270.04	8,847.7	1,804.5	-113.1	529.9	10.00	10.00	0.00

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Tough Ombres 4/5 W0PO Fed Com #1H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3222.0usft (Original Well Elev)
Project:	Eddy County, New Mexico NAD 83	MD Reference:	WELL @ 3222.0usft (Original Well Elev)
Site:	Tough Ombres 4/5 W0PO Fed Com #1H	North Reference:	Grid
Well:	Sec 4, T21S, R27E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 3200' FSL & 2552' FEL (Sec 5)		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,300.0	76.29	270.04	8,861.7	1,804.5	-161.1	576.5	10.00	10.00	0.00
9,350.0	81.29	270.04	8,871.4	1,804.5	-210.1	624.2	10.00	10.00	0.00
9,400.0	86.29	270.04	8,876.8	1,804.6	-259.8	672.6	10.00	10.00	0.00
9,437.2	90.01	270.04	8,878.0	1,804.6	-297.0	708.7	10.00	10.00	0.00
LP: 3200' FSL & 583' FEL (Sec 4)									
9,437.7	90.06	270.04	8,878.0	1,804.6	-297.5	709.3	10.00	10.00	0.00
9,500.0	90.06	270.04	8,877.9	1,804.6	-359.8	769.8	0.00	0.00	0.00
9,600.0	90.06	270.04	8,877.8	1,804.7	-459.8	867.1	0.00	0.00	0.00
9,700.0	90.06	270.04	8,877.7	1,804.8	-559.8	964.4	0.00	0.00	0.00
9,800.0	90.06	270.04	8,877.6	1,804.9	-659.8	1,061.6	0.00	0.00	0.00
9,900.0	90.06	270.04	8,877.5	1,804.9	-759.8	1,158.9	0.00	0.00	0.00
10,000.0	90.06	270.04	8,877.4	1,805.0	-859.8	1,256.2	0.00	0.00	0.00
10,100.0	90.06	270.04	8,877.3	1,805.1	-959.8	1,353.5	0.00	0.00	0.00
10,184.2	90.06	270.04	8,877.2	1,805.1	-1,044.0	1,435.4	0.00	0.00	0.00
PPP2: 3200' FSL & 1330' FEL (Sec 4)									
10,200.0	90.06	270.04	8,877.2	1,805.1	-1,059.8	1,450.7	0.00	0.00	0.00
10,300.0	90.06	270.04	8,877.1	1,805.2	-1,159.8	1,548.0	0.00	0.00	0.00
10,400.0	90.06	270.04	8,876.9	1,805.3	-1,259.8	1,645.3	0.00	0.00	0.00
10,500.0	90.06	270.04	8,876.8	1,805.4	-1,359.8	1,742.5	0.00	0.00	0.00
10,600.0	90.06	270.04	8,876.7	1,805.4	-1,459.8	1,839.8	0.00	0.00	0.00
10,700.0	90.06	270.04	8,876.6	1,805.5	-1,559.8	1,937.1	0.00	0.00	0.00
10,800.0	90.06	270.04	8,876.5	1,805.6	-1,659.8	2,034.4	0.00	0.00	0.00
10,900.0	90.06	270.04	8,876.4	1,805.7	-1,759.8	2,131.6	0.00	0.00	0.00
11,000.0	90.06	270.04	8,876.3	1,805.7	-1,859.8	2,228.9	0.00	0.00	0.00
11,100.0	90.06	270.04	8,876.2	1,805.8	-1,959.8	2,326.2	0.00	0.00	0.00
11,200.0	90.06	270.04	8,876.1	1,805.9	-2,059.8	2,423.5	0.00	0.00	0.00
11,300.0	90.06	270.04	8,875.9	1,806.0	-2,159.8	2,520.7	0.00	0.00	0.00
11,400.0	90.06	270.04	8,875.8	1,806.0	-2,259.8	2,618.0	0.00	0.00	0.00
11,500.0	90.06	270.04	8,875.7	1,806.1	-2,359.8	2,715.3	0.00	0.00	0.00
11,514.1	90.06	270.04	8,875.7	1,806.1	-2,373.9	2,729.0	0.00	0.00	0.00
PPP3: 3200' FSL & 2640' FWL (Sec 4)									
11,600.0	90.06	270.04	8,875.6	1,806.2	-2,459.8	2,812.5	0.00	0.00	0.00
11,700.0	90.06	270.04	8,875.5	1,806.2	-2,559.8	2,909.8	0.00	0.00	0.00
11,800.0	90.06	270.04	8,875.4	1,806.3	-2,659.8	3,007.1	0.00	0.00	0.00
11,900.0	90.06	270.04	8,875.3	1,806.4	-2,759.8	3,104.4	0.00	0.00	0.00
12,000.0	90.06	270.04	8,875.2	1,806.5	-2,859.8	3,201.6	0.00	0.00	0.00
12,100.0	90.06	270.04	8,875.1	1,806.5	-2,959.8	3,298.9	0.00	0.00	0.00
12,200.0	90.06	270.04	8,875.0	1,806.6	-3,059.8	3,396.2	0.00	0.00	0.00
12,300.0	90.06	270.04	8,874.8	1,806.7	-3,159.8	3,493.5	0.00	0.00	0.00
12,400.0	90.06	270.04	8,874.7	1,806.8	-3,259.8	3,590.7	0.00	0.00	0.00
12,500.0	90.06	270.04	8,874.6	1,806.8	-3,359.8	3,688.0	0.00	0.00	0.00
12,600.0	90.06	270.04	8,874.5	1,806.9	-3,459.8	3,785.3	0.00	0.00	0.00
12,700.0	90.06	270.04	8,874.4	1,807.0	-3,559.8	3,882.5	0.00	0.00	0.00
12,800.0	90.06	270.04	8,874.3	1,807.0	-3,659.8	3,979.8	0.00	0.00	0.00
12,900.0	90.06	270.04	8,874.2	1,807.1	-3,759.8	4,077.1	0.00	0.00	0.00
13,000.0	90.06	270.04	8,874.1	1,807.2	-3,859.8	4,174.4	0.00	0.00	0.00
13,100.0	90.06	270.04	8,874.0	1,807.3	-3,959.8	4,271.6	0.00	0.00	0.00
13,200.0	90.06	270.04	8,873.9	1,807.3	-4,059.8	4,368.9	0.00	0.00	0.00
13,300.0	90.06	270.04	8,873.7	1,807.4	-4,159.8	4,466.2	0.00	0.00	0.00
13,400.0	90.06	270.04	8,873.6	1,807.5	-4,259.8	4,563.4	0.00	0.00	0.00
13,500.0	90.06	270.04	8,873.5	1,807.6	-4,359.8	4,660.7	0.00	0.00	0.00
13,600.0	90.06	270.04	8,873.4	1,807.6	-4,459.8	4,758.0	0.00	0.00	0.00
13,700.0	90.06	270.04	8,873.3	1,807.7	-4,559.8	4,855.3	0.00	0.00	0.00

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Tough Ombres 4/5 W0PO Fed Com #1H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3222.0usft (Original Well Elev)
Project:	Eddy County, New Mexico NAD 83	MD Reference:	WELL @ 3222.0usft (Original Well Elev)
Site:	Tough Ombres 4/5 W0PO Fed Com #1H	North Reference:	Grid
Well:	Sec 4, T21S, R27E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 3200' FSL & 2552' FEL (Sec 5)		
Design:	Design #1		



Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,800.0	90.06	270.04	8,873.2	1,807.8	-4,659.8	4,952.5	0.00	0.00	0.00
13,900.0	90.06	270.04	8,873.1	1,807.8	-4,759.8	5,049.8	0.00	0.00	0.00
14,000.0	90.06	270.04	8,873.0	1,807.9	-4,859.8	5,147.1	0.00	0.00	0.00
14,100.0	90.06	270.04	8,872.9	1,808.0	-4,959.8	5,244.4	0.00	0.00	0.00
14,200.0	90.06	270.04	8,872.8	1,808.1	-5,059.8	5,341.6	0.00	0.00	0.00
14,300.0	90.06	270.04	8,872.6	1,808.1	-5,159.8	5,438.9	0.00	0.00	0.00
14,400.0	90.06	270.04	8,872.5	1,808.2	-5,259.8	5,536.2	0.00	0.00	0.00
14,500.0	90.06	270.04	8,872.4	1,808.3	-5,359.8	5,633.4	0.00	0.00	0.00
14,600.0	90.06	270.04	8,872.3	1,808.4	-5,459.8	5,730.7	0.00	0.00	0.00
14,700.0	90.06	270.04	8,872.2	1,808.4	-5,559.8	5,828.0	0.00	0.00	0.00
14,800.0	90.06	270.04	8,872.1	1,808.5	-5,659.8	5,925.3	0.00	0.00	0.00
14,900.0	90.06	270.04	8,872.0	1,808.6	-5,759.8	6,022.5	0.00	0.00	0.00
15,000.0	90.06	270.04	8,871.9	1,808.7	-5,859.8	6,119.8	0.00	0.00	0.00
15,100.0	90.06	270.04	8,871.8	1,808.7	-5,959.8	6,217.1	0.00	0.00	0.00
15,200.0	90.06	270.04	8,871.7	1,808.8	-6,059.8	6,314.3	0.00	0.00	0.00
15,300.0	90.06	270.04	8,871.5	1,808.9	-6,159.8	6,411.6	0.00	0.00	0.00
15,400.0	90.06	270.04	8,871.4	1,808.9	-6,259.8	6,508.9	0.00	0.00	0.00
15,500.0	90.06	270.04	8,871.3	1,809.0	-6,359.8	6,606.2	0.00	0.00	0.00
15,600.0	90.06	270.04	8,871.2	1,809.1	-6,459.8	6,703.4	0.00	0.00	0.00
15,700.0	90.06	270.04	8,871.1	1,809.2	-6,559.8	6,800.7	0.00	0.00	0.00
15,800.0	90.06	270.04	8,871.0	1,809.2	-6,659.8	6,898.0	0.00	0.00	0.00
15,900.0	90.06	270.04	8,870.9	1,809.3	-6,759.8	6,995.3	0.00	0.00	0.00
16,000.0	90.06	270.04	8,870.8	1,809.4	-6,859.8	7,092.5	0.00	0.00	0.00
16,100.0	90.06	270.04	8,870.7	1,809.5	-6,959.8	7,189.8	0.00	0.00	0.00
16,200.0	90.06	270.04	8,870.6	1,809.5	-7,059.8	7,287.1	0.00	0.00	0.00
16,300.0	90.06	270.04	8,870.4	1,809.6	-7,159.8	7,384.3	0.00	0.00	0.00
16,400.0	90.06	270.04	8,870.3	1,809.7	-7,259.8	7,481.6	0.00	0.00	0.00
16,500.0	90.06	270.04	8,870.2	1,809.7	-7,359.8	7,578.9	0.00	0.00	0.00
16,600.0	90.06	270.04	8,870.1	1,809.8	-7,459.8	7,676.2	0.00	0.00	0.00
16,705.3	90.06	270.04	8,870.0	1,809.9	-7,565.1	7,778.6	0.00	0.00	0.00
BHL: 3200' FSL & 2552' FEL (Sec 5)									

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Tough Ombres 4/5 W0PO Fed Com #1H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3222.0usft (Original Well Elev)
Project:	Eddy County, New Mexico NAD 83	MD Reference:	WELL @ 3222.0usft (Original Well Elev)
Site:	Tough Ombres 4/5 W0PO Fed Com #1H	North Reference:	Grid
Well:	Sec 4, T21S, R27E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 3200' FSL & 2552' FEL (Sec 5)		
Design:	Design #1		

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
SHL: 1390' FSL & 260' F - plan hits target center - Point	0.00	0.00	0.0	0.0	0.0	547,752.90	586,443.30	32.5057482	-104.1870164
KOP: 3200' FSL & 10' FI - plan hits target center - Point	0.00	0.00	8,305.0	1,804.2	276.1	549,557.07	586,719.40	32.5107065	-104.1861127
FTP: 3200' FSL & 100' FI - plan hits target center - Point	0.00	0.00	8,613.3	1,804.2	186.1	549,557.14	586,629.39	32.5107070	-104.1864047
BHL: 3200' FSL & 2552' - plan hits target center - Point	0.00	0.00	8,870.0	1,809.9	-7,565.1	549,562.80	578,878.20	32.5107494	-104.2115497
PPP3: 3200' FSL & 264 - plan hits target center - Point	0.00	0.00	8,875.7	1,806.1	-2,373.9	549,559.01	584,069.40	32.5107215	-104.1947093
PPP2: 3200' FSL & 133C - plan hits target center - Point	0.00	0.00	8,877.2	1,805.1	-1,044.0	549,558.04	585,399.28	32.5107140	-104.1903952
LP: 3200' FSL & 583' FE - plan hits target center - Point	0.00	0.00	8,878.0	1,804.6	-297.0	549,557.49	586,146.34	32.5107098	-104.1879717

Tough Ombres 4/5 W0PO Fed Com #1H

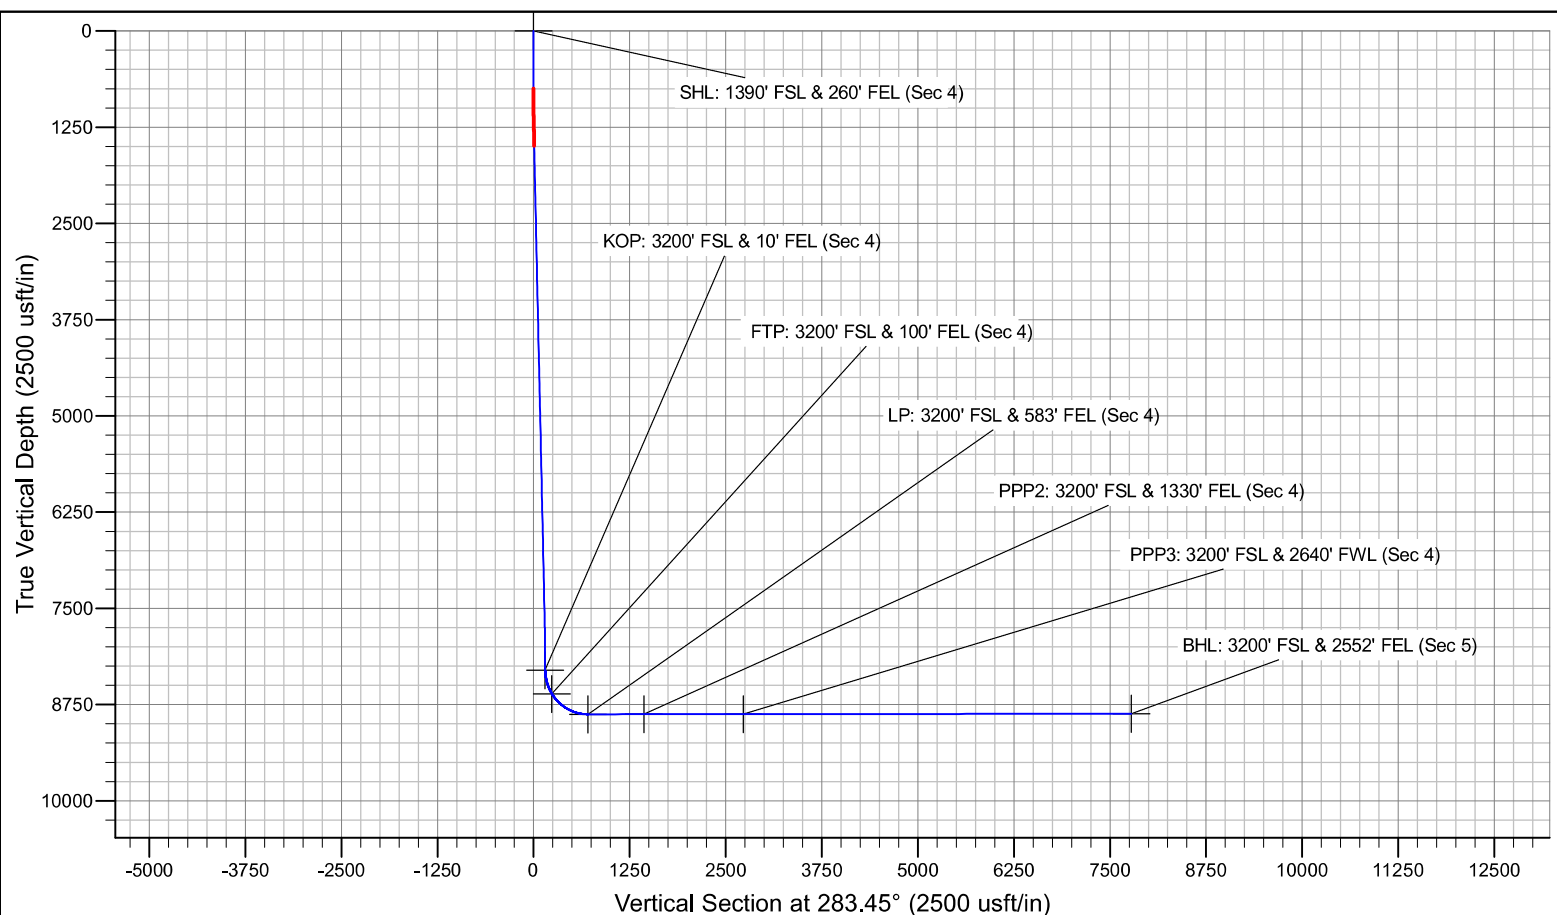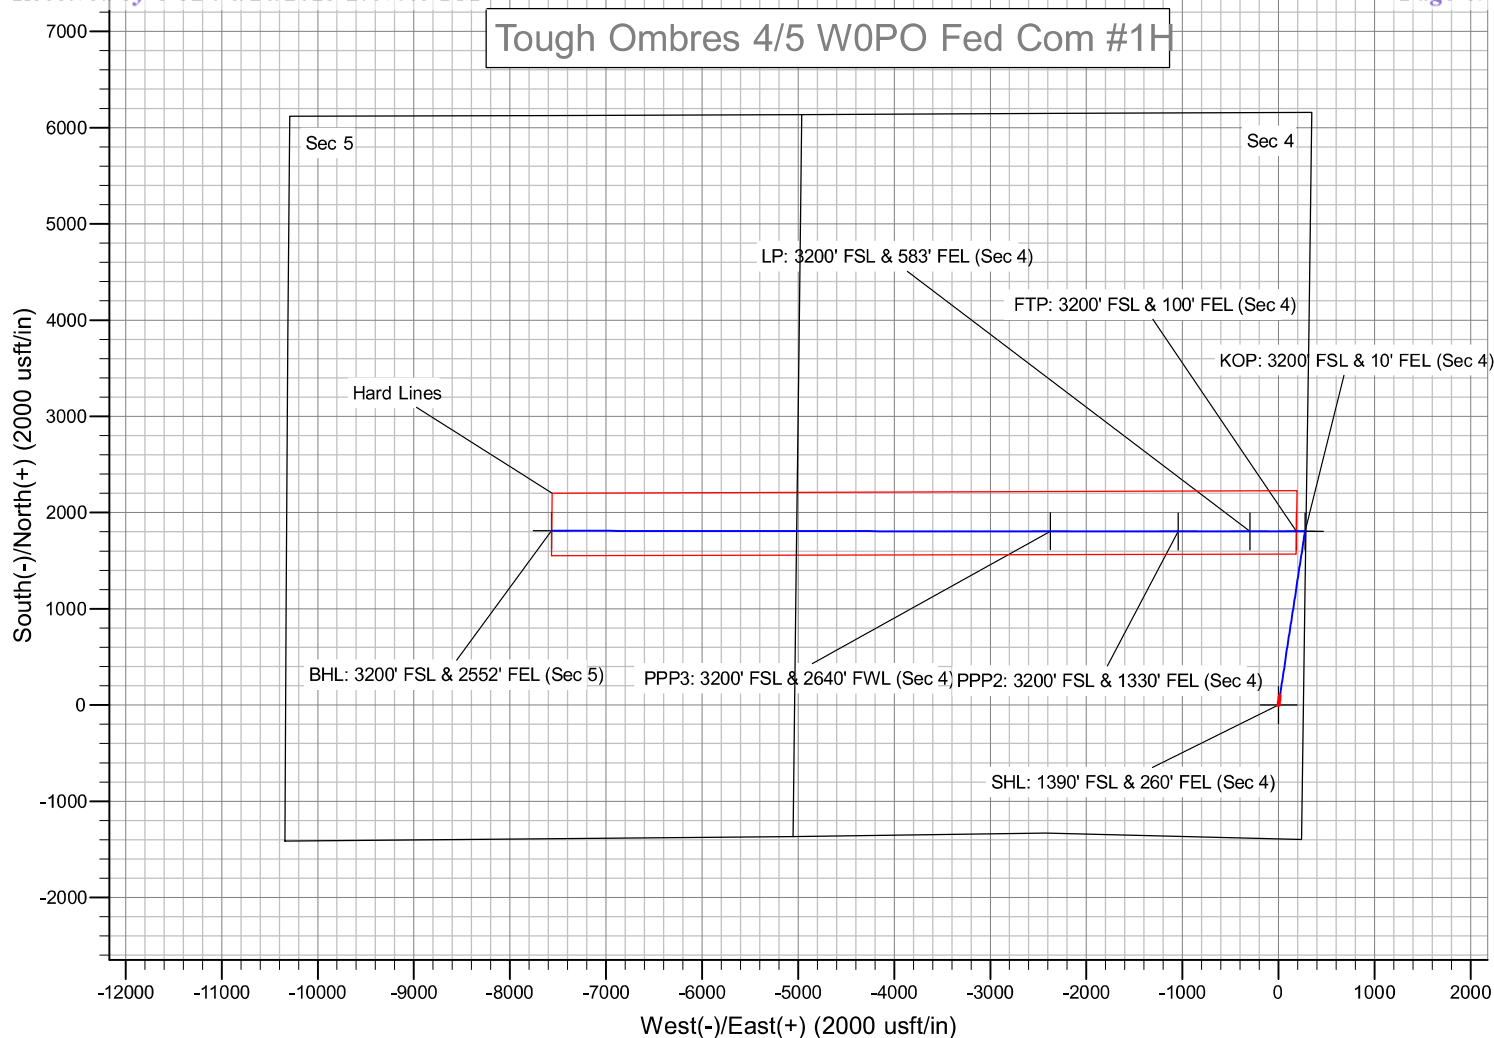

Operator Name: Mewbourne Oil Company	Property Name: Tough Ombres 4/5 W0PO Fed Com	Well Number 1H
---	---	-------------------

Kick Off Point (KOP)

UL P	Section 4	Township 21S	Range 27E	Lot 16	Feet 3200	From N/S S	Feet 10	From E/W E	County Eddy
Latitude 32.5107065					Longitude -104.1861127			NAD 83	

First Take Point (FTP)

UL P	Section 4	Township 21S	Range 27E	Lot 16	Feet 3200	From N/S S	Feet 100	From E/W E	County Eddy
Latitude 32.5107070					Longitude -104.1864047			NAD 83	

Last Take Point (LTP)

UL O	Section 5	Township 21S	Range 27E	Lot 15	Feet 3200	From N/S S	Feet 2552	From E/W E	County Eddy
Latitude 32.5107494					Longitude -104.2115497			NAD 83	

Is this well the defining well for the Horizontal Spacing Unit?

Is this well an infill well?

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #			
Operator Name:	Property Name:	Well Number	

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	MEWBOURNE OIL COMPANY
LEASE NO.:	NMNM18726
WELL NAME & NO.:	TOUGH OMBRES 4-5 W0PO FED COM 1H
SURFACE HOLE FOOTAGE:	1390'/S & 260'/E
BOTTOM HOLE FOOTAGE:	3200'/S & 2552'/E
LOCATION:	SECTION 4, T21S, R27E, NMP
COUNTY:	Eddy County, New Mexico

COA

H2S	☐ Yes	☒ No	
Potash	☒ None	☐ Secretary	☐ R-111-P
Cave/Karst Potential	☐ Low	☐ Medium	☒ High
Cave/Karst Potential	☐ Critical		
Variance	☐ None	☒ Flex Hose	☐ Other
Wellhead	☐ Conventional	☒ Multibowl	☐ Both
Other	☒ 4 String Area	☒ Capitan Reef	☐ WIPP
Other	☐ Fluid Filled	☐ Cement Squeeze	☐ Pilot Hole
Special Requirements	☐ Water Disposal	☒ COM	☐ Unit

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H2S) monitors shall be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

Casing Design:

1. The **20** inch surface casing shall be set at approximately **350** feet (a minimum of **70** feet (**Eddy County**) into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after

- completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The **13-3/8** inch first intermediate casing shall be set at approximately **700** feet. The minimum required fill of cement behind the **13-3/8** inch first intermediate casing is:
- Cement to surface. If cement does not circulate see B.1.a, c-d above.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
 - ❖ In High Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
 - ❖ In Capitan Reef Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
 - ❖ **Special Capitan Reef requirements.** If lost circulation (50% or greater) occurs below the Base of the Salt, the operator shall do the following:
(Use this for 3 string wells in the Capitan Reef, if 4 string well ensure FW based mud used across the capitan interval)
 - Switch to fresh water mud to protect the Capitan Reef and use fresh water mud until setting the intermediate casing. The appropriate BLM office is to be notified for a PET to witness the switch to fresh water.
 - Daily drilling reports from the Base of the Salt to the setting of the intermediate casing are to be submitted to the BLM CFO engineering staff via e-mail by 0800 hours each morning. Any lost circulation encountered is to be recorded on these drilling reports. The daily drilling report should show mud volume per shift/tour. Failure to submit these reports will result in an Incidence of Non-Compliance being issued for failure to comply with the Conditions of Approval. If not already planned, the operator shall run a caliper survey for the intermediate well bore and submit to the appropriate BLM office.

3. The **9-5/8** inch second intermediate casing shall be set at approximately **2,600** feet. The minimum required fill of cement behind the **9-5/8** inch second intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
Excess cement calculates to -17%, additional cement might be required.

Option 2:

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
 - b. Second stage above DV tool:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
Excess cement calculates to 5%, additional cement might be required.
4. The minimum required fill of cement behind the **7** inch production casing is:
- Cement should tie-back at least **50 feet** on top of Capitan Reef top. If cement does not circulate see B.1.a, c-d above.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
Excess cement calculates to 0%, additional cement might be required.
5. The minimum required fill of cement behind the **4-1/2** inch production liner is:
- Cement should tie-back **100 feet** into the previous casing. Operator shall provide method of verification.

Excess cement calculates to -21%, additional cement might be required.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
 2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Carlsbad Field Office, 620 E Greene St. Carlsbad, New Mexico 88220, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including

lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

OTA06112023

Hydrogen Sulfide Drilling Operations Plan
Mewbourne Oil Company

1. General Requirements

Rule 118 does not apply to this well because MOC has researched this area and no high concentrations of H₂S were found. MOC will have on location and working all H₂S safety equipment before the Delaware formation for purposes of safety and insurance requirements.

2. Hydrogen Sulfide Training

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will have received training from a qualified instructor in the following areas prior to entering the drilling pad area of the well:

1. The hazards and characteristics of hydrogen sulfide gas.
2. The proper use of personal protective equipment and life support systems.
3. The proper use of hydrogen sulfide detectors, alarms, warning systems, briefing areas, evacuation procedures.
4. The proper techniques for first aid and rescue operations.

Additionally, supervisory personnel will be trained in the following areas:

- 1 The effects of hydrogen sulfide on metal components. If high tensile tubular systems are utilized, supervisory personnel will be trained in their special maintenance requirements.
- 2 Corrective action and shut in procedures, blowout prevention, and well control procedures while drilling a well.
- 3 The contents of the Hydrogen Sulfide Drilling Operations Plan.

There will be an initial training session prior to encountering a known hydrogen sulfide source. The initial training session shall include a review of the site specific Hydrogen Sulfide Drilling Operations Plan.

3. Hydrogen Sulfide Safety Equipment and Systems

All hydrogen sulfide safety equipment and systems will be installed, tested, and operational prior to drilling below the 9 5/8" intermediate casing.

1. Well Control Equipment
 - A. Choke manifold with minimum of one adjustable choke/remote choke.
 - B. Blowout preventers equipped with blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit
 - C. Auxiliary equipment including annular type blowout preventer.
2. Protective Equipment for Essential Personnel

Thirty minute self contained work unit located in the dog house and at briefing areas.

Additionally: If H₂S is encountered in concentrations less than 10 ppm, fans will be placed in work areas to prevent the accumulation of hazardous amounts of poisonous gas. If higher concentrations of H₂S are detected the well will be shut in and a rotating head, mud/gas separator, remote choke and flare line with igniter will be installed.

3. Hydrogen Sulfide Protection and Monitoring Equipment
Two portable hydrogen sulfide monitors positioned on location for optimum coverage and detection. The units shall have audible sirens to notify personnel when hydrogen sulfide levels exceed 20 PPM.
4. Visual Warning Systems
 - A. Wind direction indicators as indicated on the wellsite diagram.
 - B. Caution signs shall be posted on roads providing access to location. Signs shall be painted a high visibility color with lettering of sufficient size to be readable at reasonable distances from potentially contaminated areas.

4. **Mud Program**

The mud program has been designed to minimize the amount of hydrogen sulfide entrained in the mud system. Proper mud weight, safe drilling practices, and the use of hydrogen sulfide scavengers will minimize hazards while drilling the well.

5. **Metallurgy**

All tubular systems, wellheads, blowout preventers, drilling spools, kill lines, choke manifolds, and valves shall be suitable for service in a hydrogen sulfide environment when chemically treated.

6. **Communications**

State & County Officials phone numbers are posted on rig floor and supervisors trailer. Communications in company vehicles and toolpushers are either two way radios or cellular phones.

7. **Well Testing**

Drill stem testing is not an anticipated requirement for evaluation of this well. If a drill stem test is required, it will be conducted with a minimum number of personnel in the immediate vicinity. The test will be conducted during daylight hours only.

8. **Emergency Phone Numbers**

Eddy County Sheriff's Office	911 or 575-887-7551
Ambulance Service	911 or 575-885-2111
Carlsbad Fire Dept	911 or 575-885-2111
Loco Hills Volunteer Fire Dept.	911 or 575-677-3266
Closest Medical Facility - Columbia Medical Center of Carlsbad	575-492-5000

Mewbourne Oil Company	Hobbs District Office	575-393-5905
	Fax	575-397-6252
	2nd Fax	575-393-7259

District Manager	Robin Terrell	575-390-4816
Drilling Superintendent	Frosty Lathan	575-390-4103
	Bradley Bishop	575-390-6838
Drilling Foreman	Wesley Noseff	575-441-0729

Mewbourne Oil Company

Eddy County, New Mexico NAD 83

Tough Ombres 4/5 W0PO Fed Com #1H

Sec 4, T21S, R27E

SHL: 1390' FSL & 260' FEL (Sec 4)

BHL: 3200' FSL & 2552' FEL (Sec 5)

Plan: Design #1

Standard Planning Report

09 August, 2022

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Tough Ombres 4/5 W0PO Fed Com #1H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3222.0usft (Original Well Elev)
Project:	Eddy County, New Mexico NAD 83	MD Reference:	WELL @ 3222.0usft (Original Well Elev)
Site:	Tough Ombres 4/5 W0PO Fed Com #1H	North Reference:	Grid
Well:	Sec 4, T21S, R27E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 3200' FSL & 2552' FEL (Sec 5)		
Design:	Design #1		

Project	Eddy County, New Mexico NAD 83		
Map System:	US State Plane 1983	System Datum:	Ground Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Tough Ombres 4/5 W0PO Fed Com #1H			
Site Position:		Northing:	547,752.90 usft	Latitude: 32.5057482
From:	Map	Easting:	586,443.30 usft	Longitude: -104.1870164
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "	

Well	Sec 4, T21S, R27E			
Well Position	+N/-S	0.0 usft	Northing:	547,752.90 usft
	+E/-W	0.0 usft	Easting:	586,443.30 usft
Position Uncertainty		0.0 usft	Wellhead Elevation:	3,222.0 usft
Grid Convergence:		0.08 °	Ground Level:	3,194.0 usft

Wellbore	BHL: 3200' FSL & 2552' FEL (Sec 5)				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	12/31/2014	7.45	60.26	48,341.02214313

Design	Design #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	283.45

Plan Survey Tool Program	Date	8/9/2022		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.0	16,705.3	Design #1 (BHL: 3200' FSL & 255	

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
750.0	0.00	0.00	750.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,501.3	15.03	8.70	1,492.7	96.8	14.8	2.00	2.00	0.00	8.70	
7,785.7	15.03	8.70	7,562.3	1,707.3	261.3	0.00	0.00	0.00	0.00	
8,537.0	0.00	0.00	8,305.0	1,804.2	276.1	2.00	-2.00	0.00	180.00	KOP: 3200' FSL & 10'
9,437.7	90.06	270.04	8,878.0	1,804.6	-297.5	10.00	10.00	0.00	-89.96	
16,705.3	90.06	270.04	8,870.0	1,809.9	-7,565.1	0.00	0.00	0.00	0.00	BHL: 3200' FSL & 255

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Tough Ombres 4/5 W0PO Fed Com #1H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3222.0usft (Original Well Elev)
Project:	Eddy County, New Mexico NAD 83	MD Reference:	WELL @ 3222.0usft (Original Well Elev)
Site:	Tough Ombres 4/5 W0PO Fed Com #1H	North Reference:	Grid
Well:	Sec 4, T21S, R27E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 3200' FSL & 2552' FEL (Sec 5)		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
SHL: 1390' FSL & 260' FEL (Sec 4)									
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
750.0	0.00	0.00	750.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	1.00	8.70	800.0	0.4	0.1	0.0	2.00	2.00	0.00
900.0	3.00	8.70	899.9	3.9	0.6	0.3	2.00	2.00	0.00
1,000.0	5.00	8.70	999.7	10.8	1.6	0.9	2.00	2.00	0.00
1,100.0	7.00	8.70	1,099.1	21.1	3.2	1.8	2.00	2.00	0.00
1,200.0	9.00	8.70	1,198.2	34.9	5.3	2.9	2.00	2.00	0.00
1,300.0	11.00	8.70	1,296.6	52.0	8.0	4.4	2.00	2.00	0.00
1,400.0	13.00	8.70	1,394.4	72.6	11.1	6.1	2.00	2.00	0.00
1,501.3	15.03	8.70	1,492.7	96.8	14.8	8.1	2.00	2.00	0.00
1,600.0	15.03	8.70	1,588.0	122.1	18.7	10.2	0.00	0.00	0.00
1,700.0	15.03	8.70	1,684.6	147.7	22.6	12.4	0.00	0.00	0.00
1,800.0	15.03	8.70	1,781.2	173.4	26.5	14.5	0.00	0.00	0.00
1,900.0	15.03	8.70	1,877.8	199.0	30.5	16.7	0.00	0.00	0.00
2,000.0	15.03	8.70	1,974.4	224.6	34.4	18.8	0.00	0.00	0.00
2,100.0	15.03	8.70	2,070.9	250.3	38.3	21.0	0.00	0.00	0.00
2,200.0	15.03	8.70	2,167.5	275.9	42.2	23.1	0.00	0.00	0.00
2,300.0	15.03	8.70	2,264.1	301.5	46.1	25.3	0.00	0.00	0.00
2,400.0	15.03	8.70	2,360.7	327.1	50.1	27.4	0.00	0.00	0.00
2,500.0	15.03	8.70	2,457.3	352.8	54.0	29.6	0.00	0.00	0.00
2,600.0	15.03	8.70	2,553.9	378.4	57.9	31.7	0.00	0.00	0.00
2,700.0	15.03	8.70	2,650.4	404.0	61.8	33.9	0.00	0.00	0.00
2,800.0	15.03	8.70	2,747.0	429.6	65.7	36.0	0.00	0.00	0.00
2,900.0	15.03	8.70	2,843.6	455.3	69.7	38.2	0.00	0.00	0.00
3,000.0	15.03	8.70	2,940.2	480.9	73.6	40.3	0.00	0.00	0.00
3,100.0	15.03	8.70	3,036.8	506.5	77.5	42.5	0.00	0.00	0.00
3,200.0	15.03	8.70	3,133.3	532.2	81.4	44.6	0.00	0.00	0.00
3,300.0	15.03	8.70	3,229.9	557.8	85.4	46.8	0.00	0.00	0.00
3,400.0	15.03	8.70	3,326.5	583.4	89.3	48.9	0.00	0.00	0.00
3,500.0	15.03	8.70	3,423.1	609.0	93.2	51.1	0.00	0.00	0.00
3,600.0	15.03	8.70	3,519.7	634.7	97.1	53.2	0.00	0.00	0.00
3,700.0	15.03	8.70	3,616.2	660.3	101.0	55.4	0.00	0.00	0.00
3,800.0	15.03	8.70	3,712.8	685.9	105.0	57.5	0.00	0.00	0.00
3,900.0	15.03	8.70	3,809.4	711.5	108.9	59.7	0.00	0.00	0.00
4,000.0	15.03	8.70	3,906.0	737.2	112.8	61.8	0.00	0.00	0.00
4,100.0	15.03	8.70	4,002.6	762.8	116.7	64.0	0.00	0.00	0.00
4,200.0	15.03	8.70	4,099.1	788.4	120.7	66.1	0.00	0.00	0.00
4,300.0	15.03	8.70	4,195.7	814.1	124.6	68.3	0.00	0.00	0.00
4,400.0	15.03	8.70	4,292.3	839.7	128.5	70.4	0.00	0.00	0.00
4,500.0	15.03	8.70	4,388.9	865.3	132.4	72.6	0.00	0.00	0.00
4,600.0	15.03	8.70	4,485.5	890.9	136.3	74.7	0.00	0.00	0.00
4,700.0	15.03	8.70	4,582.1	916.6	140.3	76.9	0.00	0.00	0.00
4,800.0	15.03	8.70	4,678.6	942.2	144.2	79.0	0.00	0.00	0.00
4,900.0	15.03	8.70	4,775.2	967.8	148.1	81.1	0.00	0.00	0.00
5,000.0	15.03	8.70	4,871.8	993.4	152.0	83.3	0.00	0.00	0.00
5,100.0	15.03	8.70	4,968.4	1,019.1	155.9	85.4	0.00	0.00	0.00

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Tough Ombres 4/5 W0PO Fed Com #1H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3222.0usft (Original Well Elev)
Project:	Eddy County, New Mexico NAD 83	MD Reference:	WELL @ 3222.0usft (Original Well Elev)
Site:	Tough Ombres 4/5 W0PO Fed Com #1H	North Reference:	Grid
Well:	Sec 4, T21S, R27E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 3200' FSL & 2552' FEL (Sec 5)		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,200.0	15.03	8.70	5,065.0	1,044.7	159.9	87.6	0.00	0.00	0.00
5,300.0	15.03	8.70	5,161.5	1,070.3	163.8	89.7	0.00	0.00	0.00
5,400.0	15.03	8.70	5,258.1	1,095.9	167.7	91.9	0.00	0.00	0.00
5,500.0	15.03	8.70	5,354.7	1,121.6	171.6	94.0	0.00	0.00	0.00
5,600.0	15.03	8.70	5,451.3	1,147.2	175.6	96.2	0.00	0.00	0.00
5,700.0	15.03	8.70	5,547.9	1,172.8	179.5	98.3	0.00	0.00	0.00
5,800.0	15.03	8.70	5,644.4	1,198.5	183.4	100.5	0.00	0.00	0.00
5,900.0	15.03	8.70	5,741.0	1,224.1	187.3	102.6	0.00	0.00	0.00
6,000.0	15.03	8.70	5,837.6	1,249.7	191.2	104.8	0.00	0.00	0.00
6,100.0	15.03	8.70	5,934.2	1,275.3	195.2	106.9	0.00	0.00	0.00
6,200.0	15.03	8.70	6,030.8	1,301.0	199.1	109.1	0.00	0.00	0.00
6,300.0	15.03	8.70	6,127.3	1,326.6	203.0	111.2	0.00	0.00	0.00
6,400.0	15.03	8.70	6,223.9	1,352.2	206.9	113.4	0.00	0.00	0.00
6,500.0	15.03	8.70	6,320.5	1,377.8	210.9	115.5	0.00	0.00	0.00
6,600.0	15.03	8.70	6,417.1	1,403.5	214.8	117.7	0.00	0.00	0.00
6,700.0	15.03	8.70	6,513.7	1,429.1	218.7	119.8	0.00	0.00	0.00
6,800.0	15.03	8.70	6,610.2	1,454.7	222.6	122.0	0.00	0.00	0.00
6,900.0	15.03	8.70	6,706.8	1,480.4	226.5	124.1	0.00	0.00	0.00
7,000.0	15.03	8.70	6,803.4	1,506.0	230.5	126.3	0.00	0.00	0.00
7,100.0	15.03	8.70	6,900.0	1,531.6	234.4	128.4	0.00	0.00	0.00
7,200.0	15.03	8.70	6,996.6	1,557.2	238.3	130.6	0.00	0.00	0.00
7,300.0	15.03	8.70	7,093.2	1,582.9	242.2	132.7	0.00	0.00	0.00
7,400.0	15.03	8.70	7,189.7	1,608.5	246.1	134.9	0.00	0.00	0.00
7,500.0	15.03	8.70	7,286.3	1,634.1	250.1	137.0	0.00	0.00	0.00
7,600.0	15.03	8.70	7,382.9	1,659.7	254.0	139.2	0.00	0.00	0.00
7,700.0	15.03	8.70	7,479.5	1,685.4	257.9	141.3	0.00	0.00	0.00
7,785.7	15.03	8.70	7,562.3	1,707.3	261.3	143.2	0.00	0.00	0.00
7,800.0	14.74	8.70	7,576.1	1,711.0	261.8	143.5	2.00	-2.00	0.00
7,900.0	12.74	8.70	7,673.2	1,734.4	265.4	145.4	2.00	-2.00	0.00
8,000.0	10.74	8.70	7,771.1	1,754.6	268.5	147.1	2.00	-2.00	0.00
8,100.0	8.74	8.70	7,869.7	1,771.3	271.1	148.5	2.00	-2.00	0.00
8,200.0	6.74	8.70	7,968.7	1,784.6	273.1	149.6	2.00	-2.00	0.00
8,300.0	4.74	8.70	8,068.2	1,794.5	274.6	150.5	2.00	-2.00	0.00
8,400.0	2.74	8.70	8,168.0	1,800.9	275.6	151.0	2.00	-2.00	0.00
8,500.0	0.74	8.70	8,268.0	1,803.9	276.1	151.3	2.00	-2.00	0.00
8,537.0	0.00	0.00	8,305.0	1,804.2	276.1	151.3	2.00	-2.00	0.00
KOP: 3200' FSL & 10' FEL (Sec 4)									
8,550.0	1.30	270.04	8,318.0	1,804.2	275.9	151.4	10.00	10.00	0.00
8,600.0	6.30	270.04	8,367.8	1,804.2	272.6	154.6	10.00	10.00	0.00
8,650.0	11.30	270.04	8,417.2	1,804.2	265.0	162.1	10.00	10.00	0.00
8,700.0	16.30	270.04	8,465.8	1,804.2	253.1	173.7	10.00	10.00	0.00
8,750.0	21.29	270.04	8,513.1	1,804.2	237.0	189.3	10.00	10.00	0.00
8,800.0	26.29	270.04	8,558.8	1,804.2	216.8	208.9	10.00	10.00	0.00
8,850.0	31.29	270.04	8,602.6	1,804.2	192.7	232.4	10.00	10.00	0.00
8,862.6	32.55	270.04	8,613.3	1,804.2	186.1	238.8	10.00	10.00	0.00
FTP: 3200' FSL & 100' FEL (Sec 4)									
8,900.0	36.29	270.04	8,644.2	1,804.3	164.9	259.4	10.00	10.00	0.00
8,950.0	41.29	270.04	8,683.1	1,804.3	133.6	289.9	10.00	10.00	0.00
9,000.0	46.29	270.04	8,719.2	1,804.3	99.0	323.5	10.00	10.00	0.00
9,050.0	51.29	270.04	8,752.1	1,804.3	61.4	360.1	10.00	10.00	0.00
9,100.0	56.29	270.04	8,781.7	1,804.4	21.1	399.3	10.00	10.00	0.00
9,150.0	61.29	270.04	8,807.6	1,804.4	-21.7	440.9	10.00	10.00	0.00
9,200.0	66.29	270.04	8,829.6	1,804.4	-66.5	484.5	10.00	10.00	0.00
9,250.0	71.29	270.04	8,847.7	1,804.5	-113.1	529.9	10.00	10.00	0.00

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Tough Ombres 4/5 W0PO Fed Com #1H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3222.0usft (Original Well Elev)
Project:	Eddy County, New Mexico NAD 83	MD Reference:	WELL @ 3222.0usft (Original Well Elev)
Site:	Tough Ombres 4/5 W0PO Fed Com #1H	North Reference:	Grid
Well:	Sec 4, T21S, R27E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 3200' FSL & 2552' FEL (Sec 5)		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,300.0	76.29	270.04	8,861.7	1,804.5	-161.1	576.5	10.00	10.00	0.00
9,350.0	81.29	270.04	8,871.4	1,804.5	-210.1	624.2	10.00	10.00	0.00
9,400.0	86.29	270.04	8,876.8	1,804.6	-259.8	672.6	10.00	10.00	0.00
9,437.2	90.01	270.04	8,878.0	1,804.6	-297.0	708.7	10.00	10.00	0.00
LP: 3200' FSL & 583' FEL (Sec 4)									
9,437.7	90.06	270.04	8,878.0	1,804.6	-297.5	709.3	10.00	10.00	0.00
9,500.0	90.06	270.04	8,877.9	1,804.6	-359.8	769.8	0.00	0.00	0.00
9,600.0	90.06	270.04	8,877.8	1,804.7	-459.8	867.1	0.00	0.00	0.00
9,700.0	90.06	270.04	8,877.7	1,804.8	-559.8	964.4	0.00	0.00	0.00
9,800.0	90.06	270.04	8,877.6	1,804.9	-659.8	1,061.6	0.00	0.00	0.00
9,900.0	90.06	270.04	8,877.5	1,804.9	-759.8	1,158.9	0.00	0.00	0.00
10,000.0	90.06	270.04	8,877.4	1,805.0	-859.8	1,256.2	0.00	0.00	0.00
10,100.0	90.06	270.04	8,877.3	1,805.1	-959.8	1,353.5	0.00	0.00	0.00
10,184.2	90.06	270.04	8,877.2	1,805.1	-1,044.0	1,435.4	0.00	0.00	0.00
PPP2: 3200' FSL & 1330' FEL (Sec 4)									
10,200.0	90.06	270.04	8,877.2	1,805.1	-1,059.8	1,450.7	0.00	0.00	0.00
10,300.0	90.06	270.04	8,877.1	1,805.2	-1,159.8	1,548.0	0.00	0.00	0.00
10,400.0	90.06	270.04	8,876.9	1,805.3	-1,259.8	1,645.3	0.00	0.00	0.00
10,500.0	90.06	270.04	8,876.8	1,805.4	-1,359.8	1,742.5	0.00	0.00	0.00
10,600.0	90.06	270.04	8,876.7	1,805.4	-1,459.8	1,839.8	0.00	0.00	0.00
10,700.0	90.06	270.04	8,876.6	1,805.5	-1,559.8	1,937.1	0.00	0.00	0.00
10,800.0	90.06	270.04	8,876.5	1,805.6	-1,659.8	2,034.4	0.00	0.00	0.00
10,900.0	90.06	270.04	8,876.4	1,805.7	-1,759.8	2,131.6	0.00	0.00	0.00
11,000.0	90.06	270.04	8,876.3	1,805.7	-1,859.8	2,228.9	0.00	0.00	0.00
11,100.0	90.06	270.04	8,876.2	1,805.8	-1,959.8	2,326.2	0.00	0.00	0.00
11,200.0	90.06	270.04	8,876.1	1,805.9	-2,059.8	2,423.5	0.00	0.00	0.00
11,300.0	90.06	270.04	8,875.9	1,806.0	-2,159.8	2,520.7	0.00	0.00	0.00
11,400.0	90.06	270.04	8,875.8	1,806.0	-2,259.8	2,618.0	0.00	0.00	0.00
11,500.0	90.06	270.04	8,875.7	1,806.1	-2,359.8	2,715.3	0.00	0.00	0.00
11,514.1	90.06	270.04	8,875.7	1,806.1	-2,373.9	2,729.0	0.00	0.00	0.00
PPP3: 3200' FSL & 2640' FWL (Sec 4)									
11,600.0	90.06	270.04	8,875.6	1,806.2	-2,459.8	2,812.5	0.00	0.00	0.00
11,700.0	90.06	270.04	8,875.5	1,806.2	-2,559.8	2,909.8	0.00	0.00	0.00
11,800.0	90.06	270.04	8,875.4	1,806.3	-2,659.8	3,007.1	0.00	0.00	0.00
11,900.0	90.06	270.04	8,875.3	1,806.4	-2,759.8	3,104.4	0.00	0.00	0.00
12,000.0	90.06	270.04	8,875.2	1,806.5	-2,859.8	3,201.6	0.00	0.00	0.00
12,100.0	90.06	270.04	8,875.1	1,806.5	-2,959.8	3,298.9	0.00	0.00	0.00
12,200.0	90.06	270.04	8,875.0	1,806.6	-3,059.8	3,396.2	0.00	0.00	0.00
12,300.0	90.06	270.04	8,874.8	1,806.7	-3,159.8	3,493.5	0.00	0.00	0.00
12,400.0	90.06	270.04	8,874.7	1,806.8	-3,259.8	3,590.7	0.00	0.00	0.00
12,500.0	90.06	270.04	8,874.6	1,806.8	-3,359.8	3,688.0	0.00	0.00	0.00
12,600.0	90.06	270.04	8,874.5	1,806.9	-3,459.8	3,785.3	0.00	0.00	0.00
12,700.0	90.06	270.04	8,874.4	1,807.0	-3,559.8	3,882.5	0.00	0.00	0.00
12,800.0	90.06	270.04	8,874.3	1,807.0	-3,659.8	3,979.8	0.00	0.00	0.00
12,900.0	90.06	270.04	8,874.2	1,807.1	-3,759.8	4,077.1	0.00	0.00	0.00
13,000.0	90.06	270.04	8,874.1	1,807.2	-3,859.8	4,174.4	0.00	0.00	0.00
13,100.0	90.06	270.04	8,874.0	1,807.3	-3,959.8	4,271.6	0.00	0.00	0.00
13,200.0	90.06	270.04	8,873.9	1,807.3	-4,059.8	4,368.9	0.00	0.00	0.00
13,300.0	90.06	270.04	8,873.7	1,807.4	-4,159.8	4,466.2	0.00	0.00	0.00
13,400.0	90.06	270.04	8,873.6	1,807.5	-4,259.8	4,563.4	0.00	0.00	0.00
13,500.0	90.06	270.04	8,873.5	1,807.6	-4,359.8	4,660.7	0.00	0.00	0.00
13,600.0	90.06	270.04	8,873.4	1,807.6	-4,459.8	4,758.0	0.00	0.00	0.00
13,700.0	90.06	270.04	8,873.3	1,807.7	-4,559.8	4,855.3	0.00	0.00	0.00

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Tough Ombres 4/5 W0PO Fed Com #1H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3222.0usft (Original Well Elev)
Project:	Eddy County, New Mexico NAD 83	MD Reference:	WELL @ 3222.0usft (Original Well Elev)
Site:	Tough Ombres 4/5 W0PO Fed Com #1H	North Reference:	Grid
Well:	Sec 4, T21S, R27E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 3200' FSL & 2552' FEL (Sec 5)		
Design:	Design #1		



Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,800.0	90.06	270.04	8,873.2	1,807.8	-4,659.8	4,952.5	0.00	0.00	0.00
13,900.0	90.06	270.04	8,873.1	1,807.8	-4,759.8	5,049.8	0.00	0.00	0.00
14,000.0	90.06	270.04	8,873.0	1,807.9	-4,859.8	5,147.1	0.00	0.00	0.00
14,100.0	90.06	270.04	8,872.9	1,808.0	-4,959.8	5,244.4	0.00	0.00	0.00
14,200.0	90.06	270.04	8,872.8	1,808.1	-5,059.8	5,341.6	0.00	0.00	0.00
14,300.0	90.06	270.04	8,872.6	1,808.1	-5,159.8	5,438.9	0.00	0.00	0.00
14,400.0	90.06	270.04	8,872.5	1,808.2	-5,259.8	5,536.2	0.00	0.00	0.00
14,500.0	90.06	270.04	8,872.4	1,808.3	-5,359.8	5,633.4	0.00	0.00	0.00
14,600.0	90.06	270.04	8,872.3	1,808.4	-5,459.8	5,730.7	0.00	0.00	0.00
14,700.0	90.06	270.04	8,872.2	1,808.4	-5,559.8	5,828.0	0.00	0.00	0.00
14,800.0	90.06	270.04	8,872.1	1,808.5	-5,659.8	5,925.3	0.00	0.00	0.00
14,900.0	90.06	270.04	8,872.0	1,808.6	-5,759.8	6,022.5	0.00	0.00	0.00
15,000.0	90.06	270.04	8,871.9	1,808.7	-5,859.8	6,119.8	0.00	0.00	0.00
15,100.0	90.06	270.04	8,871.8	1,808.7	-5,959.8	6,217.1	0.00	0.00	0.00
15,200.0	90.06	270.04	8,871.7	1,808.8	-6,059.8	6,314.3	0.00	0.00	0.00
15,300.0	90.06	270.04	8,871.5	1,808.9	-6,159.8	6,411.6	0.00	0.00	0.00
15,400.0	90.06	270.04	8,871.4	1,808.9	-6,259.8	6,508.9	0.00	0.00	0.00
15,500.0	90.06	270.04	8,871.3	1,809.0	-6,359.8	6,606.2	0.00	0.00	0.00
15,600.0	90.06	270.04	8,871.2	1,809.1	-6,459.8	6,703.4	0.00	0.00	0.00
15,700.0	90.06	270.04	8,871.1	1,809.2	-6,559.8	6,800.7	0.00	0.00	0.00
15,800.0	90.06	270.04	8,871.0	1,809.2	-6,659.8	6,898.0	0.00	0.00	0.00
15,900.0	90.06	270.04	8,870.9	1,809.3	-6,759.8	6,995.3	0.00	0.00	0.00
16,000.0	90.06	270.04	8,870.8	1,809.4	-6,859.8	7,092.5	0.00	0.00	0.00
16,100.0	90.06	270.04	8,870.7	1,809.5	-6,959.8	7,189.8	0.00	0.00	0.00
16,200.0	90.06	270.04	8,870.6	1,809.5	-7,059.8	7,287.1	0.00	0.00	0.00
16,300.0	90.06	270.04	8,870.4	1,809.6	-7,159.8	7,384.3	0.00	0.00	0.00
16,400.0	90.06	270.04	8,870.3	1,809.7	-7,259.8	7,481.6	0.00	0.00	0.00
16,500.0	90.06	270.04	8,870.2	1,809.7	-7,359.8	7,578.9	0.00	0.00	0.00
16,600.0	90.06	270.04	8,870.1	1,809.8	-7,459.8	7,676.2	0.00	0.00	0.00
16,705.3	90.06	270.04	8,870.0	1,809.9	-7,565.1	7,778.6	0.00	0.00	0.00
BHL: 3200' FSL & 2552' FEL (Sec 5)									

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Tough Ombres 4/5 W0PO Fed Com #1H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3222.0usft (Original Well Elev)
Project:	Eddy County, New Mexico NAD 83	MD Reference:	WELL @ 3222.0usft (Original Well Elev)
Site:	Tough Ombres 4/5 W0PO Fed Com #1H	North Reference:	Grid
Well:	Sec 4, T21S, R27E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 3200' FSL & 2552' FEL (Sec 5)		
Design:	Design #1		

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
SHL: 1390' FSL & 260' F - plan hits target center - Point	0.00	0.00	0.0	0.0	0.0	547,752.90	586,443.30	32.5057482	-104.1870164
KOP: 3200' FSL & 10' FI - plan hits target center - Point	0.00	0.00	8,305.0	1,804.2	276.1	549,557.07	586,719.40	32.5107065	-104.1861127
FTP: 3200' FSL & 100' FI - plan hits target center - Point	0.00	0.00	8,613.3	1,804.2	186.1	549,557.14	586,629.39	32.5107070	-104.1864047
BHL: 3200' FSL & 2552' - plan hits target center - Point	0.00	0.00	8,870.0	1,809.9	-7,565.1	549,562.80	578,878.20	32.5107494	-104.2115497
PPP3: 3200' FSL & 264 - plan hits target center - Point	0.00	0.00	8,875.7	1,806.1	-2,373.9	549,559.01	584,069.40	32.5107215	-104.1947093
PPP2: 3200' FSL & 133C - plan hits target center - Point	0.00	0.00	8,877.2	1,805.1	-1,044.0	549,558.04	585,399.28	32.5107140	-104.1903952
LP: 3200' FSL & 583' FE - plan hits target center - Point	0.00	0.00	8,878.0	1,804.6	-297.0	549,557.49	586,146.34	32.5107098	-104.1879717

Tough Ombres 4/5 W0PO Fed Com #1H

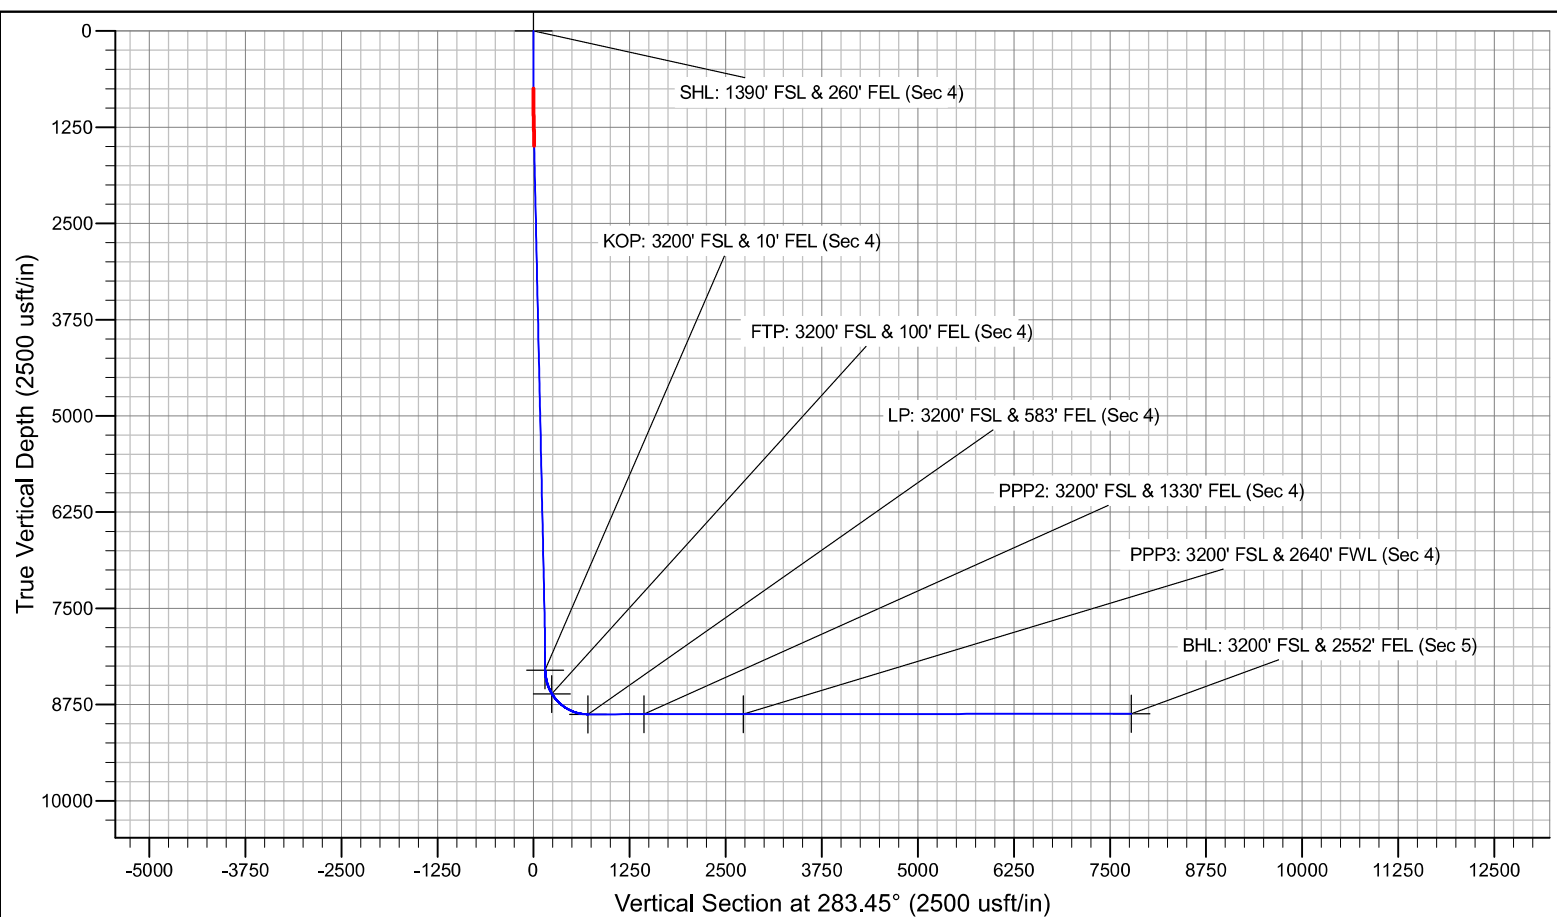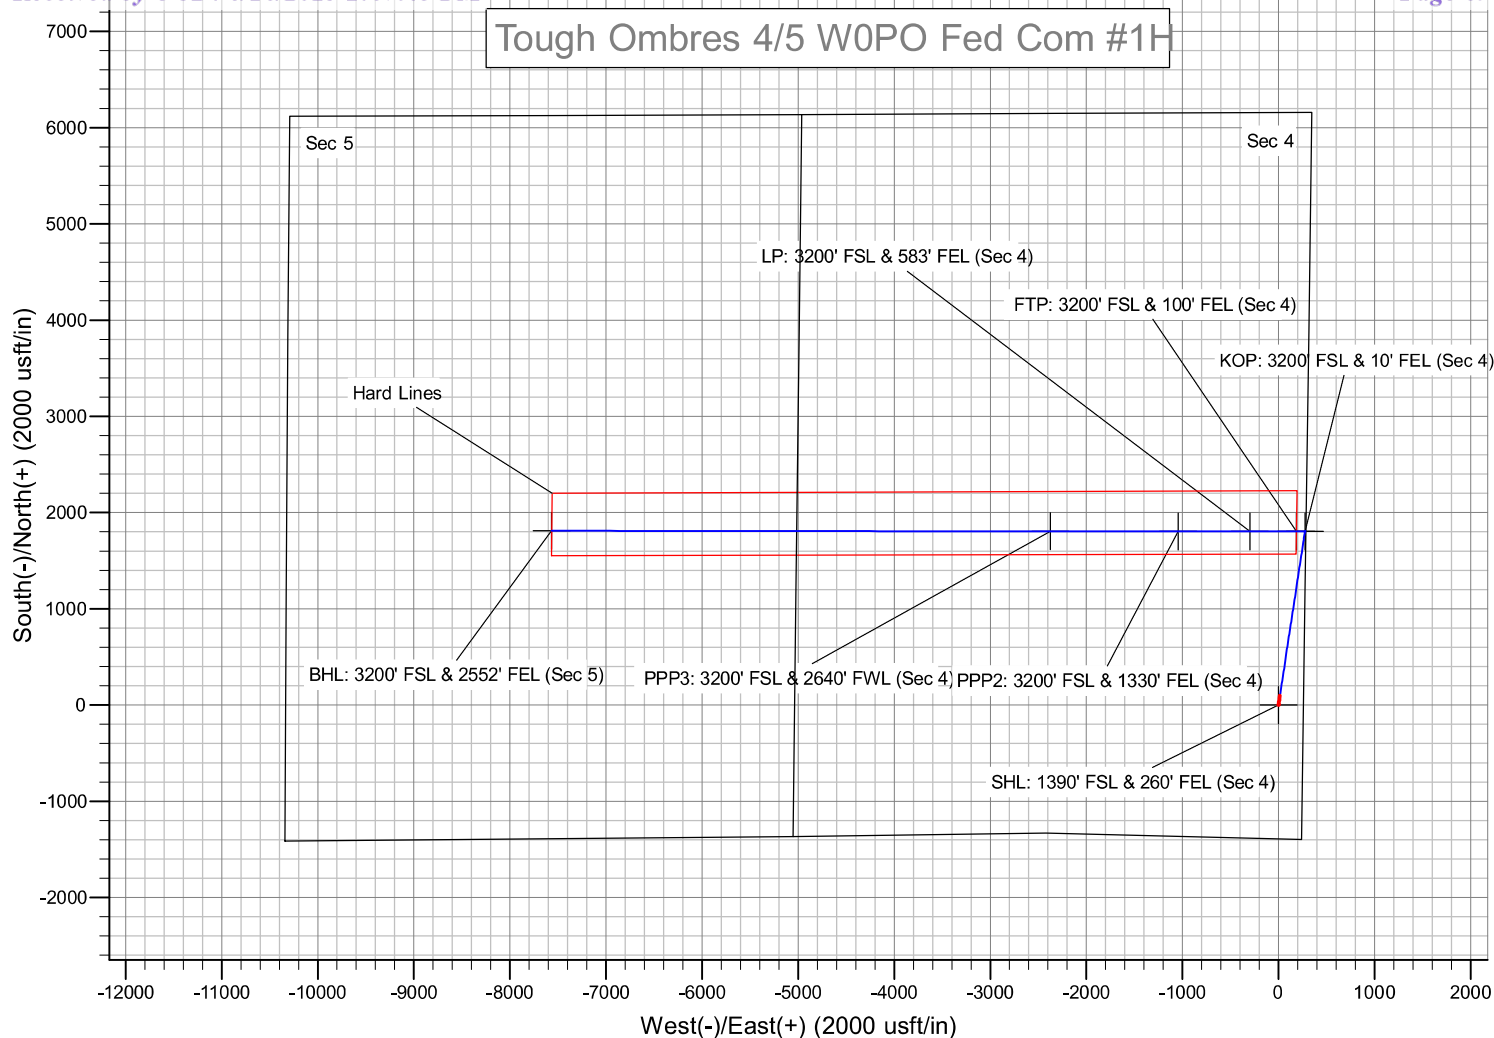

Operator Name: Mewbourne Oil Company	Property Name: Tough Ombres 4/5 W0PO Fed Com	Well Number 1H
---	---	-------------------

Kick Off Point (KOP)

UL P	Section 4	Township 21S	Range 27E	Lot 16	Feet 3200	From N/S S	Feet 10	From E/W E	County Eddy
Latitude 32.5107065					Longitude -104.1861127			NAD 83	

First Take Point (FTP)

UL P	Section 4	Township 21S	Range 27E	Lot 16	Feet 3200	From N/S S	Feet 100	From E/W E	County Eddy
Latitude 32.5107070					Longitude -104.1864047			NAD 83	

Last Take Point (LTP)

UL O	Section 5	Township 21S	Range 27E	Lot 15	Feet 3200	From N/S S	Feet 2552	From E/W E	County Eddy
Latitude 32.5107494					Longitude -104.2115497			NAD 83	

Is this well the defining well for the Horizontal Spacing Unit? Is this well an infill well?

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

SUPO Data Report

06/14/2023

APD ID: 10400087297

Submission Date: 08/15/2022

Operator Name: MEWBOURNE OIL COMPANY

Well Name: TOUGH OMBRES 4/5 W0PO FED COM

Well Number: 1H

Well Type: OIL WELL

Well Work Type: Drill

Highlighted data
reflects the most
recent changes
[Show Final Text](#)

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

Tough_Ombres_4_5_W0PO_Fed_Com_1H_ExistingRoadMap_20220811132728.pdf

Existing Road Purpose: ACCESS,FLUID TRANSPORT

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

Tough_Ombres_4_5_W0PO_Fed_Com_1H_NewRoadMap_20220811132835.pdf

New road type: RESOURCE

Length: 361.44

Feet

Width (ft.): 30

Max slope (%): 3

Max grade (%): 3

Army Corp of Engineers (ACOE) permit required? N

ACOE Permit Number(s):

New road travel width: 14

New road access erosion control: N/A

New road access plan or profile prepared? N

New road access plan

Operator Name: MEWBOURNE OIL COMPANY

Well Name: TOUGH OMBRES 4/5 W0PO FED COM

Well Number: 1H

Access road engineering design? N

Access road engineering design

Turnout? N

Access surfacing type: NONE

Access topsoil source: OFFSITE

Access surfacing type description:

Access onsite topsoil source depth:

Offsite topsoil source description: N/A

Onsite topsoil removal process:

Access other construction information:

Access miscellaneous information:

Number of access turnouts:

Access turnout map:

Drainage Control

New road drainage crossing: OTHER

Drainage Control comments: N/A

Road Drainage Control Structures (DCS) description: N/A

Road Drainage Control Structures (DCS) attachment:

Access Additional Attachments

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Attach Well map:

Tough_Ombres_4_5_W0PO_Fed_Com_1H_ExistingWellMap_20220811133121.pdf

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? SUBMIT

Production Facilities description: Pad is 600' x 440' w battery to the West.

Production Facilities map:

Tough_Ombres_4_5_W0PO_Fed_Com_1H_ProductionFacilityMap_20220811133136.pdf

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** TOUGH OMBRES 4/5 W0PO FED COM**Well Number:** 1H

Section 5 - Location and Types of Water Supply

Water Source Table

Water source type: IRRIGATION**Water source use type:** DUST CONTROL

SURFACE CASING

INTERMEDIATE/PRODUCTION
CASING**Source latitude:** 32.115456**Source longitude:** -104.082855**Source datum:** NAD83**Water source permit type:** WATER WELL**Water source transport method:** TRUCKING**Source land ownership:** PRIVATE**Source transportation land ownership:** PRIVATE**Water source volume (barrels):** 2135**Source volume (acre-feet):** 0.27518675**Source volume (gal):** 89670

Water source and transportation

Tough_Ombres_4_5_W0PO_Fed_Com_1H_WaterSourceTransMap_20220811133151.jpg

Water source comments:

New water well? N

New Water Well Info

Well latitude:**Well Longitude:****Well datum:****Well target aquifer:****Est. depth to top of aquifer(ft):****Est thickness of aquifer:****Aquifer comments:****Aquifer documentation:****Well depth (ft):****Well casing type:****Well casing outside diameter (in.):****Well casing inside diameter (in.):****New water well casing?****Used casing source:****Drilling method:****Drill material:**

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** TOUGH OMBRES 4/5 W0PO FED COM**Well Number:** 1H**Grout material:****Grout depth:****Casing length (ft.):****Casing top depth (ft.):****Well Production type:****Completion Method:****Water well additional information:****State appropriation permit:****Additional information attachment:**

Section 6 - Construction Materials

Using any construction materials: YES**Construction Materials description:** Caliche**Construction Materials source location**

Tough_Ombres_4_5_W0PO_Fed_Com_1H_CalicheSourceTransMap_20220811133202.jpg

Section 7 - Methods for Handling

Waste type: DRILLING**Waste content description:** Drill cuttings**Amount of waste:** 1335 barrels**Waste disposal frequency :** One Time Only**Safe containment description:** 20 yard roll off bins**Safe containmant attachment:****Waste disposal type:** HAUL TO COMMERCIAL FACILITY**Disposal location ownership:** PRIVATE**Disposal type description:****Disposal location description:** NMOCD approved waste disposal locations are CRI or Lea Land, both facilities are located on HWY 62/180, Sec. 27 T20S R32E.**Waste type:** SEWAGE**Waste content description:** Human waste & grey water**Amount of waste:** 1500 gallons**Waste disposal frequency :** Weekly**Safe containment description:** 2,000 gallon plastic container**Safe containmant attachment:****Waste disposal type:** HAUL TO COMMERCIAL FACILITY**Disposal location ownership:** PRIVATE**Disposal type description:****Disposal location description:** City of Carlsbad Water Treatment facility

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** TOUGH OMBRES 4/5 W0PO FED COM**Well Number:** 1H**Waste type:** GARBAGE**Waste content description:** Garbage & trash from all drilling & completion procedures**Amount of waste:** 1500 pounds**Waste disposal frequency :** One Time Only**Safe containment description:** Enclosed trash trailers**Safe containmant attachment:****Waste disposal type:** HAUL TO COMMERCIAL FACILITY**Disposal location ownership:** PRIVATE**Disposal type description:****Disposal location description:** County of Eddy waste management

Reserve Pit

Reserve Pit being used? NO**Temporary disposal of produced water into reserve pit?** NO**Reserve pit length (ft.)****Reserve pit width (ft.)****Reserve pit depth (ft.)****Reserve pit volume (cu. yd.)****Is at least 50% of the reserve pit in cut?****Reserve pit liner****Reserve pit liner specifications and installation description**

Cuttings Area

Cuttings Area being used? NO**Are you storing cuttings on location?** Y

Description of cuttings location Drill cuttings will be properly contained in steel tanks (20 yard roll off bins.) and taken to an NMOCD approved disposal facility listed below. After drilling and completion operations, trash, chemicals, salts, frac sand and other waste material will be removed and disposed of properly at the said facilities. NMOCD approved waste disposal locations are CRI or Lea Land, both facilities are located on HWY 62/180, Sec. 27 T20S R32E.

Cuttings area length (ft.)**Cuttings area width (ft.)****Cuttings area depth (ft.)****Cuttings area volume (cu. yd.)****Is at least 50% of the cuttings area in cut?****WCuttings area liner****Cuttings area liner specifications and installation description**

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** TOUGH OMBRES 4/5 W0PO FED COM**Well Number:** 1H

Section 8 - Ancillary

Are you requesting any Ancillary Facilities?: N**Ancillary Facilities****Comments:**

Section 9 - Well Site

Well Site Layout Diagram:

Tough_Ombres_4_5_W0PO_Fed_Com_1H_WellSiteLayout_20220811133214.pdf

Comments:

Section 10 - Plans for Surface

Type of disturbance: New Surface Disturbance**Multiple Well Pad Name:** Tough Ombres 4-5 QR, XW, PO**Multiple Well Pad Number:** 3**Recontouring****Drainage/Erosion control construction:** None required**Drainage/Erosion control reclamation:** None required**Well pad proposed disturbance (acres):** 6.4**Road proposed disturbance (acres):** 0.101**Powerline proposed disturbance (acres):** 0**Pipeline proposed disturbance (acres):** 0**Other proposed disturbance (acres):** 0**Well pad interim reclamation (acres):** 0.6**Road interim reclamation (acres):** 0**Powerline interim reclamation (acres):** 0**Pipeline interim reclamation (acres):** 0**Other interim reclamation (acres):** 0**Well pad long term disturbance (acres):** 6.4**Road long term disturbance (acres):** 0**Powerline long term disturbance (acres):** 0**Pipeline long term disturbance (acres):** 0**Other long term disturbance (acres):** 0**Total proposed disturbance:** 6.501**Total interim reclamation:** 0.6**Total long term disturbance:** 6.4**Disturbance Comments:** The length of the pipeline is unknown. A sundry notice will be filed for approval of said pipeline.**Reconstruction method:** Remove caliche, redistribute topsoil over reclaimed area & reseed.**Topsoil redistribution:** Use backhoe/loader to spread material.**Soil treatment:** None**Existing Vegetation at the well pad:** Various brush & grasses.**Existing Vegetation at the well pad**

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** TOUGH OMBRES 4/5 W0PO FED COM**Well Number:** 1H**Existing Vegetation Community at the road:** Various brush & grasses.**Existing Vegetation Community at the road****Existing Vegetation Community at the pipeline:** Various brush & grasses.**Existing Vegetation Community at the pipeline****Existing Vegetation Community at other disturbances:** Various brush & grasses.**Existing Vegetation Community at other disturbances****Non native seed used?** N**Non native seed description:****Seedling transplant description:****Will seedlings be transplanted for this project?** N**Seedling transplant description****Will seed be harvested for use in site reclamation?** N**Seed harvest description:****Seed harvest description attachment:****Seed****Seed Table****Seed Summary****Total pounds/Acre:****Seed Type****Pounds/Acre****Seed reclamation****Operator Contact/Responsible Official****First Name:****Last Name:****Phone:****Email:****Seedbed prep:** recontouring**Seed BMP:** NA**Seed method:** broadcast & drill**Existing invasive species?** N**Existing invasive species treatment description:**

Operator Name: MEWBOURNE OIL COMPANY

Well Name: TOUGH OMBRES 4/5 W0PO FED COM

Well Number: 1H

Existing invasive species treatment

Weed treatment plan description: None

Weed treatment plan

Monitoring plan description: Visual inspection within 3 months of interim reclamation.

Monitoring plan

Success standards: Complete re-growth within 1 year of interim reclamation.

Pit closure description: None

Pit closure attachment:

Section 11 - Surface

Disturbance type: WELL PAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Disturbance type: NEW ACCESS ROAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

Operator Name: MEWBOURNE OIL COMPANY

Well Name: TOUGH OMBRES 4/5 W0PO FED COM

Well Number: 1H

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Disturbance type: NEW ACCESS ROAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** TOUGH OMBRES 4/5 W0PO FED COM**Well Number:** 1H**Disturbance type:** OTHER**Describe:** Production Facility**Surface Owner:** BUREAU OF LAND MANAGEMENT**Other surface owner description:****BIA Local Office:****BOR Local Office:****COE Local Office:****DOD Local Office:****NPS Local Office:****State Local Office:****Military Local Office:****USFWS Local Office:****Other Local Office:****USFS Region:****USFS Forest/Grassland:****USFS Ranger District:****Section 12 - Other****Right of Way needed?** N**Use APD as ROW?****ROW Type(s):****ROW****SUPO Additional Information:****Use a previously conducted onsite?** Y

Previous Onsite information: JUL 26 2022 Met w/RRC Surveying & staked location @ 1390' FSL & 260' FEL, Sec 4, T21S, R27E, Eddy Co., NM. (Elevation @ 3194'). Pad is 650 x 430 w/battery to the W. Topsoil staked 30 wide on N side. Approx. 365 of new road need off SW corner W to Angel Ranch Rd. Reclaim 60' N & E. Fence cut & cattleguard required. BLM onsite approved on Dec 16, 2021. Arch, & cave/karst completed. Lat: 32.50574813 N, Long: -104.18701630 W NAD 83. (BPS)

Operator Name: MEWBOURNE OIL COMPANY

Well Name: TOUGH OMBRES 4/5 W0PO FED COM


Well Number: 1H

Tough_Ombres_4_5_W0PO_Fed_Com_1H_NGMP_20220811133638.pdf

Tough_Ombres_4_5_W0PO_Fed_Com_1H_InterimReclamationMap_20220811133643.pdf

VICINITY MAP

NOT TO SCALE

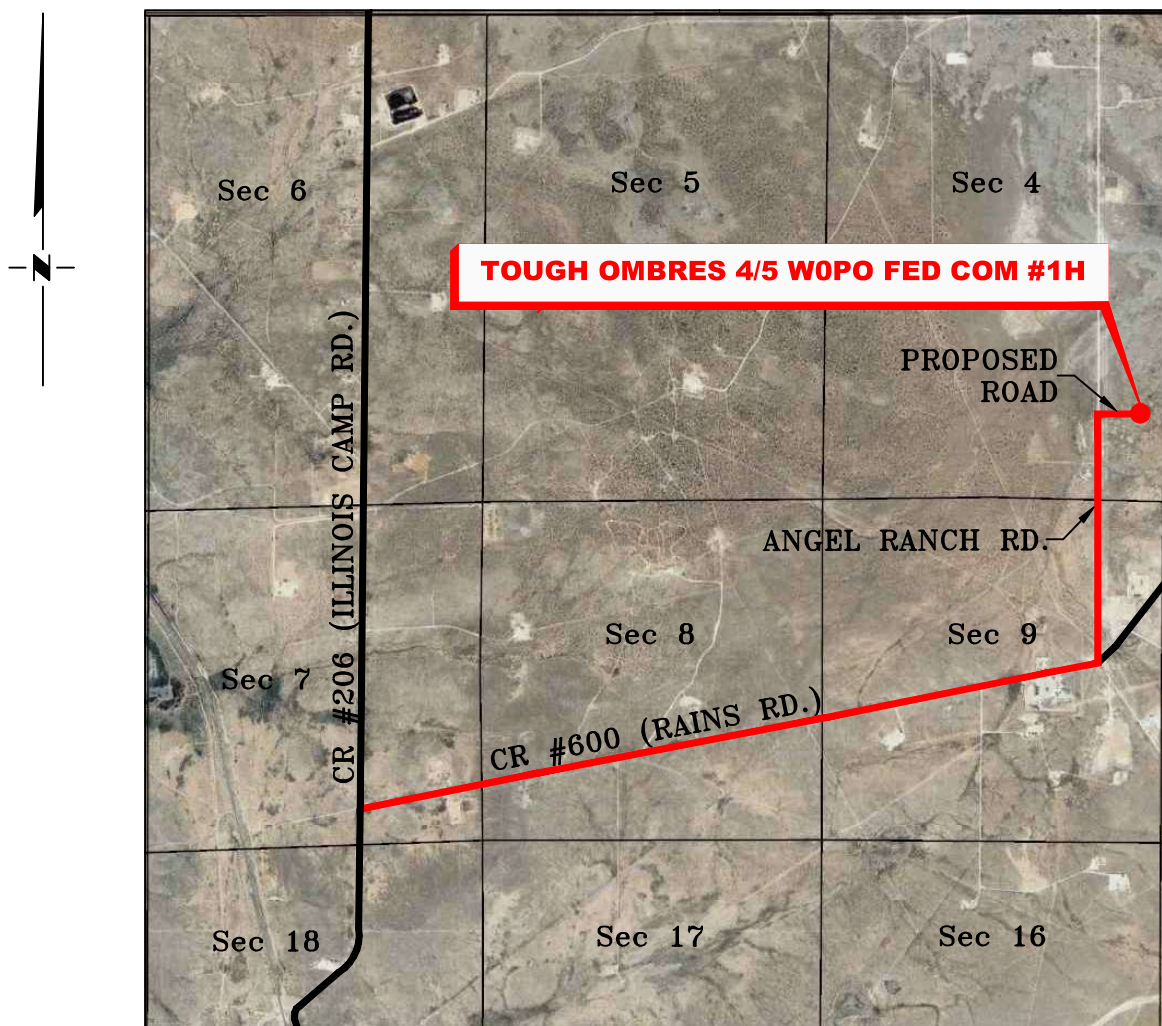

SECTION 4, TWP. 21 SOUTH, RGE. 27 EAST,
N. M. P. M., EDDY CO., NEW MEXICO

OPERATOR: Mewbourne Oil CompanyLOCATION: 1390' FSL & 260' FELLEASE: Tough Ombres 4/5 W0PO Fed ComELEVATION: 3194'WELL NO.: 1H

Copyright 2016 - All Rights Reserved

NO.	REVISION	DATE
JOB NO.: LS22080933		
DWG. NO.: 22080933-3		



701 S. CECIL ST., HOBBS, NM 88240 (575) 964-8200

SCALE: N. T. S.
DATE: 07/22/2022
SURVEYED BY: ML/AB
DRAWN BY: LM
APPROVED BY: RMH
SHEET: 1 OF 1

SCALE: 1" = 1000'
DATE: 07/22/2022
SURVEYED BY: ML/AG
DRAWN BY: LM
APPROVED BY: RMH
SHEET: 1 OF 2

MEWBOURNE OIL COMPANY
ACCESS ROAD FOR THE TOUGH OMBRES 4/5 FED COM #1H WELL LOCATIONS
SECTION 4, T21S, R27E
N. M. P. M., EDDY COUNTY, NEW MEXICO

DESCRIPTION

A strip of land 30 feet wide, being 361.44 feet or 21.906 rods in length, lying in Section 4, Township 21 South, Range 27 East, N. M. P. M., Eddy County, New Mexico, being 15 feet left and 15 feet right of the following described survey of a centerline across B. L. M. land:

BEGINNING at Engr. Sta. 0+00, a point in the Southeast quarter of Section 4, which bears, N 56°29'21" E, 1,987.03 feet, from a brass cap, stamped "1943", found for the South quarter corner of Section 4;

Thence S 89°14'29" E, 361.44 feet, to Engr. Sta. 3+61.44, the End of Survey, a point in the Southeast quarter of Section 4, which bears, S 24°41'46" W, 1,629.10 feet from a brass cap, stamped "1943", found for the East quarter corner of Section 4.


Said strip of land contains 0.249 acres, more or less, and is allocated by forties as follows:

SE 1/4 SE 1/4	361.44 Feet	21.906 Rods	0.249 Acres
---------------	-------------	-------------	-------------

Copyright 2016 - All Rights Reserved

			 RRC ENERGY SERVICES, LLC. 701 S. CECIL ST., HOBBS, NM 88240 (575) 964-8200	SCALE: 1" = 1000'
				DATE: 07/22/2022
				SURVEYED BY: ML/AG
				DRAWN BY: LM
				APPROVED BY: RMH
NO.	REVISION	DATE		SHEET: 2 OF 2
JOB NO.:	LS22080933			
DWG. NO.:	22080933-6			

OCD Well Locations

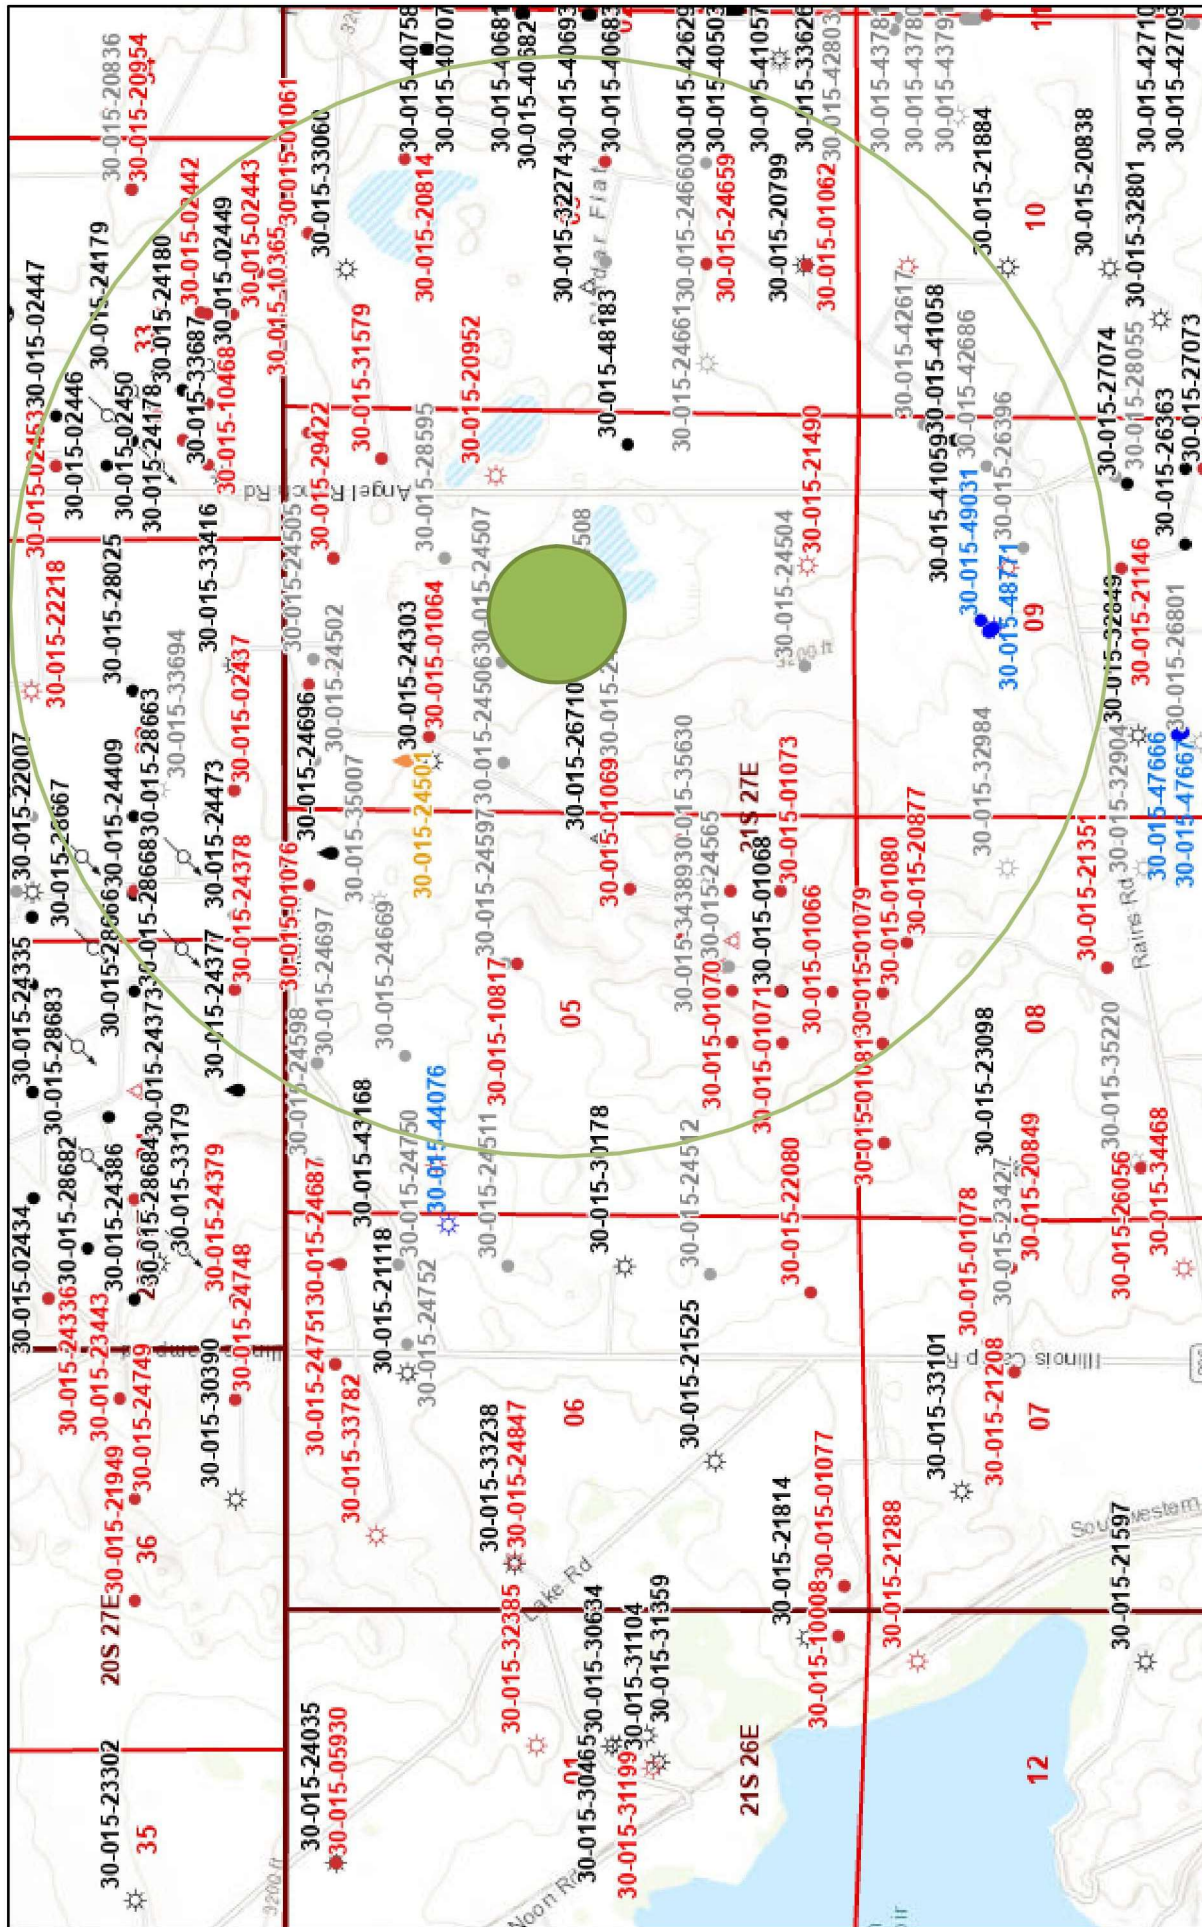

8/10/2022, 10:14:14 AM

- Areas
- Wells - Large Scale
 - Override 1
 - Override 2
 - Gas, Cancelled
 - Gas, New
 - Gas, Plugged
 - Injection, Active
 - Oil, Active
 - Oil, Cancelled
 - Oil, New
 - Oil, Plugged
 - Salt Water Injection, Active

Released to Imaging: 6/16/2023 2:20:03 PM

Released to Imaging: 6/16/2023 2:20:03 PM

Page 5

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Mewbourne Oil Co. **OGRID:** 14744 **Date:** 5/2/22

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Tough Ombres 4/5 W0PO Fed Com 1H		Q 4 21S 27E	1390' FSL x 260' FEL	1500	3500	4500

IV. Central Delivery Point Name: Tough Ombres 4/5 W0PO Fed Com 1H [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Tough Ombres 4/5 W0PO Fed Com 1H		7/2/22	8/2/22	9/2/22	9/17/22	9/17/22

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan
EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications**Effective May 25, 2021**

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

Page 8

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:	<i>Bradley Bishop</i>
Printed Name:	BRADLEY BISHOP
Title:	REGULATORY MANAGER
E-mail Address:	BBISHOP@MEWBOURNE.COM
Date:	5/2/22
Phone:	575-393-5905
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)	
Approved By:	
Title:	
Approval Date:	
Conditions of Approval:	

Mewbourne Oil Company

Natural Gas Management Plan – Attachment

- VI. Separation equipment will be sized by construction engineering staff based on stated manufacturer daily throughput capacities and anticipated daily production rates to ensure adequate capacity. Closed vent system piping, compression needs, and VRUs will be sized utilizing ProMax modelling software to ensure adequate capacity for anticipated production volumes and conditions.
- VII. Mewbourne Oil Company (MOC) will take following actions to comply with the regulations listed in 19.15.27.8 :
- A. MOC will maximize the recovery of natural gas by minimizing the waste, as defined by 19.15.2 NMAC, of natural gas through venting and flaring. MOC will ensure that well(s) will be connected to a natural gas gathering system with sufficient capacity to transport natural gas. If there is no adequate takeaway for the gas, well(s) will be shut in until the natural gas gathering system is available.
 - B. All drilling operations will be equipped with a rig flare located at least 100 ft from the nearest surface hole. Rig flare will be utilized to combust any natural gas that is brought to surface during normal drilling operations. In the case of emergency venting or flaring the volumes will be estimated and reported appropriately.
 - C. During completion operations any natural gas brought to surface will be flared. Immediately following the finish of completion operations, all well flow will be directed to permanent separation equipment. Produced natural gas from separation equipment will be sent to sales. It is not anticipated that gas will not meet pipeline standards. However, if natural gas does not meet gathering pipeline quality specifications, MOC will flare the natural gas for 60 days or until the natural gas meets the pipeline quality specifications, whichever is sooner. MOC will ensure that the flare is sized properly and is equipped with automatic igniter or continuous pilot. The gas sample will analyzed twice per week and the gas will be routed into a gathering system as soon as pipeline specifications are met.
 - D. Natural gas will not be flared with the exceptions and provisions listed in the 19.15.27.8 D.(1) through (4). If there is no adequate takeaway for the separator gas, well(s) will be shut in until the natural gas gathering system is available with exception of emergency or malfunction situations. Venting and/or flaring volumes will be estimated and reported appropriately.
 - E. MOC will comply with the performance standards requirements and provisions listed in 19.15.27.8 E.(1) through (8). All equipment will be designed and sized to handle maximum anticipated pressures and throughputs in order to minimize the waste. Production storage tanks constructed after May 25, 2021 will be equipped with automatic gauging system. Flares constructed after May 25, 2021 will be equipped with automatic igniter or continuous pilot. Flares will be located at least 100' from the well and storage tanks unless otherwise approved by the division. MOC will conduct AVO inspections as described in 19.15.27.8 E (5) (a) with frequencies specified in 19.15.27.8 E (5) (b) and (c). All emergencies will be resolved as quickly and safely as feasible to minimize waste.
 - F. The volume of natural gas that is vented or flared as the result of malfunction or emergency during drilling and completions operations will be estimated. The volume of natural gas that is vented, flared or beneficially used during production operations, will be measured or estimated. MOC will install equipment to measure

the volume of natural gas flared from existing process piping or a flowline piped from equipment such as high pressure separators, heater treaters, or vapor recovery units associated with a well or facility associated with a well authorized by an APD issued after May 25, 2021 that has an average daily production greater than 60 Mcf/day. If metering is not practicable due to circumstances such as low flow rate or low pressure venting and flaring, MOC will estimate the volume of vented or flared natural gas. Measuring equipment will conform to industry standards and will not be designed or equipped with a manifold that allows the diversion of natural gas around the metering element except for the sole purpose of inspecting and servicing the measurement equipment.

- VIII. For maintenance activities involving production equipment and compression, venting will be limited to the depressurization of the subject equipment to ensure safe working conditions. For maintenance of production and compression equipment the associated producing wells will be shut in to eliminate venting. For maintenance of VRUs all gas normally routed to the VRU will be routed to flare to eliminate venting.

Released to Imaging: 6/16/2023 2:20:03 PM



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

PWD Data Report

06/14/2023

APD ID: 10400087297

Submission Date: 08/15/2022

Operator Name: MEWBOURNE OIL COMPANY

Well Name: TOUGH OMBRES 4/5 W0PO FED COM

Well Number: 1H

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined

Would you like to utilize Lined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit

Pit liner description:

Pit liner manufacturers

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule

Lined pit reclamation description:

Lined pit reclamation

Leak detection system description:

Leak detection system

Operator Name: MEWBOURNE OIL COMPANY

Well Name: TOUGH OMBRES 4/5 W0PO FED COM

Well Number: 1H

Lined pit Monitor description:

Lined pit Monitor

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information

Section 3 - Unlined

Would you like to utilize Unlined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD disturbance (acres):

PWD surface owner:

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule

Unlined pit reclamation description:

Unlined pit reclamation

Unlined pit Monitor description:

Unlined pit Monitor

Do you propose to put the produced water to beneficial use?

Beneficial use user

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic

State

Unlined Produced Water Pit Estimated

Unlined pit: do you have a reclamation bond for the pit?

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** TOUGH OMBRES 4/5 W0PO FED COM**Well Number:** 1H**Is the reclamation bond a rider under the BLM bond?****Unlined pit bond number:****Unlined pit bond amount:****Additional bond information**

Section 4 -

Would you like to utilize Injection PWD options? N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Injection PWD discharge volume (bbl/day):****Injection well mineral owner:****Injection well type:****Injection well number:****Injection well name:****Assigned injection well API number?****Injection well API number:****Injection well new surface disturbance (acres):****Minerals protection information:****Mineral protection****Underground Injection Control (UIC) Permit?****UIC Permit**

Section 5 - Surface

Would you like to utilize Surface Discharge PWD options? N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Surface discharge PWD discharge volume (bbl/day):****Surface Discharge NPDES Permit?****Surface Discharge NPDES Permit attachment:****Surface Discharge site facilities information:****Surface discharge site facilities map:**

Section 6 -

Would you like to utilize Other PWD options? N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):**

Operator Name: MEWBOURNE OIL COMPANY

Well Name: TOUGH OMBRES 4/5 W0PO FED COM

Well Number: 1H

Other PWD type description:

Other PWD type

Have other regulatory requirements been met?

Other regulatory requirements



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Info Data

06/14/2023

APD ID: 10400087297

Submission Date: 08/15/2022

Operator Name: MEWBOURNE OIL COMPANY

Well Name: TOUGH OMBRES 4/5 W0PO FED COM

Well Number: 1H

Well Type: OIL WELL

Well Work Type: Drill

Highlighted data
reflects the most
recent changes
[Show Final Text](#)

Bond

Federal/Indian APD: FED

BLM Bond number: NM 1693

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** TOUGH OMBRES 4/5 W0PO FED COM**Well Number:** 1H**Waste type:** GARBAGE**Waste content description:** Garbage & trash from all drilling & completion procedures**Amount of waste:** 1500 pounds**Waste disposal frequency :** One Time Only**Safe containment description:** Enclosed trash trailers**Safe containmant attachment:****Waste disposal type:** HAUL TO COMMERCIAL FACILITY**Disposal location ownership:** PRIVATE**Disposal type description:****Disposal location description:** County of Eddy waste management

Reserve Pit

Reserve Pit being used? NO**Temporary disposal of produced water into reserve pit?** NO**Reserve pit length (ft.)** **Reserve pit width (ft.)****Reserve pit depth (ft.)** **Reserve pit volume (cu. yd.)****Is at least 50% of the reserve pit in cut?****Reserve pit liner****Reserve pit liner specifications and installation description**

Cuttings Area

Cuttings Area being used? NO**Are you storing cuttings on location?** Y

Description of cuttings location Drill cuttings will be properly contained in steel tanks (20 yard roll off bins.) and taken to an NMOCD approved disposal facility listed below. After drilling and completion operations, trash, chemicals, salts, frac sand and other waste material will be removed and disposed of properly at the said facilities. NMOCD approved waste disposal locations are CRI or Lea Land, both facilities are located on HWY 62/180, Sec. 27 T20S R32E.

Cuttings area length (ft.) **Cuttings area width (ft.)****Cuttings area depth (ft.)** **Cuttings area volume (cu. yd.)****Is at least 50% of the cuttings area in cut?****WCuttings area liner****Cuttings area liner specifications and installation description**

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** TOUGH OMBRES 4/5 W0PO FED COM**Well Number:** 1H**Section 8 - Ancillary****Are you requesting any Ancillary Facilities?:** N**Ancillary Facilities****Comments:****Section 9 - Well Site****Well Site Layout Diagram:**

Tough_Ombres_4_5_W0PO_Fed_Com_1H_WellSiteLayout_20220811133214.pdf

Comments:**Section 10 - Plans for Surface****Type of disturbance:** New Surface Disturbance**Multiple Well Pad Name:** Tough Ombres 4-5 QR, XW, PO**Multiple Well Pad Number:** 3**Recontouring****Drainage/Erosion control construction:** None required**Drainage/Erosion control reclamation:** None required**Well pad proposed disturbance (acres):** 6.4**Road proposed disturbance (acres):** 0.101**Powerline proposed disturbance (acres):** 0**Pipeline proposed disturbance (acres):** 0**Other proposed disturbance (acres):** 0**Well pad interim reclamation (acres):** 0.6**Road interim reclamation (acres):** 0**Powerline interim reclamation (acres):** 0**Pipeline interim reclamation (acres):** 0**Other interim reclamation (acres):** 0**Well pad long term disturbance (acres):** 6.4**Road long term disturbance (acres):** 0**Powerline long term disturbance (acres):** 0**Pipeline long term disturbance (acres):** 0**Other long term disturbance (acres):** 0**Total proposed disturbance:** 6.501**Total interim reclamation:** 0.6**Total long term disturbance:** 6.4**Disturbance Comments:** The length of the pipeline is unknown. A sundry notice will be filed for approval of said pipeline.**Reconstruction method:** Remove caliche, redistribute topsoil over reclaimed area & reseed.**Topsoil redistribution:** Use backhoe/loader to spread material.**Soil treatment:** None**Existing Vegetation at the well pad:** Various brush & grasses.**Existing Vegetation at the well pad**

District I

1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 227971

CONDITIONS

Operator: MEWBOURNE OIL CO P.O. Box 5270 Hobbs, NM 88241	OGRID:
	14744
	Action Number: 227971
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
ward.rikala	Notify OCD 24 hours prior to casing & cement	6/16/2023
ward.rikala	Will require a File As Drilled C-102 and a Directional Survey with the C-104	6/16/2023
ward.rikala	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string	6/16/2023
ward.rikala	Cement is required to circulate on both surface and intermediate1 strings of casing	6/16/2023
ward.rikala	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system	6/16/2023
ward.rikala	Please submit a corrected copy of the C102 to properly reflect the spacing as E, F, G, H Sec 4 and G, H Sec 5-T21S-R27E for total dedicated acres of 240.	6/16/2023