



U.S. Department of the Interior
Bureau of Land Management

Application for Permit to Drill

APD Package Report

Date Printed:

APD ID:
APD Received Date:
Operator:

Well Status:
Well Name:
Well Number:

APD Package Report Contents

- Form 3160-3
- Operator Certification Report
- Application Report
- Application Attachments
 - Well Plat: 2 file(s)
- Drilling Plan Report
- Drilling Plan Attachments
 - Blowout Prevention Choke Diagram Attachment: 1 file(s)
 - Blowout Prevention BOP Diagram Attachment: 1 file(s)
 - Casing Spec Documents: 2 file(s)
 - Casing Design Assumptions and Worksheet(s): 4 file(s)
 - Hydrogen sulfide drilling operations plan: 1 file(s)
 - Proposed horizontal/directional/multi-lateral plan submission: 2 file(s)
 - Other Facets: 1 file(s)
 - Other Variances: 2 file(s)
- SUPO Report
- SUPO Attachments
 - Existing Road Map: 1 file(s)
 - New Road Map: 1 file(s)
 - Attach Well map: 1 file(s)
 - Production Facilities map: 1 file(s)
 - Water source and transportation map: 1 file(s)
 - Construction Materials source location attachment: 1 file(s)
 - Well Site Layout Diagram: 1 file(s)
 - Recontouring attachment: 1 file(s)
 - Other SUPO Attachment: 2 file(s)
- PWD Report
- PWD Attachments

-- None

- Bond Report

- Bond Attachments

-- None

Form 3160-3
(June 2015)FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: ☐ DRILL ☐ REENTER 1b. Type of Well: ☐ Oil Well ☐ Gas Well ☐ Other 1c. Type of Completion: ☐ Hydraulic Fracturing ☐ Single Zone ☐ Multiple Zone		5. Lease Serial No. 6. If Indian, Allottee or Tribe Name 7. If Unit or CA Agreement, Name and No. 8. Lease Name and Well No.	
2. Name of Operator		9. API Well No. 30-015-54166	
3a. Address		3b. Phone No. (include area code)	
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface At proposed prod. zone		10. Field and Pool, or Exploratory	
14. Distance in miles and direction from nearest town or post office*		11. Sec., T. R. M. or Blk. and Survey or Area	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)		12. County or Parish	
16. No of acres in lease		13. State	
17. Spacing Unit dedicated to this well		18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.	
19. Proposed Depth		20. BLM/BIA Bond No. in file	
21. Elevations (Show whether DF, KDB, RT, GL, etc.)		22. Approximate date work will start*	
23. Estimated duration		24. Attachments	
The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)			
1. Well plat certified by a registered surveyor. 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).		4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 5. Operator certification. 6. Such other site specific information and/or plans as may be requested by the BLM.	
25. Signature		Name (Printed/Typed)	
Title		Date	
Approved by (Signature)		Name (Printed/Typed)	
Title		Date	
Office		Date	
Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Conditions of approval, if any, are attached.			
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.			

(Continued on page 2)

*(Instructions on page 2)



Approval Date: 08/29/2023

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM I: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

ITEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM connects this information to an evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

0. SHL: SESE / 1144 FSL / 135 FEL / TWSP: 20S / RANGE: 28E / SECTION: 8 / LAT: 32.583968 / LONG: -104.1916296 (TVD: 0 feet, MD: 0 feet)

PPP: NWSW / 1650 FSL / 100 FWL / TWSP: 20S / RANGE: 28E / SECTION: 9 / LAT: 32.585362 / LONG: -104.190837 (TVD: 6244 feet, MD: 6400 feet)

PPP: NWSW / 1650 FSL / 0 FEL / TWSP: 20S / RANGE: 28E / SECTION: 10 / LAT: 32.585431 / LONG: -104.173848 (TVD: 6303 feet, MD: 11830 feet)

PPP: NWSE / 1650 FSL / 2665 FWL / TWSP: 20S / RANGE: 28E / SECTION: 9 / LAT: 32.585396 / LONG: -104.182506 (TVD: 6303 feet, MD: 9165 feet)

BHL: NESE / 1650 FSL / 10 FEL / TWSP: 20S / RANGE: 28E / SECTION: 10 / LAT: 32.58551 / LONG: -104.15662 (TVD: 6303 feet, MD: 16922 feet)

BLM Point of Contact

Name: GAVIN MICKWEE

Title: Land Law Examiner

Phone: (575) 234-5972

Email: gmickwee@blm.gov

CONFIDENTIAL

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

CONFIDENTIAL

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Colgate
LEASE NO.:	NMNM15003
LOCATION:	Section 8, T.20 S, R.28E., NMPM
COUNTY:	Eddy County, New Mexico
WELL NAME & NO.:	Koala 9 Fed Com 113H
SURFACE HOLE FOOTAGE:	1144'/S & 135'/E
BOTTOM HOLE FOOTAGE:	1650'/S & 10'/E

COA

H₂S	☒ Yes	☐ No		
Potash / WIPP	☒ None	☐ Secretary	☐ R-111-P	☐ WIPP
Cave / Karst	☐ Low	☐ Medium	☒ High	☐ Critical
Wellhead	☐ Conventional	☒ Multibowl	☐ Both	☐ Diverter
Cementing	☐ Primary Squeeze	☐ Cont. Squeeze	☐ EchoMeter	☐ DV Tool
Special Req	☐ Break Testing	☐ Water Disposal	☒ COM	☐ Unit
Variance	☒ Flex Hose	☐ Casing Clearance	☐ Pilot Hole	☒ Capitan Reef
Variance	☐ Four-String	☒ Offline Cementing	☐ Fluid-Filled	☐ Open Annulus
☐ Batch APD / Sundry				

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H₂S) Drilling Plan shall be activated 500 feet prior to drilling into the **Delaware** formation. As a result, the Hydrogen Sulfide area must meet all requirements from **43 CFR 3176**, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

1. The 13-3/8 inch surface casing shall be set at approximately **340** feet (a minimum of **70 feet (Eddy County)** into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours

after bringing cement to surface or 500 pounds compressive strength, whichever is greater.

- d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the **9-5/8** inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above.

Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst, Capitan Reef, or potash.

 - ❖ In High Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
 - ❖ In Capitan Reef Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
 - ❖ **Special Capitan Reef requirements.** If lost circulation (50% or greater) occurs below the Base of the Salt, the operator shall do the following:
(Use this for 3 string wells in the Capitan Reef, if 4 string well ensure FW based mud used across the Capitan interval)
 - Switch to fresh water mud to protect the Capitan Reef and use fresh water mud until setting the intermediate casing. The appropriate BLM office is to be notified for a PET to witness the switch to fresh water.
 - Daily drilling reports from the Base of the Salt to the setting of the intermediate casing are to be submitted to the BLM CFO engineering staff via e-mail by 0800 hours each morning. Any lost circulation encountered is to be recorded on these drilling reports. The daily drilling report should show mud volume per shift/tour. Failure to submit these reports will result in an Incidence of Non-Compliance being issued for failure to comply with the Conditions of Approval. If not already planned, the operator shall run a caliper survey for the intermediate well bore and submit to the appropriate BLM office.
 3. The minimum required fill of cement behind the **5-1/2** inch production casing is:
 4. Cement should tie-back at least **200 feet** into the previous casing, whichever is greater. If cement does not circulate see B.1.a, c-d above. **Excess calculates to 8%. Additional cement maybe required.**

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).

2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the casing shoe shall be **5000 (5M)** psi. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - a. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - b. Manufacturer representative shall install the test plug for the initial BOP test.
 - c. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - d. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172 must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in 43 CFR 3171 and 3172.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

Offline Cementing

Contact the BLM prior to the commencement of any offline cementing procedure.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Email **or** call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, BLM_NM_CFO_DrillingNotifications@BLM.GOV
(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240,
(575) 689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per **43 CFR part 3170 Subpart 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR part 3170 Subpart 3172** and **API STD 53 Sec. 5.3**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in **43 CFR part 3170 Subpart 3172** must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin

after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR part 3170 Subpart 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR part 3170 Subpart 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

ZS 8/22/2023



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Operator Certification Data Report

08/31/2023

Operator

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: MIKAH THOMAS

Signed on: 07/18/2023

Title: Regulatory Manager

Street Address: 1400 WOODLOCH FOREST DR SUITE 300

City: THE WOODLANDS

State: TX

Zip: 77380

Phone: (432)661-7106

Email address: MTHOMAS@EARTHSTONEENERGY.COM

Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Application Data

08/31/2023

APD ID: 10400085812

Submission Date: 06/03/2022

Operator Name: COLGATE OPERATING LLC

Well Name: KOALA 9 FED COM

Well Number: 113H

Well Type: OIL WELL

Well Work Type: Drill

Highlighted data
reflects the most
recent changes
[Show Final Text](#)

Section 1 - General

APD ID: 10400085812

Tie to previous NOS? N

Submission Date: 06/03/2022

BLM Office: Carlsbad

User: MIKAH THOMAS

Title: Regulatory Manager

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM15003

Lease Acres:

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? Y

Permitting Agent? NO

APD Operator: COLGATE OPERATING LLC

Operator letter of

Operator Info

Operator Organization Name: COLGATE OPERATING LLC

Operator Address: 300 N MARIENFELD STREET SUITE 1000

Zip: 79701

Operator PO Box:

Operator City: MIDLAND

State: TX

Operator Phone: (432)695-4272

Operator Internet Address: MTHOMAS@COLGATEENERGY.COM

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: KOALA 9 FED COM

Well Number: 113H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: 1ST BONE SPRING SAND

Pool Name: BURTON FLAT, MORROW (PRO GAS)

Operator Name: COLGATE OPERATING LLC**Well Name:** KOALA 9 FED COM**Well Number:** 113H**Is the proposed well in an area containing other mineral resources?** NATURAL GAS,OIL**Is the proposed well in a Helium production area?** N**Use Existing Well Pad?** N**New surface disturbance?****Type of Well Pad:** MULTIPLE WELL**Multiple Well Pad Name:**
KOALA 9 FED COM SOUTH**Number:** 1**Well Class:** HORIZONTAL**Number of Legs:** 1**Well Work Type:** Drill**Well Type:** OIL WELL**Describe Well Type:****Well sub-Type:** INFILL**Describe sub-type:****Distance to town:** 11 Miles**Distance to nearest well:** 1260 FT**Distance to lease line:** 135 FT**Reservoir well spacing assigned acres Measurement:** 320 Acres**Well plat:** 10326__KOALA_9_FED_COM_113H_C102_SIGNED_20230307204040.pdf

10326__KOALA_9_FED_COM_113H_C102_Rev_1_20230307204044.pdf

Well work start Date: 09/30/2022**Duration:** 90 DAYS**Section 3 - Well Location Table****Survey Type:** RECTANGULAR**Describe Survey Type:****Datum:** NAD83**Vertical Datum:** NAVD88**Survey number:** 25490**Reference Datum:** GROUND LEVEL

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this
SHL Leg #1	1144	FSL	135	FEL	20S	28E	8	Aliquot SESE	32.583968	-104.1916296	EDD Y	NEW MEXI CO	NEW MEXI CO	F	FEE	3274	0	0	N
KOP Leg #1	1653	FSL	85	FEL	20S	28E	8	Aliquot NESE	32.5853669	-104.1917898	EDD Y	NEW MEXI CO	NEW MEXI CO	F	FEE	-2456	5762	5730	N

Operator Name: COLGATE OPERATING LLC

Well Name: KOALA 9 FED COM

Well Number: 113H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this
PPP Leg #1-1	1650	FSL	100	FWL	20S	28E	9	Aliquot NWSW	32.585362	-104.190837	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 15003	-2970	6400	6244	Y
PPP Leg #1-2	1650	FSL	2665	FWL	20S	28E	9	Aliquot NWSE	32.585396	-104.182506	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 13232	-3029	9165	6303	Y
PPP Leg #1-3	1650	FSL	0	FEL	20S	28E	10	Aliquot NWSW	32.585431	-104.173848	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 15003	-3029	11830	6303	Y
EXIT Leg #1	1650	FSL	100	FEL	20S	28E	10	Aliquot NESE	32.585509	-104.156912	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 15003	-3029	16832	6303	Y
BHL Leg #1	1650	FSL	10	FEL	20S	28E	10	Aliquot NESE	32.58551	-104.15662	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 15003	-3029	16922	6303	N

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

1 API Number 30-015-54166	2 Pool Code 48035	3 Pool Name Old Millman Ranch; Bone Spring (Assoc)
4 Property Code 334680	5 Property Name KOALA 9 FED COM	
6 Well Number 113H		7 OGRID No. 371449
8 Operator Name COLGATE ENERGY LLC		9 Elevation 3274.23'

10 Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	8	20-S	28-E		1144'	SOUTH	135'	EAST	EDDY

11 Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
I	10	20-S	28-E		1650'	SOUTH	10'	EAST	EDDY

12 Dedicated Acres	13 Joint or Infill	14 Consolidation Code	15 Order No.

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

16 SURFACE HOLE LOCATION (SHL) NEW MEXICO EAST - NAD 83 X=584983.28 LAT.= 32.58396809° N Y=576207.36 LONG.= 104.19162967° W NEW MEXICO EAST - NAD 27 X=543803.08 LAT.= 32.58385085° N Y=576145.95 LONG.= 104.1912222° W 1144' FSL, 135' FEL - SECTION 8 FIRST TAKE POINT (FTP) NEW MEXICO EAST - NAD 83 X=585226.77 LAT.= 32.58536207° N Y=576714.82 LONG.= 104.19083692° W NEW MEXICO EAST - NAD 27 X=544046.58 LAT.= 32.58524483° N Y=576653.40 LONG.= 104.19032945° W 1650' FSL, 100' FWL - SECTION 9 LAST TAKE POINT (LTP) NEW MEXICO EAST - NAD 83 X=595675.74 LAT.= 32.58550854° N Y=576783.77 LONG.= 104.15691174° W NEW MEXICO EAST - NAD 27 X=554495.52 LAT.= 32.58539094° N Y=576722.27 LONG.= 104.15640515° W 1650' FSL, 100' FEL - SECTION 10 BOTTOM HOLE LOCATION (BHL) NEW MEXICO EAST - NAD 83 X=595765.76 LAT.= 32.58550966° N Y=576784.33 LONG.= 104.15661948° W NEW MEXICO EAST - NAD 27 X=554585.54 LAT.= 32.58539205° N Y=576722.82 LONG.= 104.15611290° W 1650' FSL, 10' FEL - SECTION 10 CORNER DATA NEW MEXICO EAST - NAD 83 A - FOUND IRON PIPE W/ BRASS CAP N:580356.62' E:585185.65' B - FOUND 1" IRON PIPE N:580373.68' E:587849.16' C - FOUND 1" IRON PIPE N:580391.30' E:590513.47' D - FOUND 1" IRON PIPE N:580412.62' E:593168.80' E - FOUND 1" IRON PIPE N:580433.88' E:595824.69' F - FOUND IRON PIPE W/ BRASS CAP N:577783.78' E:595789.28' G - FOUND IRON PIPE W/ BRASS CAP N:575134.28' E:595753.43' H - FOUND IRON PIPE W/ BRASS CAP N:575115.45' E:593094.38' I - FOUND 2" IRON PIPE N:575097.10' E:590435.59' J - FOUND 1 1/4" IRON PIPE N:575080.69' E:587767.05' K - FOUND IRON PIPE W/ BRASS CAP N:575063.99' E:585099.23' L - FOUND IRON PIPE W/ BRASS CAP N:577711.68' E:585143.38' M - FOUND 1" IRON PIPE N:577744.14' E:590473.87'	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. Signature _____ Date _____ Printed Name _____ E-mail Address _____ 18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Date of Survey _____ Signature and Seal of Professional Surveyor: Certificate Number _____ 5/5/2022
--	---

District I

1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III

1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102

Revised August 1, 2011

Submit one copy to appropriate

District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

1 API Number	2 Pool Code 73280	3 Pool Name BURTON FLAT, MORROW (PRO GAS)
4 Property Code	5 Property Name KOALA 9 FED COM	6 Well Number 113H
7 OGRID No. 371449	8 Operator Name COLGATE OPERATING, LLC	9 Elevation 3274.23'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	8	20-S	28-E		1144'	SOUTH	135'	EAST	EDDY

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
I	10	20-S	28-E		1650'	SOUTH	10'	EAST	EDDY

12 Dedicated Acres 320	13 Joint or Infill	14 Consolidation Code	15 Order No.
---------------------------	--------------------	-----------------------	--------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

¹⁶ SURFACE HOLE LOCATION (SHL) NEW MEXICO EAST - NAD 83 X=584983.28 LAT.= 32.58396809° N Y=576207.36 LONG.= 104.19162967° W NEW MEXICO EAST - NAD 27 X=543803.08 LAT.= 32.58385085° N Y=576145.95 LONG.= 104.19112222° W 1144' FSL, 135' FEL - SECTION 8 LAST TAKE POINT (LTP) NEW MEXICO EAST - NAD 83 X=595675.74 LAT.= 32.58550854° N Y=576783.77 LONG.= 104.15691174° W NEW MEXICO EAST - NAD 27 X=554495.52 LAT.= 32.58539094° N Y=576722.27 LONG.= 104.15640515° W 1650' FSL, 100' FEL - SECTION 10 PENETRATION POINT 1 (PP1) NEW MEXICO EAST - NAD 83 X=587792.65 LAT.= 32.58539613° N Y=576730.75 LONG.= 104.18250617° W NEW MEXICO EAST - NAD 27 X=546612.45 LAT.= 32.58527880° N Y=576669.31 LONG.= 104.18199892° W 1650' FSL, 2665' FWL - SECTION 9 FIRST TAKE POINT (FTP) NEW MEXICO EAST - NAD 83 X=585226.77 LAT.= 32.58536207° N Y=576714.82 LONG.= 104.19083692° W NEW MEXICO EAST - NAD 27 X=544046.58 LAT.= 32.58524483° N Y=576653.40 LONG.= 104.19032945° W 1650' FSL, 100' FWL - SECTION 9 BOTTOM HOLE LOCATION (BHL) NEW MEXICO EAST - NAD 83 X=595765.76 LAT.= 32.58550966° N Y=576784.33 LONG.= 104.15661948° W NEW MEXICO EAST - NAD 27 X=554585.54 LAT.= 32.58539205° N Y=576722.82 LONG.= 104.15611290° W 1650' FSL, 10' FEL - SECTION 10 PENETRATION POINT 2 (PP2) NEW MEXICO EAST - NAD 83 X=590459.45 LAT.= 32.58543094° N Y=576747.30 LONG.= 104.17384773° W NEW MEXICO EAST - NAD 27 X=549279.25 LAT.= 32.58531351° N Y=576685.84 LONG.= 104.17334070° W 1650' FSL, 0' FEL - SECTION 9 CORNER DATA NEW MEXICO EAST - NAD 83 A. FOUND IRON PIPE W/ BRASS CAP N:580356.62° E:585185.65° B. FOUND 1" IRON PIPE N:580373.68° E:587849.16° C. FOUND 1" IRON PIPE N:580391.30° E:590513.47° D. FOUND 1" IRON PIPE N:580412.62° E:593168.80° E. FOUND 1" IRON PIPE N:580433.88° E:595824.69° F. FOUND IRON PIPE W/ BRASS CAP N:577783.78° E:595789.28° G. FOUND IRON PIPE W/ BRASS CAP N:575134.28° E:595753.43° H. FOUND IRON PIPE W/ BRASS CAP N:575115.45° E:593094.38° I. FOUND 2" IRON PIPE N:575097.10° E:590435.59° J. FOUND 1 1/4" IRON PIPE N:575080.69° E:587767.05° K. FOUND IRON PIPE W/ BRASS CAP N:575063.99° E:585099.23° L. FOUND IRON PIPE W/ BRASS CAP N:577711.68° E:585143.38° M. FOUND 1" IRON PIPE N:577744.14° E:590473.87°	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. Signature _____ Date _____ Printed Name _____ E-mail Address _____ 18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. CHARLES L. JURICA NEW MEXICO PROFESSIONAL SURVEYOR 25490 01/18/2023 Date of Survey Signature and Seal of Surveyor Certificate Number
---	---



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

08/31/2023

APD ID: 10400085812

Submission Date: 06/03/2022

Highlighted data
reflects the most
recent changes

Operator Name: COLGATE OPERATING LLC

Well Name: KOALA 9 FED COM

Well Number: 113H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical	Measured Depth	Lithologies	Mineral Resources	Producing Formatio
12032387	RUSTLER	3274	227	227	ANHYDRITE, LIMESTONE, SALT	NONE	N
12032388	TOP SALT	2906	368	368	ANHYDRITE, SALT	NONE	N
12032389	TANSILL	2570	704	704	ANHYDRITE, DOLOMITE	NONE	N
12032391	YATES	2495	779	779	DOLOMITE, SANDSTONE, SHALE	NATURAL GAS, OIL	N
12032386	SEVEN RIVERS	2120	1154	1154	ANHYDRITE, DOLOMITE, SANDSTONE, SHALE	NONE	N
12032390	QUEEN	1450	1824	1824	ANHYDRITE, DOLOMITE, SANDSTONE, SHALE	NATURAL GAS, OIL	N
12032392	GRAYBURG	1220	2054	2054	ANHYDRITE, DOLOMITE, SANDSTONE, SHALE	NATURAL GAS, OIL	N
12032393	SAN ANDRES	870	2404	2404	ANHYDRITE, DOLOMITE	NATURAL GAS, OIL	N
12032394	CHERRY CANYON	295	2979	2979	LIMESTONE, SANDSTONE, SHALE	NATURAL GAS, OIL	N
12032385	BRUSHY CANYON	-80	3354	3354	LIMESTONE, SANDSTONE, SHALE	NATURAL GAS, OIL	N
12032395	BONE SPRING LIME	-1380	4654	4654	LIMESTONE, SANDSTONE, SHALE	NATURAL GAS, OIL	N
12032396	BONE SPRING 1ST	-2830	6104	6104	LIMESTONE, SANDSTONE, SHALE	NATURAL GAS, OIL	Y
12032382	BONE SPRING 2ND	-3905	7179	7179	LIMESTONE, SANDSTONE, SHALE	NATURAL GAS, OIL	N
12032383	BONE SPRING 3RD	-5030	8304	8304	LIMESTONE, SANDSTONE, SHALE	NATURAL GAS, OIL	N
12032384	WOLFCAMP	-5430	8704	8704	LIMESTONE, SANDSTONE, SHALE	NATURAL GAS, OIL	N

Section 2 - Blowout Prevention

Operator Name: COLGATE OPERATING LLC**Well Name:** KOALA 9 FED COM**Well Number:** 113H**Pressure Rating (PSI):** 5M**Rating Depth:** 6403

Equipment: BOPE with working pressure ratings in excess of anticipated maximum surface pressure will be utilized for well control from drill out of surface casing to TMD. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. All BOPE connections shall be flanged, welded or clamped. All choke lines shall be straight unless targeted with running tees or tee blocks are used, and choke lines shall be anchored to prevent whip and reduce vibrations. All valves in the choke line & the choke manifold shall be full opening as to not cause restrictions and to allow for straight fluid paths to minimize potential erosion. All gauges utilized in the well control system shall be of a type designed for drilling fluid service. A top drive inside BOP valve will be utilized at all times. Subs equipped with full opening valves sized to fit the drill pipe and collars will be available on the rig floor in the open position. The key to operate said valve equipped subs will be on the rig floor at all times. The accumulator system will have sufficient capacity to open the HCR and close all three sets of rams plus the annular preventer while retaining at least 300 psi above precharge on the closing manifold (accumulator system shall be capable of doing so without using the closing unit pumps). The fluid reservoir capacity will be double the usable fluid volume of the accumulator system capacity, and the fluid level will be maintained at the manufacturer's recommended level. Prior to connecting the closing unit to the BOP stack, an accumulator precharge pressure test shall be performed to ensure the precharge pressure is within 100 psi of the desired precharge pressure (only nitrogen gas will be used to precharge). Two independent power sources will be made available at all times to power the closing unit pumps so that the pumps can automatically start when the closing valve manifold pressure has decreased to the preset level. Closing unit pumps will be sized to allow opening of HCR and closing of annular preventer on 5" drill pipe achieving at least 200 psi above precharge pressure with the accumulator system isolated from service in less than two minutes. A valve shall be installed in the closing line as close to the annular preventer as possible to act as a locking device; the valve shall be maintained in the open position and shall be closed only when the power source for the accumulator system is inoperative. Remote controls capable of opening and closing all preventers & the HCR shall be readily accessible to the driller; master controls with the same capability will be operable at the accumulator. The wellhead will be a multibowl speed head allowing for hangoff of intermediate casing & isolation of the 133/8 x 95/8 annulus without breaking the connection between the BOP & wellhead to install an additional casing head. A wear bushing will be installed & inspected frequently to guard against internal wear to wellhead. VBRs (variablebore rams) will be run in upper rambody of BOP stack to provide redundancy to annular preventer while RIH w/ production casing;

Requesting Variance? YES**Variance request:** Flex hose and offline cement variances, see attachments in section 8.

Testing Procedure: The BOP test shall be performed before drilling out of the surface casing shoe and will occur at a minimum: a. when initially installed b. whenever any seal subject to test pressure is broken c. following related repairs d. at 30-day intervals e. checked daily as to mechanical operating conditions. The ram type preventer(s) will be tested using a test plug to 250 psi (low) and 5,000 psi (high) (casinghead WP) with a test plug upon its installation onto the 13 surface casing. If a test plug is not used, the ram type preventer(s) shall be tested to 70% of the minimum internal yield pressure of the casing. The annular type preventer(s) shall be tested to 3500 psi. Pressure will be maintained for at least 10 minutes or until provisions of the test are met, whichever is longer. A Sundry Notice (Form 3160 5), along with a copy of the BOP test report, shall be submitted to the local BLM office within 5 working days following the test. If the bleed line is connected into the buffer tank (header), all BOP equipment including the buffer tank and associated valves will be rated at the required BOP pressure. The BLM office will be provided with a minimum of four (4) hours notice of BOP testing to allow witnessing. The BOP Configuration, choke manifold layout, and accumulator system, will be in compliance with Onshore Order 2 for a 5,000 psi system. A remote accumulator and a multi-bowl system will be used, please see attachment in section 8 for multi-bowl procedure. Pressures, capacities, and specific placement and use of the manual and/or hydraulic controls, accumulator controls, bleed lines, etc., will be identified at the time of the BLM 'witnessed OP test. Any remote controls will be capable of both opening and closing all preventers and shall be readily accessible.

Choke Diagram Attachment:

Choke_Diagram_Attachment_20230717111615.pdf

BOP Diagram Attachment:

BOP_Diagram_Attachment_20230717111618.pdf

Operator Name: COLGATE OPERATING LLC

Well Name: KOALA 9 FED COM

Well Number: 113H

Choke_Diagram_Attachment_20230717111615.pdf

BOP_Diagram_Attachment_20230717111618.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	378	0	378	3274	2896	378	J-55	54.5	OTHER - BTC	6.05	3.07	DRY	7.54	DRY	7.07
2	INTERMEDIATE	12.25	9.625	NEW	API	N	0	2929	0	2929	3274	345	2929	J-55	36	OTHER - BTC	3.63	1.83	DRY	3.11	DRY	2.75
3	PRODUCTION	8.75	5.5	NEW	NON API	N	0	6661	0	6303	3274	-3029	6661	P-110	17	OTHER - GEOCONN	2.28	2.38	DRY	2.64	DRY	2.64
4	PRODUCTION	7.875	5.5	NEW	NON API	N	6661	16921	6303	6303	-3029	-3029	10260	P-110	17	OTHER - GEOCONN	2.28	2.38	DRY	2.64	DRY	2.64

Casing Attachments

Casing ID: 1 String SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Casing_Assumptions_Worksheet_20230717111712.pdf

Operator Name: COLGATE OPERATING LLC**Well Name:** KOALA 9 FED COM**Well Number:** 113H**Casing Attachments****Casing ID:** 2 **String** INTERMEDIATE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

Casing_Assumptions_Worksheet_20230717111748.pdf

Casing ID: 3 **String** PRODUCTION**Inspection Document:****Spec Document:**

Connection_Data_Sheet_P110RY_GeoConn_SC_20230717111840.pdf

Tapered String Spec:**Casing Design Assumptions and Worksheet(s):**

Casing_Assumptions_Worksheet_20230717111856.pdf

Casing ID: 4 **String** PRODUCTION**Inspection Document:****Spec Document:**

Connection_Data_Sheet_P110RY_GeoConn_SC_20230717111933.pdf

Tapered String Spec:**Casing Design Assumptions and Worksheet(s):**

Casing_Assumptions_Worksheet_20230717111948.pdf

Section 4 - Cement

Operator Name: COLGATE OPERATING LLC**Well Name:** KOALA 9 FED COM**Well Number:** 113H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	0	0	0	0	0		0	0
SURFACE	Tail		0	378	300	1.34	14.8	400	50	Class C	Accelerator
INTERMEDIATE	Lead		0	2340	510	2.08	12.7	1060	50	Class C	Salt, Extender & LCM Additives
INTERMEDIATE	Tail		2340	2929	210	1.34	14.8	280	50	Class C	Accelerator
PRODUCTION	Lead		2429	5761	480	2.41	11.5	1140	40	Class H	POZ, Extender, Fluid Loss, Dispersant, Retarder
PRODUCTION	Tail		5761	16921	1460	1.73	12.5	2510	25	Class H	POZ, Extender, Fluid Loss, Dispersant, Retarder
PRODUCTION	Lead		2429	5761	480	2.41	11.5	1140	40	Class H	POZ, Extender, Fluid Loss, Dispersant, Retarder
PRODUCTION	Tail		5761	16921	1460	1.73	12.5	2510	25	Class H	POZ, Extender, Fluid Loss, Dispersant, Retarder

Section 5 - Circulating Medium

Mud System Type: Closed**Will an air or gas system be Used?** NO**Description of the equipment for the circulating system in accordance with Onshore Order #2:****Diagram of the equipment for the circulating system in accordance with Onshore Order #2:**

Describe what will be on location to control well or mitigate other conditions: Sufficient quantities of mud materials will be on the well site at all times for the purpose of assuring well control and maintaining wellbore integrity. Surface interval will employ fresh water mud. The intermediate hole will utilize a saturated brine fluid to inhibit salt washout. The production hole will employ brine based and oil base fluid to inhibit formation reactivity and of the appropriate density to maintain well control.

Describe the mud monitoring system utilized: Centrifuge separation system. Open tank monitoring with EDR will be used for drilling fluids and return volumes. Open tank monitoring will be used for cement and cuttings return volumes. Mud properties will be monitored at least every 24 hours using industry accepted mud check practices.

Circulating Medium Table

Operator Name: COLGATE OPERATING LLC**Well Name:** KOALA 9 FED COM**Well Number:** 113H

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	378	WATER-BASED MUD	8.6	9.5							
378	2929	SALT SATURATED	10	10							
2929	6661	OTHER : Brine	9	10							
6661	1692 1	OIL-BASED MUD	9	10							

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Will utilize MWD/LWD (Gamma Ray logging) from intermediate hole to TD of the well.

List of open and cased hole logs run in the well:

GAMMA RAY LOG,DIRECTIONAL SURVEY,

Coring operation description for the well:

N/A.

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 3280

Anticipated Surface Pressure: 1893

Anticipated Bottom Hole Temperature(F): 122

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations


Colgate_H2S_Contingency_Plan_20220602142028.pdf

Operator Name: COLGATE OPERATING LLC**Well Name:** KOALA 9 FED COM**Well Number:** 113H**Section 8 - Other Information****Proposed horizontal/directional/multi-lateral plan submission:**[_B07__Koala_9_Fed_Com_113H_APD_Rev00_20220602142042.pdf](#)[_B07__Koala_9_Fed_Com_113H_APD_Rev00_AC_20230717113437.pdf](#)**Other proposed operations facets description:**

Please see attached Drilling Plan, including multi-bowl diagram and procedure, proposed WBD, and casing connection data sheet. We also plan to batch drill this well along with offline cementing, see details under variance request below. Permian Resources Operating, LLC requests to use a flex hose on H&P choke manifold for this well. The Flex Hose specifications are attached below.

Other proposed operations facets attachment:[Koala_9_Fed_Com_113H_drilling_packet_20230718125334.pdf](#)**Other Variance attachment:**[Flex_Hose_Data_Sheet_20230717113514.pdf](#)[Multi_well_Pad_Batch_Drilling___Offline_Cement_Procedure_20230717113518.pdf](#)

5M Choke Manifold Equipment (WITH MGS + CLOSED LOOP)

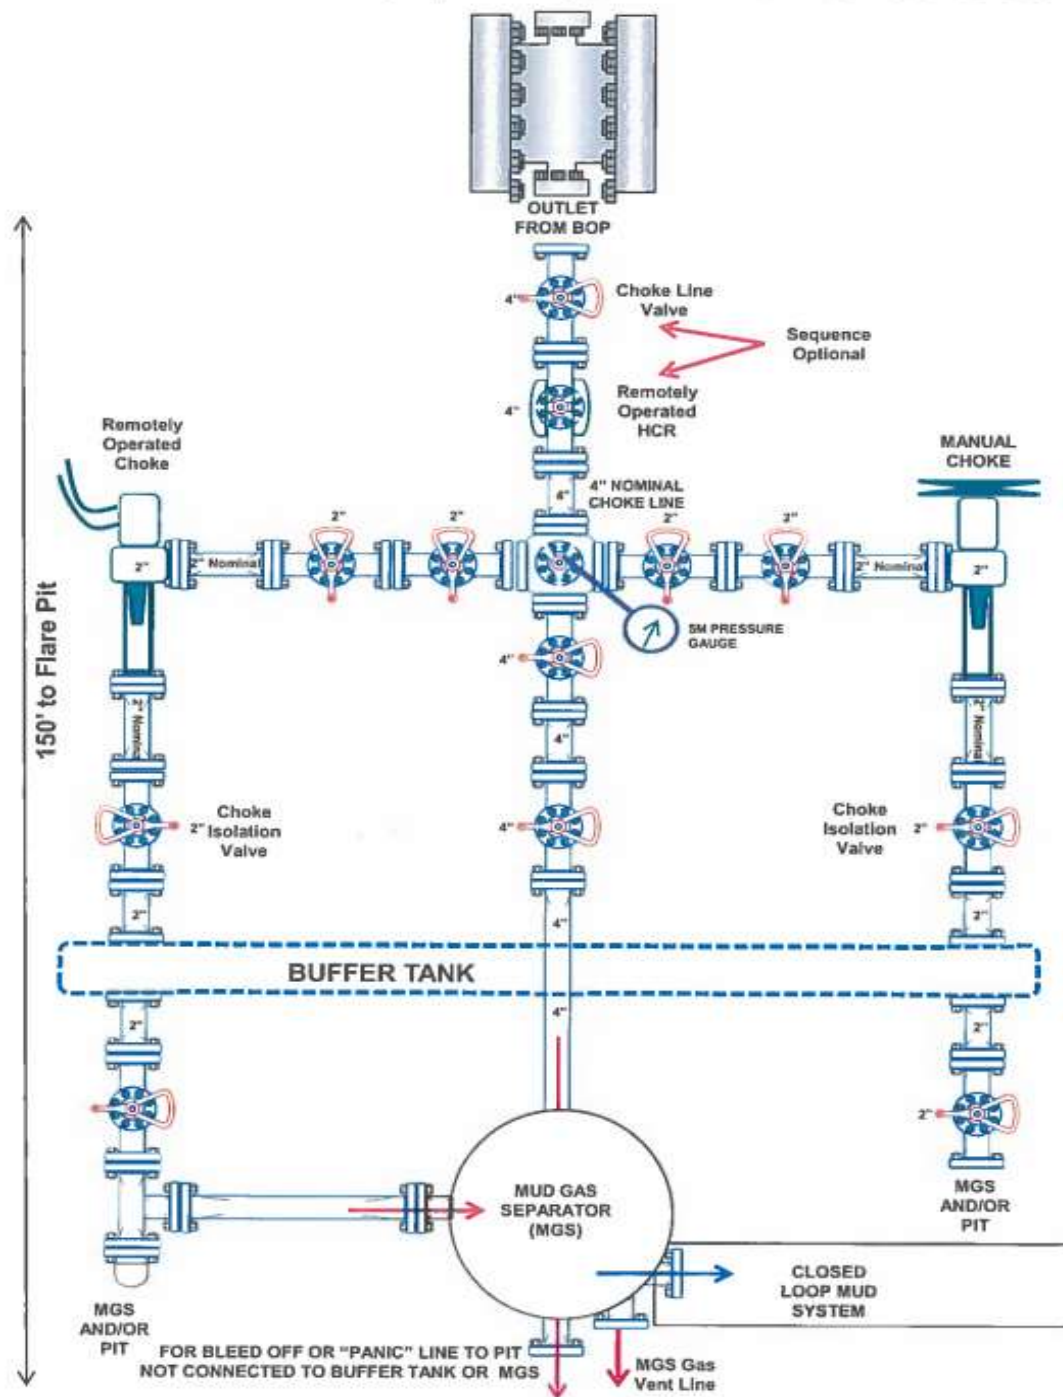



ContiTech

CONTITECH RUBBER Industrial Kft.	No:QC-DB- 210/ 2014 Page: 9 / 113
-------------------------------------	--------------------------------------

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 504	
PURCHASER: ContiTech Oil & Marine Corp.				P.O. N°: 4500409659	
CONTITECH RUBBER order N°: 538236		HOSE TYPE: 3" ID		Choke and Kill Hose	
HOSE SERIAL N°: 67255		NOMINAL / ACTUAL LENGTH:		10,67 m / 10,77 m	
W.P.: 68,9 MPa 10000 psi		T.P.: 103,4 MPa 15000 psi		Duration: 60 min	
Pressure test with water at ambient temperature					
See attachment. (1 page)					
↑ 10 mm = 10 Min. → 10 mm = 20 MPa					
COUPLINGS Type		Serial N°		Quality	
3" coupling with		9251 9254		AISI 4130	
4 1/16" 10K API b.w. Flange end				AISI 4130	
				A0578N	
				035608	
Not Designed For Well Testing				API Spec 16 C	
				Temperature rate: "B"	
All metal parts are flawless					
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.					
COUNTRY OF ORIGIN HUNGARY/EU					
Date:		Inspector		Quality Control	
20. March 2014.				ContiTech Rubber Industrial Oil Quality Control Dept.  	


CentFeed Rubber Industrial Co., Ltd. (Registered at 10, H-8728 Sangon) H-6701 P.O. Box 102 Sangon, Hangzhou
Phone: +86 571 864 737 / Fax: +86 52 566 728 / e-mail: info@hdc-centfeed.cn / Internet: www.centfeed-rubber.cn / www.centfeed.cn
The Court of Hangzhou County is a Registry Court / Registry Court No: Cg 90-09-00050 / EU 107 No: H11153709
Data Data Communication Co., Ltd. (Registered at 14210106-2683000)

ATTACHMENT OF QUALITY CONTROL INSPECTION AND TEST CERTIFICATE No: 501, 504, 505

Page: 1/1




5,000 psi BOP Schematic

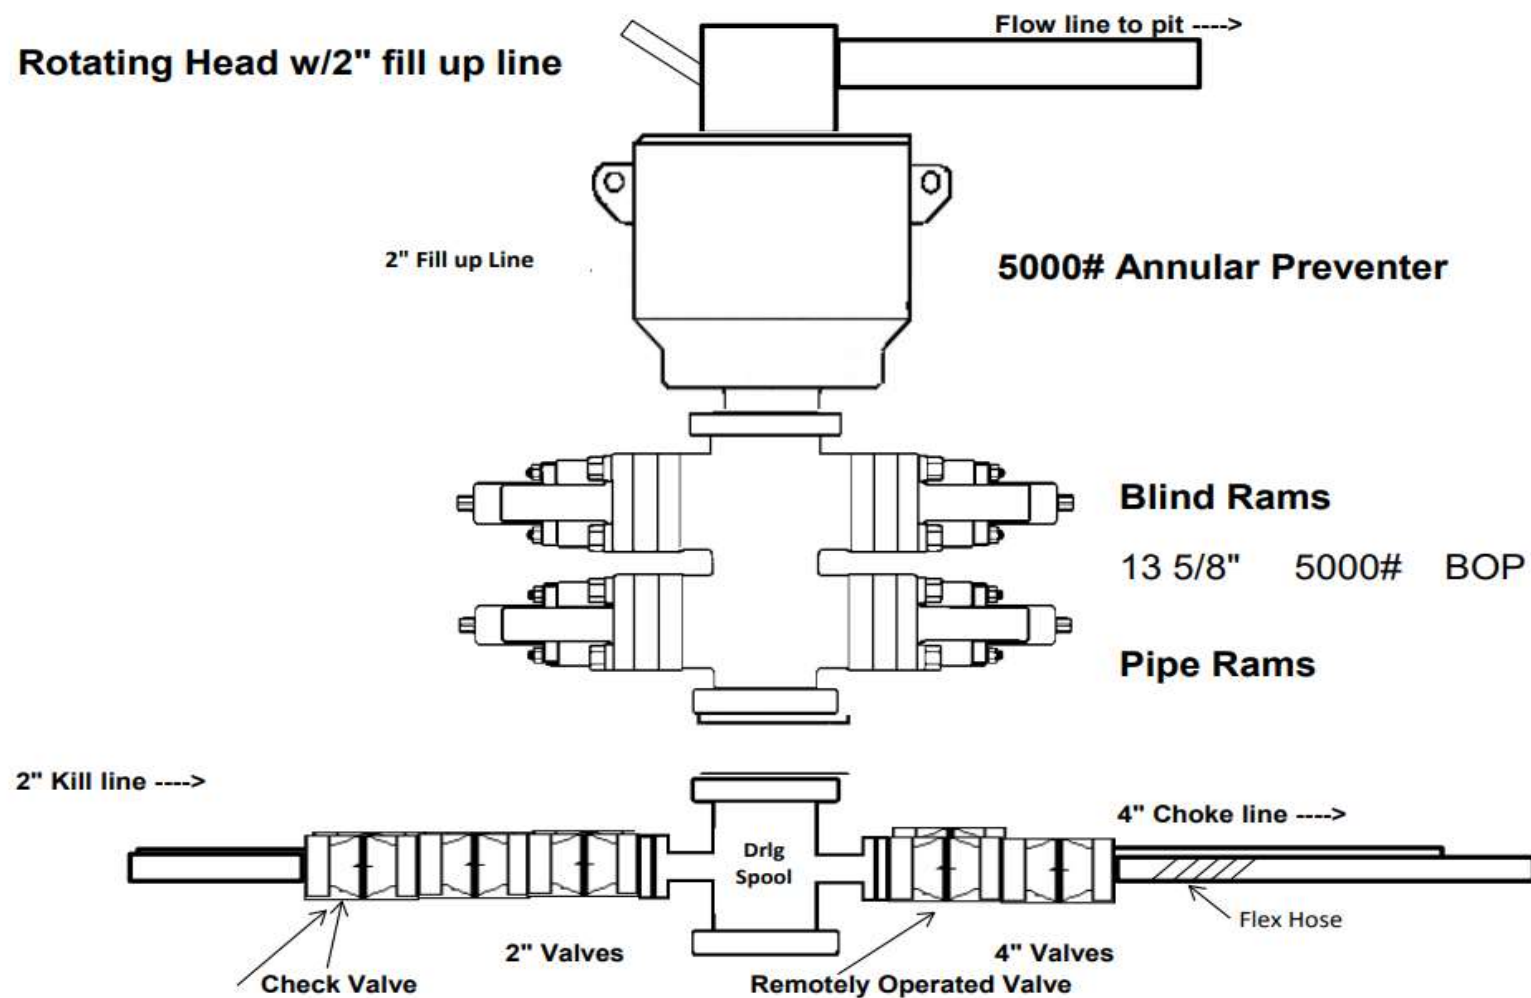

Metal One Corp. 	GEOCONN-SC Pipe: SeAH P110RY 95%PBW (SMYS110ksi) *1 Coupling: P110RY (SMYS110ksi) Connection Data Sheet	Page Date Rev.	MAI GC 5.5 17 SeAH P110RY 95%RBW+SC-Cplg6.050 P110RY 3-Feb-21 0
---	--	----------------------	--

GEOCONN-SC



Geometry		Imperial		S.I.	
Pipe Body					
Grade *1	P110RY	-	P110RY	-	
SMYS	110	ksi	110	ksi	
Pipe OD (D)	5.500	in	139.70	mm	
Weight	17.00	lb/ft	25.33	kg/m	
Wall Thickness (t)	0.304	in	7.72	mm	
Pipe ID (d)	4.892	in	124.26	mm	
Drift Dia.	4.767	in	121.08	mm	
Connection					
Coupling SMYS	110	ksi	110	ksi	
SC-Coupling OD (Wsc1)	6.050	in	153.67	mm	
Coupling Length (NL)	8.350	in	212.09	mm	
Make up Loss	4.125	in	104.78	mm	
Pipe Critical Area	4.96	in ²	3,202	mm ²	
Box Critical Area	6.10	in ²	3,937	mm ²	
Thread Taper	1 / 16 (3/4" per ft)				
Number of Threads	5 TPI				

Performance		Imperial		S.I.	
Performance Properties for Pipe Body					
S.M.Y.S. *1	546	kips	2,428	kN	
M.I.Y.P. *1	11,550	psi	79.66	MPa	
Collapse Strength *1	7,480	psi	51.59	MPa	
Note S.M.Y.S.= Specified Minimum YIELD Strength of Pipe body M.I.Y.P. = Minimum Internal Yield Pressure of Pipe body *1: SeAH P110RY 95%RBW: SMYS110ksi, MIYP11,550psi					
Performance Properties for Connection					
Min. Connection Joint Strength	100%		of S.M.Y.S.		
Min. Compression Yield	100%		of S.M.Y.S.		
Internal Pressure	100%		of M.I.Y.P.		
External Pressure	100%		of Collapse Strength		
Max. DLS (deg. /100ft)	>90				

Recommended Torque				
Min.	10,800	ft-lb	14,600	N-m
Opti.	12,000	ft-lb	16,200	N-m
Max.	13,200	ft-lb	17,800	N-m
Operational Max.	15,600	ft-lb	21,100	N-m

Note : Operational Max. torque can be applied for high torque application

Legal Notice


The use of this information is at the reader/user's risk and no warranty is implied or expressed by Metal One Corporation or its parents, subsidiaries or affiliates (herein collectively referred to as "Metal One") with respect to the use of information contained herein. The information provided on this Connection Data Sheet is for informational purposes only, and was prepared by reference to engineering information that is specific to the subject products, without regard to safety-related factors, all of which are the sole responsibility of the operators and users of the subject connectors. Metal One assumes no responsibility for any errors with respect to this information.

Statements regarding the suitability of products for certain types of applications are based on Metal One's knowledge of typical requirements that are often placed on Metal One products in standard well configurations. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

The products described in this Connection Data Sheet are not recommended for use in deep water offshore applications. For more information, please refer to http://www.mto.co.jp/mto-con/ Images/top/WebsiteTerms_Active_20333287_1.pdf the contents of which are incorporated by reference into this Connection Data Sheet.

Metal One Corp. 	GEOCONN-SC Pipe: SeAH P110RY 95%PBW (SMYS110ksi) *1 Coupling: P110RY (SMYS110ksi) Connection Data Sheet	Page Date Rev.	MAI GC 5.5 17 SeAH P110RY 95%RBW+SC-Cplg6.050 P110RY 3-Feb-21 0
---	--	----------------------	--

GEOCONN-SC

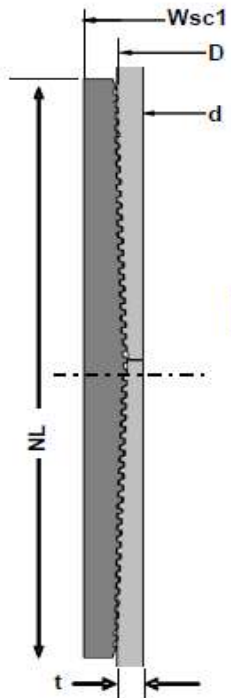

Geometry	Imperial		S.I.	
Pipe Body				
Grade *1	P110RY	-	P110RY	-
SMYS	110	ksi	110	ksi
Pipe OD (D)	5.500	in	139.70	mm
Weight	17.00	lb/ft	25.33	kg/m
Wall Thickness (t)	0.304	in	7.72	mm
Pipe ID (d)	4.892	in	124.26	mm
Drift Dia.	4.767	in	121.08	mm
Connection				
Coupling SMYS	110	ksi	110	ksi
SC-Coupling OD (Wsc1)	6.050	in	153.67	mm
Coupling Length (NL)	8.350	in	212.09	mm
Make up Loss	4.125	in	104.78	mm
Pipe Critical Area	4.96	in ²	3,202	mm ²
Box Critical Area	6.10	in ²	3,937	mm ²
Thread Taper	1 / 16 (3/4" per ft)			
Number of Threads	5 TPI			

Performance	Imperial		S.I.	
Performance Properties for Pipe Body				
S.M.Y.S. *1	546	kips	2,428	kN
M.I.Y.P. *1	11,550	psi	79.66	MPa
Collapse Strength *1	7,480	psi	51.59	MPa

Note S.M.Y.S.= Specified Minimum YIELD Strength of Pipe body
 M.I.Y.P. = Minimum Internal Yield Pressure of Pipe body

*1: SeAH P110RY 95%RBW: SMYS110ksi, MIYP11,550psi

Performance Properties for Connection	
Min. Connection Joint Strength	100% of S.M.Y.S.
Min. Compression Yield	100% of S.M.Y.S.
Internal Pressure	100% of M.I.Y.P.
External Pressure	100% of Collapse Strength
Max. DLS (deg. /100ft)	>90

Recommended Torque				
Min.	10,800	ft-lb	14,600	N-m
Opti.	12,000	ft-lb	16,200	N-m
Max.	13,200	ft-lb	17,800	N-m
Operational Max.	15,600	ft-lb	21,100	N-m

Note : Operational Max. torque can be applied for high torque application

Legal Notice

The use of this information is at the reader/user's risk and no warranty is implied or expressed by Metal One Corporation or its parents, subsidiaries or affiliates (herein collectively referred to as "Metal One") with respect to the use of information contained herein. The information provided on this Connection Data Sheet is for informational purposes only, and was prepared by reference to engineering information that is specific to the subject products, without regard to safety-related factors, all of which are the sole responsibility of the operators and users of the subject connectors. Metal One assumes no responsibility for any errors with respect to this information.

Statements regarding the suitability of products for certain types of applications are based on Metal One's knowledge of typical requirements that are often placed on Metal One products in standard well configurations. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

The products described in this Connection Data Sheet are not recommended for use in deep water offshore applications. For more information, please refer to http://www.mto.co.jp/mto-con/ Images/top/WebsiteTerms_Active_20333287_1.pdf the contents of which are incorporated by reference into this Connection Data Sheet.

Permian Resources Casing Design Criteria

A sundry will be requested if any lesser grade or different size casing is substituted. All casing will be centralized as specified in On Shore Order II. Casing will be tested as specified in On Shore Order II.

Casing Design Assumptions:

Surface

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate I

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.

- (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate or Intermediate II

- 1) Burst Design Loads
 - a) Gas Kick Profile
 - (1) Internal: Load profile based on influx encountered in lateral portion of wellbore with a maximum influx volume of 150 bbl and a kick intensity of 1.5 ppg using maximum anticipated MW of 9.9 ppg.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the deepest TVD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Production

- 1) Burst Design Loads
 - a) Injection Down Casing
 - (1) Internal: Surface pressure plus injection fluid gradient.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test (Drilling)
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - c) Casing Pressure Test (Production)
 - (1) Internal: The design pressure test should be the greater of the planned test pressure prior to simulation down the casing, the regulatory test pressure, and the expected gas lift system pressure. The design test fluid should be the fluid associated with the pressure test having the greatest pressure.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - d) Tubing Leak
 - (1) Internal: SITP plus a packer fluid gradient to the top of packer.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
 - b) Full Evacuation
 - (1) Internal: Full void pipe.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Permian Resources Casing Design Criteria

A sundry will be requested if any lesser grade or different size casing is substituted. All casing will be centralized as specified in On Shore Order II. Casing will be tested as specified in On Shore Order II.

Casing Design Assumptions:

Surface

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate I

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.

- (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate or Intermediate II

- 1) Burst Design Loads
 - a) Gas Kick Profile
 - (1) Internal: Load profile based on influx encountered in lateral portion of wellbore with a maximum influx volume of 150 bbl and a kick intensity of 1.5 ppg using maximum anticipated MW of 9.9 ppg.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the deepest TVD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Production

- 1) Burst Design Loads
 - a) Injection Down Casing
 - (1) Internal: Surface pressure plus injection fluid gradient.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test (Drilling)
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - c) Casing Pressure Test (Production)
 - (1) Internal: The design pressure test should be the greater of the planned test pressure prior to simulation down the casing, the regulatory test pressure, and the expected gas lift system pressure. The design test fluid should be the fluid associated with the pressure test having the greatest pressure.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - d) Tubing Leak
 - (1) Internal: SITP plus a packer fluid gradient to the top of packer.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
 - b) Full Evacuation
 - (1) Internal: Full void pipe.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Permian Resources Casing Design Criteria

A sundry will be requested if any lesser grade or different size casing is substituted. All casing will be centralized as specified in On Shore Order II. Casing will be tested as specified in On Shore Order II.

Casing Design Assumptions:

Surface

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate I

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.

- (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate or Intermediate II

- 1) Burst Design Loads
 - a) Gas Kick Profile
 - (1) Internal: Load profile based on influx encountered in lateral portion of wellbore with a maximum influx volume of 150 bbl and a kick intensity of 1.5 ppg using maximum anticipated MW of 9.9 ppg.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the deepest TVD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Production

- 1) Burst Design Loads
 - a) Injection Down Casing
 - (1) Internal: Surface pressure plus injection fluid gradient.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test (Drilling)
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - c) Casing Pressure Test (Production)
 - (1) Internal: The design pressure test should be the greater of the planned test pressure prior to simulation down the casing, the regulatory test pressure, and the expected gas lift system pressure. The design test fluid should be the fluid associated with the pressure test having the greatest pressure.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - d) Tubing Leak
 - (1) Internal: SITP plus a packer fluid gradient to the top of packer.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
 - b) Full Evacuation
 - (1) Internal: Full void pipe.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Permian Resources Casing Design Criteria

A sundry will be requested if any lesser grade or different size casing is substituted. All casing will be centralized as specified in On Shore Order II. Casing will be tested as specified in On Shore Order II.

Casing Design Assumptions:

Surface

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate I

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.

- (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate or Intermediate II

- 1) Burst Design Loads
 - a) Gas Kick Profile
 - (1) Internal: Load profile based on influx encountered in lateral portion of wellbore with a maximum influx volume of 150 bbl and a kick intensity of 1.5 ppg using maximum anticipated MW of 9.9 ppg.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the deepest TVD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Production

- 1) Burst Design Loads
 - a) Injection Down Casing
 - (1) Internal: Surface pressure plus injection fluid gradient.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test (Drilling)
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - c) Casing Pressure Test (Production)
 - (1) Internal: The design pressure test should be the greater of the planned test pressure prior to simulation down the casing, the regulatory test pressure, and the expected gas lift system pressure. The design test fluid should be the fluid associated with the pressure test having the greatest pressure.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - d) Tubing Leak
 - (1) Internal: SITP plus a packer fluid gradient to the top of packer.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
 - b) Full Evacuation
 - (1) Internal: Full void pipe.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.



H₂S Contingency Plan



Table of Contents

I. EMERGENCY ASSISTANCE TELEPHONE LIST	3
II. H ₂ S CONTINGENCY PLAN SECTION	5
III. OPERATING PROCEDURES	7
IV. OPERATING CONDITIONS	10
V. EMERGENCY PROCEDURES	11
VI. POST EMERGENCY ACTIONS	14
VII. IGNITION PROCEDURES	15
VIII. TRAINING PROGRAM	16
IX. EMERGENCY EQUIPMENT	16
X. CHECKLISTS	20
XI. BRIEFING PROCEDURES	22
XII. EVACUATION PLAN	23
XIII. APPENDICES AND GENERAL INFORMATION	24

I. EMERGENCY ASSISTANCE TELEPHONE LIST**PUBLIC SAFETY****911 or****Sheriff's Department:**

Eddy County Sherriff's Office (575) 887-7551

Fire Department:

Carlsbad Fire Department (575) 885-3125

Artesia Fire Department (575) 746-5051

Ambulance:

Elite Medical Transport (Carlsbad) (915) 542-1144

Trans Aero MedEvac (Artesia) (970) 657-7449

Hospitals:

Carlsbad Medical Center (575) 887-4100

Artesia General Hospital (575) 748-3333

New Mexico Dept. of Transportation:

Highway & Transportation Department (505) 795- 1401

New Mexico Railroad Commission:

Main Line (505) 476-3441

OSHA 24 Hr. Reporting

(800) 321-6742

(8 hrs. after death or 24 hrs. after in-patient, amputation, loss of an eye)

Office Contacts**911 or**

Colgate Energy LLC. (432) 695-4222
Vice President of Operations:

Casey McCain (432) 664-6140

Drilling Engineering Supervisor

Rafael Madrid (432) 556-6387

Drilling Engineering Technical Adviser

Steven Segrest (405) 550-0277

Operations Superintendent

Rick Lawson (432) 530- 3188

Drilling Superintendent

Daniel Cameron (405) 933-0435

Onsite Supervision (H&P 481 Rig Managers)

Juan Gutierrez (970)394-4768

Jonathan Jackson (970)394-4768

Onsite Supervision (H&P 481 Company Men)

Pierre Dupuis (432)438-0114

Eric Rutherford (432)438-0114

Rolando Torres (432)438-0114

Trevor Hein (432)438-0114

Emergency Accommodations

Safety Solutions Office (432) 563-0400

Safety Solutions Dispatch (432) 556-2002

Craig Strasner (432) 894-0341 (Cell)

II. H₂S CONTINGENCY PLAN SECTION

Scope:

This contingency plan provides an organized plan of action for alerting and protecting the public within an area of exposure prior to an intentional release or following the accidental release of a potentially hazardous volume of hydrogen sulfide. The plan establishes guidelines for all personnel whose work activity may involve exposure to Hydrogen Sulfide Gas (H₂S).

Objective:

Prevent any and all accidents and prevent the uncontrolled release of H₂S into the atmosphere.

Provide proper evacuation procedures to cope with emergencies.

Provide immediate and adequate medical attention should an injury occur.

Purpose, Distribution and Updating of Contingency Plan:

The Purpose of this contingency plan is to protect the general public from the harmful effects of H₂S accidentally escaping from the subject producing well. This plan is designed to accomplish its purpose by assuring the preparedness necessary to:

1. Minimize the possibility of releasing H₂S into the atmosphere during related operations.
2. Provide for the logical, efficient, and safe emergency actions required to protect the general public in the event of an accidental release of a potentially hazardous quantity of H₂S.

Supplemental information is included with this plan and is intended as reference material for anyone needing a more detailed understanding of the many factors pertinent to H₂S drilling operations safety. The release of a potentially hazardous quantity of H₂S is highly unlikely. If such a release should occur however, obviously the exact time, rate, duration, and other pertinent facts will be known in advance thus, this contingency plan must necessarily be somewhat general. The plan does review in detail, as is reasonably possible, the type of accidental release that could possibly endanger the general public, the probable extent of such danger, and the emergency actions generally appropriate. In the event of such an accidental release, the specific actions to be taken will have to be determined at the time of release by the responsible personnel at the drilling location. Complete familiarity with this plan will help such personnel make the proper decisions rapidly. Familiarity with this plan is so required all operators, operator representatives, and drilling contractor supervisory personnel who could possibly be on duty at the drilling location at the time of an H₂S emergency.

IT IS THE RESPONSIBILITY OF THE OPERATOR TO ASSURE SUCH FAMILIARITY BEFORE DRILLING WITHIN 1000' OR THREE DAYS PRIOR TO PENETRATION OF THE SHALLOWEST FORMATION KNOWN OR SUSPECTED TO CONTAIN H₂S IN POTENTIALLY HAZARDOUS QUANTITIES, AND ALSO TO ASSURE THE TIMELY ACCOMPLISHMENT OF ALL THE OTHER ACTION SPECIFIED HERE IN.

As this contingency plan was prepared considerably in advance of the anticipated H₂S operation, the plan must be kept current if it is to effectively serve its purpose. The operators will be responsible for seeing that all copies are updated. Updating the plan is required when any changes to the personnel Call List (Section) including telephone numbers occur or when any pertinent data or plans for the well are altered. The plan must also be updated when any changes in the general public likely to be within the exposure area in the event of an

accidental release from the well bore of a potentially hazardous quantity of H₂S. Two copies of this plan shall be retained at the office of Colgate Energy. Two copies shall be retained at the drilling location.

Discussion of Plan:

Suspected Problem Zones:

Implementation: This plan, with all details, is to be fully implemented 1000' before drilling into the first sour zone.

Emergency Response Procedure: This section outlines the conditions and denotes steps to be taken in the event of an emergency.

Emergency Equipment and Procedure: This section outlines the safety and emergency equipment that will be required for the drilling of this well.

Training Provisions: This section outlines the training provisions that must be adhered to 1000' before drilling into the first sour zone.

Emergency call list: Included are the telephone numbers of all persons that would need to be contacted, should an H₂S emergency occur.

Briefing: This section deals with the briefing of all persons involved with the drilling of this well.

Public Safety: Public Safety Personnel will be made aware of the drilling of this well.

Check Lists: Status check lists and procedural check lists have been included to ensure adherence to the plan.

General Information: A general information section has been included to supply support information.

III. OPERATING PROCEDURES

A. Blowout Preventer Drills

Due to the special piping and Mani folding necessary to handle poisonous gas, particular care will be taken to ensure that all rig personnel are completely familiar with their jobs during the drills. The Drilling Consultant and Tool Pusher (Rig Superintendent) are thoroughly familiar with the additional controls and piping necessary.

B. H₂S Alarm Drills

The Company Man and/ or designee will conduct frequent H₂S alarm drills for each crew by injecting a trace of H₂S where the detector will give an alarm. Under these conditions all personnel on location will put on air equipment and remain masked until all clear is announced.

C. Surface Annular Preventer/ Diverter System Testing

After installation of the surface annular preventer, Hydraulic Control Valve and diverter system, both are to be function tested. They also should be function tested frequently while drilling surface hole.

D. Blowout Preventer

After installation of the Blowout Preventer Stack, the stack will be pressure tested. The Choke manifold is also to be pressure tested at this time. This procedure will be repeated as required by the NMOCD, the BLM, or if any of the stack is nipped down. Also, at this time, the Blind and Pipe Rams are checked for correct operation.

E. Well Control Practice Drills and Safety Meeting for Crew Members

Pit drills are for the purpose of acquainting each member of the drilling crew with his duties in the event of an emergency. Drills will be held with each crew as frequently as required to thoroughly familiarize each man with his duties. Drills are to be held at least weekly from that time forward.

1. BOP Drill while on Bottom Drilling:

A. Signal will be three or more long blast given by driller on the horn.

B. Procedure will be as follows:

1. Tool Pusher: Supervises entire operation.

2. Driller

a. Gives signal.

b. Picks up Kelly.

c. Stops pumps.

d. Observes flow.

e. Signal to close (pipe rams if necessary).

f. Check that Choke Manifold is closed.

g. Record drill pipe pressure, casing pressure and determine mud volume gain.

3. Motorman

a. Go to closing unit and standby for signal to close BOP.

b. Close BOP in signal.

c. Check on BOP closing.

d. Go to floor to assist driller. (NOTE: During test drills the BOP

need not be completely closed at the discretion of the supervisor. Supervisor should make it very clear that it is a test drill only!)

4. Derrickman
 - a. Check pumps.
 - b. Go to floor for directions from the driller.
 5. Floorman
 - a. Go to manifold.
 - b. Observe and record pressure.
 - c. Check manifold and BOP for leaks.
 - d. Check with driller for additional instructions.
2. BOP Drill While Making Trip:
- A. During trip driller will fill hole every five (5) stands and check the pits to be sure hole is taking mud.
 - B. Drill Procedure is as follows:
 1. Driller
 - a. Order Safety valve installed.
 - b. Alert those not on the floor.
 - c. Go to stations as described in above drill.
3. Safety Meetings
- A. Every person involved in the operating will be informed of the characteristics of H₂S, its danger and safety procedures to be used when it is encountered, and recommended first-aid procedure for regular rig personnel. This will be done through a series of talks made before spud.
 - B. The Safety Advisor or Drilling Supervisor will conduct these training sessions and will repeat them as deemed necessary by him or as instructed by Colgate Energy. Talks may include the following subjects:
 1. Dangers of Hydrogen Sulfide (H₂S).
 2. Use and limitations of air equipment.
 3. Use of resuscitator.
 4. Organize Buddy System.
 5. First Aid procedures.
 6. Use of H₂S detection devices.
 7. Designate responsible people.
 8. Explain rig layout and policy to visitors.
 - a. Designate smoking and safety or Muster area.
 - b. Emphasize the importance of wind directions.
 9. Describe and explain operation of BOP stack, manifold, separator, and pit piping. Include maximum allowable pressure for casing procedure.
 10. Explain functions of Safety Supervisor.
 11. Explain organize H₂S Drills.
 12. Explain the overall emergency plan with emphasis given to the evacuation phase of the plans.

- Note: The above talks will be attended by every person involved in the operation. When drilling has reached a depth where H₂S is anticipated, temporary service personnel and visitors will be directed to the Drilling Consultant, who will designate the air equipment to be used by them in case of emergency, acquaint them with the dangers involved and be sure of their safety while they are in the area. He will point out the Briefing Areas, Windsocks, and Smoking Areas. He may refuse entrance to anyone, who in his opinion should not be admitted because of lack of safety equipment, special operations in progress or for other reasons involving personnel safety.

F. Outside Service Personnel

All service people such as cementing crews, logging crews, specialist, mechanics, and welders will furnish their own safety equipment. The Company Man/ or designee will be sure that the number of people on location does not exceed the number of masks on location, and they have been briefed regarding safety procedures. He will also be sure each of these people know about smoking and "Briefing Areas" and know what to do in case of an emergency alert or drill. Visitors will be restricted, except with special permission from the Drilling Consultant, when H₂S might be encountered. They will be briefed as to what to do in case of an alert or drill.

G. Onsite/ off shift workers

All workers that are staying on site must be identified as to where they are staying while off tour. If a drill/ or emergency takes place related to an H₂S release, each crew must have a designated person(s) that will wake them up and ensure that they are cleared to the appropriate muster area immediately.

H. Simultaneous Operations (SIMOPS)

If work is going on adjacent to the location is the responsibility of the Drilling Consultant or designee to communicate any applicable risks that may affect personnel working on that adjacent location. In the case of an H₂S drill or event, there should be a designated crew member that is responsible for contacting personnel on adjacent locations. This could include just communication on potential events or in case of an event, notification to evacuate location. Drilling Consultant or designee are the Point of Contact and oversee all activities at such point of an H₂S event occurrence.

I. Area Residences/ Occupied Locations/ Public Roads

Any occupied residences/ businesses that are within a reasonable perimeter of the location (attached map will identify a 3000' radius around location) should be identified as part of this contingency and a reasonable effort will be made to gain contact information for them. As part of the briefing of the contingency plan, the team reviewing should identify where these potential receptors are and plan on who will contact them in case of a release that may impact that area.

J. Drilling Fluids

Drilling Fluid Monitoring – On Any Hazardous H₂S gas well, the earlier the warning of danger the better chance to control operations. Mud Company will be in daily contact with Colgate Energy Consultant. The Mud Engineer will take samples of the mud, analyze these samples, and make necessary recommendations to prevent H₂S gas from the formation, the pH will be increased as necessary for corrosion control.

pH Control – For normal drilling, pH of 10.5 – 11.5. Would be enough for corrosion protection. If there is an influx of H₂S gas from the formation, the pH will be increased as necessary for corrosion control.

H₂S Scavengers – If necessary H₂S scavengers will be added to the drilling mud.

IV. OPERATING CONDITIONS

A. Posting Well Condition Flags

Post the green, yellow or red well condition flag, as appropriate, on the well condition sign at the location entrance, and take necessary precautions as indicated below:

1. **Green Flag:** Potential Danger- When Drilling in known H₂S zones or when H₂S has been detected in the drilling fluid atmosphere. Protective breathing equipment shall be inspected, and all personnel on duty shall be alerted to be ready to use this equipment.
2. **Yellow Flag:** Potential Danger- When the threshold limit value of H₂S (10 PPM) or of SO₂ (5 PPM) is reached. If the concentration of H₂S or SO₂ reaches 10 PPM, protective breathing equipment shall be worn by all working personnel, and non-working personnel shall go to the upwind Safe Briefing Area.
3. **Red Flag:** Extreme danger*- When the ambient concentration of H₂S or SO₂ is reasonably believed or determined to have exceeded the potentially hazardous level. All non-essential personnel shall leave the drilling location taking the route most likely to exposure to escaping gas.

B. Requiring Air Masks Conditions

1. Whenever air masks are used, the person must be clean shaven as shown in the APC Guidelines
2. When breaking out any line where H₂S can reasonably be expected.
3. When sampling air in areas to determine if toxic concentrations of H₂S exist.
4. When working in areas where 10 PPM or more of H₂S has been detected.
5. At any time, there is doubt as to the H₂S level in the area to be entered.

C. Kick Procedure

1. It is very important that the driller be continuously alert, especially when approaching a gas formation.
2. Should gas come into the well bore, it is very important to be aware of a kick at the earliest time.
3. If a kick is identified, follow appropriate diverter or shut in procedures according to the situation that is presented utilizing appropriate kick procedures.

V. EMERGENCY PROCEDURES

- I. In the event of any evidence of H₂S level above 10ppm, take the following steps immediately:
 - a. Secure breathing apparatus.
 - b. Order non-essential personnel out of the danger zone.
 - c. Take steps to determine if the H₂S level can be corrected or suppressed, and if so, proceed with normal operations.
- II. If uncontrollable conditions occur, proceed with the following:
 - a. Take steps to protect and/or remove any public downwind of the rig, including partial evacuation or isolation. Notify necessary public safety personnel.
 - b. Remove all personnel to the Safe Briefing Area.
 - c. Notify public safety personnel for help with maintaining roadblocks, thus limiting traffic and implementing evacuation.
 - d. Determine and proceed with the best possible plan to regain control of the well. Maintain tight security and safety measures.
- III. Responsibility
 - a. The Company Approved Supervisor shall be responsible for the total implementation of the plan.
 - b. The Company Approved Supervisor shall be in complete command during any emergency.
 - c. The Company Approved Supervisor shall designate a backup Supervisor if he/she is not available.
- IV. Actions to be taken
 - a. Assign specific tasks to drilling location personnel
 - b. Evacuate the general public from the exposure area
 - c. Cordon off the exposure area to prevent entry by unauthorized persons
 - d. Request assistance if and as needed and initiate emergency notifications
 - e. Stop the dispersion of H₂S
 - f. Complete emergency notifications as required
 - g. Return the situation to normal

EMERGENCY PROCEDURE IMPLEMENTATION**I. Drilling or Tripping****a. All Personnel**

- i. When alarm sounds, don escape unit and report to upwind Safe Briefing Area.
- ii. Check status of other personnel (buddy system).
- iii. Secure breathing apparatus.
- iv. Wait for orders from supervisor.

b. Drilling Consultant

- i. Report to the upwind Safe Briefing Area.
- ii. Don Breathing Apparatus and return to the point of release with the Tool Pusher or Driller (buddy system).
- iii. Determine the concentration of H₂S.
- iv. Assess the situation and take appropriate control measures.

c. Tool Pusher

- i. Report to the upwind Safe Briefing Area.
- ii. Don Breathing Apparatus and return to the point of release with the Drilling Consultant or the Driller (buddy system).
- iii. Determine the concentration of H₂S.
- iv. Assess the situation and take appropriate control measures.

d. Driller

- i. Check the status of other personnel (in a rescue attempt, always use the buddy system).
- ii. Assign the least essential person to notify the Drilling Consultant and Tool Pusher, in the event of their absence.
- iii. Assume the responsibility of the Drilling Consultant and the Tool Pusher until they arrive, in the event of their absence.

e. Derrick Man and Floor Hands

- i. Remain in the upwind Safe Briefing Area until otherwise instructed by a supervisor.

f. Mud Engineer

- i. Report to the upwind Safe Briefing Area.
- ii. When instructed, begin check of mud for pH level and H₂S level.

g. Safety Personnel

- i. Don Breathing Apparatus.
- ii. Check status of personnel.
- iii. Wait for instructions from Drilling Consultant or Tool Pusher.

II. Taking a Kick

- a.* All Personnel report to the upwind Safe Briefing Area.
- b.* Follow standard BOP/ diverter procedures.

III. Open Hole Logging

- a.* All unnecessary personnel should leave the rig floor.
- b.* Drilling Consultant and Safety Personnel should monitor the conditions and make necessary safety equipment recommendations.

IV. Running Casing or Plugging

- a.* Follow "Drilling or Tripping" procedures.
- b.* Assure that all personnel have access to protective equipment.

VI. POST EMERGENCY ACTIONS

In the event this plan is activated, the following post emergency actions shall be taken in an effort to reduce the possibility of a reoccurrence of the type of problem that required its activation, and/or assure that any future activation of a similar plan will be as effective as possible.

- A. Review the factors that caused or permitted the emergency occur, and if the need is indicated, modify operating, maintenance and/or surveillance procedures.
- B. If the need is indicated, retrain employees in blowout prevention, H₂S emergency procedures and etc.
- C. Clean up, recharge, restock, repair, and/ or replace H₂S emergency equipment as necessary, and return it to its proper place. (For whatever rental equipment is used, this will be the responsibility of Rental Company).
- D. See that future H₂S drilling contingency plans are modified accordingly, if the need is indicated.

VII. IGNITION PROCEDURES

Responsibilities:

The decision to ignite the well is the responsibility of the DRILLING CONSULTANT in concurrence with the STATE POLICE. In the event the Drilling Consultant is incapacitated, it becomes the responsibility of the RIG TOOL PUSHER. This decision should be made only as a last resort and in a situation where it is clear that:

1. Human life and property are endangered.
2. There is no hope of controlling the blowout under the prevailing conditions.

If time permits, notify the main office, but do not delay if human life is in danger. Initiate the first phase of the evacuation plan.

Instructions for Igniting the Well:

1. Two people are required for the actual igniting operation. Both men must wear self-contained breathing apparatus and must use a full body harness and attach a retrievable safety line to the D-Ring in the back. One man must monitor the atmosphere for explosive gases with the LEL monitor, while the Drilling Consultant is responsible for igniting the well.
2. The primary method to ignite is a 25mm flare gun with a range of approximately 500 feet.
3. Ignite from upwind and do not approach any closer than is warranted.
4. Select the ignition site best suited for protection and which offers an easy escape route.
5. Before igniting, check for the presence of combustible gases.
6. After igniting, continue emergency actions and procedures as before.
7. All unassigned personnel will limit their actions to those directed by the Drilling Consultant.

Note: After the well is ignited, burning Hydrogen Sulfide will convert to Sulfur Dioxide, which is also highly toxic. Also, both are heavier than air. Do not assume the area is safe even after the well is ignited.

VIII. TRAINING PROGRAM

When working in an area where Hydrogen Sulfide (H₂S) might be encountered, definite training requirements must be carried out. The Company Supervisor will ensure that all personnel, at the well site, have had adequate training in the following:

1. Hazards and characteristics of Hydrogen Sulfide (H₂S).
2. Physicals effects of Hydrogen Sulfide on the human body.
3. Toxicity of Hydrogen Sulfide and Sulfur Dioxide.
4. H₂S detection, Emergency alarm and sensor location.
5. Don and Doff of SCBA and be clean shaven.
6. Emergency rescue.
7. Resuscitators.
8. First aid and artificial resuscitation.
9. The effects of Hydrogen Sulfide on metals.
10. Location safety.

Service company personnel and visiting personnel must be notified if the zone contains H₂S, and each service company must provide adequate training and equipment for their employees before they arrive at the well site.

IX. EMERGENCY EQUIPMENT

Lease Entrance Sign:

Should be located at the lease entrance with the following information:

CAUTION – POTENTIAL POISON GAS
HYDROGEN SULFIDE
NO ADMITTANCE WITHOUT AUTHORIZATION

Respiratory Equipment:

- Fresh air breathing equipment should be placed at the safe briefing areas and should include the following:
- Two SCBA's at each briefing area.
- Enough airline units to operate safely, anytime the H₂S concentration reaches the IDLH level (100 ppm).

- Cascade system with enough breathing air hose and manifolds to reach the rig floor, the derrickman and the other operation areas.

Windssocks or Wind Streamers:

- A minimum of two 10" windssocks located at strategic locations so that they may be seen from any point on location.
- Wind streamers (if preferred) should always be placed at various locations on the well site to ensure wind consciousness. (Corners of location).

Hydrogen Sulfide Detector and Alarms:

- 1 - Four channel H₂S monitor with alarms.
- Three (3) sensors located as follows: #1 – Rig Floor, #2 – Shale Shaker, #3 – Cellar.
- Gastec or Draeger pump with tubes.
- Sensor test gas.

Well Condition Sign and Flags:

The Well Condition Sign w/flags should be placed a minimum of 150' before you enter the location. It should have three (3) color coded flags (green, yellow and red) that will be used to denote the following location conditions:

GREEN – Normal Operating Conditions
YELLOW – Potential Danger
RED – Danger, H₂S Gas Present

Auxiliary Rescue Equipment:

- Stretcher
- 2 – 100' Rescue lines.
- First Aid kit properly stocked.

Mud Inspection Equipment:

Garret Gas Train or Hach Tester for inspection of Hydrogen Sulfide in the drilling mud system.

Fire Extinguishers:

Adequate fire extinguishers shall be located at strategic locations.

Blowout Preventer:

- The well shall have hydraulic BOP equipment for the anticipated bottom hole pressure (BHP).
- The BOP should be tested upon installation.
- BOP, Choke Line and Kill Line will be tested as specified by Operator.

Confined Space Monitor:

There should be a portable multi-gas monitor with at least 3 sensors (O₂, LEL H₂S), preferably 4 (O₂, LEL, H₂S, CO). This instrument should be used to test the atmosphere of any confined space before entering. It should also be used for atmospheric testing for LEL gas before beginning any type of Hot Work. Proper calibration documentation will need to be provided.

Communication Equipment:

- Proper communication equipment such as cell phones or 2-way radios should be available at the rig.
- Radio communication shall be available for communication between the company man's trailer, rig floor and the tool pusher's trailer.
- Communication equipment shall be available on the vehicles.

Special Control Equipment:

- Hydraulic BOP equipment with remote control on the ground.
- Rotating head at the surface casing point.

Evacuation Plan:

- Evacuation routes should be established prior to spudding the well.
- Should be discussed with all rig personnel.

Designated Areas:***Parking and Visitor area:***

- All vehicles are to be parked at a pre-determined safe distance from the wellhead.
- Designated smoking area.

Safe Briefing Areas:

- Two Safe Briefing Areas shall be designated on either side of the location at the maximum allowable distance from the well bore so they offset prevailing winds, or they are at a 180-degree angle if wind directions tend to shift in the area.
- Personal protective equipment should be stored at both briefing areas and if a moveable cascade trailer is used, it should be kept upwind of existing winds. When wind is from the prevailing direction, both briefing areas should be accessible.

Note:

- Additional equipment will be available at the H₂S Provider Safety office.
- Additional personal H₂S monitors are available for all employees on location.
- Automatic Flare Igniters are recommended for installation on the rig.

X. CHECKLISTS**Rig-up & Equipment Status Check List**

Note: Initial & Date each item as they are implemented. Multiple wells require additional Columns to be Dated/ Initialed

	Date & Initial 1 st Well	Date & Initial 2 nd Well	Date & Initial 3 rd Well	Date & Initial 4 th Well
Sign at location entrance.				
Two (2) windsocks (in required locations).				
Wind Streamers (if required).				
SCBA's on location (Minimum of 2 @ each Muster Area)				
Air packs (working packs and escape packs), inspected and ready for use.				
Spare bottles for each air pack (if required).				
Cascade system and hose line hook up.				
Choke manifold hooked-up and tested. (before drilling out surface casing.)				
Remote Hydraulic BOP control tested (before drilling out surface casing).				
BOP tested (before drilling out surface casing).				
Safe Briefing Areas set-up				
Well Condition sign and flags on location and ready.				
Hydrogen Sulfide detection/ alarm system hooked-up & tested.				
Stretcher on location				
2 – 100' Lifelines on location.				
1 – 20# Fire Extinguisher in safety trailer.				
Confined Space monitor on location and tested.				
All rig crews and supervisor trained (as required).				
All rig crews and supervision medically qualified and fit tested on proper respirators				
Access restricted for unauthorized personnel.				
Pre-spud meeting held reviewing Contingencies				
Drills on H ₂ S and well control procedures.				
All outside service contractors advised of potential H ₂ S on the well.				
25mm Flare Gun on location w/flares.				

Procedural Check List

Perform the following on each tour:

1. Check fire extinguishers to see that they have the proper charge.
2. Check breathing equipment to ensure that they have not been tampered with.
3. Check pressure on the supply air bottles to make sure they are capable of recharging.
4. Make sure all the Hydrogen Sulfide detection systems are operative.
5. Ensure that all BOP/ Surface Annular/ Diverter systems are functioning and operational.

Perform the following each week:

1. Check each piece of breathing equipment to make sure that they are fully charged and operational. This requires that the air cylinder be opened, and the mask assembly be put on and tested to make sure that the regulators and masks are properly working. Negative and Positive pressure should be conducted on all masks.
2. BOP skills.
3. Check supply pressure on BOP accumulator stand-by source.
4. Check all breathing air mask assemblies to see that straps are loosened and turned back, ready for use.
5. Check pressure on cascade air cylinders to make sure they are fully charged and ready to use for refill purposes if necessary.
6. Check all cascade system regulators to make sure they work properly.
7. Perform breathing drills with on-site personnel.
8. Check the following supplies for availability (may be with H₂S Techs On-call):
 - Stretcher
 - Safety Belts and Ropes
 - Spare air Bottles
 - Spare Oxygen Bottles (if resuscitator required)
 - Gas Detector Pump and Tubes
 - Emergency telephone lists
 - Test the Confined Space Monitor to verify the batteries are good.

XI. BRIEFING PROCEDURES

The following scheduled briefings will be held to ensure the effective drilling and operation of this project:

Pre-Spud Meeting

Date: Prior to spudding the well.

Attendance: Drilling Supervisor
 Drilling Engineer
 Drilling Consultant
 Rig Tool Pushers
 Rig Drillers
 Mud Engineer
 All Safety Personnel
 Key Service Company Personnel

Purpose: Review and discuss the well program, step-by-step, to insure complete understanding of assignments and responsibilities.

XII. EVACUATION PLAN

General Plan

The direct lines of action prepared by Colgate Energy to protect the public from hazardous gas situations are as follows:

1. When the company approved supervisor (Drilling Consultant, Tool Pusher or Driller) determine that Hydrogen Sulfide gas cannot be limited to the well location, and the public will be involved, he will activate the evacuation plan. Escape routes are noted on the area map.
2. Company safety personnel or designee will notify the appropriate local government agency that a hazardous condition exists, and evacuation needs to be implemented.
3. Company approved safety personnel that have been trained in the use of the proper emergency equipment will be utilized.
4. Law enforcement personnel (State Police, Local Police Department, Fire Department, and the Sheriff's Department) will be called to aid in setting up and maintaining roadblocks. Also, they will aid in evacuation of the public if necessary.

NOTE: Law enforcement personnel will not be asked to come into a contaminated area. Their assistance will be limited to uncontaminated areas. Constant radio contact will be maintained with them.

5. After the discharge of gas has been controlled, "Company" personnel will determine when the area is safe for re-entry.
6. If a major release is secured, all exposed housing, vehicles, rig buildings, and low-lying areas and other structures downwind must be tested and clear with SCBAs donned to ensure that all residual H₂S is cleared. Fans, or opening of doors is recommended to ensure that areas are cleared out as part of this process.

XIII. APPENDICES AND GENERAL INFORMATION

Radius of Exposure Affected Notification List

(within a 65' radius of exposure @100ppm)

The geologic zones that will be encountered during drilling are known to contain hazardous quantities of H₂S. The accompanying map illustrates the affected areas of the community. The residents within this radius will be notified via a hand delivered written notice describing the activities, potential hazards, conditions of evacuation, evacuation drill siren alarms and other precautionary measures.

Evacuee Description: Residents:

Notification Process:

A continuous siren audible to all residence will be activated, signaling evacuation of previously notified and informed residents.

Evacuation Plan:

All evacuees will migrate lateral to the wind direction.

The Operating Company will identify all home bound or highly susceptible individuals and make special evacuation preparations, interfacing with the local and emergency medical service as necessary.

Toxic Effects of H₂S Poisoning

Hydrogen Sulfide is extremely toxic. The acceptable ceiling concentration for eight-hour exposure is 10 PPM, which is .001% by volume. Hydrogen Sulfide is heavier than air (specific gravity – 1.192) and is colorless and transparent. Hydrogen Sulfide is almost as toxic as Hydrogen Cyanide and is 5-6 times more toxic than Carbon Monoxide. Occupational exposure limits for Hydrogen Sulfide and other gases are compared below in Table 1. Toxicity table for H₂S and physical effects are shown in Table 2.

Table 1
Permissible Exposure Limits of Various Gases

<u>Common Name</u>	<u>Symbol</u>	<u>Sp. Gravity</u>	<u>TLV</u>	<u>STEL</u>	<u>IDLH</u>
Hydrogen Cyanide	HCN	.94	4.7 ppm	4.7 ppm	50 ppm
Hydrogen Sulfide	H ₂ S	1.192	10 ppm	15 ppm	100 ppm
Sulfide Dioxide	SO ₂	2.21	2 ppm	5 ppm	100 ppm
Chlorine	CL	2.45	.5 ppm	1 ppm	10 ppm
Carbon Monoxide	CO	.97	25 ppm	200 ppm	1200 ppm
Carbon Dioxide	CO ₂	1.52	5000 ppm	30,000 ppm	40,000 ppm
Methane	CH ₄	.55	5% LEL	15% UEL	

Definitions

- A. TLV – Threshold Limit Value is the concentration employees may be exposed based on a TWA (time weighted average) for eight (8) hours in one day for 40 hours in one (1) week. This is set by ACGIH (American Conference of Governmental Hygienists) and regulated by OSHA.
- B. STEL – Short Term Exposure Limit is the 15-minute average concentration an employee may be exposed to providing that the highest exposure never exceeds the OEL (Occupational Exposure Limit). The OEL for H₂S is 20 PPM.
- C. IDLH – Immediately Dangerous to Life and Health is the concentration that has been determined by the ACGIH to cause serious health problems or death if exposed to this level. The IDLH for H₂S is 100 PPM.
- D. TWA – Time Weighted Average is the average concentration of any chemical or gas for an eight (8) hour period. This is the concentration that any employee may be exposed based on a TWA.

Toxicity Table of H₂S

<u>Percent %</u>	<u>PPM</u>	<u>Physical Effects</u>
.0001	1	Can smell less than 1 ppm.
.001	10	TLV for 8 hours of exposure.
.0015	15	STEL for 15 minutes of exposure.
.01	100	Immediately Dangerous to Life & Health. Kills sense of smell in 3 to 5 minutes.
.02	200	Kills sense of smell quickly, may burn eyes and throat.
.05	500	Dizziness, cessation of breathing begins in a few minutes .
.07	700	Unconscious quickly, death will result if not rescued promptly.
.10	1000	Death will result unless rescued promptly. Artificial resuscitation may be necessary.

PHYSICAL PROPERTIES OF H₂S

The properties of all gases are usually described in the context of seven major categories:

- COLOR
- ODOR
- VAPOR DENSITY
- EXPLOSIVE LIMITS
- FLAMMABILITY
- SOLUBILITY (IN WATER)
- BOILING POINT

Hydrogen Sulfide is no exception. Information from these categories should be considered in order to provide a complete picture of the properties of the gas.

COLOR – TRANSPARENT

Hydrogen Sulfide is colorless, so it is invisible. This fact simply means that you can't rely on your eyes to detect its presence. In fact, that makes this gas extremely dangerous to be around.

ODOR – ROTTEN EGGS

Hydrogen Sulfide has a distinctive offensive smell, like "rotten eggs". For this reason, it earned its common name "sour gas". However, H₂S, even in low concentrations, is so toxic that it attacks and quickly impairs a victim's sense of smell, so it could be fatal to rely on your nose as a detection device.

VAPOR DENSITY – SPECIFIC GRAVITY OF 1.192

Hydrogen Sulfide is heavier than air, so it tends to settle in low-lying areas like pits, cellars or tanks. If you find yourself in a location where H₂S is known to exist, protect yourself. Whenever possible, work in an area upwind and keep to higher ground.

EXPLOSIVE LIMITS – 4.0% TO 44%

Mixed with the right proportion of air or oxygen, H₂S will ignite and burn or explode, producing another alarming element of danger besides poisoning.

FLAMMABILITY

Hydrogen Sulfide will burn readily with a distinctive clear blue flame, producing Sulfur Dioxide (SO₂), another hazardous gas that irritates the eyes and lungs.

SOLUBILITY – 4 TO 1 RATIO WITH WATER

Hydrogen Sulfide can be dissolved in liquids, which means that it can be present in any container or vessel used to carry or hold well fluids including oil, water, emulsion and sludge. The solubility of H₂S is dependent on temperature and pressure, but if conditions are right, simply agitating a fluid containing H₂S may release the gas into the air.

BOILING POINT – (-77° Fahrenheit)

Liquefied Hydrogen Sulfide boils at a very low temperature, so it is usually found as a gas.

RESPIRATOR USE

The Occupational Safety and Health Administration (OSHA) regulate the use of respiratory protection to protect the health of employees. OSHA's requirements are written in the Code of Federal Regulations, Title 29, Part 1910, Section 134, Respiratory Protection. This regulation requires that all employees who might be required to wear respirators, shall complete an OSHA mandated medical evaluation questionnaire. The employee then should be fit tested prior to wearing any respirator while being exposed to hazardous gases.

Written procedures shall be prepared covering safe use of respirators in dangerous atmospheric situations, which might be encountered in normal operations or in emergencies. Personnel shall be familiar with these procedures and the available respirators.

Respirators shall be inspected prior to and after each use to make sure that the respirator has been properly cleaned, disinfected and that the respirator works properly. The unit should be fully charged prior to being used.

Anyone who may use respirators shall be properly trained in how to properly seal the face piece. They shall wear respirators in normal air and then in a test atmosphere. (Note: Such items as facial hair (beard or sideburns) and eyeglass temple pieces will not allow a proper seal.) Anyone who may be expected to wear respirators should have these items removed before entering a toxic atmosphere. A special mask must be obtained for anyone who must wear eyeglasses. Contact lenses should not be allowed.

Respirators shall be worn during the following conditions:

- A. Any employee who works near the top or on the top of any tank unless tests reveal less than 20 ppm of H₂S.
- B. When breaking out any line where H₂S can reasonably be expected.
- C. When sampling air in areas where H₂S may be present.
- D. When working in areas where the concentration of H₂S exceeds the Threshold Limit Value for H₂S (10 ppm).
- E. At any time where there is a doubt as to the H₂S level in the area to be entered.

EMERGENCY RESCUE PROCEDURES


DO NOT PANIC!!!

Remain Calm – Think

1. Before attempting any rescue, you must first get out of the hazardous area yourself. Go to a safe briefing area.
2. Sound alarm and activate the 911 system.
3. Put on breathing apparatus. At least two persons should do this, when available use the buddy system.
4. Rescue the victim and return them to a safe briefing area.
5. Perform an initial assessment and begin proper First Aid/CPR procedures.
6. Keep victim lying down with a blanket or coat, etc., under the shoulders to keep airway open. Conserve body heat and do not leave unattended.
7. If the eyes are affected by H₂S, wash them thoroughly with potable water. For slight irritation, cold compresses are helpful.
8. In case a person has only minor exposure and does not lose consciousness totally, it's best if he doesn't return to work until the following day.
9. Any personnel overcome by H₂S should always be examined by medical personnel. They should always be transported to a hospital or doctor.

Facial Hair – Clean Shaven Examples

Purpose: To define clean shaven expectations in the field for: 1) Respirator Use, if applicable and 2) First Aid Administration, if situation occurs related to H₂S exposure, having no facial hair can greatly benefit response time and treatment ability.

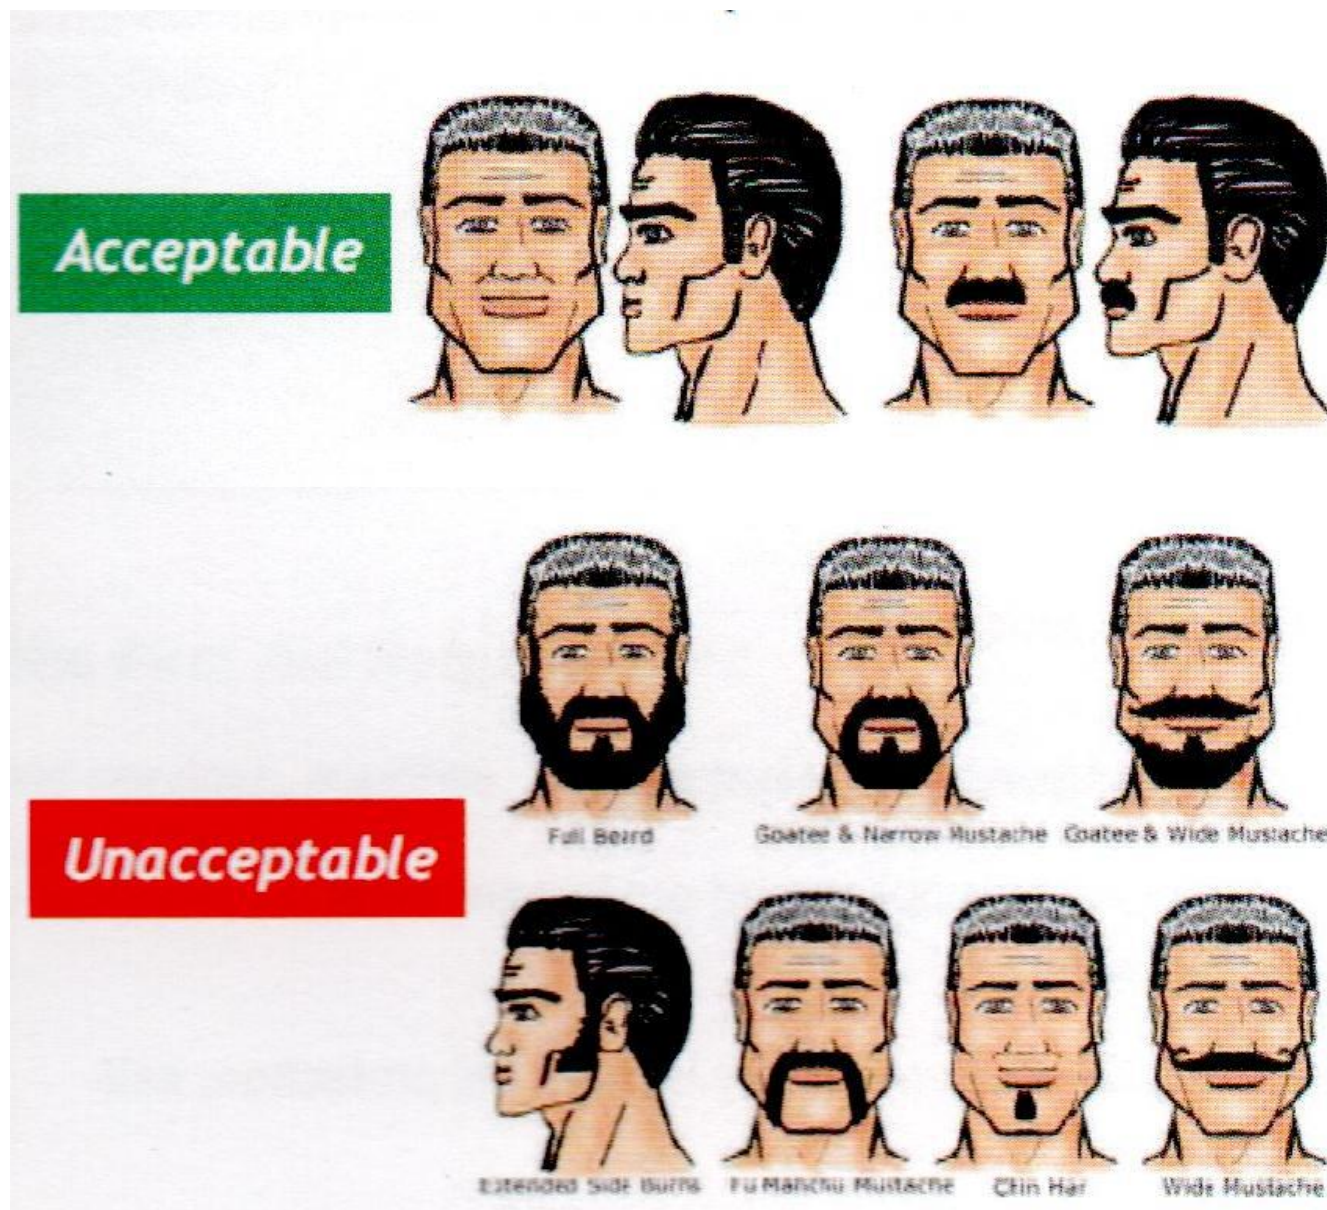



Colgate Energy

(Permit) Eddy County, NM (83-NME)

(Permit) Koala 9 Fed Com

(B07) Koala 9 Fed Com 113H

Permit

Plan: APD-Rev00

Standard Planning Report

12 May, 2022



Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Company:	Colgate Energy	TVD Reference:	3274+30 @ 3304.00usft
Project:	(Permit) Eddy County, NM (83-NME)	MD Reference:	3274+30 @ 3304.00usft
Site:	(Permit) Koala 9 Fed Com	North Reference:	Grid
Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Permit		
Design:	APD-Rev00		

Project	(Permit) Eddy County, NM (83-NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	(Permit) Koala 9 Fed Com				
Site Position:		Northing:	579,560.58 usft	Latitude:	32.59318638
From:	Map	Easting:	584,661.65 usft	Longitude:	-104.19265949
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "		

Well	(B07) Koala 9 Fed Com 113H					
Well Position	+N/-S	0.00 usft	Northing:	576,207.36 usft	Latitude:	32.58396808
	+E/-W	0.00 usft	Easting:	584,983.28 usft	Longitude:	-104.19162966
Position Uncertainty		0.00 usft	Wellhead Elevation:	usft	Ground Level:	3,274.00 usft
Grid Convergence:		0.08 °				

Wellbore	Permit				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	5/6/2022	6.76	60.11	47,550.54537201

Design	APD-Rev00				
Audit Notes:					
Version:		Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	89.62	

Plan Survey Tool Program	Date	5/12/2022			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	16,921.74	APD-Rev00 (Permit)	MWD+IFR1+SAG+FDIR (SQC OWSG MWD + IFR1 + Sag + F	



Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Company:	Colgate Energy	TVD Reference:	3274+30 @ 3304.00usft
Project:	(Permit) Eddy County, NM (83-NME)	MD Reference:	3274+30 @ 3304.00usft
Site:	(Permit) Koala 9 Fed Com	North Reference:	Grid
Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Permit		
Design:	APD-Rev00		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,697.75	7.47	354.39	1,696.34	32.23	-3.17	1.50	1.50	0.00	354.39	
5,134.20	7.47	354.39	5,103.66	476.63	-46.83	0.00	0.00	0.00	0.00	
5,631.95	0.00	0.00	5,600.00	508.86	-50.00	1.50	-1.50	0.00	180.00	
5,761.99	0.00	0.00	5,730.04	508.86	-50.00	0.00	0.00	0.00	0.00	
6,661.99	90.00	90.00	6,303.00	508.86	522.96	10.00	10.00	0.00	90.00	
6,681.03	90.00	89.62	6,303.00	508.92	541.99	2.00	0.00	-2.00	-90.00	
16,921.74	90.00	89.62	6,303.00	576.97	10,782.48	0.00	0.00	0.00	0.00	PBHL(K9- 113H)



Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Company:	Colgate Energy	TVD Reference:	3274+30 @ 3304.00usft
Project:	(Permit) Eddy County, NM (83-NME)	MD Reference:	3274+30 @ 3304.00usft
Site:	(Permit) Koala 9 Fed Com	North Reference:	Grid
Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Permit		
Design:	APD-Rev00		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
227.00	0.00	0.00	227.00	0.00	0.00	0.00	0.00	0.00	0.00
Rustler									
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
368.00	0.00	0.00	368.00	0.00	0.00	0.00	0.00	0.00	0.00
T/Salt									
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
704.00	0.00	0.00	704.00	0.00	0.00	0.00	0.00	0.00	0.00
Tansill									
779.00	0.00	0.00	779.00	0.00	0.00	0.00	0.00	0.00	0.00
Yates									
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,154.00	0.00	0.00	1,154.00	0.00	0.00	0.00	0.00	0.00	0.00
Seven Rivers									
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	1.50	354.39	1,299.99	1.30	-0.13	-0.12	1.50	1.50	0.00
1,400.00	3.00	354.39	1,399.91	5.21	-0.51	-0.48	1.50	1.50	0.00
1,500.00	4.50	354.39	1,499.69	11.72	-1.15	-1.07	1.50	1.50	0.00
1,600.00	6.00	354.39	1,599.27	20.82	-2.05	-1.91	1.50	1.50	0.00
1,697.75	7.47	354.39	1,696.34	32.23	-3.17	-2.95	1.50	1.50	0.00
1,700.00	7.47	354.39	1,698.57	32.52	-3.20	-2.98	0.00	0.00	0.00
1,800.00	7.47	354.39	1,797.73	45.45	-4.47	-4.16	0.00	0.00	0.00
1,826.50	7.47	354.39	1,824.00	48.88	-4.80	-4.48	0.00	0.00	0.00
Queen									
1,900.00	7.47	354.39	1,896.88	58.38	-5.74	-5.35	0.00	0.00	0.00
2,000.00	7.47	354.39	1,996.03	71.32	-7.01	-6.53	0.00	0.00	0.00
2,058.47	7.47	354.39	2,054.00	78.88	-7.75	-7.23	0.00	0.00	0.00
Grayburg									
2,100.00	7.47	354.39	2,095.18	84.25	-8.28	-7.72	0.00	0.00	0.00
2,200.00	7.47	354.39	2,194.33	97.18	-9.55	-8.90	0.00	0.00	0.00
2,300.00	7.47	354.39	2,293.49	110.11	-10.82	-10.09	0.00	0.00	0.00
2,400.00	7.47	354.39	2,392.64	123.04	-12.09	-11.27	0.00	0.00	0.00
2,411.46	7.47	354.39	2,404.00	124.53	-12.24	-11.41	0.00	0.00	0.00
San Andres									
2,500.00	7.47	354.39	2,491.79	135.98	-13.36	-12.46	0.00	0.00	0.00
2,600.00	7.47	354.39	2,590.94	148.91	-14.63	-13.64	0.00	0.00	0.00
2,700.00	7.47	354.39	2,690.10	161.84	-15.90	-14.83	0.00	0.00	0.00
2,800.00	7.47	354.39	2,789.25	174.77	-17.17	-16.01	0.00	0.00	0.00
2,900.00	7.47	354.39	2,888.40	187.70	-18.44	-17.20	0.00	0.00	0.00
2,991.38	7.47	354.39	2,979.00	199.52	-19.60	-18.28	0.00	0.00	0.00
CYCN									
3,000.00	7.47	354.39	2,987.55	200.64	-19.71	-18.38	0.00	0.00	0.00
3,100.00	7.47	354.39	3,086.70	213.57	-20.98	-19.57	0.00	0.00	0.00
3,200.00	7.47	354.39	3,185.86	226.50	-22.26	-20.75	0.00	0.00	0.00
3,300.00	7.47	354.39	3,285.01	239.43	-23.53	-21.94	0.00	0.00	0.00



Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Company:	Colgate Energy	TVD Reference:	3274+30 @ 3304.00usft
Project:	(Permit) Eddy County, NM (83-NME)	MD Reference:	3274+30 @ 3304.00usft
Site:	(Permit) Koala 9 Fed Com	North Reference:	Grid
Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Permit		
Design:	APD-Rev00		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
3,400.00	7.47	354.39	3,384.16	252.36	-24.80	-23.12	0.00	0.00	0.00
3,500.00	7.47	354.39	3,483.31	265.30	-26.07	-24.31	0.00	0.00	0.00
3,600.00	7.47	354.39	3,582.46	278.23	-27.34	-25.49	0.00	0.00	0.00
3,700.00	7.47	354.39	3,681.62	291.16	-28.61	-26.68	0.00	0.00	0.00
3,800.00	7.47	354.39	3,780.77	304.09	-29.88	-27.86	0.00	0.00	0.00
3,900.00	7.47	354.39	3,879.92	317.02	-31.15	-29.05	0.00	0.00	0.00
4,000.00	7.47	354.39	3,979.07	329.96	-32.42	-30.23	0.00	0.00	0.00
4,100.00	7.47	354.39	4,078.23	342.89	-33.69	-31.42	0.00	0.00	0.00
4,200.00	7.47	354.39	4,177.38	355.82	-34.96	-32.60	0.00	0.00	0.00
4,300.00	7.47	354.39	4,276.53	368.75	-36.23	-33.79	0.00	0.00	0.00
4,400.00	7.47	354.39	4,375.68	381.68	-37.50	-34.97	0.00	0.00	0.00
4,500.00	7.47	354.39	4,474.83	394.62	-38.77	-36.16	0.00	0.00	0.00
4,600.00	7.47	354.39	4,573.99	407.55	-40.05	-37.34	0.00	0.00	0.00
4,680.70	7.47	354.39	4,654.00	417.98	-41.07	-38.30	0.00	0.00	0.00
BSGL									
4,700.00	7.47	354.39	4,673.14	420.48	-41.32	-38.53	0.00	0.00	0.00
4,800.00	7.47	354.39	4,772.29	433.41	-42.59	-39.71	0.00	0.00	0.00
4,900.00	7.47	354.39	4,871.44	446.34	-43.86	-40.90	0.00	0.00	0.00
5,000.00	7.47	354.39	4,970.59	459.28	-45.13	-42.08	0.00	0.00	0.00
5,100.00	7.47	354.39	5,069.75	472.21	-46.40	-43.27	0.00	0.00	0.00
5,134.20	7.47	354.39	5,103.66	476.63	-46.83	-43.67	0.00	0.00	0.00
5,200.00	6.48	354.39	5,168.97	484.58	-47.61	-44.40	1.50	-1.50	0.00
5,300.00	4.98	354.39	5,268.47	494.51	-48.59	-45.31	1.50	-1.50	0.00
5,400.00	3.48	354.39	5,368.19	501.85	-49.31	-45.98	1.50	-1.50	0.00
5,500.00	1.98	354.39	5,468.08	506.59	-49.78	-46.42	1.50	-1.50	0.00
5,600.00	0.48	354.39	5,568.05	508.73	-49.99	-46.61	1.50	-1.50	0.00
5,631.95	0.00	0.00	5,600.00	508.86	-50.00	-46.62	1.50	-1.50	0.00
5,700.00	0.00	0.00	5,668.05	508.86	-50.00	-46.62	0.00	0.00	0.00
5,761.99	0.00	0.00	5,730.04	508.86	-50.00	-46.62	0.00	0.00	0.00
KOP: 5761.99' MD, -46.62' VS, 5730.04' TVD									
5,800.00	3.80	90.00	5,768.02	508.86	-48.74	-45.36	10.00	10.00	0.00
5,850.00	8.80	90.00	5,817.70	508.86	-43.25	-39.88	10.00	10.00	0.00
5,900.00	13.80	90.00	5,866.72	508.86	-33.46	-30.08	10.00	10.00	0.00
5,950.00	18.80	90.00	5,914.69	508.86	-19.43	-16.05	10.00	10.00	0.00
6,000.00	23.80	90.00	5,961.26	508.86	-1.27	2.10	10.00	10.00	0.00
6,050.00	28.80	90.00	6,006.07	508.86	20.88	24.25	10.00	10.00	0.00
6,100.00	33.80	90.00	6,048.78	508.86	46.84	50.22	10.00	10.00	0.00
6,150.00	38.80	90.00	6,089.06	508.86	76.44	79.81	10.00	10.00	0.00
6,169.43	40.74	90.00	6,104.00	508.86	88.87	92.24	10.00	10.00	0.00
FBSG									
6,200.00	43.80	90.00	6,126.62	508.86	109.43	112.80	10.00	10.00	0.00
6,250.00	48.80	90.00	6,161.15	508.86	145.56	148.94	10.00	10.00	0.00
6,300.00	53.80	90.00	6,192.40	508.86	184.57	187.94	10.00	10.00	0.00
6,350.00	58.80	90.00	6,220.13	508.86	226.16	229.53	10.00	10.00	0.00
6,370.10	60.81	90.00	6,230.24	508.86	243.53	246.90	10.00	10.00	0.00
100'FWL									
6,400.00	63.80	90.00	6,244.14	508.86	270.00	273.37	10.00	10.00	0.00
FTP(K9- 113H)									
6,450.00	68.80	90.00	6,264.23	508.86	315.77	319.14	10.00	10.00	0.00
6,500.00	73.80	90.00	6,280.25	508.86	363.12	366.48	10.00	10.00	0.00
6,550.00	78.80	90.00	6,292.09	508.86	411.68	415.04	10.00	10.00	0.00
6,600.00	83.80	90.00	6,299.65	508.86	461.09	464.45	10.00	10.00	0.00
6,650.00	88.80	90.00	6,302.87	508.86	510.97	514.33	10.00	10.00	0.00



Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Company:	Colgate Energy	TVD Reference:	3274+30 @ 3304.00usft
Project:	(Permit) Eddy County, NM (83-NME)	MD Reference:	3274+30 @ 3304.00usft
Site:	(Permit) Koala 9 Fed Com	North Reference:	Grid
Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Permit		
Design:	APD-Rev00		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
6,661.99	90.00	90.00	6,303.00	508.86	522.96	526.32	10.00	10.00	0.00	
EOC: 6661.99' MD, 526.32' VS, 6303.00' TVD										
6,681.03	90.00	89.62	6,303.00	508.92	541.99	545.36	2.00	0.00	-2.00	
6,700.00	90.00	89.62	6,303.00	509.05	560.97	564.33	0.00	0.00	0.00	
6,800.00	90.00	89.62	6,303.00	509.71	660.96	664.33	0.00	0.00	0.00	
6,900.00	90.00	89.62	6,303.00	510.38	760.96	764.33	0.00	0.00	0.00	
7,000.00	90.00	89.62	6,303.00	511.04	860.96	864.33	0.00	0.00	0.00	
7,100.00	90.00	89.62	6,303.00	511.71	960.96	964.33	0.00	0.00	0.00	
7,200.00	90.00	89.62	6,303.00	512.37	1,060.96	1,064.33	0.00	0.00	0.00	
7,300.00	90.00	89.62	6,303.00	513.04	1,160.95	1,164.33	0.00	0.00	0.00	
7,400.00	90.00	89.62	6,303.00	513.70	1,260.95	1,264.33	0.00	0.00	0.00	
7,500.00	90.00	89.62	6,303.00	514.37	1,360.95	1,364.33	0.00	0.00	0.00	
7,600.00	90.00	89.62	6,303.00	515.03	1,460.95	1,464.33	0.00	0.00	0.00	
7,700.00	90.00	89.62	6,303.00	515.69	1,560.94	1,564.33	0.00	0.00	0.00	
7,800.00	90.00	89.62	6,303.00	516.36	1,660.94	1,664.33	0.00	0.00	0.00	
7,900.00	90.00	89.62	6,303.00	517.02	1,760.94	1,764.33	0.00	0.00	0.00	
8,000.00	90.00	89.62	6,303.00	517.69	1,860.94	1,864.33	0.00	0.00	0.00	
8,100.00	90.00	89.62	6,303.00	518.35	1,960.94	1,964.33	0.00	0.00	0.00	
8,200.00	90.00	89.62	6,303.00	519.02	2,060.93	2,064.33	0.00	0.00	0.00	
8,300.00	90.00	89.62	6,303.00	519.68	2,160.93	2,164.33	0.00	0.00	0.00	
8,400.00	90.00	89.62	6,303.00	520.35	2,260.93	2,264.33	0.00	0.00	0.00	
8,500.00	90.00	89.62	6,303.00	521.01	2,360.93	2,364.33	0.00	0.00	0.00	
8,600.00	90.00	89.62	6,303.00	521.67	2,460.92	2,464.33	0.00	0.00	0.00	
8,700.00	90.00	89.62	6,303.00	522.34	2,560.92	2,564.33	0.00	0.00	0.00	
8,800.00	90.00	89.62	6,303.00	523.00	2,660.92	2,664.33	0.00	0.00	0.00	
8,900.00	90.00	89.62	6,303.00	523.67	2,760.92	2,764.33	0.00	0.00	0.00	
8,948.93	90.00	89.62	6,303.00	523.99	2,809.85	2,813.26	0.00	0.00	0.00	
Enter NM 013232 - Exit NM 015003										
9,000.00	90.00	89.62	6,303.00	524.33	2,860.92	2,864.33	0.00	0.00	0.00	
9,100.00	90.00	89.62	6,303.00	525.00	2,960.91	2,964.33	0.00	0.00	0.00	
9,200.00	90.00	89.62	6,303.00	525.66	3,060.91	3,064.33	0.00	0.00	0.00	
9,300.00	90.00	89.62	6,303.00	526.33	3,160.91	3,164.33	0.00	0.00	0.00	
9,400.00	90.00	89.62	6,303.00	526.99	3,260.91	3,264.33	0.00	0.00	0.00	
9,500.00	90.00	89.62	6,303.00	527.65	3,360.90	3,364.33	0.00	0.00	0.00	
9,600.00	90.00	89.62	6,303.00	528.32	3,460.90	3,464.33	0.00	0.00	0.00	
9,700.00	90.00	89.62	6,303.00	528.98	3,560.90	3,564.33	0.00	0.00	0.00	
9,800.00	90.00	89.62	6,303.00	529.65	3,660.90	3,664.33	0.00	0.00	0.00	
9,900.00	90.00	89.62	6,303.00	530.31	3,760.90	3,764.33	0.00	0.00	0.00	
10,000.00	90.00	89.62	6,303.00	530.98	3,860.89	3,864.33	0.00	0.00	0.00	
10,100.00	90.00	89.62	6,303.00	531.64	3,960.89	3,964.33	0.00	0.00	0.00	
10,200.00	90.00	89.62	6,303.00	532.31	4,060.89	4,064.33	0.00	0.00	0.00	
10,300.00	90.00	89.62	6,303.00	532.97	4,160.89	4,164.33	0.00	0.00	0.00	
10,400.00	90.00	89.62	6,303.00	533.63	4,260.88	4,264.33	0.00	0.00	0.00	
10,500.00	90.00	89.62	6,303.00	534.30	4,360.88	4,364.33	0.00	0.00	0.00	
10,600.00	90.00	89.62	6,303.00	534.96	4,460.88	4,464.33	0.00	0.00	0.00	
10,700.00	90.00	89.62	6,303.00	535.63	4,560.88	4,564.33	0.00	0.00	0.00	
10,800.00	90.00	89.62	6,303.00	536.29	4,660.88	4,664.33	0.00	0.00	0.00	
10,900.00	90.00	89.62	6,303.00	536.96	4,760.87	4,764.33	0.00	0.00	0.00	
11,000.00	90.00	89.62	6,303.00	537.62	4,860.87	4,864.33	0.00	0.00	0.00	
11,100.00	90.00	89.62	6,303.00	538.29	4,960.87	4,964.33	0.00	0.00	0.00	
11,200.00	90.00	89.62	6,303.00	538.95	5,060.87	5,064.33	0.00	0.00	0.00	
11,300.00	90.00	89.62	6,303.00	539.62	5,160.87	5,164.33	0.00	0.00	0.00	
11,400.00	90.00	89.62	6,303.00	540.28	5,260.86	5,264.33	0.00	0.00	0.00	
11,500.00	90.00	89.62	6,303.00	540.94	5,360.86	5,364.33	0.00	0.00	0.00	



Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Company:	Colgate Energy	TVD Reference:	3274+30 @ 3304.00usft
Project:	(Permit) Eddy County, NM (83-NME)	MD Reference:	3274+30 @ 3304.00usft
Site:	(Permit) Koala 9 Fed Com	North Reference:	Grid
Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Permit		
Design:	APD-Rev00		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
11,600.00	90.00	89.62	6,303.00	541.61	5,460.86	5,464.33	0.00	0.00	0.00
11,615.34	90.00	89.62	6,303.00	541.71	5,476.20	5,479.67	0.00	0.00	0.00
Exit NM 013232 - Enter NM 015003									
11,700.00	90.00	89.62	6,303.00	542.27	5,560.86	5,564.33	0.00	0.00	0.00
11,800.00	90.00	89.62	6,303.00	542.94	5,660.85	5,664.33	0.00	0.00	0.00
11,900.00	90.00	89.62	6,303.00	543.60	5,760.85	5,764.33	0.00	0.00	0.00
12,000.00	90.00	89.62	6,303.00	544.27	5,860.85	5,864.33	0.00	0.00	0.00
12,100.00	90.00	89.62	6,303.00	544.93	5,960.85	5,964.33	0.00	0.00	0.00
12,200.00	90.00	89.62	6,303.00	545.60	6,060.85	6,064.33	0.00	0.00	0.00
12,300.00	90.00	89.62	6,303.00	546.26	6,160.84	6,164.33	0.00	0.00	0.00
12,400.00	90.00	89.62	6,303.00	546.92	6,260.84	6,264.33	0.00	0.00	0.00
12,500.00	90.00	89.62	6,303.00	547.59	6,360.84	6,364.33	0.00	0.00	0.00
12,600.00	90.00	89.62	6,303.00	548.25	6,460.84	6,464.33	0.00	0.00	0.00
12,700.00	90.00	89.62	6,303.00	548.92	6,560.83	6,564.33	0.00	0.00	0.00
12,800.00	90.00	89.62	6,303.00	549.58	6,660.83	6,664.33	0.00	0.00	0.00
12,900.00	90.00	89.62	6,303.00	550.25	6,760.83	6,764.33	0.00	0.00	0.00
13,000.00	90.00	89.62	6,303.00	550.91	6,860.83	6,864.33	0.00	0.00	0.00
13,100.00	90.00	89.62	6,303.00	551.58	6,960.83	6,964.33	0.00	0.00	0.00
13,200.00	90.00	89.62	6,303.00	552.24	7,060.82	7,064.33	0.00	0.00	0.00
13,300.00	90.00	89.62	6,303.00	552.90	7,160.82	7,164.33	0.00	0.00	0.00
13,400.00	90.00	89.62	6,303.00	553.57	7,260.82	7,264.33	0.00	0.00	0.00
13,500.00	90.00	89.62	6,303.00	554.23	7,360.82	7,364.33	0.00	0.00	0.00
13,600.00	90.00	89.62	6,303.00	554.90	7,460.81	7,464.33	0.00	0.00	0.00
13,700.00	90.00	89.62	6,303.00	555.56	7,560.81	7,564.33	0.00	0.00	0.00
13,800.00	90.00	89.62	6,303.00	556.23	7,660.81	7,664.33	0.00	0.00	0.00
13,900.00	90.00	89.62	6,303.00	556.89	7,760.81	7,764.33	0.00	0.00	0.00
14,000.00	90.00	89.62	6,303.00	557.56	7,860.81	7,864.33	0.00	0.00	0.00
14,100.00	90.00	89.62	6,303.00	558.22	7,960.80	7,964.33	0.00	0.00	0.00
14,200.00	90.00	89.62	6,303.00	558.88	8,060.80	8,064.33	0.00	0.00	0.00
14,300.00	90.00	89.62	6,303.00	559.55	8,160.80	8,164.33	0.00	0.00	0.00
14,400.00	90.00	89.62	6,303.00	560.21	8,260.80	8,264.33	0.00	0.00	0.00
14,500.00	90.00	89.62	6,303.00	560.88	8,360.79	8,364.33	0.00	0.00	0.00
14,600.00	90.00	89.62	6,303.00	561.54	8,460.79	8,464.33	0.00	0.00	0.00
14,700.00	90.00	89.62	6,303.00	562.21	8,560.79	8,564.33	0.00	0.00	0.00
14,800.00	90.00	89.62	6,303.00	562.87	8,660.79	8,664.33	0.00	0.00	0.00
14,900.00	90.00	89.62	6,303.00	563.54	8,760.79	8,764.33	0.00	0.00	0.00
15,000.00	90.00	89.62	6,303.00	564.20	8,860.78	8,864.33	0.00	0.00	0.00
15,100.00	90.00	89.62	6,303.00	564.87	8,960.78	8,964.33	0.00	0.00	0.00
15,200.00	90.00	89.62	6,303.00	565.53	9,060.78	9,064.33	0.00	0.00	0.00
15,300.00	90.00	89.62	6,303.00	566.19	9,160.78	9,164.33	0.00	0.00	0.00
15,400.00	90.00	89.62	6,303.00	566.86	9,260.77	9,264.33	0.00	0.00	0.00
15,500.00	90.00	89.62	6,303.00	567.52	9,360.77	9,364.33	0.00	0.00	0.00
15,600.00	90.00	89.62	6,303.00	568.19	9,460.77	9,464.33	0.00	0.00	0.00
15,700.00	90.00	89.62	6,303.00	568.85	9,560.77	9,564.33	0.00	0.00	0.00
15,800.00	90.00	89.62	6,303.00	569.52	9,660.77	9,664.33	0.00	0.00	0.00
15,900.00	90.00	89.62	6,303.00	570.18	9,760.76	9,764.33	0.00	0.00	0.00
16,000.00	90.00	89.62	6,303.00	570.85	9,860.76	9,864.33	0.00	0.00	0.00
16,100.00	90.00	89.62	6,303.00	571.51	9,960.76	9,964.33	0.00	0.00	0.00
16,200.00	90.00	89.62	6,303.00	572.17	10,060.76	10,064.33	0.00	0.00	0.00
16,300.00	90.00	89.62	6,303.00	572.84	10,160.75	10,164.33	0.00	0.00	0.00
16,400.00	90.00	89.62	6,303.00	573.50	10,260.75	10,264.33	0.00	0.00	0.00
16,500.00	90.00	89.62	6,303.00	574.17	10,360.75	10,364.33	0.00	0.00	0.00
16,600.00	90.00	89.62	6,303.00	574.83	10,460.75	10,464.33	0.00	0.00	0.00



Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Company:	Colgate Energy	TVD Reference:	3274+30 @ 3304.00usft
Project:	(Permit) Eddy County, NM (83-NME)	MD Reference:	3274+30 @ 3304.00usft
Site:	(Permit) Koala 9 Fed Com	North Reference:	Grid
Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Permit		
Design:	APD-Rev00		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
16,700.00	90.00	89.62	6,303.00	575.50	10,560.75	10,564.33	0.00	0.00	0.00
16,800.00	90.00	89.62	6,303.00	576.16	10,660.74	10,664.33	0.00	0.00	0.00
16,831.71	90.00	89.62	6,303.00	576.37	10,692.45	10,696.04	0.00	0.00	0.00
100'FEL									
16,831.72	90.00	89.62	6,303.00	576.37	10,692.46	10,696.05	0.00	0.00	0.00
LTP(K9- 113H)									
16,900.00	90.00	89.62	6,303.00	576.83	10,760.74	10,764.33	0.00	0.00	0.00
16,921.74	90.00	89.62	6,303.00	576.97	10,782.48	10,786.07	0.00	0.00	0.00
TD: 16921.74' MD, 10786.07' VS, 6303.00' TVD - PBHL(K9- 113H)									

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
LTP(K9- 113H) - plan misses target center by 0.04usft at 16831.72usft MD (6303.00 TVD, 576.37 N, 10692.46 E) - Point	0.00	0.00	6,303.00	576.41	10,692.46	576,783.77	595,675.74	32.58550854	-104.15691174
FTP(K9- 113H) - plan misses target center by 64.57usft at 6400.00usft MD (6244.14 TVD, 508.86 N, 270.00 E) - Point	0.00	0.00	6,303.00	507.46	243.49	576,714.82	585,226.77	32.58536206	-104.19083692
PBHL(K9- 113H) - plan hits target center - Point	0.00	0.00	6,303.00	576.97	10,782.48	576,784.33	595,765.76	32.58550967	-104.15661947

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
227.00	227.00	Rustler				
368.00	368.00	T/Salt				
704.00	704.00	Tansill				
779.00	779.00	Yates				
1,154.00	1,154.00	Seven Rivers				
1,826.50	1,824.00	Queen				
2,058.47	2,054.00	Grayburg				
2,411.46	2,404.00	San Andres				
2,991.38	2,979.00	CYCN				
4,680.70	4,654.00	BSGL				
6,169.43	6,104.00	FBSG				



Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Company:	Colgate Energy	TVD Reference:	3274+30 @ 3304.00usft
Project:	(Permit) Eddy County, NM (83-NME)	MD Reference:	3274+30 @ 3304.00usft
Site:	(Permit) Koala 9 Fed Com	North Reference:	Grid
Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Permit		
Design:	APD-Rev00		

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
5,761.99	5,730.04	508.86	-50.00	KOP: 5761.99' MD, -46.62' VS, 5730.04' TVD
6,370.10	6,230.24	508.86	243.53	100'FWL
6,661.99	6,303.00	508.86	522.96	EOC: 6661.99' MD, 526.32' VS, 6303.00' TVD
8,948.93	6,303.00	523.99	2,809.85	Enter NM 013232
8,948.93	6,303.00	523.99	2,809.85	Exit NM 015003
11,615.34	6,303.00	541.71	5,476.20	Exit NM 013232
11,615.34	6,303.00	541.71	5,476.20	Enter NM 015003
16,831.71	6,303.00	576.37	10,692.45	100'FEL
16,921.74	6,303.00	576.97	10,782.48	TD: 16921.74' MD, 10786.07' VS, 6303.00' TVD



Colgate Energy

(Permit) Eddy County, NM (83-NME)

(Permit) Koala 9 Fed Com

(B07) Koala 9 Fed Com 113H

Permit

APD-Rev00

Anticollision Report

13 May, 2022



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Reference	APD-Rev00		
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria		
Interpolation Method:	Stations	Error Model:	ISCWSA
Depth Range:	Unlimited	Scan Method:	Closest Approach 3D
Results Limited by:	Maximum separation factor of 25	Error Surface:	Pedal Curve
Warning Levels Evaluated at:	2.00 Sigma	Casing Method:	Not applied

Survey Tool Program	Date	5/12/2022		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
0.00	16,921.74	APD-Rev00 (Permit)	MWD+IFR1+SAG+FDIR	(SQ OWSG MWD + IFR1 + Sag + FDIR Correction)

Summary						
Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Offset Well - Wellbore - Design						
(Permit) Koala 9 Fed Com						
(A01) Koala 9 Fed Com 201H - Permit - APD-Rev00	14,800.00	17,531.53	4,166.69	3,999.05	24.855	CC
(A01) Koala 9 Fed Com 201H - Permit - APD-Rev00	16,922.61	19,654.14	4,167.89	3,961.94	20.237	ES, SF
(A02) Koala 9 Fed Com 202H - Permit - APD-Rev00	13,900.00	16,689.74	3,216.20	3,087.52	24.994	CC
(A02) Koala 9 Fed Com 202H - Permit - APD-Rev00	16,922.61	19,712.35	3,217.36	3,043.42	18.497	ES, SF
(A03) Koala 9 Fed Com 131H - Permit - APD-Rev00	13,300.00	15,678.99	3,434.56	3,296.54	24.885	CC
(A03) Koala 9 Fed Com 131H - Permit - APD-Rev00	16,922.61	19,301.60	3,436.52	3,234.84	17.040	ES, SF
(A04) Koala 9 Fed Com 132H - Permit - APD-Rev00	12,800.00	15,360.25	2,554.49	2,451.84	24.885	CC
(A04) Koala 9 Fed Com 132H - Permit - APD-Rev00	16,922.61	19,482.87	2,555.82	2,398.09	16.204	ES, SF
(A05) Koala 9 Fed Com 121H - Permit - APD-Rev00	11,000.00	12,182.33	2,827.41	2,713.40	24.798	CC
(A05) Koala 9 Fed Com 121H - Permit - APD-Rev00	16,922.61	18,104.94	2,831.10	2,596.20	12.052	ES, SF
(A06) Koala 9 Fed Com 122H - Permit - APD-Rev00	8,700.00	10,025.29	1,650.49	1,584.46	24.995	CC
(A06) Koala 9 Fed Com 122H - Permit - APD-Rev00	16,922.61	18,247.90	1,654.59	1,444.96	7.893	ES, SF
(A07) Koala 9 Fed Com 111H - Permit - APD-Rev00	10,500.00	10,537.10	2,656.37	2,548.10	24.534	CC
(A07) Koala 9 Fed Com 111H - Permit - APD-Rev00	16,922.61	16,959.71	2,661.00	2,414.04	10.775	ES, SF
(A08) Koala 9 Fed Com 112H - Permit - APD-Rev00	7,500.00	7,714.07	1,336.24	1,282.27	24.756	CC
(A08) Koala 9 Fed Com 112H - Permit - APD-Rev00	16,922.61	17,136.68	1,342.94	1,096.96	5.460	ES, SF
(B01) Koala 9 Fed Com 203H - Permit - APD-Rev00	1,100.00	1,099.02	180.69	173.28	24.375	CC, ES
(B01) Koala 9 Fed Com 203H - Permit - APD-Rev00	5,200.00	5,190.15	261.21	224.32	7.081	SF
(B02) Koala 9 Fed Com 204H - Permit - APD-Rev00	1,200.00	1,200.00	149.99	141.85	18.432	CC
(B02) Koala 9 Fed Com 204H - Permit - APD-Rev00	1,400.00	1,398.64	150.89	141.38	15.860	ES
(B02) Koala 9 Fed Com 204H - Permit - APD-Rev00	2,200.00	2,190.89	189.20	174.13	12.557	SF
(B03) Koala 9 Fed Com 133H - Permit - APD-Rev00	5,571.51	5,569.44	112.88	73.18	2.843	CC
(B03) Koala 9 Fed Com 133H - Permit - APD-Rev00	5,631.95	5,629.48	113.10	72.97	2.818	ES
(B03) Koala 9 Fed Com 133H - Permit - APD-Rev00	5,700.00	5,697.03	113.91	73.30	2.805	SF
(B04) Koala 9 Fed Com 134H - Permit - APD-Rev00	1,271.15	1,271.02	90.01	81.38	10.426	CC
(B04) Koala 9 Fed Com 134H - Permit - APD-Rev00	1,400.00	1,399.15	90.47	80.95	9.508	ES
(B04) Koala 9 Fed Com 134H - Permit - APD-Rev00	1,600.00	1,595.10	98.54	87.67	9.065	SF
(B05) Koala 9 Fed Com 123H - Permit - APD-Rev00	2,147.14	2,146.46	58.79	43.90	3.947	CC
(B05) Koala 9 Fed Com 123H - Permit - APD-Rev00	3,900.00	3,899.09	65.29	37.77	2.373	ES
(B05) Koala 9 Fed Com 123H - Permit - APD-Rev00	5,134.20	5,133.13	76.15	39.75	2.092	SF
(B06) Koala 9 Fed Com 124H - Permit - APD-Rev00	1,240.55	1,240.52	30.01	21.59	3.564	CC
(B06) Koala 9 Fed Com 124H - Permit - APD-Rev00	1,300.00	1,299.88	30.09	21.25	3.405	ES
(B06) Koala 9 Fed Com 124H - Permit - APD-Rev00	1,400.00	1,399.35	31.63	22.11	3.324	SF
(B08) Koala 9 Fed Com 114H - Permit - APD-Rev00	909.03	909.05	29.96	23.93	4.968	CC
(B08) Koala 9 Fed Com 114H - Permit - APD-Rev00	1,000.00	999.90	30.18	23.53	4.536	ES
(B08) Koala 9 Fed Com 114H - Permit - APD-Rev00	1,100.00	1,099.51	31.65	24.31	4.309	SF

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Summary

Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Offset Well - Wellbore - Design						
Koala 9 Fed Com Offsets						
W01_PRE-ONGARD WELL #001_1520917 - Depth Only						Out of range
W02_GOVERNMENT AO COM #001_1524032 - Inc Only	5,698.89	5,648.83	3,329.06	3,189.56	23.864	CC
W02_GOVERNMENT AO COM #001_1524032 - Inc Only	5,800.00	5,735.73	3,330.48	3,187.00	23.213	ES
W02_GOVERNMENT AO COM #001_1524032 - Inc Only	6,350.00	6,204.95	3,593.99	3,421.73	20.864	SF
W03_PRE-ONGARD WELL #001_1525793 - Inc Only - In	3,200.00	3,159.43	1,974.21	1,894.70	24.828	CC, ES
W03_PRE-ONGARD WELL #001_1525793 - Inc Only - In	4,800.00	4,711.00	2,040.42	1,924.40	17.587	SF
W04_FEDERAL V #001_1526451 - Inc Only - Inc Only	5,700.00	5,657.53	2,587.09	2,433.94	16.892	CC
W04_FEDERAL V #001_1526451 - Inc Only - Inc Only	5,800.00	5,768.56	2,589.07	2,432.77	16.565	ES
W04_FEDERAL V #001_1526451 - Inc Only - Inc Only	5,950.00	5,931.99	2,610.59	2,449.68	16.224	SF
W05_FEDERAL V #002_1526702 - Inc Only - Inc Only	5,800.00	5,763.81	3,572.46	3,429.48	24.986	CC, ES
W05_FEDERAL V #002_1526702 - Inc Only - Inc Only	6,250.00	6,151.12	3,682.75	3,529.77	24.073	SF
W06_FEDERAL V #003_1526867 - Depth Only - Depth O	5,761.99	5,721.04	4,739.18	4,357.33	12.411	CC
W06_FEDERAL V #003_1526867 - Depth Only - Depth O	5,800.00	5,759.02	4,740.36	4,355.98	12.333	ES
W06_FEDERAL V #003_1526867 - Depth Only - Depth O	6,150.00	6,080.06	4,857.97	4,452.23	11.973	SF
W07_PRE-ONGARD WELL #001_1527282 - Depth Only	1,200.00	1,167.00	1,827.77	1,749.98	23.498	CC
W07_PRE-ONGARD WELL #001_1527282 - Depth Only	5,800.00	5,735.02	1,981.93	1,599.04	5.176	ES
W07_PRE-ONGARD WELL #001_1527282 - Depth Only	6,000.00	5,928.26	2,023.09	1,627.34	5.112	SF
W08_FEDERAL V COM #004_1535127 - Inc Only - Inc O						Out of range
W09_GOVERNMENT AB #002_1521480 - Inc Only - Inc	16,264.05	6,265.28	328.25	73.90	1.291	Level 3, CC, ES, SF
W10_GOVERNMENT AB #003_1521774 - Inc Only - Inc	13,592.24	6,274.30	327.83	123.81	1.607	CC
W10_GOVERNMENT AB #003_1521774 - Inc Only - Inc	13,600.00	6,274.30	327.92	123.80	1.607	ES, SF
W11_GOVERNMENT AB #006_1527846 - Inc Only - Inc	12,327.52	6,292.76	2,985.70	2,754.00	12.886	CC, ES
W11_GOVERNMENT AB #006_1527846 - Inc Only - Inc	12,700.00	6,292.75	3,008.85	2,773.50	12.785	SF
W12_GOVERNMENT AB #007_1527847 - Inc Only - Inc	13,648.05	6,298.17	2,986.71	2,729.56	11.615	CC
W12_GOVERNMENT AB #007_1527847 - Inc Only - Inc	13,700.00	6,298.17	2,987.16	2,729.44	11.590	ES
W12_GOVERNMENT AB #007_1527847 - Inc Only - Inc	13,900.00	6,298.15	2,997.32	2,737.60	11.540	SF
W13_GOVERNMENT AB #008_1527863 - Inc Only - Inc	14,993.68	6,316.25	2,836.90	2,588.22	11.408	CC
W13_GOVERNMENT AB #008_1527863 - Inc Only - Inc	15,000.00	6,316.25	2,836.90	2,588.15	11.405	ES
W13_GOVERNMENT AB #008_1527863 - Inc Only - Inc	15,300.00	6,316.21	2,853.39	2,601.75	11.339	SF
W14_GOVERNMENT AB #009_1527964 - MWD/Inc - M	16,319.81	6,678.00	2,899.64	2,768.89	22.177	CC, ES
W14_GOVERNMENT AB #009_1527964 - MWD/Inc - M	16,700.00	6,678.00	2,924.46	2,790.49	21.830	SF
W15_GOVERNMENT AB FEDERAL #011_1540853 - MW	13,408.51	6,290.73	1,567.65	1,463.77	15.091	CC, ES
W15_GOVERNMENT AB FEDERAL #011_1540853 - MW	13,600.00	6,289.66	1,579.30	1,473.70	14.955	SF
W16_GOVERNMENT AB FEDERAL #014_1540854 - MW	12,387.22	6,330.39	1,724.63	1,633.41	18.907	CC
W16_GOVERNMENT AB FEDERAL #014_1540854 - MW	12,400.00	6,330.23	1,724.68	1,633.33	18.880	ES
W16_GOVERNMENT AB FEDERAL #014_1540854 - MW	12,600.00	6,327.64	1,737.70	1,644.76	18.697	SF
W17_GOVERNMENT AB FEDERAL #013_1540920 - MW	16,243.29	6,312.40	1,708.82	1,568.49	12.177	CC, ES
W17_GOVERNMENT AB FEDERAL #013_1540920 - MW	16,400.00	6,312.78	1,715.99	1,574.09	12.093	SF
W18_GOVERNMENT AB FEDERAL #012_1541049 - MW	15,167.54	6,784.00	1,806.90	1,681.36	14.393	CC
W18_GOVERNMENT AB FEDERAL #012_1541049 - MW	15,200.00	6,784.00	1,807.20	1,681.36	14.361	ES
W18_GOVERNMENT AB FEDERAL #012_1541049 - MW	15,300.00	6,784.00	1,811.75	1,685.21	14.317	SF

Offset Design: (Permit) Koala 9 Fed Com - (A01) Koala 9 Fed Com 201H - Permit - APD-Rev00														Offset Site Error:	0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)														Offset Well Error:	0.00 usft
Rule Assigned:															
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning		
14,800.00	6,303.00	17,531.53	8,839.00	99.46	104.48	-127.23	3,880.29	8,636.38	4,166.69	3,999.05	167.64	24.855	CC		
14,900.00	6,303.00	17,631.53	8,839.00	100.56	105.55	-127.23	3,881.02	8,736.38	4,166.74	3,997.31	169.43	24.593			
15,000.00	6,303.00	17,731.53	8,839.00	101.65	106.62	-127.23	3,881.76	8,836.38	4,166.80	3,995.57	171.22	24.335			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A01) Koala 9 Fed Com 201H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Offset Wellbore Centre		Distance			Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)		
15,100.00	6,303.00	17,831.53	8,839.00	102.74	107.69	-127.23	3,882.49	8,936.38	4,166.86	3,993.84	173.02	24.083	
15,200.00	6,303.00	17,931.53	8,839.00	103.84	108.76	-127.23	3,883.23	9,036.37	4,166.91	3,992.09	174.82	23.836	
15,300.00	6,303.00	18,031.53	8,839.00	104.93	109.84	-127.23	3,883.96	9,136.37	4,166.97	3,990.35	176.62	23.593	
15,400.00	6,303.00	18,131.53	8,839.00	106.03	110.91	-127.23	3,884.70	9,236.37	4,167.03	3,988.61	178.42	23.356	
15,500.00	6,303.00	18,231.53	8,839.00	107.13	111.99	-127.23	3,885.43	9,336.36	4,167.08	3,986.87	180.22	23.123	
15,600.00	6,303.00	18,331.53	8,839.00	108.22	113.07	-127.23	3,886.17	9,436.36	4,167.14	3,985.12	182.02	22.894	
15,700.00	6,303.00	18,431.53	8,839.00	109.32	114.15	-127.23	3,886.91	9,536.36	4,167.20	3,983.37	183.82	22.670	
15,800.00	6,303.00	18,531.53	8,839.00	110.42	115.22	-127.23	3,887.64	9,636.36	4,167.25	3,981.62	185.63	22.450	
15,900.00	6,303.00	18,631.53	8,839.00	111.52	116.30	-127.23	3,888.38	9,736.35	4,167.31	3,979.88	187.43	22.234	
16,000.00	6,303.00	18,731.53	8,839.00	112.62	117.38	-127.22	3,889.11	9,836.35	4,167.37	3,978.13	189.24	22.022	
16,100.00	6,303.00	18,831.53	8,839.00	113.72	118.47	-127.22	3,889.85	9,936.35	4,167.42	3,976.38	191.05	21.814	
16,200.00	6,303.00	18,931.53	8,839.00	114.82	119.55	-127.22	3,890.58	10,036.35	4,167.48	3,974.62	192.86	21.609	
16,300.00	6,303.00	19,031.53	8,839.00	115.92	120.63	-127.22	3,891.32	10,136.34	4,167.54	3,972.87	194.67	21.409	
16,400.00	6,303.00	19,131.53	8,839.00	117.02	121.71	-127.22	3,892.06	10,236.34	4,167.59	3,971.12	196.48	21.212	
16,500.00	6,303.00	19,231.53	8,839.00	118.12	122.80	-127.22	3,892.79	10,336.34	4,167.65	3,969.36	198.29	21.018	
16,600.00	6,303.00	19,331.53	8,839.00	119.22	123.88	-127.22	3,893.53	10,436.33	4,167.71	3,967.61	200.10	20.828	
16,700.00	6,303.00	19,431.53	8,839.00	120.32	124.97	-127.22	3,894.26	10,536.33	4,167.76	3,965.85	201.91	20.641	
16,800.00	6,303.00	19,531.53	8,839.00	121.43	126.05	-127.22	3,895.00	10,636.33	4,167.82	3,964.09	203.73	20.458	
16,900.00	6,303.00	19,631.53	8,839.00	122.53	127.14	-127.22	3,895.73	10,736.33	4,167.88	3,962.33	205.54	20.278	
16,921.74	6,303.00	19,653.27	8,839.00	122.77	127.38	-127.22	3,895.89	10,758.07	4,167.89	3,961.95	205.94	20.239	
16,922.61	6,303.00	19,654.14	8,839.00	122.78	127.39	-127.22	3,895.90	10,758.94	4,167.89	3,961.94	205.95	20.237 ES, SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A02) Koala 9 Fed Com 202H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Offset Wellbore Centre		Distance		Rule Assigned:		Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
13,900.00	6,303.00	16,689.74	8,839.00	89.66	94.78	-141.61	2,553.96	7,746.30	3,216.20	3,087.52	128.68	24.994 CC	
14,000.00	6,303.00	16,789.74	8,839.00	90.74	95.84	-141.61	2,554.68	7,846.30	3,216.24	3,086.08	130.16	24.710	
14,100.00	6,303.00	16,889.74	8,839.00	91.83	96.90	-141.61	2,555.41	7,946.29	3,216.27	3,084.64	131.64	24.433	
14,200.00	6,303.00	16,989.74	8,839.00	92.92	97.96	-141.61	2,556.14	8,046.29	3,216.31	3,083.19	133.12	24.161	
14,300.00	6,303.00	17,089.74	8,839.00	94.01	99.03	-141.61	2,556.86	8,146.29	3,216.35	3,081.75	134.60	23.895	
14,400.00	6,303.00	17,189.74	8,839.00	95.10	100.09	-141.61	2,557.59	8,246.29	3,216.39	3,080.30	136.09	23.635	
14,500.00	6,303.00	17,289.74	8,839.00	96.19	101.16	-141.61	2,558.32	8,346.28	3,216.43	3,078.85	137.57	23.379	
14,600.00	6,303.00	17,389.74	8,839.00	97.28	102.23	-141.61	2,559.04	8,446.28	3,216.47	3,077.40	139.06	23.130	
14,700.00	6,303.00	17,489.74	8,839.00	98.37	103.30	-141.61	2,559.77	8,546.28	3,216.51	3,075.95	140.55	22.885	
14,800.00	6,303.00	17,589.74	8,839.00	99.46	104.37	-141.61	2,560.50	8,646.28	3,216.54	3,074.50	142.04	22.645	
14,900.00	6,303.00	17,689.74	8,839.00	100.56	105.44	-141.61	2,561.22	8,746.27	3,216.58	3,073.05	143.53	22.410	
15,000.00	6,303.00	17,789.74	8,839.00	101.65	106.51	-141.60	2,561.95	8,846.27	3,216.62	3,071.59	145.03	22.179	
15,100.00	6,303.00	17,889.74	8,839.00	102.74	107.58	-141.60	2,562.68	8,946.27	3,216.66	3,070.14	146.52	21.953	
15,200.00	6,303.00	17,989.74	8,839.00	103.84	108.66	-141.60	2,563.40	9,046.26	3,216.70	3,068.68	148.02	21.732	
15,300.00	6,303.00	18,089.74	8,839.00	104.93	109.73	-141.60	2,564.13	9,146.26	3,216.74	3,067.22	149.52	21.514	
15,400.00	6,303.00	18,189.74	8,839.00	106.03	110.81	-141.60	2,564.85	9,246.26	3,216.78	3,065.76	151.01	21.301	
15,500.00	6,303.00	18,289.74	8,839.00	107.13	111.89	-141.60	2,565.58	9,346.26	3,216.81	3,064.30	152.51	21.092	
15,600.00	6,303.00	18,389.74	8,839.00	108.22	112.96	-141.60	2,566.31	9,446.25	3,216.85	3,062.84	154.01	20.887	
15,700.00	6,303.00	18,489.74	8,839.00	109.32	114.04	-141.60	2,567.03	9,546.25	3,216.89	3,061.38	155.51	20.685	
15,800.00	6,303.00	18,589.74	8,839.00	110.42	115.12	-141.60	2,567.76	9,646.25	3,216.93	3,059.91	157.02	20.488	
15,900.00	6,303.00	18,689.74	8,839.00	111.52	116.20	-141.60	2,568.49	9,746.25	3,216.97	3,058.45	158.52	20.294	
16,000.00	6,303.00	18,789.74	8,839.00	112.62	117.29	-141.60	2,569.21	9,846.24	3,217.01	3,056.98	160.03	20.103	
16,100.00	6,303.00	18,889.74	8,839.00	113.72	118.37	-141.59	2,569.94	9,946.24	3,217.04	3,055.51	161.53	19.916	
16,200.00	6,303.00	18,989.74	8,839.00	114.82	119.45	-141.59	2,570.67	10,046.24	3,217.08	3,054.05	163.04	19.732	
16,300.00	6,303.00	19,089.74	8,839.00	115.92	120.53	-141.59	2,571.39	10,146.24	3,217.12	3,052.58	164.54	19.552	
16,400.00	6,303.00	19,189.74	8,839.00	117.02	121.62	-141.59	2,572.12	10,246.23	3,217.16	3,051.11	166.05	19.374	
16,500.00	6,303.00	19,289.74	8,839.00	118.12	122.70	-141.59	2,572.85	10,346.23	3,217.20	3,049.64	167.56	19.200	
16,600.00	6,303.00	19,389.74	8,839.00	119.22	123.79	-141.59	2,573.57	10,446.23	3,217.24	3,048.17	169.07	19.029	
16,700.00	6,303.00	19,489.74	8,839.00	120.32	124.87	-141.59	2,574.30	10,546.23	3,217.28	3,046.69	170.58	18.861	
16,800.00	6,303.00	19,589.74	8,839.00	121.43	125.96	-141.59	2,575.02	10,646.22	3,217.31	3,045.22	172.09	18.695	
16,900.00	6,303.00	19,689.74	8,839.00	122.53	127.05	-141.59	2,575.75	10,746.22	3,217.35	3,043.75	173.60	18.533	
16,921.74	6,303.00	19,711.48	8,839.00	122.77	127.29	-141.59	2,575.91	10,767.96	3,217.36	3,043.43	173.93	18.498	
16,922.61	6,303.00	19,712.35	8,839.00	122.78	127.29	-141.59	2,575.92	10,768.83	3,217.36	3,043.42	173.94	18.497 ES, SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A03) Koala 9 Fed Com 131H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
13,300.00	6,303.00	15,678.99	8,494.00	83.16	87.77	-129.33	3,209.31	7,141.32	3,434.56	3,296.54	138.02	24.885	CC
13,400.00	6,303.00	15,778.99	8,494.00	84.24	88.82	-129.33	3,210.05	7,241.31	3,434.62	3,294.87	139.75	24.577	
13,500.00	6,303.00	15,878.99	8,494.00	85.32	89.88	-129.33	3,210.78	7,341.31	3,434.67	3,293.19	141.48	24.277	
13,600.00	6,303.00	15,978.99	8,494.00	86.40	90.94	-129.33	3,211.52	7,441.31	3,434.72	3,291.51	143.21	23.983	
13,700.00	6,303.00	16,078.99	8,494.00	87.49	92.00	-129.33	3,212.25	7,541.31	3,434.78	3,289.83	144.95	23.696	
13,800.00	6,303.00	16,178.99	8,494.00	88.57	93.06	-129.33	3,212.98	7,641.30	3,434.83	3,288.14	146.69	23.416	
13,900.00	6,303.00	16,278.99	8,494.00	89.66	94.13	-129.33	3,213.72	7,741.30	3,434.89	3,286.46	148.43	23.142	
14,000.00	6,303.00	16,378.99	8,494.00	90.74	95.19	-129.33	3,214.45	7,841.30	3,434.94	3,284.77	150.17	22.874	
14,100.00	6,303.00	16,478.99	8,494.00	91.83	96.26	-129.33	3,215.19	7,941.29	3,434.99	3,283.08	151.91	22.611	
14,200.00	6,303.00	16,578.99	8,494.00	92.92	97.33	-129.33	3,215.92	8,041.29	3,435.05	3,281.39	153.66	22.355	
14,300.00	6,303.00	16,678.99	8,494.00	94.01	98.39	-129.33	3,216.66	8,141.29	3,435.10	3,279.69	155.41	22.104	
14,400.00	6,303.00	16,778.99	8,494.00	95.10	99.46	-129.33	3,217.39	8,241.29	3,435.16	3,278.00	157.16	21.858	
14,500.00	6,303.00	16,878.99	8,494.00	96.19	100.54	-129.33	3,218.12	8,341.28	3,435.21	3,276.30	158.91	21.618	
14,600.00	6,303.00	16,978.99	8,494.00	97.28	101.61	-129.33	3,218.86	8,441.28	3,435.26	3,274.61	160.66	21.382	
14,700.00	6,303.00	17,078.99	8,494.00	98.37	102.68	-129.32	3,219.59	8,541.28	3,435.32	3,272.91	162.41	21.152	
14,800.00	6,303.00	17,178.99	8,494.00	99.46	103.75	-129.32	3,220.33	8,641.28	3,435.37	3,271.21	164.17	20.926	
14,900.00	6,303.00	17,278.99	8,494.00	100.56	104.83	-129.32	3,221.06	8,741.27	3,435.43	3,269.50	165.92	20.705	
15,000.00	6,303.00	17,378.99	8,494.00	101.65	105.91	-129.32	3,221.80	8,841.27	3,435.48	3,267.80	167.68	20.488	
15,100.00	6,303.00	17,478.99	8,494.00	102.74	106.98	-129.32	3,222.53	8,941.27	3,435.53	3,266.09	169.44	20.276	
15,200.00	6,303.00	17,578.99	8,494.00	103.84	108.06	-129.32	3,223.26	9,041.26	3,435.59	3,264.39	171.20	20.068	
15,300.00	6,303.00	17,678.99	8,494.00	104.93	109.14	-129.32	3,224.00	9,141.26	3,435.64	3,262.68	172.96	19.864	
15,400.00	6,303.00	17,778.99	8,494.00	106.03	110.22	-129.32	3,224.73	9,241.26	3,435.70	3,260.97	174.72	19.664	
15,500.00	6,303.00	17,878.99	8,494.00	107.13	111.30	-129.32	3,225.47	9,341.26	3,435.75	3,259.26	176.49	19.468	
15,600.00	6,303.00	17,978.99	8,494.00	108.22	112.38	-129.32	3,226.20	9,441.25	3,435.80	3,257.55	178.25	19.275	
15,700.00	6,303.00	18,078.99	8,494.00	109.32	113.46	-129.32	3,226.93	9,541.25	3,435.86	3,255.84	180.02	19.086	
15,800.00	6,303.00	18,178.99	8,494.00	110.42	114.55	-129.32	3,227.67	9,641.25	3,435.91	3,254.13	181.78	18.901	
15,900.00	6,303.00	18,278.99	8,494.00	111.52	115.63	-129.32	3,228.40	9,741.25	3,435.96	3,252.41	183.55	18.719	
16,000.00	6,303.00	18,378.99	8,494.00	112.62	116.72	-129.31	3,229.14	9,841.24	3,436.02	3,250.70	185.32	18.541	
16,100.00	6,303.00	18,478.99	8,494.00	113.72	117.80	-129.31	3,229.87	9,941.24	3,436.07	3,248.98	187.09	18.366	
16,200.00	6,303.00	18,578.99	8,494.00	114.82	118.89	-129.31	3,230.61	10,041.24	3,436.13	3,247.27	188.86	18.194	
16,300.00	6,303.00	18,678.99	8,494.00	115.92	119.97	-129.31	3,231.34	10,141.23	3,436.18	3,245.55	190.63	18.025	
16,400.00	6,303.00	18,778.99	8,494.00	117.02	121.06	-129.31	3,232.07	10,241.23	3,436.23	3,243.83	192.40	17.859	
16,500.00	6,303.00	18,878.99	8,494.00	118.12	122.15	-129.31	3,232.81	10,341.23	3,436.29	3,242.11	194.18	17.697	
16,600.00	6,303.00	18,978.99	8,494.00	119.22	123.24	-129.31	3,233.54	10,441.23	3,436.34	3,240.39	195.95	17.537	
16,700.00	6,303.00	19,078.99	8,494.00	120.32	124.33	-129.31	3,234.28	10,541.22	3,436.40	3,238.67	197.73	17.380	
16,800.00	6,303.00	19,178.99	8,494.00	121.43	125.41	-129.31	3,235.01	10,641.22	3,436.45	3,236.95	199.50	17.225	
16,900.00	6,303.00	19,278.99	8,494.00	122.53	126.50	-129.31	3,235.75	10,741.22	3,436.50	3,235.23	201.28	17.073	
16,921.74	6,303.00	19,300.73	8,494.00	122.77	126.74	-129.31	3,235.90	10,762.96	3,436.52	3,234.85	201.67	17.041	
16,922.61	6,303.00	19,301.60	8,494.00	122.78	126.75	-129.31	3,235.91	10,763.83	3,436.52	3,234.84	201.68	17.040	ES, SF

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A04) Koala 9 Fed Com 132H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis		Distance		Rule Assigned:		Warning					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
12,800.00	6,303.00	15,360.25	8,494.00	77.77	82.95	-148.45	1,885.99	6,651.13	2,554.49	2,451.84	102.65	24.885	CC
12,900.00	6,303.00	15,460.25	8,494.00	78.84	83.99	-148.45	1,886.72	6,751.13	2,554.52	2,450.57	103.96	24.573	
13,000.00	6,303.00	15,560.25	8,494.00	79.92	85.04	-148.45	1,887.44	6,851.12	2,554.55	2,449.29	105.26	24.268	
13,100.00	6,303.00	15,660.25	8,494.00	81.00	86.08	-148.45	1,888.17	6,951.12	2,554.59	2,448.01	106.57	23.971	
13,200.00	6,303.00	15,760.25	8,494.00	82.08	87.13	-148.45	1,888.89	7,051.12	2,554.62	2,446.73	107.88	23.679	
13,300.00	6,303.00	15,860.25	8,494.00	83.16	88.18	-148.45	1,889.62	7,151.11	2,554.65	2,445.45	109.20	23.395	
13,400.00	6,303.00	15,960.25	8,494.00	84.24	89.23	-148.45	1,890.35	7,251.11	2,554.68	2,444.17	110.51	23.117	
13,500.00	6,303.00	16,060.25	8,494.00	85.32	90.29	-148.45	1,891.07	7,351.11	2,554.71	2,442.88	111.83	22.845	
13,600.00	6,303.00	16,160.25	8,494.00	86.40	91.34	-148.45	1,891.80	7,451.11	2,554.75	2,441.60	113.15	22.579	
13,700.00	6,303.00	16,260.25	8,494.00	87.49	92.40	-148.44	1,892.52	7,551.10	2,554.78	2,440.31	114.47	22.318	
13,800.00	6,303.00	16,360.25	8,494.00	88.57	93.46	-148.44	1,893.25	7,651.10	2,554.81	2,439.02	115.79	22.064	
13,900.00	6,303.00	16,460.25	8,494.00	89.66	94.52	-148.44	1,893.98	7,751.10	2,554.84	2,437.73	117.12	21.814	
14,000.00	6,303.00	16,560.25	8,494.00	90.74	95.58	-148.44	1,894.70	7,851.10	2,554.88	2,436.43	118.44	21.570	
14,100.00	6,303.00	16,660.25	8,494.00	91.83	96.64	-148.44	1,895.43	7,951.09	2,554.91	2,435.14	119.77	21.332	
14,200.00	6,303.00	16,760.25	8,494.00	92.92	97.71	-148.44	1,896.16	8,051.09	2,554.94	2,433.84	121.10	21.098	
14,300.00	6,303.00	16,860.25	8,494.00	94.01	98.77	-148.44	1,896.88	8,151.09	2,554.97	2,432.54	122.43	20.869	
14,400.00	6,303.00	16,960.25	8,494.00	95.10	99.84	-148.44	1,897.61	8,251.09	2,555.00	2,431.24	123.76	20.644	
14,500.00	6,303.00	17,060.25	8,494.00	96.19	100.91	-148.43	1,898.33	8,351.08	2,555.04	2,429.94	125.10	20.425	
14,600.00	6,303.00	17,160.25	8,494.00	97.28	101.98	-148.43	1,899.06	8,451.08	2,555.07	2,428.64	126.43	20.209	
14,700.00	6,303.00	17,260.25	8,494.00	98.37	103.05	-148.43	1,899.79	8,551.08	2,555.10	2,427.33	127.77	19.998	
14,800.00	6,303.00	17,360.25	8,494.00	99.46	104.12	-148.43	1,900.51	8,651.07	2,555.13	2,426.03	129.10	19.791	
14,900.00	6,303.00	17,460.25	8,494.00	100.56	105.19	-148.43	1,901.24	8,751.07	2,555.17	2,424.72	130.44	19.589	
15,000.00	6,303.00	17,560.25	8,494.00	101.65	106.26	-148.43	1,901.96	8,851.07	2,555.20	2,423.42	131.78	19.390	
15,100.00	6,303.00	17,660.25	8,494.00	102.74	107.34	-148.43	1,902.69	8,951.07	2,555.23	2,422.11	133.12	19.195	
15,200.00	6,303.00	17,760.25	8,494.00	103.84	108.41	-148.43	1,903.42	9,051.06	2,555.26	2,420.80	134.46	19.003	
15,300.00	6,303.00	17,860.25	8,494.00	104.93	109.49	-148.43	1,904.14	9,151.06	2,555.29	2,419.49	135.81	18.816	
15,400.00	6,303.00	17,960.25	8,494.00	106.03	110.57	-148.42	1,904.87	9,251.06	2,555.33	2,418.18	137.15	18.631	
15,500.00	6,303.00	18,060.25	8,494.00	107.13	111.64	-148.42	1,905.59	9,351.06	2,555.36	2,416.86	138.50	18.451	
15,600.00	6,303.00	18,160.25	8,494.00	108.22	112.72	-148.42	1,906.32	9,451.05	2,555.39	2,415.55	139.84	18.273	
15,700.00	6,303.00	18,260.25	8,494.00	109.32	113.80	-148.42	1,907.05	9,551.05	2,555.42	2,414.23	141.19	18.099	
15,800.00	6,303.00	18,360.25	8,494.00	110.42	114.88	-148.42	1,907.77	9,651.05	2,555.46	2,412.92	142.54	17.928	
15,900.00	6,303.00	18,460.25	8,494.00	111.52	115.96	-148.42	1,908.50	9,751.05	2,555.49	2,411.60	143.89	17.760	
16,000.00	6,303.00	18,560.25	8,494.00	112.62	117.05	-148.42	1,909.23	9,851.04	2,555.52	2,410.28	145.24	17.595	
16,100.00	6,303.00	18,660.25	8,494.00	113.72	118.13	-148.42	1,909.95	9,951.04	2,555.55	2,408.96	146.59	17.434	
16,200.00	6,303.00	18,760.25	8,494.00	114.82	119.21	-148.41	1,910.68	10,051.04	2,555.59	2,407.65	147.94	17.274	
16,300.00	6,303.00	18,860.25	8,494.00	115.92	120.30	-148.41	1,911.40	10,151.03	2,555.62	2,406.32	149.29	17.118	
16,400.00	6,303.00	18,960.25	8,494.00	117.02	121.38	-148.41	1,912.13	10,251.03	2,555.65	2,405.00	150.65	16.965	
16,500.00	6,303.00	19,060.25	8,494.00	118.12	122.47	-148.41	1,912.86	10,351.03	2,555.68	2,403.68	152.00	16.814	
16,600.00	6,303.00	19,160.25	8,494.00	119.22	123.55	-148.41	1,913.58	10,451.03	2,555.71	2,402.36	153.35	16.665	
16,700.00	6,303.00	19,260.25	8,494.00	120.32	124.64	-148.41	1,914.31	10,551.02	2,555.75	2,401.04	154.71	16.520	
16,800.00	6,303.00	19,360.25	8,494.00	121.43	125.73	-148.41	1,915.03	10,651.02	2,555.78	2,399.71	156.07	16.376	
16,900.00	6,303.00	19,460.25	8,494.00	122.53	126.82	-148.41	1,915.76	10,751.02	2,555.81	2,398.39	157.42	16.235	
16,921.74	6,303.00	19,481.99	8,494.00	122.77	127.05	-148.41	1,915.92	10,772.76	2,555.82	2,398.10	157.72	16.205	
16,922.61	6,303.00	19,482.87	8,494.00	122.78	127.06	-148.41	1,915.92	10,773.63	2,555.82	2,398.09	157.73	16.204	ES, SF

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A05) Koala 9 Fed Com 121H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Rule Assigned:													
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
11,000.00	6,303.00	12,182.33	7,289.00	58.73	62.03	-110.11	3,192.64	4,841.47	2,827.41	2,713.40	114.02	24.798	CC
11,100.00	6,303.00	12,282.33	7,289.00	59.77	63.06	-110.11	3,193.37	4,941.47	2,827.48	2,711.50	115.97	24.381	
11,200.00	6,303.00	12,382.33	7,289.00	60.81	64.09	-110.11	3,194.10	5,041.47	2,827.54	2,709.61	117.93	23.976	
11,300.00	6,303.00	12,482.33	7,289.00	61.85	65.12	-110.11	3,194.83	5,141.46	2,827.60	2,707.70	119.90	23.583	
11,400.00	6,303.00	12,582.33	7,289.00	62.90	66.16	-110.11	3,195.56	5,241.46	2,827.66	2,705.79	121.87	23.202	
11,500.00	6,303.00	12,682.33	7,289.00	63.95	67.20	-110.10	3,196.29	5,341.46	2,827.72	2,703.88	123.85	22.833	
11,600.00	6,303.00	12,782.33	7,289.00	65.00	68.24	-110.10	3,197.02	5,441.45	2,827.79	2,701.96	125.83	22.474	
11,700.00	6,303.00	12,882.33	7,289.00	66.05	69.28	-110.10	3,197.75	5,541.45	2,827.85	2,700.04	127.81	22.125	
11,800.00	6,303.00	12,982.33	7,289.00	67.11	70.33	-110.10	3,198.48	5,641.45	2,827.91	2,698.11	129.80	21.786	
11,900.00	6,303.00	13,082.33	7,289.00	68.17	71.38	-110.10	3,199.21	5,741.45	2,827.97	2,696.18	131.80	21.457	
12,000.00	6,303.00	13,182.33	7,289.00	69.23	72.43	-110.10	3,199.94	5,841.44	2,828.04	2,694.24	133.79	21.137	
12,100.00	6,303.00	13,282.33	7,289.00	70.29	73.48	-110.10	3,200.68	5,941.44	2,828.10	2,692.30	135.80	20.826	
12,200.00	6,303.00	13,382.33	7,289.00	71.35	74.53	-110.10	3,201.41	6,041.44	2,828.16	2,690.36	137.80	20.523	
12,300.00	6,303.00	13,482.33	7,289.00	72.42	75.59	-110.10	3,202.14	6,141.44	2,828.22	2,688.41	139.81	20.229	
12,400.00	6,303.00	13,582.33	7,289.00	73.49	76.65	-110.10	3,202.87	6,241.43	2,828.28	2,686.46	141.82	19.942	
12,500.00	6,303.00	13,682.33	7,289.00	74.55	77.71	-110.10	3,203.60	6,341.43	2,828.35	2,684.51	143.84	19.663	
12,600.00	6,303.00	13,782.33	7,289.00	75.62	78.77	-110.10	3,204.33	6,441.43	2,828.41	2,682.55	145.86	19.392	
12,700.00	6,303.00	13,882.33	7,289.00	76.70	79.83	-110.10	3,205.06	6,541.43	2,828.47	2,680.59	147.88	19.127	
12,800.00	6,303.00	13,982.33	7,289.00	77.77	80.90	-110.10	3,205.79	6,641.42	2,828.53	2,678.63	149.90	18.869	
12,900.00	6,303.00	14,082.33	7,289.00	78.84	81.97	-110.10	3,206.52	6,741.42	2,828.60	2,676.67	151.93	18.618	
13,000.00	6,303.00	14,182.33	7,289.00	79.92	83.03	-110.10	3,207.25	6,841.42	2,828.66	2,674.70	153.96	18.373	
13,100.00	6,303.00	14,282.33	7,289.00	81.00	84.10	-110.10	3,207.98	6,941.41	2,828.72	2,672.73	155.99	18.134	
13,200.00	6,303.00	14,382.33	7,289.00	82.08	85.17	-110.10	3,208.71	7,041.41	2,828.78	2,670.76	158.03	17.901	
13,300.00	6,303.00	14,482.33	7,289.00	83.16	86.25	-110.10	3,209.44	7,141.41	2,828.84	2,668.78	160.06	17.673	
13,400.00	6,303.00	14,582.33	7,289.00	84.24	87.32	-110.10	3,210.17	7,241.41	2,828.91	2,666.80	162.10	17.451	
13,500.00	6,303.00	14,682.33	7,289.00	85.32	88.39	-110.10	3,210.90	7,341.40	2,828.97	2,664.82	164.14	17.235	
13,600.00	6,303.00	14,782.33	7,289.00	86.40	89.47	-110.10	3,211.64	7,441.40	2,829.03	2,662.84	166.19	17.023	
13,700.00	6,303.00	14,882.33	7,289.00	87.49	90.55	-110.09	3,212.37	7,541.40	2,829.09	2,660.86	168.23	16.816	
13,800.00	6,303.00	14,982.33	7,289.00	88.57	91.63	-110.09	3,213.10	7,641.40	2,829.16	2,658.87	170.28	16.615	
13,900.00	6,303.00	15,082.33	7,289.00	89.66	92.70	-110.09	3,213.83	7,741.39	2,829.22	2,656.89	172.33	16.417	
14,000.00	6,303.00	15,182.33	7,289.00	90.74	93.78	-110.09	3,214.56	7,841.39	2,829.28	2,654.90	174.38	16.225	
14,100.00	6,303.00	15,282.33	7,289.00	91.83	94.87	-110.09	3,215.29	7,941.39	2,829.34	2,652.91	176.43	16.036	
14,200.00	6,303.00	15,382.33	7,289.00	92.92	95.95	-110.09	3,216.02	8,041.38	2,829.40	2,650.92	178.49	15.852	
14,300.00	6,303.00	15,482.33	7,289.00	94.01	97.03	-110.09	3,216.75	8,141.38	2,829.47	2,648.92	180.54	15.672	
14,400.00	6,303.00	15,582.33	7,289.00	95.10	98.11	-110.09	3,217.48	8,241.38	2,829.53	2,646.93	182.60	15.496	
14,500.00	6,303.00	15,682.33	7,289.00	96.19	99.20	-110.09	3,218.21	8,341.38	2,829.59	2,644.93	184.66	15.323	
14,600.00	6,303.00	15,782.33	7,289.00	97.28	100.28	-110.09	3,218.94	8,441.37	2,829.65	2,642.93	186.72	15.154	
14,700.00	6,303.00	15,882.33	7,289.00	98.37	101.37	-110.09	3,219.67	8,541.37	2,829.71	2,640.93	188.78	14.989	
14,800.00	6,303.00	15,982.33	7,289.00	99.46	102.46	-110.09	3,220.40	8,641.37	2,829.78	2,638.93	190.85	14.827	
14,900.00	6,303.00	16,082.33	7,289.00	100.56	103.55	-110.09	3,221.13	8,741.37	2,829.84	2,636.93	192.91	14.669	
15,000.00	6,303.00	16,182.33	7,289.00	101.65	104.63	-110.09	3,221.87	8,841.36	2,829.90	2,634.92	194.98	14.514	
15,100.00	6,303.00	16,282.33	7,289.00	102.74	105.72	-110.09	3,222.60	8,941.36	2,829.96	2,632.92	197.04	14.362	
15,200.00	6,303.00	16,382.33	7,289.00	103.84	106.81	-110.09	3,223.33	9,041.36	2,830.03	2,630.91	199.11	14.213	
15,300.00	6,303.00	16,482.33	7,289.00	104.93	107.90	-110.09	3,224.06	9,141.36	2,830.09	2,628.91	201.18	14.067	
15,400.00	6,303.00	16,582.33	7,289.00	106.03	108.99	-110.09	3,224.79	9,241.35	2,830.15	2,626.90	203.25	13.924	
15,500.00	6,303.00	16,682.33	7,289.00	107.13	110.09	-110.09	3,225.52	9,341.35	2,830.21	2,624.89	205.33	13.784	
15,600.00	6,303.00	16,782.33	7,289.00	108.22	111.18	-110.09	3,226.25	9,441.35	2,830.27	2,622.88	207.40	13.647	
15,700.00	6,303.00	16,882.33	7,289.00	109.32	112.27	-110.09	3,226.98	9,541.34	2,830.34	2,620.86	209.47	13.512	
15,800.00	6,303.00	16,982.33	7,289.00	110.42	113.37	-110.09	3,227.71	9,641.34	2,830.40	2,618.85	211.55	13.380	
15,900.00	6,303.00	17,082.33	7,289.00	111.52	114.46	-110.08	3,228.44	9,741.34	2,830.46	2,616.84	213.62	13.250	
16,000.00	6,303.00	17,182.33	7,289.00	112.62	115.55	-110.08	3,229.17	9,841.34	2,830.52	2,614.82	215.70	13.123	
16,100.00	6,303.00	17,282.33	7,289.00	113.72	116.65	-110.08	3,229.90	9,941.33	2,830.59	2,612.81	217.78	12.998	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A05) Koala 9 Fed Com 121H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (")	Offset Wellbore Centre		Distance		Rule Assigned:		Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
16,200.00	6,303.00	17,382.33	7,289.00	114.82	117.74	-110.08	3,230.63	10,041.33	2,830.65	2,610.79	219.86	12.875	
16,300.00	6,303.00	17,482.33	7,289.00	115.92	118.84	-110.08	3,231.36	10,141.33	2,830.71	2,608.77	221.94	12.755	
16,400.00	6,303.00	17,582.33	7,289.00	117.02	119.94	-110.08	3,232.09	10,241.33	2,830.77	2,606.76	224.02	12.636	
16,500.00	6,303.00	17,682.33	7,289.00	118.12	121.03	-110.08	3,232.83	10,341.32	2,830.83	2,604.74	226.10	12.520	
16,600.00	6,303.00	17,782.33	7,289.00	119.22	122.13	-110.08	3,233.56	10,441.32	2,830.90	2,602.72	228.18	12.406	
16,700.00	6,303.00	17,882.33	7,289.00	120.32	123.23	-110.08	3,234.29	10,541.32	2,830.96	2,600.70	230.26	12.295	
16,800.00	6,303.00	17,982.33	7,289.00	121.43	124.33	-110.08	3,235.02	10,641.31	2,831.02	2,598.68	232.35	12.185	
16,900.00	6,303.00	18,082.33	7,289.00	122.53	125.43	-110.08	3,235.75	10,741.31	2,831.08	2,596.65	234.43	12.076	
16,921.74	6,303.00	18,104.06	7,289.00	122.77	125.67	-110.08	3,235.91	10,763.05	2,831.10	2,596.21	234.88	12.053	
16,922.61	6,303.00	18,104.94	7,289.00	122.78	125.68	-110.08	3,235.91	10,763.92	2,831.10	2,596.20	234.90	12.052 ES, SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A06) Koala 9 Fed Com 122H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
8,700.00	6,303.00	10,025.29	7,289.00	36.26	40.45	-126.08	1,856.22	2,551.24	1,650.49	1,584.46	66.03	24.995 CC	
8,800.00	6,303.00	10,125.29	7,289.00	37.15	41.29	-126.08	1,856.95	2,651.23	1,650.54	1,583.06	67.48	24.458	
8,900.00	6,303.00	10,225.29	7,289.00	38.05	42.15	-126.08	1,857.67	2,751.23	1,650.59	1,581.63	68.96	23.936	
9,000.00	6,303.00	10,325.29	7,289.00	38.96	43.02	-126.08	1,858.40	2,851.23	1,650.64	1,580.19	70.45	23.430	
9,100.00	6,303.00	10,425.29	7,289.00	39.88	43.90	-126.08	1,859.13	2,951.23	1,650.69	1,578.73	71.96	22.939	
9,200.00	6,303.00	10,525.29	7,289.00	40.81	44.80	-126.07	1,859.85	3,051.22	1,650.74	1,577.25	73.49	22.463	
9,300.00	6,303.00	10,625.29	7,289.00	41.75	45.70	-126.07	1,860.58	3,151.22	1,650.79	1,575.76	75.03	22.001	
9,400.00	6,303.00	10,725.29	7,289.00	42.70	46.61	-126.07	1,861.30	3,251.22	1,650.84	1,574.25	76.59	21.554	
9,500.00	6,303.00	10,825.29	7,289.00	43.66	47.53	-126.07	1,862.03	3,351.22	1,650.89	1,572.73	78.16	21.121	
9,600.00	6,303.00	10,925.29	7,289.00	44.63	48.46	-126.07	1,862.76	3,451.21	1,650.94	1,571.19	79.75	20.702	
9,700.00	6,303.00	11,025.29	7,289.00	45.60	49.40	-126.07	1,863.48	3,551.21	1,650.99	1,569.64	81.35	20.296	
9,800.00	6,303.00	11,125.29	7,289.00	46.58	50.35	-126.07	1,864.21	3,651.21	1,651.04	1,568.08	82.96	19.902	
9,900.00	6,303.00	11,225.29	7,289.00	47.56	51.30	-126.07	1,864.93	3,751.21	1,651.09	1,566.51	84.58	19.521	
10,000.00	6,303.00	11,325.29	7,289.00	48.56	52.26	-126.06	1,865.66	3,851.20	1,651.14	1,564.93	86.21	19.152	
10,100.00	6,303.00	11,425.29	7,289.00	49.55	53.23	-126.06	1,866.39	3,951.20	1,651.19	1,563.34	87.85	18.795	
10,200.00	6,303.00	11,525.29	7,289.00	50.55	54.20	-126.06	1,867.11	4,051.20	1,651.24	1,561.73	89.50	18.449	
10,300.00	6,303.00	11,625.29	7,289.00	51.56	55.18	-126.06	1,867.84	4,151.19	1,651.29	1,560.12	91.16	18.113	
10,400.00	6,303.00	11,725.29	7,289.00	52.57	56.16	-126.06	1,868.56	4,251.19	1,651.34	1,558.51	92.83	17.788	
10,500.00	6,303.00	11,825.29	7,289.00	53.59	57.15	-126.06	1,869.29	4,351.19	1,651.39	1,556.88	94.51	17.473	
10,600.00	6,303.00	11,925.29	7,289.00	54.61	58.15	-126.06	1,870.02	4,451.19	1,651.44	1,555.25	96.19	17.168	
10,700.00	6,303.00	12,025.29	7,289.00	55.63	59.14	-126.05	1,870.74	4,551.18	1,651.49	1,553.60	97.88	16.872	
10,800.00	6,303.00	12,125.29	7,289.00	56.66	60.15	-126.05	1,871.47	4,651.18	1,651.54	1,551.96	99.58	16.585	
10,900.00	6,303.00	12,225.29	7,289.00	57.69	61.15	-126.05	1,872.20	4,751.18	1,651.59	1,550.30	101.29	16.306	
11,000.00	6,303.00	12,325.29	7,289.00	58.73	62.16	-126.05	1,872.92	4,851.18	1,651.64	1,548.64	103.00	16.036	
11,100.00	6,303.00	12,425.29	7,289.00	59.77	63.18	-126.05	1,873.65	4,951.17	1,651.69	1,546.97	104.71	15.773	
11,200.00	6,303.00	12,525.29	7,289.00	60.81	64.20	-126.05	1,874.37	5,051.17	1,651.74	1,545.30	106.43	15.519	
11,300.00	6,303.00	12,625.29	7,289.00	61.85	65.22	-126.05	1,875.10	5,151.17	1,651.79	1,543.62	108.16	15.271	
11,400.00	6,303.00	12,725.29	7,289.00	62.90	66.24	-126.05	1,875.83	5,251.17	1,651.84	1,541.94	109.89	15.031	
11,500.00	6,303.00	12,825.29	7,289.00	63.95	67.27	-126.04	1,876.55	5,351.16	1,651.89	1,540.25	111.63	14.798	
11,600.00	6,303.00	12,925.29	7,289.00	65.00	68.30	-126.04	1,877.28	5,451.16	1,651.94	1,538.56	113.37	14.571	
11,700.00	6,303.00	13,025.29	7,289.00	66.05	69.34	-126.04	1,878.00	5,551.16	1,651.99	1,536.87	115.12	14.350	
11,800.00	6,303.00	13,125.29	7,289.00	67.11	70.37	-126.04	1,878.73	5,651.15	1,652.04	1,535.17	116.87	14.136	
11,900.00	6,303.00	13,225.29	7,289.00	68.17	71.41	-126.04	1,879.46	5,751.15	1,652.09	1,533.46	118.62	13.927	
12,000.00	6,303.00	13,325.29	7,289.00	69.23	72.46	-126.04	1,880.18	5,851.15	1,652.14	1,531.75	120.38	13.724	
12,100.00	6,303.00	13,425.29	7,289.00	70.29	73.50	-126.04	1,880.91	5,951.15	1,652.19	1,530.04	122.14	13.527	
12,200.00	6,303.00	13,525.29	7,289.00	71.35	74.55	-126.04	1,881.63	6,051.14	1,652.24	1,528.33	123.91	13.334	
12,300.00	6,303.00	13,625.29	7,289.00	72.42	75.60	-126.03	1,882.36	6,151.14	1,652.28	1,526.61	125.68	13.147	
12,400.00	6,303.00	13,725.29	7,289.00	73.49	76.65	-126.03	1,883.09	6,251.14	1,652.33	1,524.89	127.45	12.965	
12,500.00	6,303.00	13,825.29	7,289.00	74.55	77.70	-126.03	1,883.81	6,351.14	1,652.38	1,523.16	129.22	12.787	
12,600.00	6,303.00	13,925.29	7,289.00	75.62	78.75	-126.03	1,884.54	6,451.13	1,652.43	1,521.43	131.00	12.614	
12,700.00	6,303.00	14,025.29	7,289.00	76.70	79.81	-126.03	1,885.26	6,551.13	1,652.48	1,519.70	132.78	12.445	
12,800.00	6,303.00	14,125.29	7,289.00	77.77	80.87	-126.03	1,885.99	6,651.13	1,652.53	1,517.97	134.57	12.280	
12,900.00	6,303.00	14,225.29	7,289.00	78.84	81.93	-126.03	1,886.72	6,751.13	1,652.58	1,516.23	136.35	12.120	
13,000.00	6,303.00	14,325.29	7,289.00	79.92	82.99	-126.03	1,887.44	6,851.12	1,652.63	1,514.49	138.14	11.963	
13,100.00	6,303.00	14,425.29	7,289.00	81.00	84.05	-126.02	1,888.17	6,951.12	1,652.68	1,512.75	139.93	11.810	
13,200.00	6,303.00	14,525.29	7,289.00	82.08	85.12	-126.02	1,888.90	7,051.12	1,652.73	1,511.01	141.73	11.661	
13,300.00	6,303.00	14,625.29	7,289.00	83.16	86.18	-126.02	1,889.62	7,151.11	1,652.78	1,509.26	143.52	11.516	
13,400.00	6,303.00	14,725.29	7,289.00	84.24	87.25	-126.02	1,890.35	7,251.11	1,652.83	1,507.51	145.32	11.374	
13,500.00	6,303.00	14,825.29	7,289.00	85.32	88.32	-126.02	1,891.07	7,351.11	1,652.88	1,505.76	147.12	11.235	
13,600.00	6,303.00	14,925.29	7,289.00	86.40	89.39	-126.02	1,891.80	7,451.11	1,652.93	1,504.01	148.93	11.099	
13,700.00	6,303.00	15,025.29	7,289.00	87.49	90.46	-126.02	1,892.53	7,551.10	1,652.98	1,502.25	150.73	10.967	
13,800.00	6,303.00	15,125.29	7,289.00	88.57	91.53	-126.02	1,893.25	7,651.10	1,653.03	1,500.50	152.54	10.837	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A06) Koala 9 Fed Com 122H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQ2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
13,900.00	6,303.00	15,225.29	7,289.00	89.66	92.61	-126.01	1,893.98	7,751.10	1,653.08	1,498.74	154.34	10.710	
14,000.00	6,303.00	15,325.29	7,289.00	90.74	93.68	-126.01	1,894.70	7,851.10	1,653.13	1,496.98	156.15	10.587	
14,100.00	6,303.00	15,425.29	7,289.00	91.83	94.76	-126.01	1,895.43	7,951.09	1,653.18	1,495.22	157.97	10.465	
14,200.00	6,303.00	15,525.29	7,289.00	92.92	95.84	-126.01	1,896.16	8,051.09	1,653.23	1,493.45	159.78	10.347	
14,300.00	6,303.00	15,625.29	7,289.00	94.01	96.92	-126.01	1,896.88	8,151.09	1,653.28	1,491.69	161.59	10.231	
14,400.00	6,303.00	15,725.29	7,289.00	95.10	97.99	-126.01	1,897.61	8,251.09	1,653.33	1,489.92	163.41	10.118	
14,500.00	6,303.00	15,825.29	7,289.00	96.19	99.07	-126.01	1,898.33	8,351.08	1,653.38	1,488.15	165.23	10.007	
14,600.00	6,303.00	15,925.29	7,289.00	97.28	100.16	-126.01	1,899.06	8,451.08	1,653.43	1,486.38	167.05	9.898	
14,700.00	6,303.00	16,025.29	7,289.00	98.37	101.24	-126.00	1,899.79	8,551.08	1,653.48	1,484.61	168.87	9.791	
14,800.00	6,303.00	16,125.29	7,289.00	99.46	102.32	-126.00	1,900.51	8,651.08	1,653.53	1,482.84	170.69	9.687	
14,900.00	6,303.00	16,225.29	7,289.00	100.56	103.40	-126.00	1,901.24	8,751.07	1,653.58	1,481.06	172.52	9.585	
15,000.00	6,303.00	16,325.29	7,289.00	101.65	104.49	-126.00	1,901.96	8,851.07	1,653.63	1,479.29	174.34	9.485	
15,100.00	6,303.00	16,425.29	7,289.00	102.74	105.57	-126.00	1,902.69	8,951.07	1,653.68	1,477.51	176.17	9.387	
15,200.00	6,303.00	16,525.29	7,289.00	103.84	106.66	-126.00	1,903.42	9,051.06	1,653.73	1,475.74	177.99	9.291	
15,300.00	6,303.00	16,625.29	7,289.00	104.93	107.75	-126.00	1,904.14	9,151.06	1,653.78	1,473.96	179.82	9.197	
15,400.00	6,303.00	16,725.29	7,289.00	106.03	108.83	-126.00	1,904.87	9,251.06	1,653.83	1,472.18	181.65	9.104	
15,500.00	6,303.00	16,825.29	7,289.00	107.13	109.92	-125.99	1,905.60	9,351.06	1,653.88	1,470.40	183.48	9.014	
15,600.00	6,303.00	16,925.29	7,289.00	108.22	111.01	-125.99	1,906.32	9,451.05	1,653.93	1,468.61	185.32	8.925	
15,700.00	6,303.00	17,025.29	7,289.00	109.32	112.10	-125.99	1,907.05	9,551.05	1,653.98	1,466.83	187.15	8.838	
15,800.00	6,303.00	17,125.29	7,289.00	110.42	113.19	-125.99	1,907.77	9,651.05	1,654.03	1,465.05	188.98	8.752	
15,900.00	6,303.00	17,225.29	7,289.00	111.52	114.28	-125.99	1,908.50	9,751.05	1,654.08	1,463.26	190.82	8.668	
16,000.00	6,303.00	17,325.29	7,289.00	112.62	115.37	-125.99	1,909.23	9,851.04	1,654.13	1,461.48	192.65	8.586	
16,100.00	6,303.00	17,425.29	7,289.00	113.72	116.47	-125.99	1,909.95	9,951.04	1,654.18	1,459.69	194.49	8.505	
16,200.00	6,303.00	17,525.29	7,289.00	114.82	117.56	-125.99	1,910.68	10,051.04	1,654.23	1,457.90	196.33	8.426	
16,300.00	6,303.00	17,625.29	7,289.00	115.92	118.65	-125.98	1,911.40	10,151.04	1,654.28	1,456.11	198.17	8.348	
16,400.00	6,303.00	17,725.29	7,289.00	117.02	119.74	-125.98	1,912.13	10,251.03	1,654.33	1,454.32	200.01	8.271	
16,500.00	6,303.00	17,825.29	7,289.00	118.12	120.84	-125.98	1,912.86	10,351.03	1,654.38	1,452.53	201.85	8.196	
16,600.00	6,303.00	17,925.29	7,289.00	119.22	121.93	-125.98	1,913.58	10,451.03	1,654.43	1,450.74	203.69	8.122	
16,700.00	6,303.00	18,025.29	7,289.00	120.32	123.03	-125.98	1,914.31	10,551.02	1,654.48	1,448.95	205.53	8.050	
16,800.00	6,303.00	18,125.29	7,289.00	121.43	124.12	-125.98	1,915.03	10,651.02	1,654.53	1,447.15	207.37	7.978	
16,900.00	6,303.00	18,225.29	7,289.00	122.53	125.22	-125.98	1,915.76	10,751.02	1,654.58	1,445.36	209.22	7.908	
16,921.74	6,303.00	18,247.03	7,289.00	122.77	125.46	-125.98	1,915.92	10,772.76	1,654.59	1,444.97	209.62	7.893	
16,922.61	6,303.00	18,247.90	7,289.00	122.78	125.47	-125.98	1,915.92	10,773.63	1,654.59	1,444.96	209.63	7.893 ES, SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A07) Koala 9 Fed Com 111H - Permit - APD-Rev00													Offset Site Error:	0.00 usft
Survey Program:		0-MWD+IFR1+SAG+FDIR (SQC2)					Rule Assigned:				Offset Well Error:	0.00 usft		
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance			Warning					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
10,500.00	6,303.00	10,537.10	6,214.00	53.59	54.71	-87.78	3,188.60	4,341.33	2,656.37	2,548.10	108.27	24.534	CC	
10,600.00	6,303.00	10,637.10	6,214.00	54.61	55.74	-87.78	3,189.33	4,441.33	2,656.44	2,546.12	110.33	24.078		
10,700.00	6,303.00	10,737.10	6,214.00	55.63	56.78	-87.78	3,190.07	4,541.32	2,656.51	2,544.13	112.39	23.637		
10,800.00	6,303.00	10,837.10	6,214.00	56.66	57.82	-87.78	3,190.81	4,641.32	2,656.58	2,542.13	114.45	23.211		
10,900.00	6,303.00	10,937.10	6,214.00	57.69	58.86	-87.78	3,191.54	4,741.32	2,656.66	2,540.13	116.53	22.799		
11,000.00	6,303.00	11,037.10	6,214.00	58.73	59.91	-87.78	3,192.28	4,841.32	2,656.73	2,538.12	118.61	22.399		
11,100.00	6,303.00	11,137.10	6,214.00	59.77	60.96	-87.78	3,193.02	4,941.31	2,656.80	2,536.11	120.69	22.013		
11,200.00	6,303.00	11,237.10	6,214.00	60.81	62.01	-87.78	3,193.75	5,041.31	2,656.87	2,534.09	122.79	21.638		
11,300.00	6,303.00	11,337.10	6,214.00	61.85	63.06	-87.78	3,194.49	5,141.31	2,656.95	2,532.06	124.88	21.276		
11,400.00	6,303.00	11,437.10	6,214.00	62.90	64.12	-87.78	3,195.23	5,241.31	2,657.02	2,530.03	126.98	20.924		
11,500.00	6,303.00	11,537.10	6,214.00	63.95	65.17	-87.78	3,195.96	5,341.30	2,657.09	2,528.00	129.09	20.583		
11,600.00	6,303.00	11,637.10	6,214.00	65.00	66.23	-87.78	3,196.70	5,441.30	2,657.16	2,525.96	131.20	20.252		
11,700.00	6,303.00	11,737.10	6,214.00	66.05	67.30	-87.78	3,197.44	5,541.30	2,657.23	2,523.92	133.32	19.932		
11,800.00	6,303.00	11,837.10	6,214.00	67.11	68.36	-87.78	3,198.17	5,641.29	2,657.31	2,521.87	135.44	19.620		
11,900.00	6,303.00	11,937.10	6,214.00	68.17	69.43	-87.78	3,198.91	5,741.29	2,657.38	2,519.82	137.56	19.318		
12,000.00	6,303.00	12,037.10	6,214.00	69.23	70.49	-87.78	3,199.65	5,841.29	2,657.45	2,517.76	139.69	19.024		
12,100.00	6,303.00	12,137.10	6,214.00	70.29	71.56	-87.78	3,200.38	5,941.29	2,657.52	2,515.70	141.82	18.739		
12,200.00	6,303.00	12,237.10	6,214.00	71.35	72.63	-87.78	3,201.12	6,041.28	2,657.59	2,513.64	143.95	18.462		
12,300.00	6,303.00	12,337.10	6,214.00	72.42	73.71	-87.78	3,201.86	6,141.28	2,657.67	2,511.58	146.09	18.192		
12,400.00	6,303.00	12,437.10	6,214.00	73.49	74.78	-87.78	3,202.59	6,241.28	2,657.74	2,509.51	148.23	17.930		
12,500.00	6,303.00	12,537.10	6,214.00	74.55	75.85	-87.78	3,203.33	6,341.27	2,657.81	2,507.44	150.37	17.675		
12,600.00	6,303.00	12,637.10	6,214.00	75.62	76.93	-87.78	3,204.07	6,441.27	2,657.88	2,505.36	152.52	17.426		
12,700.00	6,303.00	12,737.10	6,214.00	76.70	78.01	-87.78	3,204.80	6,541.27	2,657.95	2,503.28	154.67	17.185		
12,800.00	6,303.00	12,837.10	6,214.00	77.77	79.09	-87.78	3,205.54	6,641.27	2,658.03	2,501.20	156.82	16.949		
12,900.00	6,303.00	12,937.10	6,214.00	78.84	80.17	-87.78	3,206.28	6,741.26	2,658.10	2,499.12	158.98	16.720		
13,000.00	6,303.00	13,037.10	6,214.00	79.92	81.25	-87.78	3,207.01	6,841.26	2,658.17	2,497.04	161.13	16.497		
13,100.00	6,303.00	13,137.10	6,214.00	81.00	82.33	-87.78	3,207.75	6,941.26	2,658.24	2,494.95	163.29	16.279		
13,200.00	6,303.00	13,237.10	6,214.00	82.08	83.42	-87.78	3,208.49	7,041.26	2,658.32	2,492.86	165.46	16.067		
13,300.00	6,303.00	13,337.10	6,214.00	83.16	84.50	-87.78	3,209.22	7,141.25	2,658.39	2,490.77	167.62	15.860		
13,400.00	6,303.00	13,437.10	6,214.00	84.24	85.58	-87.78	3,209.96	7,241.25	2,658.46	2,488.68	169.78	15.658		
13,500.00	6,303.00	13,537.10	6,214.00	85.32	86.67	-87.78	3,210.70	7,341.25	2,658.53	2,486.58	171.95	15.461		
13,600.00	6,303.00	13,637.10	6,214.00	86.40	87.76	-87.78	3,211.43	7,441.24	2,658.60	2,484.48	174.12	15.269		
13,700.00	6,303.00	13,737.10	6,214.00	87.49	88.85	-87.78	3,212.17	7,541.24	2,658.68	2,482.38	176.29	15.081		
13,800.00	6,303.00	13,837.10	6,214.00	88.57	89.94	-87.78	3,212.91	7,641.24	2,658.75	2,480.28	178.47	14.898		
13,900.00	6,303.00	13,937.10	6,214.00	89.66	91.03	-87.78	3,213.64	7,741.24	2,658.82	2,478.18	180.64	14.719		
14,000.00	6,303.00	14,037.10	6,214.00	90.74	92.12	-87.78	3,214.38	7,841.23	2,658.89	2,476.07	182.82	14.544		
14,100.00	6,303.00	14,137.10	6,214.00	91.83	93.21	-87.78	3,215.12	7,941.23	2,658.96	2,473.97	185.00	14.373		
14,200.00	6,303.00	14,237.10	6,214.00	92.92	94.30	-87.78	3,215.85	8,041.23	2,659.04	2,471.86	187.18	14.206		
14,300.00	6,303.00	14,337.10	6,214.00	94.01	95.39	-87.78	3,216.59	8,141.23	2,659.11	2,469.75	189.36	14.043		
14,400.00	6,303.00	14,437.10	6,214.00	95.10	96.49	-87.78	3,217.33	8,241.22	2,659.18	2,467.64	191.54	13.883		
14,500.00	6,303.00	14,537.10	6,214.00	96.19	97.58	-87.78	3,218.06	8,341.22	2,659.25	2,465.53	193.72	13.727		
14,600.00	6,303.00	14,637.10	6,214.00	97.28	98.67	-87.78	3,218.80	8,441.22	2,659.32	2,463.42	195.91	13.574		
14,700.00	6,303.00	14,737.10	6,214.00	98.37	99.77	-87.78	3,219.54	8,541.21	2,659.40	2,461.30	198.10	13.425		
14,800.00	6,303.00	14,837.10	6,214.00	99.46	100.87	-87.78	3,220.27	8,641.21	2,659.47	2,459.18	200.28	13.278		
14,900.00	6,303.00	14,937.10	6,214.00	100.56	101.96	-87.78	3,221.01	8,741.21	2,659.54	2,457.07	202.47	13.135		
15,000.00	6,303.00	15,037.10	6,214.00	101.65	103.06	-87.78	3,221.75	8,841.21	2,659.61	2,454.95	204.66	12.995		
15,100.00	6,303.00	15,137.10	6,214.00	102.74	104.16	-87.78	3,222.48	8,941.20	2,659.69	2,452.83	206.86	12.858		
15,200.00	6,303.00	15,237.10	6,214.00	103.84	105.25	-87.78	3,223.22	9,041.20	2,659.76	2,450.71	209.05	12.723		
15,300.00	6,303.00	15,337.10	6,214.00	104.93	106.35	-87.78	3,223.96	9,141.20	2,659.83	2,448.59	211.24	12.591		
15,400.00	6,303.00	15,437.10	6,214.00	106.03	107.45	-87.78	3,224.69	9,241.20	2,659.90	2,446.47	213.44	12.462		
15,500.00	6,303.00	15,537.10	6,214.00	107.13	108.55	-87.78	3,225.43	9,341.19	2,659.97	2,444.34	215.63	12.336		
15,600.00	6,303.00	15,637.10	6,214.00	108.22	109.65	-87.78	3,226.17	9,441.19	2,660.05	2,442.22	217.83	12.212		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A07) Koala 9 Fed Com 111H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
15,700.00	6,303.00	15,737.10	6,214.00	109.32	110.75	-87.78	3,226.90	9,541.19	2,660.12	2,440.09	220.03	12.090	
15,800.00	6,303.00	15,837.10	6,214.00	110.42	111.85	-87.78	3,227.64	9,641.18	2,660.19	2,437.97	222.23	11.971	
15,900.00	6,303.00	15,937.10	6,214.00	111.52	112.95	-87.78	3,228.38	9,741.18	2,660.26	2,435.84	224.42	11.854	
16,000.00	6,303.00	16,037.10	6,214.00	112.62	114.06	-87.78	3,229.11	9,841.18	2,660.33	2,433.71	226.62	11.739	
16,100.00	6,303.00	16,137.10	6,214.00	113.72	115.16	-87.78	3,229.85	9,941.18	2,660.41	2,431.58	228.83	11.626	
16,200.00	6,303.00	16,237.10	6,214.00	114.82	116.26	-87.78	3,230.59	10,041.17	2,660.48	2,429.45	231.03	11.516	
16,300.00	6,303.00	16,337.10	6,214.00	115.92	117.36	-87.78	3,231.32	10,141.17	2,660.55	2,427.32	233.23	11.407	
16,400.00	6,303.00	16,437.10	6,214.00	117.02	118.47	-87.78	3,232.06	10,241.17	2,660.62	2,425.19	235.43	11.301	
16,500.00	6,303.00	16,537.10	6,214.00	118.12	119.57	-87.78	3,232.80	10,341.17	2,660.69	2,423.06	237.64	11.196	
16,600.00	6,303.00	16,637.10	6,214.00	119.22	120.67	-87.78	3,233.53	10,441.16	2,660.77	2,420.92	239.84	11.094	
16,700.00	6,303.00	16,737.10	6,214.00	120.32	121.78	-87.78	3,234.27	10,541.16	2,660.84	2,418.79	242.05	10.993	
16,800.00	6,303.00	16,837.10	6,214.00	121.43	122.88	-87.78	3,235.01	10,641.16	2,660.91	2,416.66	244.26	10.894	
16,900.00	6,303.00	16,937.10	6,214.00	122.53	123.99	-87.78	3,235.74	10,741.15	2,660.98	2,414.52	246.46	10.797	
16,921.74	6,303.00	16,958.84	6,214.00	122.77	124.23	-87.78	3,235.90	10,762.89	2,661.00	2,414.06	246.94	10.776	
16,922.61	6,303.00	16,959.71	6,214.00	122.78	124.24	-87.78	3,235.91	10,763.77	2,661.00	2,414.04	246.96	10.775 ES, SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A08) Koala 9 Fed Com 112H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Rule Assigned:													
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
7,500.00	6,303.00	7,714.07	6,214.00	27.02	28.50	-85.58	1,846.60	1,351.15	1,336.24	1,282.27	53.98	24.756	CC
7,600.00	6,303.00	7,814.07	6,214.00	27.66	29.10	-85.58	1,847.33	1,451.14	1,336.32	1,281.03	55.29	24.169	
7,700.00	6,303.00	7,914.07	6,214.00	28.33	29.73	-85.58	1,848.07	1,551.14	1,336.39	1,279.73	56.66	23.586	
7,800.00	6,303.00	8,014.07	6,214.00	29.02	30.40	-85.58	1,848.80	1,651.14	1,336.46	1,278.37	58.09	23.009	
7,900.00	6,303.00	8,114.07	6,214.00	29.75	31.10	-85.58	1,849.54	1,751.14	1,336.53	1,276.97	59.56	22.440	
8,000.00	6,303.00	8,214.07	6,214.00	30.49	31.84	-85.58	1,850.28	1,851.13	1,336.60	1,275.52	61.08	21.882	
8,100.00	6,303.00	8,314.07	6,214.00	31.26	32.59	-85.58	1,851.01	1,951.13	1,336.67	1,274.02	62.65	21.337	
8,200.00	6,303.00	8,414.07	6,214.00	32.05	33.37	-85.58	1,851.75	2,051.13	1,336.74	1,272.49	64.25	20.805	
8,300.00	6,303.00	8,514.07	6,214.00	32.86	34.17	-85.58	1,852.48	2,151.13	1,336.81	1,270.92	65.89	20.288	
8,400.00	6,303.00	8,614.07	6,214.00	33.69	34.99	-85.58	1,853.22	2,251.12	1,336.88	1,269.31	67.57	19.786	
8,500.00	6,303.00	8,714.07	6,214.00	34.53	35.83	-85.58	1,853.95	2,351.12	1,336.95	1,267.68	69.28	19.299	
8,600.00	6,303.00	8,814.07	6,214.00	35.39	36.68	-85.58	1,854.69	2,451.12	1,337.03	1,266.01	71.01	18.828	
8,700.00	6,303.00	8,914.07	6,214.00	36.26	37.55	-85.58	1,855.43	2,551.11	1,337.10	1,264.32	72.78	18.372	
8,800.00	6,303.00	9,014.07	6,214.00	37.15	38.43	-85.58	1,856.16	2,651.11	1,337.17	1,262.60	74.57	17.932	
8,900.00	6,303.00	9,114.07	6,214.00	38.05	39.33	-85.58	1,856.90	2,751.11	1,337.24	1,260.85	76.38	17.507	
9,000.00	6,303.00	9,214.07	6,214.00	38.96	40.24	-85.58	1,857.63	2,851.11	1,337.31	1,259.09	78.22	17.097	
9,100.00	6,303.00	9,314.07	6,214.00	39.88	41.16	-85.58	1,858.37	2,951.10	1,337.38	1,257.30	80.08	16.701	
9,200.00	6,303.00	9,414.07	6,214.00	40.81	42.09	-85.58	1,859.10	3,051.10	1,337.45	1,255.50	81.95	16.320	
9,300.00	6,303.00	9,514.07	6,214.00	41.75	43.02	-85.58	1,859.84	3,151.10	1,337.52	1,253.68	83.85	15.952	
9,400.00	6,303.00	9,614.07	6,214.00	42.70	43.97	-85.58	1,860.58	3,251.10	1,337.59	1,251.84	85.76	15.597	
9,500.00	6,303.00	9,714.07	6,214.00	43.66	44.93	-85.58	1,861.31	3,351.09	1,337.66	1,249.98	87.68	15.255	
9,600.00	6,303.00	9,814.07	6,214.00	44.63	45.89	-85.58	1,862.05	3,451.09	1,337.74	1,248.11	89.63	14.926	
9,700.00	6,303.00	9,914.07	6,214.00	45.60	46.86	-85.58	1,862.78	3,551.09	1,337.81	1,246.23	91.58	14.608	
9,800.00	6,303.00	10,014.07	6,214.00	46.58	47.84	-85.58	1,863.52	3,651.08	1,337.88	1,244.33	93.55	14.302	
9,900.00	6,303.00	10,114.07	6,214.00	47.56	48.82	-85.58	1,864.25	3,751.08	1,337.95	1,242.42	95.53	14.006	
10,000.00	6,303.00	10,214.07	6,214.00	48.56	49.81	-85.59	1,864.99	3,851.08	1,338.02	1,240.50	97.52	13.721	
10,100.00	6,303.00	10,314.07	6,214.00	49.55	50.81	-85.59	1,865.73	3,951.08	1,338.09	1,238.57	99.52	13.446	
10,200.00	6,303.00	10,414.07	6,214.00	50.55	51.81	-85.59	1,866.46	4,051.07	1,338.16	1,236.63	101.53	13.180	
10,300.00	6,303.00	10,514.07	6,214.00	51.56	52.81	-85.59	1,867.20	4,151.07	1,338.23	1,234.68	103.55	12.924	
10,400.00	6,303.00	10,614.07	6,214.00	52.57	53.82	-85.59	1,867.93	4,251.07	1,338.30	1,232.72	105.58	12.676	
10,500.00	6,303.00	10,714.07	6,214.00	53.59	54.84	-85.59	1,868.67	4,351.07	1,338.38	1,230.76	107.62	12.436	
10,600.00	6,303.00	10,814.07	6,214.00	54.61	55.86	-85.59	1,869.40	4,451.06	1,338.45	1,228.78	109.66	12.205	
10,700.00	6,303.00	10,914.07	6,214.00	55.63	56.88	-85.59	1,870.14	4,551.06	1,338.52	1,226.80	111.72	11.981	
10,800.00	6,303.00	11,014.07	6,214.00	56.66	57.91	-85.59	1,870.88	4,651.06	1,338.59	1,224.81	113.78	11.765	
10,900.00	6,303.00	11,114.07	6,214.00	57.69	58.94	-85.59	1,871.61	4,751.05	1,338.66	1,222.82	115.84	11.556	
11,000.00	6,303.00	11,214.07	6,214.00	58.73	59.97	-85.59	1,872.35	4,851.05	1,338.73	1,220.81	117.92	11.353	
11,100.00	6,303.00	11,314.07	6,214.00	59.77	61.01	-85.59	1,873.08	4,951.05	1,338.80	1,218.81	120.00	11.157	
11,200.00	6,303.00	11,414.07	6,214.00	60.81	62.05	-85.59	1,873.82	5,051.05	1,338.87	1,216.79	122.08	10.967	
11,300.00	6,303.00	11,514.07	6,214.00	61.85	63.09	-85.59	1,874.55	5,151.04	1,338.94	1,214.77	124.17	10.783	
11,400.00	6,303.00	11,614.07	6,214.00	62.90	64.14	-85.59	1,875.29	5,251.04	1,339.01	1,212.75	126.27	10.605	
11,500.00	6,303.00	11,714.07	6,214.00	63.95	65.18	-85.59	1,876.03	5,351.04	1,339.09	1,210.72	128.37	10.432	
11,600.00	6,303.00	11,814.07	6,214.00	65.00	66.23	-85.59	1,876.76	5,451.04	1,339.16	1,208.68	130.47	10.264	
11,700.00	6,303.00	11,914.07	6,214.00	66.05	67.29	-85.59	1,877.50	5,551.03	1,339.23	1,206.65	132.58	10.101	
11,800.00	6,303.00	12,014.07	6,214.00	67.11	68.34	-85.59	1,878.23	5,651.03	1,339.30	1,204.60	134.69	9.943	
11,900.00	6,303.00	12,114.07	6,214.00	68.17	69.40	-85.59	1,878.97	5,751.03	1,339.37	1,202.56	136.81	9.790	
12,000.00	6,303.00	12,214.07	6,214.00	69.23	70.46	-85.59	1,879.70	5,851.02	1,339.44	1,200.51	138.93	9.641	
12,100.00	6,303.00	12,314.07	6,214.00	70.29	71.52	-85.59	1,880.44	5,951.02	1,339.51	1,198.45	141.06	9.496	
12,200.00	6,303.00	12,414.07	6,214.00	71.35	72.58	-85.59	1,881.18	6,051.02	1,339.58	1,196.39	143.19	9.355	
12,300.00	6,303.00	12,514.07	6,214.00	72.42	73.65	-85.59	1,881.91	6,151.02	1,339.65	1,194.33	145.32	9.219	
12,400.00	6,303.00	12,614.07	6,214.00	73.49	74.71	-85.59	1,882.65	6,251.01	1,339.72	1,192.27	147.46	9.086	
12,500.00	6,303.00	12,714.07	6,214.00	74.55	75.78	-85.59	1,883.38	6,351.01	1,339.80	1,190.20	149.59	8.956	
12,600.00	6,303.00	12,814.07	6,214.00	75.62	76.85	-85.59	1,884.12	6,451.01	1,339.87	1,188.13	151.74	8.830	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A08) Koala 9 Fed Com 112H - Permit - APD-Rev00												Offset Site Error:	0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
12,700.00	6,303.00	12,914.07	6,214.00	76.70	77.92	-85.59	1,884.85	6,551.01	1,339.94	1,186.06	153.88	8.708	
12,800.00	6,303.00	13,014.07	6,214.00	77.77	78.99	-85.59	1,885.59	6,651.00	1,340.01	1,183.98	156.03	8.588	
12,900.00	6,303.00	13,114.07	6,214.00	78.84	80.07	-85.59	1,886.33	6,751.00	1,340.08	1,181.90	158.18	8.472	
13,000.00	6,303.00	13,214.07	6,214.00	79.92	81.14	-85.59	1,887.06	6,851.00	1,340.15	1,179.82	160.33	8.359	
13,100.00	6,303.00	13,314.07	6,214.00	81.00	82.22	-85.59	1,887.80	6,950.99	1,340.22	1,177.74	162.48	8.248	
13,200.00	6,303.00	13,414.07	6,214.00	82.08	83.29	-85.59	1,888.53	7,050.99	1,340.29	1,175.66	164.64	8.141	
13,300.00	6,303.00	13,514.07	6,214.00	83.16	84.37	-85.59	1,889.27	7,150.99	1,340.36	1,173.57	166.80	8.036	
13,400.00	6,303.00	13,614.07	6,214.00	84.24	85.45	-85.59	1,890.00	7,250.99	1,340.44	1,171.48	168.96	7.934	
13,500.00	6,303.00	13,714.07	6,214.00	85.32	86.53	-85.59	1,890.74	7,350.98	1,340.51	1,169.39	171.12	7.834	
13,600.00	6,303.00	13,814.07	6,214.00	86.40	87.62	-85.59	1,891.48	7,450.98	1,340.58	1,167.29	173.29	7.736	
13,700.00	6,303.00	13,914.07	6,214.00	87.49	88.70	-85.59	1,892.21	7,550.98	1,340.65	1,165.20	175.45	7.641	
13,800.00	6,303.00	14,014.07	6,214.00	88.57	89.78	-85.59	1,892.95	7,650.98	1,340.72	1,163.10	177.62	7.548	
13,900.00	6,303.00	14,114.07	6,214.00	89.66	90.87	-85.59	1,893.68	7,750.97	1,340.79	1,161.00	179.79	7.457	
14,000.00	6,303.00	14,214.07	6,214.00	90.74	91.95	-85.59	1,894.42	7,850.97	1,340.86	1,158.90	181.96	7.369	
14,100.00	6,303.00	14,314.07	6,214.00	91.83	93.04	-85.59	1,895.15	7,950.97	1,340.93	1,156.80	184.14	7.282	
14,200.00	6,303.00	14,414.07	6,214.00	92.92	94.13	-85.59	1,895.89	8,050.96	1,341.00	1,154.69	186.31	7.198	
14,300.00	6,303.00	14,514.07	6,214.00	94.01	95.22	-85.60	1,896.63	8,150.96	1,341.07	1,152.59	188.49	7.115	
14,400.00	6,303.00	14,614.07	6,214.00	95.10	96.30	-85.60	1,897.36	8,250.96	1,341.15	1,150.48	190.67	7.034	
14,500.00	6,303.00	14,714.07	6,214.00	96.19	97.39	-85.60	1,898.10	8,350.96	1,341.22	1,148.37	192.85	6.955	
14,600.00	6,303.00	14,814.07	6,214.00	97.28	98.49	-85.60	1,898.83	8,450.95	1,341.29	1,146.26	195.03	6.877	
14,700.00	6,303.00	14,914.07	6,214.00	98.37	99.58	-85.60	1,899.57	8,550.95	1,341.36	1,144.15	197.21	6.802	
14,800.00	6,303.00	15,014.07	6,214.00	99.46	100.67	-85.60	1,900.30	8,650.95	1,341.43	1,142.04	199.39	6.728	
14,900.00	6,303.00	15,114.07	6,214.00	100.56	101.76	-85.60	1,901.04	8,750.95	1,341.50	1,139.92	201.58	6.655	
15,000.00	6,303.00	15,214.07	6,214.00	101.65	102.85	-85.60	1,901.78	8,850.94	1,341.57	1,137.81	203.76	6.584	
15,100.00	6,303.00	15,314.07	6,214.00	102.74	103.95	-85.60	1,902.51	8,950.94	1,341.64	1,135.69	205.95	6.514	
15,200.00	6,303.00	15,414.07	6,214.00	103.84	105.04	-85.60	1,903.25	9,050.94	1,341.71	1,133.57	208.14	6.446	
15,300.00	6,303.00	15,514.07	6,214.00	104.93	106.14	-85.60	1,903.98	9,150.93	1,341.78	1,131.46	210.33	6.379	
15,400.00	6,303.00	15,614.07	6,214.00	106.03	107.23	-85.60	1,904.72	9,250.93	1,341.86	1,129.34	212.52	6.314	
15,500.00	6,303.00	15,714.07	6,214.00	107.13	108.33	-85.60	1,905.45	9,350.93	1,341.93	1,127.22	214.71	6.250	
15,600.00	6,303.00	15,814.07	6,214.00	108.22	109.43	-85.60	1,906.19	9,450.93	1,342.00	1,125.09	216.90	6.187	
15,700.00	6,303.00	15,914.07	6,214.00	109.32	110.52	-85.60	1,906.93	9,550.92	1,342.07	1,122.97	219.10	6.125	
15,800.00	6,303.00	16,014.07	6,214.00	110.42	111.62	-85.60	1,907.66	9,650.92	1,342.14	1,120.85	221.29	6.065	
15,900.00	6,303.00	16,114.07	6,214.00	111.52	112.72	-85.60	1,908.40	9,750.92	1,342.21	1,118.72	223.49	6.006	
16,000.00	6,303.00	16,214.07	6,214.00	112.62	113.82	-85.60	1,909.13	9,850.92	1,342.28	1,116.60	225.68	5.948	
16,100.00	6,303.00	16,314.07	6,214.00	113.72	114.92	-85.60	1,909.87	9,950.91	1,342.35	1,114.47	227.88	5.891	
16,200.00	6,303.00	16,414.07	6,214.00	114.82	116.02	-85.60	1,910.60	10,050.91	1,342.42	1,112.35	230.08	5.835	
16,300.00	6,303.00	16,514.07	6,214.00	115.92	117.12	-85.60	1,911.34	10,150.91	1,342.50	1,110.22	232.28	5.780	
16,400.00	6,303.00	16,614.07	6,214.00	117.02	118.22	-85.60	1,912.08	10,250.90	1,342.57	1,108.09	234.48	5.726	
16,500.00	6,303.00	16,714.07	6,214.00	118.12	119.32	-85.60	1,912.81	10,350.90	1,342.64	1,105.96	236.68	5.673	
16,600.00	6,303.00	16,814.07	6,214.00	119.22	120.42	-85.60	1,913.55	10,450.90	1,342.71	1,103.83	238.88	5.621	
16,700.00	6,303.00	16,914.07	6,214.00	120.32	121.52	-85.60	1,914.28	10,550.90	1,342.78	1,101.70	241.08	5.570	
16,800.00	6,303.00	17,014.07	6,214.00	121.43	122.62	-85.60	1,915.02	10,650.89	1,342.85	1,099.57	243.28	5.520	
16,900.00	6,303.00	17,114.07	6,214.00	122.53	123.72	-85.60	1,915.75	10,750.89	1,342.92	1,097.44	245.49	5.470	
16,921.74	6,303.00	17,135.80	6,214.00	122.77	123.96	-85.60	1,915.91	10,772.63	1,342.94	1,096.97	245.96	5.460	
16,922.61	6,303.00	17,136.68	6,214.00	122.78	123.97	-85.60	1,915.92	10,773.50	1,342.94	1,096.96	245.98	5.460 ES, SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B01) Koala 9 Fed Com 203H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance		Rule Assigned:		Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
1,100.00	1,100.00	1,099.02	1,098.71	3.71	3.71	-86.49	11.07	-180.35	180.69	173.28	7.41	24.375 CC, ES	
1,200.00	1,200.00	1,198.06	1,197.34	4.07	4.06	-83.65	20.09	-180.62	181.75	173.63	8.12	22.372	
1,300.00	1,299.99	1,296.72	1,295.32	4.43	4.42	-74.84	31.62	-180.96	183.42	174.58	8.83	20.766	
1,400.00	1,399.91	1,395.12	1,392.72	4.79	4.77	-71.70	45.63	-181.38	185.47	175.93	9.54	19.445	
1,500.00	1,499.69	1,493.82	1,490.05	5.14	5.12	-68.68	62.00	-181.87	187.83	177.59	10.24	18.337	
1,600.00	1,599.27	1,593.49	1,588.25	5.50	5.47	-66.30	79.02	-182.38	189.81	178.85	10.95	17.327	
1,697.75	1,696.34	1,691.09	1,684.42	5.85	5.83	-64.71	95.68	-182.87	190.95	179.30	11.65	16.388	
1,700.00	1,698.57	1,693.34	1,686.64	5.86	5.83	-64.68	96.06	-182.89	190.97	179.30	11.67	16.366	
1,800.00	1,797.73	1,793.25	1,785.08	6.22	6.20	-63.43	113.12	-183.39	191.71	179.33	12.38	15.481	
1,900.00	1,896.88	1,893.16	1,883.52	6.57	6.56	-62.18	130.17	-183.90	192.55	179.45	13.10	14.697	
2,000.00	1,996.03	1,993.07	1,981.96	6.93	6.92	-60.95	147.23	-184.41	193.48	179.66	13.82	14.000	
2,100.00	2,095.18	2,092.98	2,080.40	7.28	7.29	-59.73	164.28	-184.92	194.49	179.95	14.54	13.377	
2,200.00	2,194.33	2,192.89	2,178.84	7.64	7.65	-58.53	181.34	-185.43	195.59	180.33	15.26	12.818	
2,300.00	2,293.49	2,292.80	2,277.29	8.00	8.02	-57.34	198.39	-185.94	196.78	180.80	15.98	12.315	
2,400.00	2,392.64	2,392.71	2,375.73	8.36	8.39	-56.16	215.45	-186.45	198.05	181.35	16.70	11.859	
2,500.00	2,491.79	2,492.62	2,474.17	8.72	8.75	-55.00	232.50	-186.96	199.41	181.99	17.42	11.446	
2,600.00	2,590.94	2,592.53	2,572.61	9.09	9.12	-53.85	249.56	-187.47	200.84	182.70	18.14	11.070	
2,700.00	2,690.10	2,692.44	2,671.05	9.45	9.49	-52.72	266.61	-187.98	202.36	183.49	18.87	10.727	
2,800.00	2,789.25	2,792.35	2,769.50	9.81	9.85	-51.61	283.67	-188.48	203.95	184.36	19.59	10.413	
2,900.00	2,888.40	2,892.26	2,867.94	10.17	10.22	-50.52	300.72	-188.99	205.62	185.31	20.31	10.125	
3,000.00	2,987.55	2,992.17	2,966.38	10.53	10.59	-49.44	317.78	-189.50	207.36	186.33	21.03	9.860	
3,100.00	3,086.70	3,092.08	3,064.82	10.89	10.96	-48.39	334.83	-190.01	209.17	187.42	21.75	9.616	
3,200.00	3,185.86	3,191.99	3,163.26	11.26	11.33	-47.35	351.89	-190.52	211.06	188.58	22.47	9.391	
3,300.00	3,285.01	3,291.90	3,261.70	11.62	11.70	-46.33	368.94	-191.03	213.01	189.81	23.20	9.183	
3,400.00	3,384.16	3,391.80	3,360.15	11.98	12.06	-45.32	386.00	-191.54	215.03	191.11	23.92	8.990	
3,500.00	3,483.31	3,491.71	3,458.59	12.35	12.43	-44.34	403.05	-192.05	217.11	192.47	24.64	8.812	
3,600.00	3,582.46	3,591.62	3,557.03	12.71	12.80	-43.38	420.11	-192.56	219.26	193.90	25.36	8.646	
3,700.00	3,681.62	3,691.53	3,655.47	13.07	13.17	-42.43	437.16	-193.07	221.46	195.38	26.08	8.491	
3,800.00	3,780.77	3,791.44	3,753.91	13.44	13.54	-41.51	454.22	-193.57	223.73	196.93	26.80	8.347	
3,900.00	3,879.92	3,891.35	3,852.35	13.80	13.91	-40.60	471.27	-194.08	226.05	198.53	27.52	8.213	
4,000.00	3,979.07	3,991.26	3,950.80	14.16	14.28	-39.71	488.33	-194.59	228.43	200.19	28.25	8.087	
4,100.00	4,078.23	4,091.17	4,049.24	14.53	14.65	-38.84	505.38	-195.10	230.86	201.90	28.97	7.970	
4,200.00	4,177.38	4,191.08	4,147.68	14.89	15.02	-37.99	522.44	-195.61	233.35	203.66	29.69	7.860	
4,300.00	4,276.53	4,290.99	4,246.12	15.25	15.39	-37.16	539.49	-196.12	235.88	205.48	30.41	7.757	
4,400.00	4,375.68	4,390.90	4,344.56	15.62	15.76	-36.34	556.55	-196.63	238.47	207.34	31.13	7.661	
4,500.00	4,474.83	4,490.81	4,443.01	15.98	16.13	-35.54	573.60	-197.14	241.10	209.25	31.85	7.570	
4,600.00	4,573.99	4,590.72	4,541.45	16.35	16.50	-34.76	590.66	-197.65	243.78	211.21	32.57	7.485	
4,700.00	4,673.14	4,690.63	4,639.89	16.71	16.87	-34.00	607.71	-198.15	246.50	213.21	33.29	7.405	
4,800.00	4,772.29	4,790.54	4,738.33	17.07	17.24	-33.25	624.77	-198.66	249.26	215.25	34.01	7.329	
4,900.00	4,871.44	4,890.45	4,836.77	17.44	17.61	-32.52	641.82	-199.17	252.07	217.34	34.73	7.258	
5,000.00	4,970.59	4,990.36	4,935.21	17.80	17.98	-31.81	658.88	-199.68	254.91	219.46	35.45	7.191	
5,100.00	5,069.75	5,090.27	5,033.66	18.17	18.35	-31.11	675.93	-200.19	257.80	221.63	36.17	7.128	
5,134.20	5,103.66	5,124.44	5,067.32	18.29	18.47	-30.87	681.77	-200.37	258.79	222.38	36.42	7.107	
5,200.00	5,168.97	5,190.15	5,132.07	18.53	18.72	-30.38	692.98	-200.70	261.21	224.32	36.89	7.081 SF	
5,300.00	5,268.47	5,289.89	5,230.34	18.89	19.09	-29.43	710.01	-201.21	266.80	229.20	37.60	7.095	
5,400.00	5,368.19	5,389.40	5,328.40	19.25	19.46	-28.29	727.00	-201.71	274.77	236.46	38.32	7.171	
5,500.00	5,468.08	5,488.63	5,426.17	19.61	19.82	-26.98	743.94	-202.22	285.18	246.15	39.02	7.308	
5,600.00	5,568.05	5,587.50	5,523.59	19.96	20.19	-25.57	760.81	-202.72	298.08	258.35	39.73	7.503	
5,631.95	5,600.00	5,619.01	5,554.63	20.07	20.31	-30.72	766.19	-202.88	302.74	262.79	39.95	7.577	
5,700.00	5,668.05	5,686.05	5,620.69	20.31	20.56	-29.69	777.64	-203.23	312.99	272.56	40.43	7.742	
5,761.99	5,730.04	5,747.13	5,680.87	20.53	20.78	-28.81	788.06	-203.54	322.41	281.54	40.86	7.890	
5,800.00	5,768.02	5,784.55	5,717.74	20.66	20.92	-117.92	794.45	-203.73	328.80	287.67	41.13	7.995	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B01) Koala 9 Fed Com 203H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Offset Wellbore Centre		Distance		Rule Assigned:		Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
5,850.00	5,817.70	5,833.48	5,765.95	20.83	21.10	-117.18	802.80	-203.98	338.99	297.51	41.47	8.173	
5,900.00	5,866.72	5,881.72	5,813.48	20.99	21.28	-116.87	811.04	-204.22	351.15	309.33	41.82	8.396	
5,950.00	5,914.69	5,928.92	5,859.99	21.15	21.46	-116.92	819.10	-204.46	365.34	323.18	42.17	8.664	
6,000.00	5,961.26	5,974.71	5,905.11	21.31	21.63	-117.20	826.91	-204.70	381.70	339.19	42.51	8.979	
6,050.00	6,006.07	6,018.75	5,948.50	21.45	21.79	-117.59	834.43	-204.92	400.37	357.53	42.84	9.345	
6,100.00	6,048.78	6,060.70	5,989.83	21.58	21.94	-117.96	841.59	-205.13	421.52	378.35	43.17	9.765	
6,150.00	6,089.06	6,100.24	6,028.79	21.70	22.09	-118.17	848.34	-205.34	445.28	401.81	43.47	10.243	
6,200.00	6,126.62	6,137.07	6,065.08	21.81	22.23	-118.11	854.63	-205.52	471.74	427.97	43.77	10.779	
6,250.00	6,161.15	6,170.91	6,098.43	21.94	22.35	-117.65	860.40	-205.70	500.90	456.86	44.04	11.375	
6,300.00	6,192.40	6,201.51	6,128.57	22.09	22.47	-116.65	865.63	-205.85	532.72	488.44	44.28	12.030	
6,350.00	6,220.13	6,228.62	6,155.29	22.24	22.57	-114.98	870.26	-205.99	567.07	522.56	44.50	12.742	
6,400.00	6,244.14	6,252.05	6,178.37	22.38	22.65	-112.48	874.25	-206.11	603.76	559.06	44.70	13.508	
6,450.00	6,264.23	6,271.61	6,197.64	22.53	22.73	-108.96	877.59	-206.21	642.54	597.68	44.86	14.323	
6,500.00	6,280.25	6,287.16	6,212.96	22.68	22.78	-104.24	880.25	-206.29	683.14	638.14	45.00	15.182	
6,550.00	6,292.09	6,298.57	6,224.21	22.83	22.83	-98.15	882.20	-206.35	725.22	680.11	45.10	16.079	
6,600.00	6,299.65	6,305.77	6,231.30	22.97	22.85	-90.63	883.43	-206.38	768.43	723.25	45.18	17.007	
6,650.00	6,302.87	6,308.69	6,234.18	23.11	22.86	-81.86	883.92	-206.40	812.41	767.17	45.24	17.959	
6,661.99	6,303.00	6,308.76	6,234.25	23.14	22.86	-79.61	883.93	-206.40	823.02	777.78	45.24	18.190	
6,681.03	6,303.00	6,308.67	6,234.16	23.20	22.86	-79.73	883.92	-206.40	839.91	794.65	45.26	18.558	
6,700.00	6,303.00	6,308.60	6,234.09	23.25	22.86	-79.72	883.91	-206.40	856.81	811.53	45.27	18.926	
6,800.00	6,303.00	6,308.20	6,233.70	23.57	22.86	-79.66	883.84	-206.40	947.15	901.81	45.33	20.892	
6,900.00	6,303.00	6,307.80	6,233.31	23.94	22.86	-79.60	883.77	-206.39	1,039.26	993.87	45.39	22.896	
7,000.00	6,303.00	6,307.41	6,232.92	24.35	22.86	-79.54	883.70	-206.39	1,132.71	1,087.27	45.44	24.928	
16,100.00	6,303.00	18,875.46	8,853.00	113.72	117.83	-165.49	1,231.47	9,956.39	2,634.02	2,528.14	105.88	24.878	
16,200.00	6,303.00	18,975.46	8,853.00	114.82	118.91	-165.49	1,232.13	10,056.39	2,634.02	2,527.14	106.88	24.645	
16,300.00	6,303.00	19,075.46	8,853.00	115.92	119.99	-165.49	1,232.79	10,156.38	2,634.02	2,526.14	107.88	24.416	
16,400.00	6,303.00	19,175.46	8,853.00	117.02	121.07	-165.49	1,233.46	10,256.38	2,634.02	2,525.14	108.88	24.191	
16,500.00	6,303.00	19,275.46	8,853.00	118.12	122.16	-165.49	1,234.12	10,356.38	2,634.02	2,524.13	109.89	23.970	
16,600.00	6,303.00	19,375.46	8,853.00	119.22	123.24	-165.49	1,234.78	10,456.38	2,634.02	2,523.13	110.89	23.753	
16,700.00	6,303.00	19,475.46	8,853.00	120.32	124.32	-165.49	1,235.44	10,556.37	2,634.02	2,522.12	111.89	23.540	
16,800.00	6,303.00	19,575.46	8,853.00	121.43	125.41	-165.49	1,236.11	10,656.37	2,634.02	2,521.12	112.90	23.331	
16,900.00	6,303.00	19,675.46	8,853.00	122.53	126.49	-165.49	1,236.77	10,756.37	2,634.02	2,520.11	113.90	23.125	
16,921.74	6,303.00	19,697.20	8,853.00	122.77	126.73	-165.49	1,236.91	10,778.11	2,634.02	2,519.89	114.12	23.081	
16,922.61	6,303.00	19,698.08	8,853.00	122.78	126.74	-165.49	1,236.92	10,778.98	2,634.02	2,519.89	114.13	23.079	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B02) Koala 9 Fed Com 204H - Permit - APD-Revv00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
1,000.00	1,000.00	1,000.00	1,000.00	3.35	3.35	-90.19	-0.50	-149.99	149.99	143.29	6.70	22.375	
1,100.00	1,100.00	1,100.00	1,100.00	3.71	3.71	-90.19	-0.50	-149.99	149.99	142.57	7.42	20.213	
1,200.00	1,200.00	1,200.00	1,200.00	4.07	4.07	-90.19	-0.50	-149.99	149.99	141.85	8.14	18.432 CC	
1,300.00	1,299.99	1,298.83	1,298.82	4.43	4.40	-85.52	-1.70	-150.39	150.30	141.47	8.83	17.021	
1,400.00	1,399.91	1,398.64	1,398.60	4.79	4.73	-87.83	-3.90	-151.12	150.89	141.38	9.51	15.860 ES	
1,500.00	1,499.69	1,498.26	1,498.19	5.14	5.06	-91.08	-6.10	-151.85	151.76	141.56	10.20	14.878	
1,600.00	1,599.27	1,597.61	1,597.52	5.50	5.39	-95.24	-8.30	-152.58	153.34	142.45	10.89	14.081	
1,697.75	1,696.34	1,694.42	1,694.30	5.85	5.72	-100.07	-10.43	-153.29	156.08	144.52	11.56	13.497	
1,700.00	1,698.57	1,696.64	1,696.52	5.86	5.73	-100.19	-10.48	-153.31	156.16	144.58	11.58	13.486	
1,800.00	1,797.73	1,795.49	1,795.34	6.22	6.07	-105.39	-12.66	-154.03	160.48	148.21	12.27	13.076	
1,900.00	1,896.88	1,894.34	1,894.17	6.57	6.40	-110.28	-14.85	-154.76	166.07	153.10	12.97	12.805	
2,000.00	1,996.03	1,993.19	1,992.99	6.93	6.74	-114.83	-17.03	-155.49	172.80	159.13	13.67	12.644	
2,100.00	2,095.18	2,092.04	2,091.81	7.28	7.09	-119.03	-19.21	-156.21	180.55	166.19	14.37	12.568	
2,200.00	2,194.33	2,190.89	2,190.63	7.64	7.43	-122.86	-21.39	-156.94	189.20	174.13	15.07	12.557 SF	
2,300.00	2,293.49	2,289.74	2,289.46	8.00	7.77	-126.35	-23.57	-157.66	198.62	182.85	15.77	12.597	
2,400.00	2,392.64	2,388.58	2,388.28	8.36	8.12	-129.51	-25.76	-158.39	208.72	192.25	16.47	12.673	
2,500.00	2,491.79	2,487.43	2,487.10	8.72	8.46	-132.38	-27.94	-159.11	219.39	202.22	17.17	12.776	
2,600.00	2,590.94	2,586.28	2,585.92	9.09	8.81	-134.98	-30.12	-159.84	230.57	212.69	17.88	12.898	
2,700.00	2,690.10	2,685.13	2,684.75	9.45	9.16	-137.34	-32.30	-160.56	242.17	223.59	18.58	13.034	
2,800.00	2,789.25	2,783.98	2,783.57	9.81	9.51	-139.48	-34.48	-161.29	254.15	234.86	19.28	13.180	
2,900.00	2,888.40	2,882.83	2,882.39	10.17	9.86	-141.43	-36.67	-162.01	266.44	246.45	19.99	13.330	
3,000.00	2,987.55	2,981.68	2,981.21	10.53	10.20	-143.21	-38.85	-162.74	279.01	258.32	20.69	13.484	
3,100.00	3,086.70	3,080.53	3,080.04	10.89	10.55	-144.83	-41.03	-163.47	291.83	270.43	21.40	13.639	
3,200.00	3,185.86	3,179.38	3,178.86	11.26	10.90	-146.31	-43.21	-164.19	304.86	282.76	22.10	13.793	
3,300.00	3,285.01	3,278.23	3,277.68	11.62	11.25	-147.68	-45.39	-164.92	318.07	295.26	22.81	13.945	
3,400.00	3,384.16	3,377.08	3,376.50	11.98	11.60	-148.93	-47.58	-165.64	331.45	307.94	23.51	14.095	
3,500.00	3,483.31	3,475.93	3,475.33	12.35	11.96	-150.09	-49.76	-166.37	344.97	320.75	24.22	14.243	
3,600.00	3,582.46	3,574.78	3,574.15	12.71	12.31	-151.16	-51.94	-167.09	358.62	333.70	24.93	14.387	
3,700.00	3,681.62	3,673.62	3,672.97	13.07	12.66	-152.15	-54.12	-167.82	372.39	346.75	25.63	14.527	
3,800.00	3,780.77	3,772.47	3,771.79	13.44	13.01	-153.07	-56.30	-168.54	386.26	359.91	26.34	14.663	
3,900.00	3,879.92	3,871.32	3,870.62	13.80	13.36	-153.93	-58.49	-169.27	400.21	373.16	27.05	14.796	
4,000.00	3,979.07	3,970.17	3,969.44	14.16	13.71	-154.72	-60.67	-169.99	414.25	386.50	27.76	14.925	
4,100.00	4,078.23	4,069.02	4,068.26	14.53	14.07	-155.47	-62.85	-170.72	428.37	399.90	28.46	15.049	
4,200.00	4,177.38	4,167.87	4,167.08	14.89	14.42	-156.17	-65.03	-171.44	442.55	413.38	29.17	15.170	
4,300.00	4,276.53	4,266.72	4,265.91	15.25	14.77	-156.83	-67.21	-172.17	456.79	426.91	29.88	15.287	
4,400.00	4,375.68	4,365.57	4,364.73	15.62	15.12	-157.44	-69.40	-172.90	471.09	440.50	30.59	15.401	
4,500.00	4,474.83	4,464.42	4,463.55	15.98	15.48	-158.02	-71.58	-173.62	485.44	454.14	31.30	15.511	
4,600.00	4,573.99	4,563.27	4,562.37	16.35	15.83	-158.57	-73.76	-174.35	499.83	467.82	32.01	15.617	
4,700.00	4,673.14	4,662.12	4,661.20	16.71	16.18	-159.08	-75.94	-175.07	514.26	481.55	32.71	15.720	
4,800.00	4,772.29	4,760.97	4,760.02	17.07	16.53	-159.57	-78.12	-175.80	528.74	495.32	33.42	15.819	
4,900.00	4,871.44	4,859.81	4,858.84	17.44	16.89	-160.03	-80.31	-176.52	543.25	509.12	34.13	15.916	
5,000.00	4,970.59	4,958.66	4,957.66	17.80	17.24	-160.47	-82.49	-177.25	557.79	522.95	34.84	16.009	
5,100.00	5,069.75	5,057.51	5,056.49	18.17	17.59	-160.89	-84.67	-177.97	572.36	536.81	35.55	16.100	
5,134.20	5,103.66	5,091.32	5,090.28	18.29	17.71	-161.02	-85.42	-178.22	577.35	541.56	35.79	16.130	
5,200.00	5,168.97	5,156.44	5,155.39	18.53	17.95	-161.31	-86.85	-178.70	586.43	550.17	36.26	16.173	
5,300.00	5,268.47	5,255.70	5,254.62	18.89	18.30	-161.65	-89.05	-179.43	598.21	561.24	36.97	16.180	
5,400.00	5,368.19	5,355.24	5,354.14	19.25	18.66	-161.89	-91.24	-180.16	607.52	569.84	37.68	16.122	
5,500.00	5,468.08	5,455.00	5,453.86	19.61	19.02	-162.04	-93.44	-180.89	614.36	575.96	38.40	16.001	
5,600.00	5,568.05	5,554.90	5,553.74	19.96	19.37	-162.10	-95.65	-181.62	618.71	579.60	39.11	15.821	
5,631.95	5,600.00	5,586.84	5,585.67	20.07	19.49	-167.71	-96.35	-181.86	619.58	580.24	39.34	15.751	
5,700.00	5,668.05	5,654.87	5,653.68	20.31	19.73	-167.69	-97.86	-182.36	621.15	581.33	39.82	15.599	
5,761.99	5,730.04	5,716.84	5,715.64	20.53	19.95	-167.68	-99.22	-182.81	622.59	582.32	40.26	15.464	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B02) Koala 9 Fed Com 204H - Permit - APD-Revv00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
5,800.00	5,768.02	5,754.81	5,753.59	20.66	20.09	102.33	-100.06	-183.09	623.73	583.21	40.53	15.390	
5,850.00	5,817.70	5,804.44	5,803.21	20.83	20.27	102.60	-101.16	-183.46	626.09	585.21	40.88	15.317	
5,900.00	5,866.72	5,853.37	5,852.12	20.99	20.44	103.13	-102.24	-183.81	629.49	588.27	41.22	15.272	
5,950.00	5,914.69	5,901.22	5,899.97	21.15	20.61	103.87	-103.29	-184.17	634.10	592.55	41.56	15.259	
6,000.00	5,961.26	5,947.65	5,946.38	21.31	20.78	104.77	-104.32	-184.51	640.14	598.26	41.89	15.283	
6,050.00	6,006.07	5,992.28	5,991.00	21.45	20.94	105.73	-105.30	-184.83	647.87	605.67	42.20	15.351	
6,100.00	6,048.78	6,034.79	6,033.50	21.58	21.09	106.68	-106.24	-185.15	657.57	615.06	42.51	15.468	
6,150.00	6,089.06	6,074.84	6,073.54	21.70	21.23	107.51	-107.13	-185.44	669.52	626.72	42.80	15.642	
6,200.00	6,126.62	6,112.14	6,110.83	21.81	21.37	108.14	-107.95	-185.71	683.97	640.89	43.08	15.878	
6,250.00	6,161.15	6,146.40	6,145.08	21.94	21.49	108.47	-108.71	-185.97	701.11	657.78	43.33	16.181	
6,300.00	6,192.40	6,177.36	6,176.03	22.09	21.60	108.41	-109.39	-186.19	721.09	677.53	43.56	16.554	
6,350.00	6,220.13	6,204.78	6,203.44	22.24	21.70	107.86	-109.99	-186.39	743.95	700.18	43.77	16.998	
6,400.00	6,244.14	6,228.45	6,227.11	22.38	21.78	106.74	-110.52	-186.57	769.66	725.71	43.94	17.515	
6,450.00	6,264.23	6,248.20	6,246.85	22.53	21.86	104.95	-110.95	-186.71	798.10	754.01	44.09	18.101	
6,500.00	6,280.25	6,263.87	6,262.52	22.68	21.91	102.40	-111.30	-186.83	829.07	784.86	44.21	18.753	
6,550.00	6,292.09	6,275.35	6,273.99	22.83	21.95	99.02	-111.55	-186.91	862.29	817.99	44.30	19.465	
6,600.00	6,299.65	6,282.55	6,281.19	22.97	21.98	94.76	-111.71	-186.96	897.45	853.09	44.36	20.232	
6,650.00	6,302.87	6,285.41	6,284.05	23.11	21.99	89.61	-111.77	-186.99	934.17	889.78	44.39	21.045	
6,661.99	6,303.00	6,285.44	6,284.08	23.14	21.99	88.25	-111.78	-186.99	943.17	898.78	44.39	21.246	
6,681.03	6,303.00	6,285.30	6,283.94	23.20	21.99	88.23	-111.77	-186.98	957.62	913.22	44.40	21.570	
6,700.00	6,303.00	6,285.16	6,283.80	23.25	21.99	88.21	-111.77	-186.98	972.22	927.82	44.40	21.896	
6,800.00	6,303.00	6,284.41	6,283.05	23.57	21.99	88.14	-111.75	-186.98	1,051.49	1,007.06	44.43	23.668	
15,700.00	6,303.00	18,374.25	8,853.00	109.32	112.98	165.49	-91.07	9,565.14	2,634.01	2,528.46	105.55	24.955	
15,800.00	6,303.00	18,474.25	8,853.00	110.42	114.06	165.49	-90.41	9,665.14	2,634.01	2,527.44	106.57	24.717	
15,900.00	6,303.00	18,574.25	8,853.00	111.52	115.14	165.49	-89.74	9,765.14	2,634.01	2,526.43	107.58	24.483	
16,000.00	6,303.00	18,674.25	8,853.00	112.62	116.23	165.49	-89.08	9,865.13	2,634.01	2,525.41	108.60	24.254	
16,100.00	6,303.00	18,774.25	8,853.00	113.72	117.31	165.49	-88.42	9,965.13	2,634.01	2,524.39	109.62	24.029	
16,200.00	6,303.00	18,874.25	8,853.00	114.82	118.39	165.49	-87.76	10,065.13	2,634.01	2,523.37	110.64	23.807	
16,300.00	6,303.00	18,974.25	8,853.00	115.92	119.47	165.49	-87.09	10,165.13	2,634.01	2,522.36	111.66	23.590	
16,400.00	6,303.00	19,074.25	8,853.00	117.02	120.56	165.49	-86.43	10,265.13	2,634.01	2,521.34	112.68	23.376	
16,500.00	6,303.00	19,174.25	8,853.00	118.12	121.64	165.49	-85.77	10,365.12	2,634.01	2,520.32	113.70	23.167	
16,600.00	6,303.00	19,274.25	8,853.00	119.22	122.73	165.49	-85.10	10,465.12	2,634.02	2,519.29	114.72	22.960	
16,700.00	6,303.00	19,374.25	8,853.00	120.32	123.81	165.49	-84.44	10,565.12	2,634.02	2,518.27	115.74	22.758	
16,800.00	6,303.00	19,474.25	8,853.00	121.43	124.90	165.49	-83.78	10,665.12	2,634.02	2,517.25	116.76	22.558	
16,900.00	6,303.00	19,574.25	8,853.00	122.53	125.99	165.49	-83.12	10,765.11	2,634.02	2,516.23	117.79	22.362	
16,900.01	6,303.00	19,574.26	8,853.00	122.53	125.99	165.49	-83.12	10,765.13	2,634.02	2,516.23	117.79	22.362	
16,921.74	6,303.00	19,583.50	8,853.00	122.77	126.08	165.49	-83.05	10,774.37	2,634.05	2,516.11	117.93	22.335	
16,922.61	6,303.00	19,583.50	8,853.00	122.78	126.08	165.49	-83.05	10,774.37	2,634.05	2,516.10	117.95	22.332	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B03) Koala 9 Fed Com 133H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
800.00	800.00	800.00	800.00	2.63	2.63	-90.18	-0.38	-119.98	119.98	114.71	5.27	22.769	
900.00	900.00	900.00	900.00	2.99	2.99	-90.18	-0.38	-119.98	119.98	113.99	5.99	20.042	
1,000.00	1,000.00	1,000.00	1,000.00	3.35	3.35	-90.18	-0.38	-119.98	119.98	113.28	6.70	17.898	
1,100.00	1,100.00	1,100.00	1,100.00	3.71	3.71	-90.18	-0.38	-119.98	119.98	112.56	7.42	16.169	
1,200.00	1,200.00	1,200.00	1,200.00	4.07	4.07	-90.18	-0.38	-119.98	119.98	111.84	8.14	14.745	
1,300.00	1,299.99	1,299.74	1,299.73	4.43	4.43	-84.57	0.92	-120.09	119.96	111.11	8.85	13.552	
1,400.00	1,399.91	1,399.49	1,399.40	4.79	4.78	-84.57	4.81	-120.42	119.91	110.35	9.57	12.536	
1,500.00	1,499.69	1,499.23	1,498.93	5.14	5.14	-84.58	11.29	-120.97	119.82	109.55	10.28	11.659	
1,600.00	1,599.27	1,598.98	1,598.25	5.50	5.50	-84.59	20.36	-121.74	119.70	108.72	10.99	10.894	
1,697.75	1,696.34	1,696.56	1,695.18	5.85	5.85	-84.66	31.60	-122.70	119.54	107.86	11.68	10.233	
1,700.00	1,698.57	1,698.81	1,697.42	5.86	5.86	-84.67	31.87	-122.72	119.53	107.84	11.70	10.218	
1,800.00	1,797.73	1,798.81	1,796.68	6.22	6.21	-85.09	43.94	-123.75	119.30	106.89	12.41	9.612	
1,900.00	1,896.88	1,898.81	1,895.94	6.57	6.57	-85.51	56.01	-124.78	119.07	105.94	13.13	9.071	
2,000.00	1,996.03	1,998.80	1,995.20	6.93	6.92	-85.93	68.08	-125.80	118.84	105.00	13.84	8.586	
2,100.00	2,095.18	2,098.80	2,094.46	7.28	7.28	-86.36	80.14	-126.83	118.62	104.06	14.56	8.148	
2,200.00	2,194.33	2,198.79	2,193.71	7.64	7.64	-86.78	92.21	-127.85	118.41	103.13	15.28	7.751	
2,300.00	2,293.49	2,298.79	2,292.97	8.00	8.00	-87.21	104.28	-128.88	118.21	102.21	16.00	7.389	
2,400.00	2,392.64	2,398.79	2,392.23	8.36	8.36	-87.63	116.35	-129.91	118.01	101.29	16.72	7.059	
2,500.00	2,491.79	2,498.78	2,491.49	8.72	8.72	-88.06	128.42	-130.93	117.82	100.38	17.44	6.756	
2,600.00	2,590.94	2,598.78	2,590.75	9.09	9.08	-88.49	140.49	-131.96	117.63	99.47	18.16	6.477	
2,700.00	2,690.10	2,698.77	2,690.01	9.45	9.44	-88.92	152.56	-132.99	117.45	98.57	18.88	6.220	
2,800.00	2,789.25	2,798.77	2,789.27	9.81	9.80	-89.36	164.63	-134.01	117.28	97.67	19.61	5.982	
2,900.00	2,888.40	2,898.76	2,888.53	10.17	10.16	-89.79	176.70	-135.04	117.11	96.78	20.33	5.761	
3,000.00	2,987.55	2,998.76	2,987.79	10.53	10.52	-90.23	188.77	-136.06	116.95	95.90	21.05	5.555	
3,100.00	3,086.70	3,098.76	3,087.05	10.89	10.89	-90.66	200.84	-137.09	116.80	95.02	21.78	5.363	
3,200.00	3,185.86	3,198.75	3,186.31	11.26	11.25	-91.10	212.91	-138.12	116.66	94.15	22.50	5.184	
3,300.00	3,285.01	3,298.75	3,285.57	11.62	11.61	-91.54	224.97	-139.14	116.52	93.29	23.23	5.016	
3,400.00	3,384.16	3,398.74	3,384.83	11.98	11.97	-91.98	237.04	-140.17	116.39	92.43	23.95	4.859	
3,500.00	3,483.31	3,498.74	3,484.09	12.35	12.33	-92.42	249.11	-141.20	116.26	91.58	24.68	4.711	
3,600.00	3,582.46	3,598.74	3,583.35	12.71	12.70	-92.86	261.18	-142.22	116.15	90.74	25.40	4.572	
3,700.00	3,681.62	3,698.73	3,682.61	13.07	13.06	-93.30	273.25	-143.25	116.03	89.90	26.13	4.441	
3,800.00	3,780.77	3,798.73	3,781.87	13.44	13.42	-93.75	285.32	-144.28	115.93	89.07	26.86	4.317	
3,900.00	3,879.92	3,898.72	3,881.13	13.80	13.78	-94.19	297.39	-145.30	115.83	88.25	27.58	4.199	
4,000.00	3,979.07	3,998.72	3,980.39	14.16	14.15	-94.63	309.46	-146.33	115.74	87.43	28.31	4.089	
4,100.00	4,078.23	4,098.72	4,079.65	14.53	14.51	-95.08	321.53	-147.35	115.66	86.62	29.04	3.983	
4,200.00	4,177.38	4,198.71	4,178.91	14.89	14.87	-95.53	333.60	-148.38	115.59	85.82	29.76	3.884	
4,300.00	4,276.53	4,298.71	4,278.17	15.25	15.23	-95.97	345.67	-149.41	115.52	85.03	30.49	3.789	
4,400.00	4,375.68	4,398.70	4,377.43	15.62	15.60	-96.42	357.74	-150.43	115.45	84.24	31.22	3.698	
4,500.00	4,474.83	4,498.70	4,476.69	15.98	15.96	-96.87	369.80	-151.46	115.40	83.46	31.94	3.613	
4,600.00	4,573.99	4,598.70	4,575.95	16.35	16.32	-97.31	381.87	-152.49	115.35	82.68	32.67	3.531	
4,700.00	4,673.14	4,698.69	4,675.20	16.71	16.69	-97.76	393.94	-153.51	115.31	81.91	33.40	3.453	
4,800.00	4,772.29	4,798.69	4,774.46	17.07	17.05	-98.21	406.01	-154.54	115.28	81.15	34.13	3.378	
4,900.00	4,871.44	4,898.68	4,873.72	17.44	17.41	-98.66	418.08	-155.57	115.25	80.40	34.85	3.307	
5,000.00	4,970.59	4,998.68	4,972.98	17.80	17.78	-99.11	430.15	-156.59	115.23	79.65	35.58	3.239	
5,100.00	5,069.75	5,098.67	5,072.24	18.17	18.14	-99.56	442.22	-157.62	115.22	78.91	36.31	3.173	
5,134.20	5,103.66	5,132.87	5,106.19	18.29	18.26	-99.71	446.35	-157.97	115.22	78.66	36.56	3.152	
5,200.00	5,168.97	5,198.67	5,171.50	18.53	18.50	-99.73	454.29	-158.64	115.12	78.08	37.04	3.108	
5,300.00	5,268.47	5,298.65	5,270.74	18.89	18.87	-99.68	466.36	-159.67	114.62	76.86	37.76	3.035	
5,400.00	5,368.19	5,398.53	5,369.89	19.25	19.23	-96.31	478.41	-160.70	113.84	75.35	38.48	2.958	
5,500.00	5,468.08	5,498.26	5,468.88	19.61	19.59	-92.61	490.45	-161.72	113.10	73.90	39.20	2.885	
5,571.51	5,539.57	5,569.44	5,539.54	19.86	19.85	-89.14	499.04	-162.45	112.88	73.18	39.71	2.843 CC	
5,600.00	5,568.05	5,597.75	5,567.65	19.96	19.95	-87.57	502.46	-162.74	112.93	73.02	39.91	2.830	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B03) Koala 9 Fed Com 133H - Permit - APD-Rev00												Offset Site Error:	0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
5,631.95	5,600.00	5,629.48	5,599.14	20.07	20.07	-91.30	506.29	-163.07	113.10	72.97	40.13	2.818 ES	
5,700.00	5,668.05	5,697.03	5,666.19	20.31	20.31	-87.19	514.44	-163.76	113.91	73.30	40.61	2.805 SF	
5,761.99	5,730.04	5,758.57	5,727.28	20.53	20.54	-83.51	521.87	-164.39	115.16	74.12	41.04	2.806	
5,800.00	5,768.02	5,796.26	5,764.69	20.66	20.67	-171.36	526.42	-164.78	117.41	76.10	41.30	2.843	
5,850.00	5,817.70	5,845.52	5,813.58	20.83	20.85	-168.92	532.36	-165.28	124.34	82.70	41.64	2.986	
5,900.00	5,866.72	5,894.07	5,861.78	20.99	21.03	-167.01	538.22	-165.78	135.63	93.65	41.98	3.231	
5,950.00	5,914.69	5,941.55	5,908.91	21.15	21.20	-165.65	543.95	-166.27	151.09	108.78	42.31	3.571	
6,000.00	5,961.26	5,987.59	5,954.61	21.31	21.37	-164.71	549.51	-166.74	170.52	127.89	42.63	4.000	
6,050.00	6,006.07	6,031.84	5,998.54	21.45	21.53	-164.07	554.85	-167.20	193.76	150.82	42.94	4.513	
6,100.00	6,048.78	6,074.02	6,040.41	21.58	21.68	-163.60	559.94	-167.63	220.63	177.40	43.23	5.104	
6,150.00	6,089.06	6,114.53	6,080.64	21.70	21.83	-163.26	564.58	-168.02	250.87	207.37	43.50	5.767	
6,200.00	6,126.62	6,152.37	6,118.28	21.81	21.97	-162.96	568.54	-168.36	284.25	240.49	43.75	6.497	
6,250.00	6,161.15	6,187.24	6,152.99	21.94	22.09	-162.59	571.85	-168.64	320.56	276.58	43.98	7.289	
6,300.00	6,192.40	6,218.86	6,184.49	22.09	22.21	-162.01	574.58	-168.87	359.59	315.41	44.18	8.139	
6,350.00	6,220.13	6,246.95	6,212.50	22.24	22.31	-161.08	576.79	-169.06	401.09	356.73	44.35	9.043	
6,400.00	6,244.14	6,271.29	6,236.77	22.38	22.40	-159.59	578.54	-169.21	444.77	400.26	44.50	9.994	
6,450.00	6,264.23	6,291.66	6,257.10	22.53	22.47	-157.18	579.89	-169.32	490.32	445.70	44.62	10.988	
6,500.00	6,280.25	6,307.90	6,273.30	22.68	22.53	-153.09	580.88	-169.41	537.42	492.70	44.71	12.019	
6,550.00	6,292.09	6,319.85	6,285.23	22.83	22.57	-145.59	581.57	-169.47	585.72	540.94	44.78	13.079	
6,600.00	6,299.65	6,327.41	6,292.79	22.97	22.60	-129.96	581.99	-169.50	634.85	590.03	44.83	14.163	
6,650.00	6,302.87	6,330.51	6,295.88	23.11	22.61	-95.65	582.15	-169.52	684.46	639.61	44.85	15.262	
6,661.99	6,303.00	6,330.59	6,295.95	23.14	22.61	-84.51	582.16	-169.52	696.38	651.53	44.85	15.527	
6,681.03	6,303.00	6,330.50	6,295.87	23.20	22.61	-84.77	582.15	-169.52	715.30	670.45	44.85	15.948	
6,700.00	6,303.00	6,330.42	6,295.78	23.25	22.61	-84.71	582.15	-169.52	734.17	689.31	44.85	16.368	
6,800.00	6,303.00	6,329.98	6,295.35	23.57	22.61	-84.40	582.12	-169.52	833.67	788.80	44.87	18.581	
6,900.00	6,303.00	6,329.55	6,294.92	23.94	22.61	-84.08	582.10	-169.51	933.27	888.39	44.88	20.796	
7,000.00	6,303.00	6,329.11	6,294.48	24.35	22.60	-83.76	582.08	-169.51	1,032.95	988.06	44.89	23.012	
15,500.00	6,303.00	17,587.87	8,523.00	107.13	110.12	-180.00	567.53	9,360.77	2,220.00	2,131.19	88.81	24.998	
15,600.00	6,303.00	17,687.87	8,523.00	108.22	111.20	-180.00	568.19	9,460.77	2,220.00	2,130.32	89.68	24.755	
15,700.00	6,303.00	17,787.87	8,523.00	109.32	112.28	-180.00	568.86	9,560.77	2,220.00	2,129.45	90.56	24.515	
15,800.00	6,303.00	17,887.87	8,523.00	110.42	113.36	-180.00	569.52	9,660.77	2,220.00	2,128.57	91.43	24.281	
15,900.00	6,303.00	17,987.87	8,523.00	111.52	114.44	-180.00	570.19	9,760.76	2,220.00	2,127.69	92.31	24.050	
16,000.00	6,303.00	18,087.87	8,523.00	112.62	115.52	-180.00	570.85	9,860.76	2,220.00	2,126.82	93.18	23.824	
16,100.00	6,303.00	18,187.87	8,523.00	113.72	116.60	-180.00	571.51	9,960.76	2,220.00	2,125.94	94.06	23.602	
16,200.00	6,303.00	18,287.87	8,523.00	114.82	117.68	-180.00	572.18	10,060.76	2,220.00	2,125.06	94.94	23.384	
16,300.00	6,303.00	18,387.87	8,523.00	115.92	118.77	-180.00	572.84	10,160.75	2,220.00	2,124.18	95.82	23.169	
16,400.00	6,303.00	18,487.87	8,523.00	117.02	119.85	-180.00	573.51	10,260.75	2,220.00	2,123.31	96.70	22.959	
16,500.00	6,303.00	18,587.87	8,523.00	118.12	120.94	-180.00	574.17	10,360.75	2,220.00	2,122.43	97.57	22.752	
16,600.00	6,303.00	18,687.87	8,523.00	119.22	122.02	-180.00	574.83	10,460.75	2,220.00	2,121.55	98.45	22.549	
16,700.00	6,303.00	18,787.87	8,523.00	120.32	123.11	-180.00	575.50	10,560.75	2,220.00	2,120.67	99.33	22.349	
16,800.00	6,303.00	18,887.87	8,523.00	121.43	124.20	-180.00	576.16	10,660.74	2,220.00	2,119.78	100.22	22.152	
16,900.00	6,303.00	18,987.87	8,523.00	122.53	125.28	-180.00	576.83	10,760.74	2,220.00	2,118.90	101.10	21.959	
16,921.74	6,303.00	19,009.61	8,523.00	122.77	125.52	180.00	576.97	10,782.48	2,220.00	2,118.71	101.29	21.917	
16,921.74	6,303.00	19,009.61	8,523.00	122.77	125.52	180.00	576.97	10,782.48	2,220.00	2,118.71	101.29	21.917	
16,922.61	6,303.00	19,009.61	8,523.00	122.78	125.52	180.00	576.97	10,782.48	2,220.00	2,118.71	101.29	21.917	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B04) Koala 9 Fed Com 134H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
600.00	600.00	600.00	600.00	1.92	1.92	-90.23	-0.36	-90.02	90.02	86.19	3.84	23.470	
700.00	700.00	700.00	700.00	2.28	2.28	-90.23	-0.36	-90.02	90.02	85.47	4.55	19.774	
800.00	800.00	800.00	800.00	2.63	2.63	-90.23	-0.36	-90.02	90.02	84.75	5.27	17.083	
900.00	900.00	900.00	900.00	2.99	2.99	-90.23	-0.36	-90.02	90.02	84.03	5.99	15.037	
1,000.00	1,000.00	1,000.00	1,000.00	3.35	3.35	-90.23	-0.36	-90.02	90.02	83.32	6.70	13.429	
1,100.00	1,100.00	1,100.00	1,100.00	3.71	3.71	-90.23	-0.36	-90.02	90.02	82.60	7.42	12.132	
1,200.00	1,200.00	1,200.00	1,200.00	4.07	4.07	-90.23	-0.36	-90.02	90.02	81.88	8.14	11.063	
1,271.15	1,271.15	1,271.02	1,271.02	4.32	4.31	-85.46	-1.02	-90.06	90.01	81.38	8.63	10.426 CC	
1,300.00	1,299.99	1,299.78	1,299.77	4.43	4.41	-86.27	-1.66	-90.10	90.02	81.19	8.83	10.189	
1,400.00	1,399.91	1,399.15	1,399.06	4.79	4.73	-91.18	-5.54	-90.34	90.47	80.95	9.52	9.508 ES	
1,500.00	1,499.69	1,497.72	1,497.42	5.14	5.06	-99.04	-11.94	-90.72	92.67	82.48	10.20	9.090	
1,600.00	1,599.27	1,595.10	1,594.40	5.50	5.39	-108.99	-20.74	-91.26	98.54	87.67	10.87	9.065 SF	
1,697.75	1,696.34	1,688.79	1,687.46	5.85	5.70	-119.34	-31.53	-91.92	109.64	98.12	11.52	9.519	
1,700.00	1,698.57	1,690.93	1,689.58	5.86	5.71	-119.58	-31.81	-91.93	109.97	98.44	11.53	9.535	
1,800.00	1,797.73	1,787.05	1,784.85	6.22	6.03	-129.14	-44.60	-92.71	126.74	114.54	12.20	10.391	
1,900.00	1,896.88	1,883.59	1,880.51	6.57	6.37	-136.43	-57.51	-93.50	146.29	133.43	12.87	11.370	
2,000.00	1,996.03	1,980.13	1,976.18	6.93	6.70	-141.98	-70.42	-94.28	167.64	154.10	13.54	12.380	
2,100.00	2,095.18	2,076.67	2,071.85	7.28	7.04	-146.27	-83.34	-95.07	190.16	175.95	14.22	13.377	
2,200.00	2,194.33	2,173.21	2,167.52	7.64	7.38	-149.65	-96.25	-95.86	213.50	198.61	14.89	14.335	
2,300.00	2,293.49	2,269.75	2,263.18	8.00	7.72	-152.37	-109.16	-96.64	237.41	221.84	15.57	15.244	
2,400.00	2,392.64	2,366.29	2,358.85	8.36	8.07	-154.59	-122.07	-97.43	261.74	245.48	16.26	16.102	
2,500.00	2,491.79	2,462.82	2,454.52	8.72	8.41	-156.43	-134.99	-98.21	286.38	269.44	16.94	16.907	
2,600.00	2,590.94	2,559.36	2,550.19	9.09	8.76	-157.98	-147.90	-99.00	311.25	293.62	17.62	17.661	
2,700.00	2,690.10	2,655.90	2,645.86	9.45	9.11	-159.30	-160.81	-99.79	336.30	317.99	18.31	18.369	
2,800.00	2,789.25	2,752.44	2,741.52	9.81	9.46	-160.44	-173.73	-100.57	361.50	342.51	19.00	19.031	
2,900.00	2,888.40	2,848.98	2,837.19	10.17	9.81	-161.44	-186.64	-101.36	386.82	367.14	19.68	19.653	
3,000.00	2,987.55	2,945.52	2,932.86	10.53	10.16	-162.31	-199.55	-102.14	412.23	391.86	20.37	20.237	
3,100.00	3,086.70	3,042.05	3,028.53	10.89	10.51	-163.07	-212.46	-102.93	437.72	416.66	21.06	20.785	
3,200.00	3,185.86	3,138.59	3,124.19	11.26	10.87	-163.76	-225.38	-103.72	463.28	441.53	21.75	21.301	
3,300.00	3,285.01	3,235.13	3,219.86	11.62	11.22	-164.37	-238.29	-104.50	488.90	466.46	22.44	21.787	
3,400.00	3,384.16	3,331.67	3,315.53	11.98	11.57	-164.92	-251.20	-105.29	514.56	491.43	23.13	22.246	
3,500.00	3,483.31	3,428.21	3,411.20	12.35	11.93	-165.42	-264.11	-106.07	540.26	516.43	23.82	22.679	
3,600.00	3,582.46	3,524.75	3,506.87	12.71	12.28	-165.88	-277.03	-106.86	565.99	541.48	24.51	23.089	
3,700.00	3,681.62	3,621.29	3,602.53	13.07	12.64	-166.29	-289.94	-107.65	591.76	566.55	25.21	23.477	
3,800.00	3,780.77	3,717.82	3,698.20	13.44	12.99	-166.67	-302.85	-108.43	617.55	591.65	25.90	23.845	
3,900.00	3,879.92	3,814.36	3,793.87	13.80	13.35	-167.02	-315.77	-109.22	643.37	616.78	26.59	24.194	
4,000.00	3,979.07	3,910.90	3,889.54	14.16	13.71	-167.35	-328.68	-110.00	669.20	641.92	27.29	24.526	
4,100.00	4,078.23	4,007.44	3,985.20	14.53	14.06	-167.64	-341.59	-110.79	695.06	667.08	27.98	24.842	
13,200.00	6,303.00	15,540.75	8,523.00	82.08	85.32	149.27	-767.61	7,069.57	2,582.73	2,478.16	104.57	24.699	
13,300.00	6,303.00	15,640.75	8,523.00	83.16	86.37	149.27	-766.95	7,169.57	2,582.73	2,476.83	105.90	24.389	
13,400.00	6,303.00	15,740.75	8,523.00	84.24	87.43	149.27	-766.29	7,269.57	2,582.73	2,475.50	107.23	24.086	
13,500.00	6,303.00	15,840.75	8,523.00	85.32	88.48	149.27	-765.62	7,369.57	2,582.73	2,474.17	108.56	23.791	
13,600.00	6,303.00	15,940.75	8,523.00	86.40	89.54	149.27	-764.96	7,469.57	2,582.73	2,472.84	109.89	23.502	
13,700.00	6,303.00	16,040.75	8,523.00	87.49	90.59	149.27	-764.30	7,569.56	2,582.73	2,471.50	111.23	23.220	
13,800.00	6,303.00	16,140.75	8,523.00	88.57	91.65	149.27	-763.63	7,669.56	2,582.73	2,470.17	112.57	22.944	
13,900.00	6,303.00	16,240.75	8,523.00	89.66	92.72	149.27	-762.97	7,769.56	2,582.73	2,468.83	113.91	22.674	
14,000.00	6,303.00	16,340.75	8,523.00	90.74	93.78	149.27	-762.31	7,869.56	2,582.73	2,467.49	115.25	22.410	
14,100.00	6,303.00	16,440.75	8,523.00	91.83	94.84	149.27	-761.64	7,969.56	2,582.74	2,466.15	116.59	22.153	
14,200.00	6,303.00	16,540.75	8,523.00	92.92	95.91	149.27	-760.98	8,069.55	2,582.74	2,464.80	117.93	21.900	
14,300.00	6,303.00	16,640.75	8,523.00	94.01	96.97	149.27	-760.32	8,169.55	2,582.74	2,463.46	119.28	21.653	
14,400.00	6,303.00	16,740.75	8,523.00	95.10	98.04	149.27	-759.66	8,269.55	2,582.74	2,462.11	120.62	21.412	
14,500.00	6,303.00	16,840.75	8,523.00	96.19	99.11	149.27	-758.99	8,369.55	2,582.74	2,460.77	121.97	21.175	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B04) Koala 9 Fed Com 134H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
14,600.00	6,303.00	16,940.75	8,523.00	97.28	100.18	149.27	-758.33	8,469.54	2,582.74	2,459.42	123.32	20.944	
14,700.00	6,303.00	17,040.75	8,523.00	98.37	101.25	149.27	-757.67	8,569.54	2,582.74	2,458.07	124.67	20.717	
14,800.00	6,303.00	17,140.75	8,523.00	99.46	102.32	149.27	-757.00	8,669.54	2,582.74	2,456.72	126.02	20.495	
14,900.00	6,303.00	17,240.75	8,523.00	100.56	103.39	149.27	-756.34	8,769.54	2,582.74	2,455.37	127.37	20.277	
15,000.00	6,303.00	17,340.75	8,523.00	101.65	104.47	149.27	-755.68	8,869.54	2,582.74	2,454.02	128.72	20.064	
15,100.00	6,303.00	17,440.75	8,523.00	102.74	105.54	149.27	-755.01	8,969.53	2,582.74	2,452.66	130.08	19.855	
15,200.00	6,303.00	17,540.75	8,523.00	103.84	106.62	149.27	-754.35	9,069.53	2,582.74	2,451.31	131.43	19.651	
15,300.00	6,303.00	17,640.75	8,523.00	104.93	107.70	149.27	-753.69	9,169.53	2,582.74	2,449.96	132.79	19.450	
15,400.00	6,303.00	17,740.75	8,523.00	106.03	108.78	149.27	-753.02	9,269.53	2,582.74	2,448.60	134.15	19.253	
15,500.00	6,303.00	17,840.75	8,523.00	107.13	109.85	149.27	-752.36	9,369.52	2,582.74	2,447.24	135.50	19.060	
15,600.00	6,303.00	17,940.75	8,523.00	108.22	110.93	149.27	-751.70	9,469.52	2,582.75	2,445.88	136.86	18.871	
15,700.00	6,303.00	18,040.75	8,523.00	109.32	112.01	149.27	-751.03	9,569.52	2,582.75	2,444.52	138.22	18.686	
15,800.00	6,303.00	18,140.75	8,523.00	110.42	113.10	149.27	-750.37	9,669.52	2,582.75	2,443.17	139.58	18.503	
15,900.00	6,303.00	18,240.75	8,523.00	111.52	114.18	149.27	-749.71	9,769.52	2,582.75	2,441.80	140.94	18.325	
16,000.00	6,303.00	18,340.75	8,523.00	112.62	115.26	149.27	-749.05	9,869.51	2,582.75	2,440.44	142.31	18.149	
16,100.00	6,303.00	18,440.75	8,523.00	113.72	116.35	149.27	-748.38	9,969.51	2,582.75	2,439.08	143.67	17.977	
16,200.00	6,303.00	18,540.75	8,523.00	114.82	117.43	149.27	-747.72	10,069.51	2,582.75	2,437.72	145.03	17.808	
16,300.00	6,303.00	18,640.75	8,523.00	115.92	118.51	149.27	-747.06	10,169.51	2,582.75	2,436.35	146.40	17.642	
16,400.00	6,303.00	18,740.75	8,523.00	117.02	119.60	149.27	-746.39	10,269.50	2,582.75	2,434.99	147.76	17.479	
16,500.00	6,303.00	18,840.75	8,523.00	118.12	120.69	149.27	-745.73	10,369.50	2,582.75	2,433.63	149.13	17.319	
16,600.00	6,303.00	18,940.75	8,523.00	119.22	121.77	149.27	-745.07	10,469.50	2,582.75	2,432.26	150.49	17.162	
16,700.00	6,303.00	19,040.75	8,523.00	120.32	122.86	149.27	-744.40	10,569.50	2,582.75	2,430.89	151.86	17.007	
16,800.00	6,303.00	19,140.75	8,523.00	121.43	123.95	149.27	-743.74	10,669.50	2,582.75	2,429.53	153.23	16.856	
16,809.21	6,303.00	19,149.96	8,523.00	121.53	124.05	149.27	-743.68	10,678.70	2,582.75	2,429.40	153.35	16.842	
16,900.00	6,303.00	19,235.87	8,523.00	122.53	124.99	149.27	-743.11	10,764.61	2,582.76	2,428.20	154.56	16.711	
16,921.74	6,303.00	19,235.87	8,523.00	122.77	124.99	149.27	-743.11	10,764.61	2,582.89	2,428.21	154.68	16.698	
16,922.61	6,303.00	19,235.87	8,523.00	122.78	124.99	149.27	-743.11	10,764.61	2,582.90	2,428.20	154.70	16.696	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B05) Koala 9 Fed Com 123H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
400.00	400.00	400.00	400.00	1.20	1.20	-90.23	-0.24	-60.02	60.02	57.62	2.40	24.990	
500.00	500.00	500.00	500.00	1.56	1.56	-90.23	-0.24	-60.02	60.02	56.90	3.12	19.245	
600.00	600.00	600.00	600.00	1.92	1.92	-90.23	-0.24	-60.02	60.02	56.18	3.84	15.648	
700.00	700.00	700.00	700.00	2.28	2.28	-90.23	-0.24	-60.02	60.02	55.47	4.55	13.184	
800.00	800.00	800.00	800.00	2.63	2.63	-90.23	-0.24	-60.02	60.02	54.75	5.27	11.390	
900.00	900.00	900.00	900.00	2.99	2.99	-90.23	-0.24	-60.02	60.02	54.03	5.99	10.026	
1,000.00	1,000.00	1,000.00	1,000.00	3.35	3.35	-90.23	-0.24	-60.02	60.02	53.32	6.70	8.954	
1,100.00	1,100.00	1,100.00	1,100.00	3.71	3.71	-90.23	-0.24	-60.02	60.02	52.60	7.42	8.089	
1,200.00	1,200.00	1,200.00	1,200.00	4.07	4.07	-90.23	-0.24	-60.02	60.02	51.88	8.14	7.376	
1,300.00	1,299.99	1,299.89	1,299.88	4.43	4.43	-84.62	1.06	-60.12	59.99	51.14	8.85	6.776	
1,400.00	1,399.91	1,399.78	1,399.69	4.79	4.79	-84.62	4.97	-60.41	59.90	50.33	9.57	6.261	
1,500.00	1,499.69	1,499.67	1,499.36	5.14	5.14	-84.61	11.48	-60.90	59.75	49.47	10.28	5.813	
1,600.00	1,599.27	1,599.56	1,598.83	5.50	5.50	-84.61	20.58	-61.58	59.54	48.55	10.99	5.417	
1,697.75	1,696.34	1,697.20	1,695.79	5.85	5.85	-84.60	31.98	-62.44	59.27	47.59	11.68	5.073	
1,700.00	1,698.57	1,699.44	1,698.02	5.86	5.86	-84.60	32.27	-62.46	59.27	47.57	11.70	5.065	
1,800.00	1,797.73	1,799.37	1,796.95	6.22	6.21	-83.48	46.34	-63.51	59.06	46.65	12.41	4.758	
1,900.00	1,896.88	1,899.36	1,895.87	6.57	6.57	-81.91	60.87	-64.60	58.93	45.80	13.12	4.490	
2,000.00	1,996.03	1,999.34	1,994.79	6.93	6.92	-80.34	75.39	-65.69	58.84	45.00	13.84	4.251	
2,100.00	2,095.18	2,099.33	2,093.71	7.28	7.28	-78.76	89.92	-66.78	58.80	44.24	14.56	4.039	
2,147.14	2,141.92	2,146.46	2,140.34	7.45	7.45	-78.02	96.76	-67.29	58.79	43.90	14.89	3.947 CC	
2,200.00	2,194.33	2,199.32	2,192.63	7.64	7.64	-77.18	104.44	-67.87	58.80	43.52	15.27	3.850	
2,300.00	2,293.49	2,299.30	2,291.55	8.00	8.00	-75.61	118.97	-68.96	58.84	42.85	15.99	3.679	
2,400.00	2,392.64	2,399.29	2,390.47	8.36	8.36	-74.03	133.49	-70.05	58.93	42.22	16.71	3.527	
2,500.00	2,491.79	2,499.28	2,489.39	8.72	8.72	-72.46	148.02	-71.14	59.07	41.64	17.43	3.389	
2,600.00	2,590.94	2,599.26	2,588.31	9.09	9.08	-70.91	162.54	-72.23	59.25	41.10	18.15	3.264	
2,700.00	2,690.10	2,699.25	2,687.23	9.45	9.45	-69.36	177.07	-73.32	59.47	40.60	18.87	3.151	
2,800.00	2,789.25	2,799.24	2,786.15	9.81	9.81	-67.82	191.59	-74.41	59.73	40.14	19.59	3.049	
2,900.00	2,888.40	2,899.22	2,885.07	10.17	10.17	-66.30	206.12	-75.50	60.04	39.73	20.31	2.956	
3,000.00	2,987.55	2,999.21	2,983.99	10.53	10.54	-64.79	220.64	-76.58	60.39	39.36	21.03	2.871	
3,100.00	3,086.70	3,099.20	3,082.91	10.89	10.90	-63.31	235.17	-77.67	60.78	39.03	21.75	2.794	
3,200.00	3,185.86	3,199.19	3,181.83	11.26	11.26	-61.84	249.70	-78.76	61.22	38.74	22.48	2.724	
3,300.00	3,285.01	3,299.17	3,280.75	11.62	11.63	-60.39	264.22	-79.85	61.69	38.49	23.20	2.659	
3,400.00	3,384.16	3,399.16	3,379.67	11.98	11.99	-58.97	278.75	-80.94	62.20	38.28	23.92	2.600	
3,500.00	3,483.31	3,499.15	3,478.59	12.35	12.36	-57.57	293.27	-82.03	62.74	38.11	24.64	2.547	
3,600.00	3,582.46	3,599.13	3,577.51	12.71	12.72	-56.20	307.80	-83.12	63.33	37.97	25.36	2.497	
3,700.00	3,681.62	3,699.12	3,676.43	13.07	13.09	-54.85	322.32	-84.21	63.95	37.87	26.08	2.452	
3,800.00	3,780.77	3,799.11	3,775.35	13.44	13.45	-53.53	336.85	-85.30	64.60	37.80	26.80	2.411	
3,900.00	3,879.92	3,899.09	3,874.27	13.80	13.82	-52.24	351.37	-86.39	65.29	37.77	27.52	2.373 ES	
4,000.00	3,979.07	3,999.08	3,973.19	14.16	14.18	-50.97	365.90	-87.48	66.01	37.77	28.24	2.338	
4,100.00	4,078.23	4,099.07	4,072.11	14.53	14.55	-49.73	380.42	-88.57	66.77	37.81	28.96	2.305	
4,200.00	4,177.38	4,199.05	4,171.03	14.89	14.91	-48.52	394.95	-89.66	67.55	37.87	29.68	2.276	
4,300.00	4,276.53	4,299.04	4,269.95	15.25	15.28	-47.34	409.47	-90.75	68.36	37.96	30.40	2.249	
4,400.00	4,375.68	4,399.03	4,368.87	15.62	15.64	-46.19	424.00	-91.83	69.20	38.08	31.12	2.224	
4,500.00	4,474.83	4,499.01	4,467.79	15.98	16.01	-45.06	438.52	-92.92	70.07	38.23	31.84	2.201	
4,600.00	4,573.99	4,599.00	4,566.71	16.35	16.38	-43.96	453.05	-94.01	70.96	38.41	32.56	2.180	
4,700.00	4,673.14	4,698.99	4,665.63	16.71	16.74	-42.89	467.58	-95.10	71.88	38.61	33.28	2.160	
4,800.00	4,772.29	4,798.98	4,764.55	17.07	17.11	-41.85	482.10	-96.19	72.83	38.83	34.00	2.142	
4,900.00	4,871.44	4,898.96	4,863.47	17.44	17.47	-40.83	496.63	-97.28	73.80	39.08	34.72	2.126	
5,000.00	4,970.59	4,998.95	4,962.39	17.80	17.84	-39.84	511.15	-98.37	74.79	39.35	35.44	2.111	
5,100.00	5,069.75	5,098.94	5,061.31	18.17	18.21	-38.88	525.68	-99.46	75.80	39.65	36.15	2.097	
5,134.20	5,103.66	5,133.13	5,095.14	18.29	18.33	-38.56	530.64	-99.83	76.15	39.75	36.40	2.092 SF	
5,200.00	5,168.97	5,198.91	5,160.22	18.53	18.57	-37.70	540.20	-100.55	77.28	40.41	36.87	2.096	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B05) Koala 9 Fed Com 123H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Rule Assigned:													
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
5,300.00	5,268.47	5,298.80	5,259.04	18.89	18.94	-35.54	554.71	-101.64	80.79	43.20	37.58	2.150	
5,400.00	5,368.19	5,398.54	5,357.71	19.25	19.30	-32.63	569.20	-102.72	86.59	48.30	38.29	2.262	
5,500.00	5,468.08	5,498.05	5,456.16	19.61	19.67	-29.32	583.66	-103.81	94.87	55.88	38.99	2.433	
5,600.00	5,568.05	5,597.27	5,554.33	19.96	20.03	-25.93	598.07	-104.89	105.76	66.07	39.69	2.665	
5,631.95	5,600.00	5,628.90	5,585.62	20.07	20.15	-30.49	602.66	-105.23	109.80	69.89	39.91	2.751	
5,700.00	5,668.05	5,696.22	5,652.22	20.31	20.39	-28.38	612.45	-105.97	118.80	78.41	40.39	2.941	
5,761.99	5,730.04	5,757.55	5,712.90	20.53	20.62	-26.72	621.35	-106.64	127.11	86.28	40.82	3.114	
5,800.00	5,768.02	5,795.33	5,750.28	20.66	20.76	-115.79	626.84	-107.05	132.79	91.70	41.09	3.231	
5,850.00	5,817.70	5,846.18	5,800.64	20.83	20.94	-116.00	633.80	-107.57	141.55	100.09	41.46	3.414	
5,900.00	5,866.72	5,896.48	5,850.56	20.99	21.13	-117.60	640.03	-108.04	151.75	109.92	41.83	3.628	
5,950.00	5,914.69	5,945.86	5,899.63	21.15	21.30	-120.16	645.51	-108.45	163.78	121.59	42.19	3.882	
6,000.00	5,961.26	5,993.92	5,947.45	21.31	21.48	-123.28	650.23	-108.80	178.15	135.61	42.54	4.188	
6,050.00	6,006.07	6,040.27	5,993.63	21.45	21.64	-126.59	654.22	-109.10	195.39	152.51	42.88	4.557	
6,100.00	6,048.78	6,084.54	6,037.78	21.58	21.80	-129.76	657.50	-109.35	215.90	172.69	43.21	4.997	
6,150.00	6,089.06	6,126.39	6,079.54	21.70	21.95	-132.57	660.14	-109.54	239.93	196.42	43.51	5.514	
6,200.00	6,126.62	6,165.47	6,118.57	21.81	22.09	-134.86	662.19	-109.70	267.56	223.77	43.79	6.110	
6,250.00	6,161.15	6,201.47	6,154.53	21.94	22.22	-136.51	663.73	-109.81	298.74	254.69	44.05	6.782	
6,300.00	6,192.40	6,234.10	6,187.15	22.09	22.34	-137.41	664.83	-109.90	333.26	288.99	44.27	7.527	
6,350.00	6,220.13	6,263.11	6,216.15	22.24	22.44	-137.45	665.57	-109.95	370.87	326.40	44.47	8.340	
6,400.00	6,244.14	6,288.26	6,241.29	22.38	22.53	-136.43	666.04	-109.99	411.22	366.59	44.63	9.213	
6,450.00	6,264.23	6,309.33	6,262.36	22.53	22.60	-134.04	666.31	-110.01	453.96	409.19	44.77	10.140	
6,500.00	6,280.25	6,326.17	6,279.20	22.68	22.66	-129.74	666.43	-110.02	498.68	453.81	44.88	11.112	
6,550.00	6,292.09	6,338.63	6,291.66	22.83	22.70	-122.63	666.48	-110.02	544.99	500.03	44.95	12.123	
6,600.00	6,299.65	6,346.60	6,299.63	22.97	22.73	-111.36	666.49	-110.02	592.46	547.45	45.01	13.164	
6,650.00	6,302.87	6,349.84	6,302.87	23.11	22.74	-94.71	666.49	-110.02	640.68	595.65	45.04	14.226	
6,661.99	6,303.00	6,349.97	6,303.00	23.14	22.74	-90.00	666.49	-110.02	652.31	607.27	45.04	14.483	
6,681.03	6,303.00	6,349.97	6,303.00	23.20	22.74	-90.00	666.49	-110.02	670.78	625.74	45.04	14.891	
6,700.00	6,303.00	6,349.97	6,303.00	23.25	22.74	-90.00	666.49	-110.02	689.21	644.16	45.05	15.299	
6,800.00	6,303.00	6,349.97	6,303.00	23.57	22.74	-90.00	666.49	-110.02	786.76	741.69	45.07	17.456	
10,000.00	6,303.00	10,841.37	7,328.00	48.56	50.76	-180.00	531.06	3,860.89	1,025.00	983.85	41.16	24.905	
10,100.00	6,303.00	10,941.37	7,328.00	49.55	51.72	-180.00	531.72	3,960.89	1,025.00	983.07	41.94	24.441	
10,200.00	6,303.00	11,041.37	7,328.00	50.55	52.69	-180.00	532.38	4,060.89	1,025.00	982.28	42.72	23.991	
10,300.00	6,303.00	11,141.37	7,328.00	51.56	53.66	-180.00	533.05	4,160.89	1,025.00	981.49	43.51	23.555	
10,400.00	6,303.00	11,241.37	7,328.00	52.57	54.64	-180.00	533.71	4,260.88	1,025.00	980.69	44.31	23.133	
10,500.00	6,303.00	11,341.37	7,328.00	53.59	55.63	-180.00	534.37	4,360.88	1,025.00	979.89	45.11	22.723	
10,600.00	6,303.00	11,441.37	7,328.00	54.61	56.62	-180.00	535.04	4,460.88	1,025.00	979.09	45.91	22.325	
10,700.00	6,303.00	11,541.37	7,328.00	55.63	57.62	-180.00	535.70	4,560.88	1,025.00	978.28	46.72	21.939	
10,800.00	6,303.00	11,641.37	7,328.00	56.66	58.62	-180.00	536.36	4,660.88	1,025.00	977.47	47.53	21.565	
10,900.00	6,303.00	11,741.37	7,328.00	57.69	59.62	-180.00	537.03	4,760.87	1,025.00	976.66	48.35	21.202	
11,000.00	6,303.00	11,841.37	7,328.00	58.73	60.63	-180.00	537.69	4,860.87	1,025.00	975.84	49.16	20.849	
11,100.00	6,303.00	11,941.37	7,328.00	59.77	61.64	-180.00	538.35	4,960.87	1,025.00	975.02	49.98	20.507	
11,200.00	6,303.00	12,041.37	7,328.00	60.81	62.66	-180.00	539.02	5,060.87	1,025.00	974.20	50.81	20.174	
11,300.00	6,303.00	12,141.37	7,328.00	61.85	63.68	-180.00	539.68	5,160.86	1,025.00	973.37	51.63	19.851	
11,400.00	6,303.00	12,241.37	7,328.00	62.90	64.70	-180.00	540.34	5,260.86	1,025.00	972.54	52.46	19.537	
11,500.00	6,303.00	12,341.37	7,328.00	63.95	65.73	-180.00	541.01	5,360.86	1,025.00	971.71	53.30	19.232	
11,600.00	6,303.00	12,441.37	7,328.00	65.00	66.75	-180.00	541.67	5,460.86	1,025.00	970.87	54.13	18.936	
11,700.00	6,303.00	12,541.37	7,328.00	66.05	67.79	-180.00	542.33	5,560.86	1,025.00	970.04	54.97	18.648	
11,800.00	6,303.00	12,641.37	7,328.00	67.11	68.82	-180.00	543.00	5,660.85	1,025.00	969.20	55.81	18.367	
11,900.00	6,303.00	12,741.37	7,328.00	68.17	69.86	-180.00	543.66	5,760.85	1,025.00	968.36	56.65	18.094	
12,000.00	6,303.00	12,841.37	7,328.00	69.23	70.90	-180.00	544.32	5,860.85	1,025.00	967.51	57.49	17.829	
12,100.00	6,303.00	12,941.37	7,328.00	70.29	71.94	-180.00	544.99	5,960.85	1,025.00	966.67	58.34	17.571	
12,200.00	6,303.00	13,041.37	7,328.00	71.35	72.99	-180.00	545.65	6,060.85	1,025.00	965.82	59.18	17.319	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B05) Koala 9 Fed Com 123H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance		Rule Assigned:		Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
12,300.00	6,303.00	13,141.37	7,328.00	72.42	74.03	-180.00	546.31	6,160.84	1,025.00	964.97	60.03	17.074	
12,400.00	6,303.00	13,241.37	7,328.00	73.49	75.08	-180.00	546.98	6,260.84	1,025.00	964.12	60.88	16.836	
12,500.00	6,303.00	13,341.37	7,328.00	74.55	76.14	-180.00	547.64	6,360.84	1,025.00	963.27	61.73	16.603	
12,600.00	6,303.00	13,441.37	7,328.00	75.62	77.19	-180.00	548.30	6,460.84	1,025.00	962.41	62.59	16.377	
12,700.00	6,303.00	13,541.37	7,328.00	76.70	78.24	-180.00	548.97	6,560.83	1,025.00	961.56	63.44	16.156	
12,800.00	6,303.00	13,641.37	7,328.00	77.77	79.30	-180.00	549.63	6,660.83	1,025.00	960.70	64.30	15.941	
12,900.00	6,303.00	13,741.37	7,328.00	78.84	80.36	-180.00	550.29	6,760.83	1,025.00	959.84	65.16	15.731	
13,000.00	6,303.00	13,841.37	7,328.00	79.92	81.42	-180.00	550.96	6,860.83	1,025.00	958.98	66.02	15.526	
13,100.00	6,303.00	13,941.37	7,328.00	81.00	82.48	-180.00	551.62	6,960.83	1,025.00	958.12	66.88	15.326	
13,200.00	6,303.00	14,041.37	7,328.00	82.08	83.55	-180.00	552.28	7,060.82	1,025.00	957.26	67.74	15.131	
13,300.00	6,303.00	14,141.37	7,328.00	83.16	84.61	-180.00	552.95	7,160.82	1,025.00	956.40	68.60	14.941	
13,400.00	6,303.00	14,241.37	7,328.00	84.24	85.68	-180.00	553.61	7,260.82	1,025.00	955.53	69.47	14.755	
13,500.00	6,303.00	14,341.37	7,328.00	85.32	86.75	-180.00	554.27	7,360.82	1,025.00	954.67	70.33	14.573	
13,600.00	6,303.00	14,441.37	7,328.00	86.40	87.82	-180.00	554.94	7,460.81	1,025.00	953.80	71.20	14.396	
13,700.00	6,303.00	14,541.37	7,328.00	87.49	88.89	-180.00	555.60	7,560.81	1,025.00	952.93	72.07	14.223	
13,800.00	6,303.00	14,641.37	7,328.00	88.57	89.96	-180.00	556.26	7,660.81	1,025.00	952.06	72.94	14.053	
13,900.00	6,303.00	14,741.37	7,328.00	89.66	91.03	-180.00	556.93	7,760.81	1,025.00	951.19	73.81	13.888	
14,000.00	6,303.00	14,841.37	7,328.00	90.74	92.11	-180.00	557.59	7,860.81	1,025.00	950.32	74.68	13.726	
14,100.00	6,303.00	14,941.37	7,328.00	91.83	93.18	-180.00	558.25	7,960.80	1,025.00	949.45	75.55	13.567	
14,200.00	6,303.00	15,041.37	7,328.00	92.92	94.26	-180.00	558.92	8,060.80	1,025.00	948.58	76.42	13.412	
14,300.00	6,303.00	15,141.37	7,328.00	94.01	95.34	-180.00	559.58	8,160.80	1,025.00	947.71	77.29	13.261	
14,400.00	6,303.00	15,241.37	7,328.00	95.10	96.42	-180.00	560.24	8,260.80	1,025.00	946.83	78.17	13.113	
14,500.00	6,303.00	15,341.37	7,328.00	96.19	97.50	-180.00	560.91	8,360.79	1,025.00	945.96	79.04	12.968	
14,600.00	6,303.00	15,441.37	7,328.00	97.28	98.58	-180.00	561.57	8,460.79	1,025.00	945.08	79.92	12.825	
14,700.00	6,303.00	15,541.37	7,328.00	98.37	99.66	-180.00	562.23	8,560.79	1,025.00	944.21	80.80	12.686	
14,800.00	6,303.00	15,641.37	7,328.00	99.46	100.74	-180.00	562.90	8,660.79	1,025.00	943.33	81.67	12.550	
14,900.00	6,303.00	15,741.37	7,328.00	100.56	101.83	-180.00	563.56	8,760.79	1,025.00	942.45	82.55	12.417	
15,000.00	6,303.00	15,841.37	7,328.00	101.65	102.91	-180.00	564.22	8,860.78	1,025.00	941.57	83.43	12.286	
15,100.00	6,303.00	15,941.37	7,328.00	102.74	103.99	-180.00	564.89	8,960.78	1,025.00	940.69	84.31	12.158	
15,200.00	6,303.00	16,041.37	7,328.00	103.84	105.08	-180.00	565.55	9,060.78	1,025.00	939.81	85.19	12.032	
15,300.00	6,303.00	16,141.37	7,328.00	104.93	106.17	-180.00	566.21	9,160.78	1,025.00	938.93	86.07	11.909	
15,400.00	6,303.00	16,241.37	7,328.00	106.03	107.25	-180.00	566.88	9,260.77	1,025.00	938.05	86.95	11.789	
15,500.00	6,303.00	16,341.37	7,328.00	107.13	108.34	-180.00	567.54	9,360.77	1,025.00	937.17	87.83	11.670	
15,600.00	6,303.00	16,441.37	7,328.00	108.22	109.43	-180.00	568.20	9,460.77	1,025.00	936.29	88.71	11.554	
15,700.00	6,303.00	16,541.37	7,328.00	109.32	110.52	-180.00	568.87	9,560.77	1,025.00	935.41	89.59	11.441	
15,800.00	6,303.00	16,641.37	7,328.00	110.42	111.61	-180.00	569.53	9,660.77	1,025.00	934.52	90.48	11.329	
15,900.00	6,303.00	16,741.37	7,328.00	111.52	112.70	-180.00	570.19	9,760.76	1,025.00	933.64	91.36	11.219	
16,000.00	6,303.00	16,841.37	7,328.00	112.62	113.79	-180.00	570.86	9,860.76	1,025.00	932.76	92.24	11.112	
16,100.00	6,303.00	16,941.37	7,328.00	113.72	114.88	-180.00	571.52	9,960.76	1,025.00	931.87	93.13	11.006	
16,200.00	6,303.00	17,041.37	7,328.00	114.82	115.98	-180.00	572.18	10,060.76	1,025.00	930.99	94.01	10.903	
16,300.00	6,303.00	17,141.37	7,328.00	115.92	117.07	-180.00	572.85	10,160.76	1,025.00	930.10	94.90	10.801	
16,400.00	6,303.00	17,241.37	7,328.00	117.02	118.16	-180.00	573.51	10,260.75	1,025.00	929.22	95.78	10.701	
16,500.00	6,303.00	17,341.37	7,328.00	118.12	119.26	-180.00	574.17	10,360.75	1,025.00	928.33	96.67	10.603	
16,600.00	6,303.00	17,441.37	7,328.00	119.22	120.35	-180.00	574.84	10,460.75	1,025.00	927.44	97.56	10.507	
16,700.00	6,303.00	17,541.37	7,328.00	120.32	121.45	-180.00	575.50	10,560.75	1,025.00	926.56	98.44	10.412	
16,800.00	6,303.00	17,641.37	7,328.00	121.43	122.54	-180.00	576.16	10,660.74	1,025.00	925.67	99.33	10.319	
16,900.00	6,303.00	17,741.37	7,328.00	122.53	123.64	-180.00	576.83	10,760.74	1,025.00	924.78	100.22	10.227	
16,921.74	6,303.00	17,763.11	7,328.00	122.77	123.87	180.00	576.97	10,782.48	1,025.00	924.59	100.41	10.208	
16,921.74	6,303.00	17,763.11	7,328.00	122.77	123.87	180.00	576.97	10,782.48	1,025.00	924.59	100.41	10.208	
16,922.61	6,303.00	17,763.11	7,328.00	122.78	123.87	180.00	576.97	10,782.48	1,025.00	924.58	100.42	10.208	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B06) Koala 9 Fed Com 124H - Permit - APD-Rev00												Offset Site Error:	0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)												Offset Well Error:	0.00 usft
Reference	Offset	Semi Major Axis		Distance		Rule Assigned:		Warning					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
300.00	300.00	300.00	300.00	0.84	0.84	-90.23	-0.12	-30.01	30.01	28.33	1.68	17.812	
400.00	400.00	400.00	400.00	1.20	1.20	-90.23	-0.12	-30.01	30.01	27.61	2.40	12.495	
500.00	500.00	500.00	500.00	1.56	1.56	-90.23	-0.12	-30.01	30.01	26.89	3.12	9.623	
600.00	600.00	600.00	600.00	1.92	1.92	-90.23	-0.12	-30.01	30.01	26.17	3.84	7.824	
700.00	700.00	700.00	700.00	2.28	2.28	-90.23	-0.12	-30.01	30.01	25.46	4.55	6.592	
800.00	800.00	800.00	800.00	2.63	2.63	-90.23	-0.12	-30.01	30.01	24.74	5.27	5.695	
900.00	900.00	900.00	900.00	2.99	2.99	-90.23	-0.12	-30.01	30.01	24.02	5.99	5.013	
1,000.00	1,000.00	1,000.00	1,000.00	3.35	3.35	-90.23	-0.12	-30.01	30.01	23.31	6.70	4.477	
1,100.00	1,100.00	1,100.00	1,100.00	3.71	3.71	-90.23	-0.12	-30.01	30.01	22.59	7.42	4.044	
1,200.00	1,200.00	1,200.00	1,200.00	4.07	4.07	-90.23	-0.12	-30.01	30.01	21.87	8.14	3.688	
1,240.55	1,240.55	1,240.52	1,240.52	4.21	4.21	-85.44	-0.33	-30.02	30.01	21.59	8.42	3.564	CC
1,300.00	1,299.99	1,299.88	1,299.87	4.43	4.41	-89.58	-1.42	-30.09	30.09	21.25	8.84	3.405	ES
1,400.00	1,399.91	1,399.35	1,399.26	4.79	4.73	-103.75	-5.31	-30.33	31.63	22.11	9.52	3.324	SF
1,500.00	1,499.69	1,498.02	1,497.72	5.14	5.06	-122.51	-11.72	-30.72	37.78	27.59	10.19	3.707	
1,600.00	1,599.27	1,595.50	1,594.79	5.50	5.39	-138.64	-20.54	-31.27	50.84	39.98	10.86	4.683	
1,697.75	1,696.34	1,689.28	1,687.94	5.85	5.70	-149.38	-31.35	-31.93	70.29	58.80	11.49	6.117	
1,700.00	1,698.57	1,691.42	1,690.06	5.86	5.71	-149.58	-31.63	-31.95	70.81	59.30	11.51	6.153	
1,800.00	1,797.73	1,785.82	1,783.52	6.22	6.03	-156.37	-44.87	-32.76	95.71	83.57	12.14	7.884	
1,900.00	1,896.88	1,879.84	1,876.28	6.57	6.35	-160.55	-60.22	-33.71	123.59	110.81	12.77	9.675	
2,000.00	1,996.03	1,975.40	1,970.46	6.93	6.69	-163.27	-76.34	-34.70	152.40	138.95	13.44	11.338	
2,100.00	2,095.18	2,070.95	2,064.64	7.28	7.02	-165.12	-92.47	-35.69	181.42	167.31	14.11	12.857	
2,200.00	2,194.33	2,166.51	2,158.82	7.64	7.36	-166.47	-108.59	-36.68	210.57	195.78	14.78	14.244	
2,300.00	2,293.49	2,262.07	2,253.01	8.00	7.71	-167.49	-124.71	-37.67	239.80	224.34	15.46	15.514	
2,400.00	2,392.64	2,357.62	2,347.19	8.36	8.05	-168.28	-140.83	-38.66	269.08	252.95	16.13	16.679	
2,500.00	2,491.79	2,453.18	2,441.37	8.72	8.40	-168.92	-156.96	-39.65	298.40	281.59	16.81	17.751	
2,600.00	2,590.94	2,548.74	2,535.55	9.09	8.74	-169.45	-173.08	-40.65	327.75	310.26	17.49	18.740	
2,700.00	2,690.10	2,644.29	2,629.73	9.45	9.09	-169.89	-189.20	-41.64	357.12	338.95	18.17	19.656	
2,800.00	2,789.25	2,739.85	2,723.91	9.81	9.44	-170.26	-205.32	-42.63	386.51	367.66	18.85	20.505	
2,900.00	2,888.40	2,835.41	2,818.09	10.17	9.80	-170.58	-221.45	-43.62	415.91	396.38	19.53	21.294	
3,000.00	2,987.55	2,930.96	2,912.28	10.53	10.15	-170.86	-237.57	-44.61	445.32	425.11	20.21	22.030	
3,100.00	3,086.70	3,026.52	3,006.46	10.89	10.50	-171.10	-253.69	-45.60	474.74	453.84	20.90	22.717	
3,200.00	3,185.86	3,122.08	3,100.64	11.26	10.86	-171.32	-269.81	-46.60	504.16	482.58	21.58	23.361	
3,300.00	3,285.01	3,217.63	3,194.82	11.62	11.21	-171.51	-285.93	-47.59	533.59	511.33	22.27	23.964	
3,400.00	3,384.16	3,313.19	3,289.00	11.98	11.57	-171.68	-302.06	-48.58	563.03	540.08	22.95	24.531	
9,100.00	6,303.00	10,198.03	7,328.00	39.88	42.03	127.83	-794.78	2,969.66	1,671.08	1,603.37	67.71	24.681	
9,200.00	6,303.00	10,298.03	7,328.00	40.81	42.92	127.83	-794.11	3,069.66	1,671.08	1,601.85	69.23	24.137	
9,300.00	6,303.00	10,398.03	7,328.00	41.75	43.82	127.83	-793.45	3,169.66	1,671.08	1,600.31	70.77	23.612	
9,400.00	6,303.00	10,498.03	7,328.00	42.70	44.74	127.83	-792.79	3,269.65	1,671.08	1,598.75	72.33	23.104	
9,500.00	6,303.00	10,598.03	7,328.00	43.66	45.66	127.83	-792.13	3,369.65	1,671.08	1,597.18	73.90	22.613	
9,600.00	6,303.00	10,698.03	7,328.00	44.63	46.59	127.83	-791.46	3,469.65	1,671.09	1,595.60	75.48	22.138	
9,700.00	6,303.00	10,798.03	7,328.00	45.60	47.53	127.83	-790.80	3,569.65	1,671.09	1,594.01	77.08	21.680	
9,800.00	6,303.00	10,898.03	7,328.00	46.58	48.47	127.83	-790.14	3,669.65	1,671.09	1,592.40	78.69	21.236	
9,900.00	6,303.00	10,998.03	7,328.00	47.56	49.43	127.83	-789.48	3,769.64	1,671.09	1,590.78	80.31	20.808	
10,000.00	6,303.00	11,098.03	7,328.00	48.56	50.39	127.83	-788.81	3,869.64	1,671.09	1,589.15	81.94	20.393	
10,100.00	6,303.00	11,198.03	7,328.00	49.55	51.35	127.83	-788.15	3,969.64	1,671.09	1,587.51	83.58	19.993	
10,200.00	6,303.00	11,298.03	7,328.00	50.55	52.33	127.83	-787.49	4,069.64	1,671.09	1,585.86	85.23	19.606	
10,300.00	6,303.00	11,398.03	7,328.00	51.56	53.31	127.83	-786.82	4,169.63	1,671.09	1,584.20	86.89	19.232	
10,400.00	6,303.00	11,498.03	7,328.00	52.57	54.29	127.83	-786.16	4,269.63	1,671.10	1,582.53	88.56	18.869	
10,500.00	6,303.00	11,598.03	7,328.00	53.59	55.28	127.83	-785.50	4,369.63	1,671.10	1,580.86	90.24	18.519	
10,600.00	6,303.00	11,698.03	7,328.00	54.61	56.28	127.83	-784.84	4,469.63	1,671.10	1,579.18	91.92	18.180	
10,700.00	6,303.00	11,798.03	7,328.00	55.63	57.28	127.83	-784.17	4,569.63	1,671.10	1,577.49	93.61	17.852	
10,800.00	6,303.00	11,898.03	7,328.00	56.66	58.28	127.83	-783.51	4,669.62	1,671.10	1,575.79	95.31	17.534	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B06) Koala 9 Fed Com 124H - Permit - APD-Rev00												Offset Site Error:	0.00 usft
Survey Program:		0-MWD+IFR1+SAG+FDIR (SQC2)						Rule Assigned:				Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Separation Factor	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			Minimum Separation (usft)
10,900.00	6,303.00	11,998.03	7,328.00	57.69	59.29	127.83	-782.85	4,769.62	1,671.10	1,574.09	97.01	17.226	
11,000.00	6,303.00	12,098.03	7,328.00	58.73	60.30	127.83	-782.18	4,869.62	1,671.10	1,572.38	98.72	16.928	
11,100.00	6,303.00	12,198.03	7,328.00	59.77	61.32	127.83	-781.52	4,969.62	1,671.11	1,570.67	100.44	16.638	
11,200.00	6,303.00	12,298.03	7,328.00	60.81	62.34	127.83	-780.86	5,069.62	1,671.11	1,568.95	102.16	16.358	
11,300.00	6,303.00	12,398.03	7,328.00	61.85	63.36	127.83	-780.20	5,169.61	1,671.11	1,567.23	103.88	16.087	
11,400.00	6,303.00	12,498.03	7,328.00	62.90	64.39	127.83	-779.53	5,269.61	1,671.11	1,565.50	105.61	15.823	
11,500.00	6,303.00	12,598.03	7,328.00	63.95	65.42	127.83	-778.87	5,369.61	1,671.11	1,563.76	107.35	15.567	
11,600.00	6,303.00	12,698.03	7,328.00	65.00	66.45	127.83	-778.21	5,469.61	1,671.11	1,562.02	109.09	15.319	
11,700.00	6,303.00	12,798.03	7,328.00	66.05	67.49	127.83	-777.54	5,569.60	1,671.11	1,560.28	110.83	15.078	
11,800.00	6,303.00	12,898.03	7,328.00	67.11	68.52	127.83	-776.88	5,669.60	1,671.11	1,558.53	112.58	14.844	
11,900.00	6,303.00	12,998.03	7,328.00	68.17	69.57	127.83	-776.22	5,769.60	1,671.12	1,556.78	114.33	14.616	
12,000.00	6,303.00	13,098.03	7,328.00	69.23	70.61	127.83	-775.56	5,869.60	1,671.12	1,555.03	116.09	14.395	
12,100.00	6,303.00	13,198.03	7,328.00	70.29	71.65	127.83	-774.89	5,969.60	1,671.12	1,553.27	117.85	14.180	
12,200.00	6,303.00	13,298.03	7,328.00	71.35	72.70	127.83	-774.23	6,069.59	1,671.12	1,551.51	119.61	13.971	
12,300.00	6,303.00	13,398.03	7,328.00	72.42	73.75	127.83	-773.57	6,169.59	1,671.12	1,549.75	121.38	13.768	
12,400.00	6,303.00	13,498.03	7,328.00	73.49	74.81	127.83	-772.90	6,269.59	1,671.12	1,547.98	123.14	13.570	
12,500.00	6,303.00	13,598.03	7,328.00	74.55	75.86	127.83	-772.24	6,369.59	1,671.12	1,546.21	124.92	13.378	
12,600.00	6,303.00	13,698.03	7,328.00	75.62	76.92	127.83	-771.58	6,469.58	1,671.12	1,544.43	126.69	13.191	
12,700.00	6,303.00	13,798.03	7,328.00	76.70	77.97	127.83	-770.92	6,569.58	1,671.13	1,542.66	128.47	13.008	
12,800.00	6,303.00	13,898.03	7,328.00	77.77	79.03	127.83	-770.25	6,669.58	1,671.13	1,540.88	130.25	12.830	
12,900.00	6,303.00	13,998.03	7,328.00	78.84	80.10	127.83	-769.59	6,769.58	1,671.13	1,539.10	132.03	12.657	
13,000.00	6,303.00	14,098.03	7,328.00	79.92	81.16	127.83	-768.93	6,869.58	1,671.13	1,537.32	133.81	12.488	
13,100.00	6,303.00	14,198.03	7,328.00	81.00	82.22	127.83	-768.26	6,969.57	1,671.13	1,535.53	135.60	12.324	
13,200.00	6,303.00	14,298.03	7,328.00	82.08	83.29	127.83	-767.60	7,069.57	1,671.13	1,533.74	137.39	12.163	
13,300.00	6,303.00	14,398.03	7,328.00	83.16	84.36	127.83	-766.94	7,169.57	1,671.13	1,531.95	139.18	12.007	
13,400.00	6,303.00	14,498.03	7,328.00	84.24	85.43	127.83	-766.28	7,269.57	1,671.14	1,530.16	140.98	11.854	
13,500.00	6,303.00	14,598.03	7,328.00	85.32	86.50	127.83	-765.61	7,369.56	1,671.14	1,528.37	142.77	11.705	
13,600.00	6,303.00	14,698.03	7,328.00	86.40	87.57	127.83	-764.95	7,469.56	1,671.14	1,526.57	144.57	11.559	
13,700.00	6,303.00	14,798.03	7,328.00	87.49	88.64	127.83	-764.29	7,569.56	1,671.14	1,524.77	146.37	11.417	
13,800.00	6,303.00	14,898.03	7,328.00	88.57	89.71	127.83	-763.63	7,669.56	1,671.14	1,522.97	148.17	11.279	
13,900.00	6,303.00	14,998.03	7,328.00	89.66	90.79	127.83	-762.96	7,769.56	1,671.14	1,521.17	149.97	11.143	
14,000.00	6,303.00	15,098.03	7,328.00	90.74	91.87	127.83	-762.30	7,869.55	1,671.14	1,519.37	151.77	11.011	
14,100.00	6,303.00	15,198.03	7,328.00	91.83	92.94	127.83	-761.64	7,969.55	1,671.14	1,517.56	153.58	10.881	
14,200.00	6,303.00	15,298.03	7,328.00	92.92	94.02	127.83	-760.97	8,069.55	1,671.15	1,515.76	155.39	10.755	
14,300.00	6,303.00	15,398.03	7,328.00	94.01	95.10	127.83	-760.31	8,169.55	1,671.15	1,513.95	157.20	10.631	
14,400.00	6,303.00	15,498.03	7,328.00	95.10	96.18	127.83	-759.65	8,269.54	1,671.15	1,512.14	159.01	10.510	
14,500.00	6,303.00	15,598.03	7,328.00	96.19	97.26	127.83	-758.99	8,369.54	1,671.15	1,510.33	160.82	10.392	
14,600.00	6,303.00	15,698.03	7,328.00	97.28	98.35	127.83	-758.32	8,469.54	1,671.15	1,508.52	162.63	10.276	
14,700.00	6,303.00	15,798.03	7,328.00	98.37	99.43	127.83	-757.66	8,569.54	1,671.15	1,506.71	164.45	10.162	
14,800.00	6,303.00	15,898.03	7,328.00	99.46	100.51	127.83	-757.00	8,669.54	1,671.15	1,504.89	166.26	10.051	
14,900.00	6,303.00	15,998.03	7,328.00	100.56	101.60	127.83	-756.33	8,769.53	1,671.15	1,503.08	168.08	9.943	
15,000.00	6,303.00	16,098.03	7,328.00	101.65	102.68	127.83	-755.67	8,869.53	1,671.16	1,501.26	169.89	9.836	
15,100.00	6,303.00	16,198.03	7,328.00	102.74	103.77	127.83	-755.01	8,969.53	1,671.16	1,499.44	171.71	9.732	
15,200.00	6,303.00	16,298.03	7,328.00	103.84	104.86	127.83	-754.35	9,069.53	1,671.16	1,497.63	173.53	9.630	
15,300.00	6,303.00	16,398.03	7,328.00	104.93	105.95	127.83	-753.68	9,169.53	1,671.16	1,495.81	175.35	9.530	
15,400.00	6,303.00	16,498.03	7,328.00	106.03	107.03	127.83	-753.02	9,269.52	1,671.16	1,493.98	177.18	9.432	
15,500.00	6,303.00	16,598.03	7,328.00	107.13	108.12	127.83	-752.36	9,369.52	1,671.16	1,492.16	179.00	9.336	
15,600.00	6,303.00	16,698.03	7,328.00	108.22	109.21	127.83	-751.69	9,469.52	1,671.16	1,490.34	180.82	9.242	
15,700.00	6,303.00	16,798.03	7,328.00	109.32	110.30	127.83	-751.03	9,569.52	1,671.17	1,488.52	182.65	9.150	
15,800.00	6,303.00	16,898.03	7,328.00	110.42	111.40	127.83	-750.37	9,669.51	1,671.17	1,486.69	184.47	9.059	
15,900.00	6,303.00	16,998.03	7,328.00	111.52	112.49	127.83	-749.71	9,769.51	1,671.17	1,484.87	186.30	8.970	
16,000.00	6,303.00	17,098.03	7,328.00	112.62	113.58	127.83	-749.04	9,869.51	1,671.17	1,483.04	188.13	8.883	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B06) Koala 9 Fed Com 124H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Offset Wellbore Centre		Distance		Rule Assigned:		Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
16,100.00	6,303.00	17,198.03	7,328.00	113.72	114.67	127.83	-748.38	9,969.51	1,671.17	1,481.21	189.96	8.798	
16,200.00	6,303.00	17,298.03	7,328.00	114.82	115.77	127.83	-747.72	10,069.51	1,671.17	1,479.39	191.79	8.714	
16,300.00	6,303.00	17,398.03	7,328.00	115.92	116.86	127.83	-747.05	10,169.50	1,671.17	1,477.56	193.62	8.631	
16,400.00	6,303.00	17,498.03	7,328.00	117.02	117.95	127.83	-746.39	10,269.50	1,671.17	1,475.73	195.45	8.551	
16,500.00	6,303.00	17,598.03	7,328.00	118.12	119.05	127.83	-745.73	10,369.50	1,671.18	1,473.90	197.28	8.471	
16,600.00	6,303.00	17,698.03	7,328.00	119.22	120.15	127.83	-745.07	10,469.50	1,671.18	1,472.07	199.11	8.393	
16,700.00	6,303.00	17,798.03	7,328.00	120.32	121.24	127.83	-744.40	10,569.49	1,671.18	1,470.24	200.94	8.317	
16,800.00	6,303.00	17,898.03	7,328.00	121.43	122.34	127.83	-743.74	10,669.49	1,671.18	1,468.40	202.78	8.241	
16,809.16	6,303.00	17,907.20	7,328.00	121.53	122.44	127.83	-743.68	10,678.66	1,671.18	1,468.24	202.94	8.235	
16,900.00	6,303.00	17,993.15	7,328.00	122.53	123.38	127.83	-743.11	10,764.61	1,671.19	1,466.62	204.56	8.169	
16,921.74	6,303.00	17,993.15	7,328.00	122.77	123.38	127.83	-743.11	10,764.61	1,671.39	1,466.65	204.74	8.164	
16,922.61	6,303.00	17,993.15	7,328.00	122.78	123.38	127.83	-743.11	10,764.61	1,671.41	1,466.65	204.76	8.163	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B08) Koala 9 Fed Com 114H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
300.00	300.00	300.00	300.00	0.84	0.84	89.77	0.12	30.00	30.00	28.32	1.68	17.806	
400.00	400.00	400.00	400.00	1.20	1.20	89.77	0.12	30.00	30.00	27.60	2.40	12.491	
500.00	500.00	500.00	500.00	1.56	1.56	89.77	0.12	30.00	30.00	26.88	3.12	9.619	
600.00	600.00	600.00	600.00	1.92	1.92	89.77	0.12	30.00	30.00	26.16	3.84	7.821	
700.00	700.00	700.00	700.00	2.28	2.28	89.77	0.12	30.00	30.00	25.45	4.55	6.590	
800.00	800.00	800.00	800.00	2.63	2.63	89.77	0.12	30.00	30.00	24.73	5.27	5.693	
900.00	900.00	900.02	900.01	2.99	2.98	92.27	-1.19	29.94	29.96	23.99	5.97	5.020	
909.03	909.03	909.05	909.03	3.03	3.01	92.74	-1.43	29.93	29.96	23.93	6.03	4.968	CC
1,000.00	1,000.00	999.90	999.81	3.35	3.31	99.73	-5.10	29.75	30.18	23.53	6.65	4.536	ES
1,100.00	1,100.00	1,099.51	1,099.20	3.71	3.64	111.51	-11.60	29.44	31.65	24.31	7.34	4.309	SF
1,200.00	1,200.00	1,198.71	1,197.99	4.07	3.98	125.44	-20.65	29.00	35.66	27.63	8.03	4.439	
1,300.00	1,299.99	1,297.20	1,295.79	4.43	4.31	145.02	-32.16	28.45	44.20	35.49	8.71	5.073	
1,400.00	1,399.91	1,394.49	1,392.10	4.79	4.65	156.49	-46.00	27.79	59.03	49.64	9.38	6.292	
1,500.00	1,499.69	1,490.71	1,486.97	5.14	4.99	164.46	-62.01	27.02	79.94	69.90	10.04	7.960	
1,600.00	1,599.27	1,587.21	1,582.01	5.50	5.34	169.52	-78.71	26.22	104.90	94.18	10.72	9.782	
1,697.75	1,696.34	1,680.85	1,674.23	5.85	5.67	172.71	-94.92	25.44	132.19	120.81	11.39	11.608	
1,700.00	1,698.57	1,683.00	1,676.35	5.86	5.68	172.77	-95.29	25.43	132.85	121.45	11.41	11.647	
1,800.00	1,797.73	1,778.42	1,770.33	6.22	6.03	174.97	-111.81	24.63	162.27	150.19	12.08	13.433	
1,900.00	1,896.88	1,873.85	1,864.31	6.57	6.38	176.50	-128.33	23.84	191.83	179.08	12.75	15.040	
2,000.00	1,996.03	1,969.27	1,958.28	6.93	6.73	177.62	-144.85	23.05	221.49	208.06	13.43	16.489	
2,100.00	2,095.18	2,064.69	2,052.26	7.28	7.08	178.48	-161.37	22.26	251.21	237.10	14.11	17.802	
2,200.00	2,194.33	2,160.12	2,146.24	7.64	7.44	179.15	-177.89	21.47	280.96	266.17	14.79	18.995	
2,300.00	2,293.49	2,255.54	2,240.22	8.00	7.79	179.70	-194.41	20.67	310.75	295.28	15.47	20.084	
2,400.00	2,392.64	2,350.96	2,334.20	8.36	8.15	-179.85	-210.93	19.88	340.55	324.40	16.16	21.080	
2,500.00	2,491.79	2,446.39	2,428.18	8.72	8.51	-179.47	-227.45	19.09	370.38	353.54	16.84	21.996	
2,600.00	2,590.94	2,541.81	2,522.16	9.09	8.87	-179.15	-243.97	18.30	400.21	382.69	17.52	22.840	
2,700.00	2,690.10	2,637.23	2,616.14	9.45	9.22	-178.88	-260.49	17.50	430.06	411.85	18.21	23.620	
2,800.00	2,789.25	2,732.66	2,710.12	9.81	9.58	-178.64	-277.01	16.71	459.91	441.02	18.89	24.344	
7,500.00	6,303.00	7,494.91	6,303.00	27.02	26.67	90.00	-805.28	1,369.68	1,319.68	1,266.29	53.38	24.721	
7,600.00	6,303.00	7,594.91	6,303.00	27.66	27.29	90.00	-804.62	1,469.68	1,319.68	1,265.03	54.65	24.147	
7,700.00	6,303.00	7,694.91	6,303.00	28.33	27.94	90.00	-803.96	1,569.68	1,319.68	1,263.70	55.98	23.573	
7,800.00	6,303.00	7,794.91	6,303.00	29.02	28.62	90.00	-803.30	1,669.68	1,319.69	1,262.32	57.37	23.003	
7,900.00	6,303.00	7,894.91	6,303.00	29.75	29.33	90.00	-802.64	1,769.67	1,319.69	1,260.88	58.81	22.440	
8,000.00	6,303.00	7,994.91	6,303.00	30.49	30.06	90.00	-801.98	1,869.67	1,319.69	1,259.39	60.30	21.885	
8,100.00	6,303.00	8,094.91	6,303.00	31.26	30.82	90.00	-801.31	1,969.67	1,319.69	1,257.86	61.84	21.342	
8,200.00	6,303.00	8,194.91	6,303.00	32.05	31.60	90.00	-800.65	2,069.67	1,319.70	1,256.28	63.41	20.811	
8,300.00	6,303.00	8,294.91	6,303.00	32.86	32.40	90.00	-799.99	2,169.66	1,319.70	1,254.67	65.03	20.294	
8,400.00	6,303.00	8,394.91	6,303.00	33.69	33.22	90.00	-799.33	2,269.66	1,319.70	1,253.02	66.68	19.791	
8,500.00	6,303.00	8,494.91	6,303.00	34.53	34.06	90.00	-798.67	2,369.66	1,319.70	1,251.34	68.37	19.303	
8,600.00	6,303.00	8,594.91	6,303.00	35.39	34.91	90.00	-798.00	2,469.66	1,319.71	1,249.62	70.09	18.830	
8,700.00	6,303.00	8,694.91	6,303.00	36.26	35.78	90.00	-797.34	2,569.66	1,319.71	1,247.88	71.83	18.372	
8,800.00	6,303.00	8,794.91	6,303.00	37.15	36.66	90.00	-796.68	2,669.65	1,319.71	1,246.11	73.61	17.929	
8,900.00	6,303.00	8,894.91	6,303.00	38.05	37.56	90.00	-796.02	2,769.65	1,319.72	1,244.31	75.41	17.501	
9,000.00	6,303.00	8,994.91	6,303.00	38.96	38.46	90.00	-795.36	2,869.65	1,319.72	1,242.49	77.23	17.089	
9,100.00	6,303.00	9,094.91	6,303.00	39.88	39.38	90.00	-794.70	2,969.65	1,319.72	1,240.65	79.07	16.690	
9,200.00	6,303.00	9,194.91	6,303.00	40.81	40.31	90.00	-794.03	3,069.64	1,319.72	1,238.79	80.94	16.306	
9,300.00	6,303.00	9,294.91	6,303.00	41.75	41.24	90.00	-793.37	3,169.64	1,319.73	1,236.91	82.82	15.935	
9,400.00	6,303.00	9,394.91	6,303.00	42.70	42.19	90.00	-792.71	3,269.64	1,319.73	1,235.01	84.72	15.578	
9,500.00	6,303.00	9,494.91	6,303.00	43.66	43.15	90.00	-792.05	3,369.64	1,319.73	1,233.10	86.64	15.233	
9,600.00	6,303.00	9,594.91	6,303.00	44.63	44.11	90.00	-791.39	3,469.64	1,319.73	1,231.17	88.57	14.901	
9,700.00	6,303.00	9,694.91	6,303.00	45.60	45.08	90.00	-790.73	3,569.63	1,319.74	1,229.22	90.52	14.580	
9,800.00	6,303.00	9,794.91	6,303.00	46.58	46.06	90.00	-790.06	3,669.63	1,319.74	1,227.26	92.48	14.271	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B08) Koala 9 Fed Com 114H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Rule Assigned:													
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
9,900.00	6,303.00	9,894.91	6,303.00	47.56	47.04	90.00	-789.40	3,769.63	1,319.74	1,225.29	94.45	13.973	
10,000.00	6,303.00	9,994.91	6,303.00	48.56	48.03	90.00	-788.74	3,869.63	1,319.75	1,223.31	96.43	13.686	
10,100.00	6,303.00	10,094.91	6,303.00	49.55	49.03	90.00	-788.08	3,969.63	1,319.75	1,221.32	98.43	13.408	
10,200.00	6,303.00	10,194.91	6,303.00	50.55	50.03	90.00	-787.42	4,069.62	1,319.75	1,219.32	100.44	13.140	
10,300.00	6,303.00	10,294.91	6,303.00	51.56	51.03	90.00	-786.75	4,169.62	1,319.75	1,217.30	102.45	12.882	
10,400.00	6,303.00	10,394.91	6,303.00	52.57	52.04	90.00	-786.09	4,269.62	1,319.76	1,215.28	104.48	12.632	
10,500.00	6,303.00	10,494.91	6,303.00	53.59	53.06	90.00	-785.43	4,369.62	1,319.76	1,213.25	106.51	12.391	
10,600.00	6,303.00	10,594.91	6,303.00	54.61	54.08	90.00	-784.77	4,469.61	1,319.76	1,211.21	108.55	12.158	
10,700.00	6,303.00	10,694.91	6,303.00	55.63	55.10	90.00	-784.11	4,569.61	1,319.76	1,209.16	110.60	11.932	
10,800.00	6,303.00	10,794.91	6,303.00	56.66	56.13	90.00	-783.45	4,669.61	1,319.77	1,207.11	112.66	11.714	
10,900.00	6,303.00	10,894.91	6,303.00	57.69	57.16	90.00	-782.78	4,769.61	1,319.77	1,205.04	114.73	11.504	
11,000.00	6,303.00	10,994.91	6,303.00	58.73	58.19	90.00	-782.12	4,869.61	1,319.77	1,202.97	116.80	11.300	
11,100.00	6,303.00	11,094.91	6,303.00	59.77	59.23	90.00	-781.46	4,969.60	1,319.78	1,200.90	118.88	11.102	
11,200.00	6,303.00	11,194.91	6,303.00	60.81	60.27	90.00	-780.80	5,069.60	1,319.78	1,198.82	120.96	10.911	
11,300.00	6,303.00	11,294.91	6,303.00	61.85	61.31	90.00	-780.14	5,169.60	1,319.78	1,196.73	123.05	10.726	
11,400.00	6,303.00	11,394.91	6,303.00	62.90	62.36	90.00	-779.48	5,269.60	1,319.78	1,194.64	125.14	10.546	
11,500.00	6,303.00	11,494.91	6,303.00	63.95	63.41	90.00	-778.81	5,369.59	1,319.79	1,192.54	127.24	10.372	
11,600.00	6,303.00	11,594.91	6,303.00	65.00	64.46	90.00	-778.15	5,469.59	1,319.79	1,190.44	129.35	10.204	
11,700.00	6,303.00	11,694.91	6,303.00	66.05	65.51	90.00	-777.49	5,569.59	1,319.79	1,188.34	131.46	10.040	
11,800.00	6,303.00	11,794.91	6,303.00	67.11	66.57	90.00	-776.83	5,669.59	1,319.79	1,186.23	133.57	9.881	
11,900.00	6,303.00	11,894.91	6,303.00	68.17	67.63	90.00	-776.17	5,769.59	1,319.80	1,184.11	135.69	9.727	
12,000.00	6,303.00	11,994.91	6,303.00	69.23	68.69	90.00	-775.50	5,869.58	1,319.80	1,181.99	137.81	9.577	
12,100.00	6,303.00	12,094.91	6,303.00	70.29	69.75	90.00	-774.84	5,969.58	1,319.80	1,179.87	139.93	9.432	
12,200.00	6,303.00	12,194.91	6,303.00	71.35	70.81	90.00	-774.18	6,069.58	1,319.81	1,177.74	142.06	9.290	
12,300.00	6,303.00	12,294.91	6,303.00	72.42	71.88	90.00	-773.52	6,169.58	1,319.81	1,175.61	144.20	9.153	
12,400.00	6,303.00	12,394.91	6,303.00	73.49	72.94	90.00	-772.86	6,269.57	1,319.81	1,173.48	146.33	9.019	
12,500.00	6,303.00	12,494.91	6,303.00	74.55	74.01	90.00	-772.20	6,369.57	1,319.81	1,171.34	148.47	8.889	
12,600.00	6,303.00	12,594.91	6,303.00	75.62	75.08	90.00	-771.53	6,469.57	1,319.82	1,169.20	150.61	8.763	
12,700.00	6,303.00	12,694.91	6,303.00	76.70	76.16	90.00	-770.87	6,569.57	1,319.82	1,167.06	152.76	8.640	
12,800.00	6,303.00	12,794.91	6,303.00	77.77	77.23	90.00	-770.21	6,669.57	1,319.82	1,164.92	154.91	8.520	
12,900.00	6,303.00	12,894.91	6,303.00	78.84	78.30	90.00	-769.55	6,769.56	1,319.82	1,162.77	157.06	8.404	
13,000.00	6,303.00	12,994.91	6,303.00	79.92	79.38	90.00	-768.89	6,869.56	1,319.83	1,160.62	159.21	8.290	
13,100.00	6,303.00	13,094.91	6,303.00	81.00	80.46	90.00	-768.22	6,969.56	1,319.83	1,158.46	161.36	8.179	
13,200.00	6,303.00	13,194.91	6,303.00	82.08	81.53	90.00	-767.56	7,069.56	1,319.83	1,156.31	163.52	8.071	
13,300.00	6,303.00	13,294.91	6,303.00	83.16	82.61	90.00	-766.90	7,169.56	1,319.83	1,154.15	165.68	7.966	
13,400.00	6,303.00	13,394.91	6,303.00	84.24	83.70	90.00	-766.24	7,269.55	1,319.84	1,151.99	167.85	7.863	
13,500.00	6,303.00	13,494.91	6,303.00	85.32	84.78	90.00	-765.58	7,369.55	1,319.84	1,149.83	170.01	7.763	
13,600.00	6,303.00	13,594.91	6,303.00	86.40	85.86	90.00	-764.92	7,469.55	1,319.84	1,147.67	172.18	7.666	
13,700.00	6,303.00	13,694.91	6,303.00	87.49	86.94	90.00	-764.25	7,569.55	1,319.85	1,145.50	174.35	7.570	
13,800.00	6,303.00	13,794.91	6,303.00	88.57	88.03	90.00	-763.59	7,669.54	1,319.85	1,143.33	176.52	7.477	
13,900.00	6,303.00	13,894.91	6,303.00	89.66	89.11	90.00	-762.93	7,769.54	1,319.85	1,141.16	178.69	7.386	
14,000.00	6,303.00	13,994.91	6,303.00	90.74	90.20	90.00	-762.27	7,869.54	1,319.85	1,138.99	180.86	7.298	
14,100.00	6,303.00	14,094.91	6,303.00	91.83	91.29	90.00	-761.61	7,969.54	1,319.86	1,136.82	183.04	7.211	
14,200.00	6,303.00	14,194.91	6,303.00	92.92	92.38	90.00	-760.95	8,069.54	1,319.86	1,134.64	185.22	7.126	
14,300.00	6,303.00	14,294.91	6,303.00	94.01	93.46	90.00	-760.28	8,169.53	1,319.86	1,132.47	187.39	7.043	
14,400.00	6,303.00	14,394.91	6,303.00	95.10	94.55	90.00	-759.62	8,269.53	1,319.86	1,130.29	189.57	6.962	
14,500.00	6,303.00	14,494.91	6,303.00	96.19	95.65	90.00	-758.96	8,369.53	1,319.87	1,128.11	191.76	6.883	
14,600.00	6,303.00	14,594.91	6,303.00	97.28	96.74	90.00	-758.30	8,469.53	1,319.87	1,125.93	193.94	6.806	
14,700.00	6,303.00	14,694.91	6,303.00	98.37	97.83	90.00	-757.64	8,569.52	1,319.87	1,123.75	196.12	6.730	
14,800.00	6,303.00	14,794.91	6,303.00	99.46	98.92	90.00	-756.97	8,669.52	1,319.88	1,121.56	198.31	6.656	
14,900.00	6,303.00	14,894.91	6,303.00	100.56	100.01	90.00	-756.31	8,769.52	1,319.88	1,119.38	200.50	6.583	
15,000.00	6,303.00	14,994.91	6,303.00	101.65	101.11	90.00	-755.65	8,869.52	1,319.88	1,117.19	202.69	6.512	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B08) Koala 9 Fed Com 114H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
15,100.00	6,303.00	15,094.91	6,303.00	102.74	102.20	90.00	-754.99	8,969.52	1,319.88	1,115.01	204.88	6.442	
15,200.00	6,303.00	15,194.91	6,303.00	103.84	103.30	90.00	-754.33	9,069.51	1,319.89	1,112.82	207.07	6.374	
15,300.00	6,303.00	15,294.91	6,303.00	104.93	104.39	90.00	-753.67	9,169.51	1,319.89	1,110.63	209.26	6.307	
15,400.00	6,303.00	15,394.91	6,303.00	106.03	105.49	90.00	-753.00	9,269.51	1,319.89	1,108.44	211.45	6.242	
15,500.00	6,303.00	15,494.91	6,303.00	107.13	106.59	90.00	-752.34	9,369.51	1,319.89	1,106.25	213.65	6.178	
15,600.00	6,303.00	15,594.91	6,303.00	108.22	107.68	90.00	-751.68	9,469.50	1,319.90	1,104.06	215.84	6.115	
15,700.00	6,303.00	15,694.91	6,303.00	109.32	108.78	90.00	-751.02	9,569.50	1,319.90	1,101.86	218.04	6.054	
15,800.00	6,303.00	15,794.91	6,303.00	110.42	109.88	90.00	-750.36	9,669.50	1,319.90	1,099.67	220.23	5.993	
15,900.00	6,303.00	15,894.91	6,303.00	111.52	110.98	90.00	-749.70	9,769.50	1,319.91	1,097.47	222.43	5.934	
16,000.00	6,303.00	15,994.91	6,303.00	112.62	112.08	90.00	-749.03	9,869.50	1,319.91	1,095.28	224.63	5.876	
16,100.00	6,303.00	16,094.91	6,303.00	113.72	113.18	90.00	-748.37	9,969.49	1,319.91	1,093.08	226.83	5.819	
16,200.00	6,303.00	16,194.91	6,303.00	114.82	114.28	90.00	-747.71	10,069.49	1,319.91	1,090.88	229.03	5.763	
16,300.00	6,303.00	16,294.91	6,303.00	115.92	115.38	90.00	-747.05	10,169.49	1,319.92	1,088.68	231.23	5.708	
16,400.00	6,303.00	16,394.91	6,303.00	117.02	116.48	90.00	-746.39	10,269.49	1,319.92	1,086.48	233.44	5.654	
16,500.00	6,303.00	16,494.91	6,303.00	118.12	117.58	90.00	-745.72	10,369.49	1,319.92	1,084.28	235.64	5.601	
16,600.00	6,303.00	16,594.91	6,303.00	119.22	118.68	90.00	-745.06	10,469.48	1,319.92	1,082.08	237.84	5.550	
16,700.00	6,303.00	16,694.91	6,303.00	120.32	119.78	90.00	-744.40	10,569.48	1,319.93	1,079.88	240.05	5.499	
16,800.00	6,303.00	16,794.91	6,303.00	121.43	120.89	90.00	-743.74	10,669.48	1,319.93	1,077.68	242.25	5.449	
16,809.01	6,303.00	16,803.92	6,303.00	121.53	120.99	90.00	-743.68	10,678.49	1,319.93	1,077.48	242.45	5.444	
16,900.00	6,303.00	16,890.04	6,303.00	122.53	121.94	90.00	-743.11	10,764.61	1,319.94	1,075.53	244.41	5.401	
16,921.74	6,303.00	16,890.04	6,303.00	122.77	121.94	90.00	-743.11	10,764.61	1,320.20	1,075.57	244.63	5.397	
16,922.61	6,303.00	16,890.04	6,303.00	122.78	121.94	90.00	-743.11	10,764.61	1,320.22	1,075.58	244.63	5.397	



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W02_GOVERNMENT AO COM #001_1524032 - Inc Only - Inc Only												Offset Site Error:	0.00 usft
Survey Program: 121-INC-ONLY												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
5,600.00	5,568.05	5,549.98	5,549.05	19.96	115.07	-101.91	-493.66	-3,225.17	3,329.65	3,194.62	135.03	24.659	
5,631.95	5,600.00	5,581.93	5,581.00	20.07	116.40	-107.52	-493.66	-3,225.17	3,329.68	3,193.21	136.47	24.398	
5,698.89	5,666.94	5,648.83	5,647.84	20.31	119.19	-107.49	-491.59	-3,225.17	3,329.06	3,189.56	139.50	23.864	CC
5,700.00	5,668.05	5,649.79	5,648.80	20.31	119.23	-107.49	-491.59	-3,225.17	3,329.06	3,189.51	139.54	23.857	
5,761.99	5,730.04	5,703.07	5,702.06	20.53	121.45	-107.49	-491.83	-3,225.17	3,329.14	3,187.16	141.98	23.448	
5,800.00	5,768.02	5,735.73	5,734.70	20.66	122.81	162.47	-492.21	-3,225.17	3,330.48	3,187.00	143.47	23.213	ES
5,850.00	5,817.70	5,778.46	5,777.41	20.83	124.60	162.31	-492.98	-3,225.17	3,335.98	3,190.56	145.42	22.940	
5,900.00	5,866.72	5,840.44	5,838.68	20.99	127.58	162.07	-493.10	-3,225.17	3,345.30	3,196.73	148.57	22.516	
5,950.00	5,914.69	5,891.48	5,889.46	21.15	130.50	161.72	-492.98	-3,225.17	3,358.65	3,207.00	151.65	22.147	
6,000.00	5,961.26	5,944.54	5,942.26	21.31	133.69	161.23	-493.66	-3,225.17	3,376.18	3,221.19	154.99	21.783	
6,050.00	6,006.07	5,967.82	5,965.46	21.45	135.10	160.54	-492.80	-3,225.17	3,397.15	3,240.61	156.54	21.701	
6,100.00	6,048.78	6,032.49	6,029.78	21.58	139.14	159.76	-493.66	-3,225.17	3,422.16	3,261.43	160.72	21.292	
6,150.00	6,089.06	6,072.78	6,070.06	21.70	141.70	158.71	-493.66	-3,225.17	3,450.46	3,287.06	163.40	21.116	
6,200.00	6,126.62	6,100.69	6,097.82	21.81	143.48	157.38	-491.33	-3,225.17	3,481.38	3,316.10	165.28	21.063	
6,250.00	6,161.15	6,122.87	6,119.97	21.94	144.89	155.58	-491.68	-3,225.17	3,516.17	3,349.39	166.78	21.083	
6,300.00	6,192.40	6,177.22	6,173.40	22.09	148.34	153.53	-493.66	-3,225.17	3,554.07	3,383.75	170.32	20.867	
6,350.00	6,220.13	6,204.95	6,201.13	22.24	150.21	150.72	-493.66	-3,225.17	3,593.99	3,421.73	172.26	20.864	SF
6,400.00	6,244.14	6,221.13	6,217.24	22.38	151.31	146.90	-492.59	-3,225.17	3,635.82	3,462.42	173.40	20.968	
6,450.00	6,264.23	6,229.33	6,225.43	22.53	151.86	141.56	-492.70	-3,225.17	3,679.92	3,505.93	173.99	21.150	
6,500.00	6,280.25	6,265.57	6,261.25	22.68	154.34	134.96	-493.66	-3,225.17	3,725.70	3,549.20	176.50	21.108	
6,550.00	6,292.09	6,277.41	6,273.09	22.83	155.17	125.17	-493.66	-3,225.17	3,772.50	3,595.14	177.36	21.270	
6,600.00	6,299.65	6,284.97	6,280.65	22.97	155.71	111.66	-493.66	-3,225.17	3,820.15	3,642.25	177.91	21.473	
6,650.00	6,302.87	6,288.19	6,283.87	23.11	155.93	94.46	-493.66	-3,225.17	3,868.31	3,690.17	178.14	21.715	
6,661.99	6,303.00	6,288.32	6,284.00	23.14	155.94	90.00	-493.66	-3,225.17	3,879.89	3,701.74	178.15	21.779	
6,681.03	6,303.00	6,288.32	6,284.00	23.20	155.94	90.00	-493.66	-3,225.17	3,898.30	3,720.15	178.15	21.882	
6,700.00	6,303.00	6,288.32	6,284.00	23.25	155.94	90.00	-493.66	-3,225.17	3,916.67	3,738.52	178.15	21.985	
6,800.00	6,303.00	6,288.32	6,284.00	23.57	155.94	90.00	-493.66	-3,225.17	4,013.58	3,835.43	178.15	22.529	
6,900.00	6,303.00	6,288.32	6,284.00	23.94	155.94	90.00	-493.66	-3,225.17	4,110.64	3,932.48	178.16	23.072	
7,000.00	6,303.00	6,288.32	6,284.00	24.35	155.94	90.00	-493.66	-3,225.17	4,207.84	4,029.67	178.17	23.617	
7,100.00	6,303.00	6,288.32	6,284.00	24.81	155.94	90.00	-493.66	-3,225.17	4,305.17	4,126.98	178.19	24.161	
7,200.00	6,303.00	6,288.32	6,284.00	25.30	155.94	90.00	-493.66	-3,225.17	4,402.61	4,224.41	178.20	24.705	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W03_PRE-ONGARD WELL #001_1525793 - Inc Only - Inc Only													Offset Site Error: 0.00 usft
Survey Program: 192-INC-ONLY													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Offset Wellbore Centre		Distance		Rule Assigned:		Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
3,200.00	3,185.86	3,159.43	3,158.86	11.26	68.26	-105.52	-489.15	-1,862.19	1,974.21	1,894.70	79.52	24.828	CC, ES
3,300.00	3,285.01	3,255.39	3,254.81	11.62	70.13	-105.86	-488.93	-1,862.19	1,977.68	1,895.93	81.75	24.192	
3,400.00	3,384.16	3,357.75	3,357.16	11.98	72.23	-106.23	-489.15	-1,862.19	1,981.38	1,897.16	84.22	23.528	
3,500.00	3,483.31	3,456.90	3,456.31	12.35	74.34	-106.59	-489.15	-1,862.19	1,985.08	1,898.39	86.69	22.899	
3,600.00	3,582.46	3,554.66	3,554.06	12.71	76.42	-106.93	-488.54	-1,862.19	1,988.62	1,899.49	89.13	22.311	
3,700.00	3,681.62	3,651.35	3,650.75	13.07	78.48	-107.28	-488.87	-1,862.19	1,992.61	1,901.06	91.55	21.765	
3,800.00	3,780.77	3,754.42	3,753.77	13.44	80.63	-107.66	-489.15	-1,862.19	1,996.65	1,902.59	94.06	21.227	
3,900.00	3,879.92	3,852.93	3,852.27	13.80	82.64	-107.98	-488.38	-1,862.19	2,000.35	1,903.91	96.43	20.744	
4,000.00	3,979.07	3,946.26	3,945.59	14.16	84.54	-108.33	-488.79	-1,862.19	2,004.61	1,905.91	98.70	20.311	
4,100.00	4,078.23	4,051.92	4,051.23	14.53	86.58	-108.71	-489.15	-1,862.19	2,008.91	1,907.81	101.10	19.870	
4,200.00	4,177.38	4,151.07	4,150.38	14.89	88.43	-109.05	-489.15	-1,862.19	2,013.14	1,909.83	103.31	19.486	
4,300.00	4,276.53	4,248.29	4,247.59	15.25	90.24	-109.39	-488.88	-1,862.19	2,017.34	1,911.85	105.49	19.123	
4,400.00	4,375.68	4,349.39	4,348.68	15.62	92.13	-109.75	-489.15	-1,862.19	2,021.84	1,914.10	107.74	18.765	
4,500.00	4,474.83	4,448.55	4,447.83	15.98	93.99	-110.09	-489.15	-1,862.19	2,026.30	1,916.34	109.96	18.427	
4,600.00	4,573.99	4,544.78	4,544.06	16.35	95.79	-110.41	-488.80	-1,862.19	2,030.68	1,918.56	112.12	18.111	
4,700.00	4,673.14	4,646.87	4,646.14	16.71	97.73	-110.77	-489.15	-1,862.19	2,035.44	1,921.02	114.43	17.788	
4,800.00	4,772.29	4,711.00	4,710.26	17.07	98.98	-110.99	-489.15	-1,862.19	2,040.42	1,924.40	116.02	17.587	SF
4,900.00	4,871.44	4,711.00	4,710.26	17.44	98.98	-110.99	-489.15	-1,862.19	2,049.27	1,933.13	116.14	17.645	
5,000.00	4,970.59	4,711.00	4,710.26	17.80	98.98	-110.99	-489.15	-1,862.19	2,062.93	1,946.93	116.00	17.784	
5,100.00	5,069.75	4,711.00	4,710.26	18.17	98.98	-110.99	-489.15	-1,862.19	2,081.31	1,965.70	115.61	18.003	
5,134.20	5,103.66	4,711.00	4,710.26	18.29	98.98	-110.99	-489.15	-1,862.19	2,088.66	1,973.23	115.43	18.095	
5,200.00	5,168.97	4,711.00	4,710.26	18.53	98.98	-111.21	-489.15	-1,862.19	2,104.09	1,989.10	115.00	18.297	
5,300.00	5,268.47	4,711.00	4,710.26	18.89	98.98	-111.59	-489.15	-1,862.19	2,130.48	2,016.31	114.17	18.661	
5,400.00	5,368.19	4,711.00	4,710.26	19.25	98.98	-112.03	-489.15	-1,862.19	2,160.25	2,047.12	113.14	19.094	
5,500.00	5,468.08	4,711.00	4,710.26	19.61	98.98	-112.51	-489.15	-1,862.19	2,193.27	2,081.34	111.93	19.595	
5,600.00	5,568.05	4,711.00	4,710.26	19.96	98.98	-113.05	-489.15	-1,862.19	2,229.36	2,118.80	110.56	20.164	
5,631.95	5,600.00	4,711.00	4,710.26	20.07	98.98	-118.84	-489.15	-1,862.19	2,241.51	2,131.42	110.09	20.360	
5,700.00	5,668.05	4,711.00	4,710.26	20.31	98.98	-118.84	-489.15	-1,862.19	2,268.57	2,159.51	109.06	20.801	
5,761.99	5,730.04	4,711.00	4,710.26	20.53	98.98	-118.84	-489.15	-1,862.19	2,294.71	2,186.63	108.08	21.232	
5,800.00	5,768.02	4,711.00	4,710.26	20.66	98.98	150.18	-489.15	-1,862.19	2,312.38	2,204.91	107.47	21.517	
5,850.00	5,817.70	4,711.00	4,710.26	20.83	98.98	148.56	-489.15	-1,862.19	2,339.21	2,232.53	106.69	21.926	
5,900.00	5,866.72	4,711.00	4,710.26	20.99	98.98	146.48	-489.15	-1,862.19	2,369.80	2,263.86	105.94	22.369	
5,950.00	5,914.69	4,711.00	4,710.26	21.15	98.98	143.83	-489.15	-1,862.19	2,403.78	2,298.53	105.25	22.839	
6,000.00	5,961.26	4,711.00	4,710.26	21.31	98.98	140.45	-489.15	-1,862.19	2,440.74	2,336.13	104.61	23.331	
6,050.00	6,006.07	4,711.00	4,710.26	21.45	98.98	136.15	-489.15	-1,862.19	2,480.29	2,376.24	104.05	23.838	
6,100.00	6,048.78	4,711.00	4,710.26	21.58	98.98	130.64	-489.15	-1,862.19	2,522.01	2,418.45	103.56	24.352	
6,150.00	6,089.06	4,711.00	4,710.26	21.70	98.98	123.63	-489.15	-1,862.19	2,565.48	2,462.31	103.16	24.868	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W04_FEDERAL V #001_1526451 - Inc Only - Inc Only													Offset Site Error: 0.00 usft
Survey Program: 456-INC-ONLY													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
4,300.00	4,276.53	4,265.23	4,264.53	15.25	93.82	-42.79	2,162.67	-2,039.46	2,689.07	2,580.08	108.99	24.673	
4,400.00	4,375.68	4,374.70	4,373.97	15.62	96.55	-42.97	2,163.97	-2,039.46	2,680.39	2,568.32	112.08	23.916	
4,500.00	4,474.83	4,484.10	4,483.35	15.98	99.28	-43.20	2,163.03	-2,039.46	2,670.29	2,555.13	115.16	23.187	
4,600.00	4,573.99	4,562.86	4,561.99	16.35	101.44	-43.35	2,162.67	-2,039.46	2,660.48	2,542.79	117.69	22.606	
4,700.00	4,673.14	4,683.44	4,682.55	16.71	104.91	-43.59	2,162.74	-2,039.46	2,651.14	2,529.62	121.51	21.818	
4,800.00	4,772.29	4,761.27	4,760.29	17.07	107.38	-43.74	2,162.67	-2,039.46	2,641.56	2,517.21	124.35	21.243	
4,900.00	4,871.44	4,888.74	4,887.70	17.44	111.44	-43.98	2,163.21	-2,039.46	2,632.65	2,503.90	128.75	20.447	
5,000.00	4,970.59	4,959.77	4,958.59	17.80	113.59	-44.13	2,162.67	-2,039.46	2,622.77	2,491.49	131.28	19.978	
5,100.00	5,069.75	5,058.93	5,057.75	18.17	116.48	-44.33	2,162.67	-2,039.46	2,613.42	2,478.89	134.53	19.426	
5,134.20	5,103.66	5,092.84	5,091.66	18.29	117.47	-44.40	2,162.67	-2,039.46	2,610.23	2,474.59	135.64	19.243	
5,200.00	5,168.97	5,158.15	5,156.97	18.53	119.37	-44.46	2,162.67	-2,039.46	2,604.51	2,466.72	137.79	18.903	
5,300.00	5,268.47	5,272.00	5,270.75	18.89	122.69	-44.52	2,164.64	-2,039.46	2,598.67	2,457.22	141.46	18.371	
5,400.00	5,368.19	5,386.97	5,385.68	19.25	126.04	-44.62	2,163.14	-2,039.46	2,592.57	2,447.42	145.15	17.861	
5,500.00	5,468.08	5,457.56	5,456.08	19.61	127.92	-44.63	2,162.67	-2,039.46	2,588.72	2,441.31	147.41	17.561	
5,600.00	5,568.05	5,557.53	5,556.05	19.96	130.44	-44.65	2,162.67	-2,039.46	2,587.19	2,436.90	150.28	17.215	
5,631.95	5,600.00	5,589.48	5,588.00	20.07	131.24	-50.26	2,162.67	-2,039.46	2,587.09	2,435.89	151.20	17.110	
5,700.00	5,668.05	5,657.53	5,656.05	20.31	132.96	-50.26	2,162.67	-2,039.46	2,587.09	2,433.94	153.16	16.892 CC	
5,761.99	5,730.04	5,726.25	5,724.73	20.53	134.69	-50.23	2,164.44	-2,039.46	2,588.23	2,433.13	155.10	16.687	
5,763.98	5,732.03	5,728.47	5,726.95	20.54	134.74	-140.23	2,164.43	-2,039.46	2,588.23	2,433.06	155.17	16.680	
5,800.00	5,768.02	5,768.56	5,767.04	20.66	135.75	-140.20	2,164.21	-2,039.46	2,589.07	2,432.77	156.30	16.565 ES	
5,850.00	5,817.70	5,823.91	5,822.38	20.83	137.15	-140.04	2,163.75	-2,039.46	2,593.03	2,435.17	157.86	16.426	
5,900.00	5,866.72	5,878.53	5,876.98	20.99	138.53	-139.74	2,163.11	-2,039.46	2,600.21	2,440.81	159.40	16.313	
5,950.00	5,914.69	5,931.99	5,930.42	21.15	139.87	-139.28	2,162.30	-2,039.46	2,610.59	2,449.68	160.91	16.224 SF	
6,000.00	5,961.26	5,950.92	5,949.26	21.31	140.22	-138.43	2,162.67	-2,039.46	2,624.75	2,463.31	161.44	16.259	
6,050.00	6,006.07	5,995.73	5,994.07	21.45	141.21	-137.51	2,162.67	-2,039.46	2,641.99	2,479.40	162.59	16.250	
6,100.00	6,048.78	6,038.44	6,036.78	21.58	142.16	-136.35	2,162.67	-2,039.46	2,662.29	2,498.60	163.68	16.265	
6,150.00	6,089.06	6,078.72	6,077.06	21.70	143.05	-134.92	2,162.67	-2,039.46	2,685.54	2,520.82	164.72	16.304	
6,200.00	6,126.62	6,116.27	6,114.62	21.81	143.88	-133.16	2,162.67	-2,039.46	2,711.61	2,545.93	165.68	16.366	
6,250.00	6,161.15	6,150.80	6,149.15	21.94	144.65	-131.03	2,162.67	-2,039.46	2,740.33	2,573.76	166.57	16.451	
6,300.00	6,192.40	6,184.07	6,182.40	22.09	145.38	-128.47	2,164.00	-2,039.46	2,772.34	2,604.91	167.42	16.559	
6,350.00	6,220.13	6,214.00	6,212.32	22.24	146.04	-125.42	2,163.95	-2,039.46	2,805.78	2,637.58	168.19	16.682	
6,400.00	6,244.14	6,239.90	6,238.22	22.38	146.62	-121.77	2,163.87	-2,039.46	2,841.25	2,672.39	168.86	16.826	
6,450.00	6,264.23	6,261.58	6,259.90	22.53	147.10	-117.43	2,163.78	-2,039.46	2,878.53	2,709.10	169.43	16.989	
6,500.00	6,280.25	6,278.87	6,277.19	22.68	147.48	-112.30	2,163.69	-2,039.46	2,917.35	2,747.46	169.89	17.172	
6,550.00	6,292.09	6,291.64	6,289.96	22.83	147.76	-106.36	2,163.62	-2,039.46	2,957.43	2,787.19	170.25	17.371	
6,600.00	6,299.65	6,299.80	6,298.12	22.97	147.94	-99.62	2,163.57	-2,039.46	2,998.49	2,827.99	170.49	17.587	
6,650.00	6,302.87	6,303.28	6,301.60	23.11	148.02	-92.22	2,163.55	-2,039.46	3,040.20	2,869.57	170.63	17.818	
6,661.99	6,303.00	6,303.41	6,301.73	23.14	148.02	-90.37	2,163.55	-2,039.46	3,050.26	2,879.62	170.65	17.875	
6,681.03	6,303.00	6,303.41	6,301.73	23.20	148.02	-90.37	2,163.55	-2,039.46	3,066.24	2,895.57	170.67	17.966	
6,700.00	6,303.00	6,303.41	6,301.73	23.25	148.02	-90.37	2,163.55	-2,039.46	3,082.16	2,911.47	170.69	18.058	
6,800.00	6,303.00	6,303.41	6,301.73	23.57	148.02	-90.37	2,163.55	-2,039.46	3,166.64	2,995.84	170.80	18.540	
6,900.00	6,303.00	6,303.40	6,301.72	23.94	148.02	-90.37	2,163.55	-2,039.46	3,251.99	3,081.07	170.92	19.026	
7,000.00	6,303.00	6,303.40	6,301.72	24.35	148.02	-90.37	2,163.55	-2,039.46	3,338.16	3,167.12	171.04	19.516	
7,100.00	6,303.00	6,303.39	6,301.71	24.81	148.02	-90.37	2,163.55	-2,039.46	3,425.09	3,253.91	171.17	20.010	
7,200.00	6,303.00	6,303.39	6,301.71	25.30	148.02	-90.37	2,163.55	-2,039.46	3,512.70	3,341.40	171.30	20.506	
7,300.00	6,303.00	6,303.38	6,301.70	25.84	148.02	-90.37	2,163.55	-2,039.46	3,600.97	3,429.54	171.43	21.005	
7,400.00	6,303.00	6,303.38	6,301.70	26.41	148.02	-90.37	2,163.55	-2,039.46	3,689.83	3,518.27	171.56	21.508	
7,500.00	6,303.00	6,303.38	6,301.70	27.02	148.02	-90.37	2,163.55	-2,039.46	3,779.25	3,607.56	171.69	22.012	
7,600.00	6,303.00	6,303.37	6,301.69	27.66	148.02	-90.37	2,163.55	-2,039.46	3,869.18	3,697.37	171.82	22.519	
7,700.00	6,303.00	6,303.37	6,301.69	28.33	148.02	-90.37	2,163.55	-2,039.46	3,959.60	3,787.66	171.95	23.028	
7,800.00	6,303.00	6,303.36	6,301.68	29.02	148.02	-90.37	2,163.55	-2,039.46	4,050.47	3,878.40	172.07	23.539	
7,900.00	6,303.00	6,303.36	6,301.68	29.75	148.02	-90.37	2,163.55	-2,039.46	4,141.76	3,969.56	172.20	24.052	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W04_FEDERAL V #001_1526451 - Inc Only - Inc Only														Offset Site Error: 0.00 usft
Survey Program: 456-INC-ONLY														Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Rule Assigned:				Warning				
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
8,000.00	6,303.00	6,303.35	6,301.67	30.49	148.02	-90.37	2,163.55	-2,039.46	4,233.45	4,061.12	172.33	24.567		



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W05_FEDERAL V #002_1526702 - Inc Only - Inc Only												Offset Site Error:	0.00 usft
Survey Program: 400-INC-ONLY												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
5,800.00	5,768.02	5,763.81	5,762.91	20.66	122.48	-123.57	3,483.55	-2,027.03	3,572.46	3,429.48	142.98	24.986	CC, ES
5,850.00	5,817.70	5,819.13	5,818.23	20.83	123.65	-123.41	3,483.39	-2,027.03	3,575.38	3,431.05	144.32	24.774	
5,900.00	5,866.72	5,873.72	5,872.81	20.99	124.81	-123.12	3,483.12	-2,027.03	3,580.63	3,434.98	145.65	24.584	
5,950.00	5,914.69	5,927.14	5,926.23	21.15	125.95	-122.68	3,482.77	-2,027.03	3,588.19	3,441.24	146.95	24.417	
6,000.00	5,961.26	5,979.01	5,978.09	21.31	127.06	-122.09	3,482.33	-2,027.03	3,598.06	3,449.84	148.22	24.276	
6,050.00	6,006.07	5,996.04	5,995.07	21.45	127.48	-121.11	3,482.49	-2,027.03	3,610.60	3,461.78	148.82	24.262	
6,100.00	6,048.78	6,038.75	6,037.78	21.58	128.46	-120.09	3,482.49	-2,027.03	3,625.39	3,475.43	149.96	24.176	
6,150.00	6,089.06	6,079.03	6,078.06	21.70	129.39	-118.87	3,482.49	-2,027.03	3,642.40	3,491.36	151.04	24.116	
6,200.00	6,126.62	6,116.58	6,115.62	21.81	130.26	-117.41	3,482.49	-2,027.03	3,661.55	3,509.50	152.05	24.082	
6,250.00	6,161.15	6,151.12	6,150.15	21.94	131.05	-115.70	3,482.49	-2,027.03	3,682.75	3,529.77	152.98	24.073	SF
6,300.00	6,192.40	6,182.37	6,181.40	22.09	131.77	-113.71	3,482.49	-2,027.03	3,705.90	3,552.06	153.84	24.089	
6,350.00	6,220.13	6,210.10	6,209.13	22.24	132.41	-111.43	3,482.49	-2,027.03	3,730.87	3,576.26	154.61	24.131	
6,400.00	6,244.14	6,234.10	6,233.14	22.38	132.96	-108.83	3,482.49	-2,027.03	3,757.51	3,602.22	155.29	24.197	
6,450.00	6,264.23	6,254.19	6,253.23	22.53	133.42	-105.90	3,482.49	-2,027.03	3,785.66	3,629.79	155.87	24.287	
6,500.00	6,280.25	6,270.22	6,269.25	22.68	133.79	-102.64	3,482.49	-2,027.03	3,815.14	3,658.79	156.35	24.401	
6,550.00	6,292.09	6,282.05	6,281.09	22.83	134.07	-99.05	3,482.49	-2,027.03	3,845.75	3,689.02	156.73	24.537	
6,600.00	6,299.65	6,289.61	6,288.65	22.97	134.24	-95.16	3,482.49	-2,027.03	3,877.27	3,720.26	157.01	24.694	
6,650.00	6,302.87	6,292.84	6,291.87	23.11	134.31	-91.02	3,482.49	-2,027.03	3,909.47	3,752.29	157.18	24.872	
6,661.99	6,303.00	6,292.96	6,292.00	23.14	134.32	-90.00	3,482.49	-2,027.03	3,917.26	3,760.06	157.21	24.918	
6,681.03	6,303.00	6,292.96	6,292.00	23.20	134.32	-90.00	3,482.49	-2,027.03	3,929.63	3,772.39	157.24	24.991	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W06_FEDERAL V #003_1526867 - Depth Only - Depth Only													Offset Site Error:	0.00 usft
Survey Program:		6300-INC-ONLY					Rule Assigned:				Offset Well Error:		0.00 usft	
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance			Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)		Separation Factor	
3,000.00	2,987.55	2,978.55	2,978.55	10.53	188.14	-61.03	2,152.73	-4,494.94	4,882.46	4,683.80	198.65	24.578		
3,100.00	3,086.70	3,077.70	3,077.70	10.89	194.40	-61.16	2,152.73	-4,494.94	4,876.13	4,670.86	205.28	23.754		
3,200.00	3,185.86	3,176.86	3,176.86	11.26	200.67	-61.29	2,152.73	-4,494.94	4,869.84	4,657.94	211.90	22.982		
3,300.00	3,285.01	3,276.01	3,276.01	11.62	206.93	-61.43	2,152.73	-4,494.94	4,863.57	4,645.04	218.52	22.256		
3,400.00	3,384.16	3,375.16	3,375.16	11.98	213.19	-61.56	2,152.73	-4,494.94	4,857.33	4,632.18	225.15	21.574		
3,500.00	3,483.31	3,474.31	3,474.31	12.35	219.45	-61.70	2,152.73	-4,494.94	4,851.11	4,619.34	231.77	20.930		
3,600.00	3,582.46	3,573.46	3,573.46	12.71	225.72	-61.83	2,152.73	-4,494.94	4,844.92	4,606.53	238.40	20.323		
3,700.00	3,681.62	3,672.62	3,672.62	13.07	231.98	-61.96	2,152.73	-4,494.94	4,838.76	4,593.74	245.02	19.748		
3,800.00	3,780.77	3,771.77	3,771.77	13.44	238.24	-62.10	2,152.73	-4,494.94	4,832.63	4,580.98	251.65	19.204		
3,900.00	3,879.92	3,870.92	3,870.92	13.80	244.51	-62.24	2,152.73	-4,494.94	4,826.52	4,568.25	258.27	18.688		
4,000.00	3,979.07	3,970.07	3,970.07	14.16	250.77	-62.37	2,152.73	-4,494.94	4,820.44	4,555.54	264.90	18.197		
4,100.00	4,078.23	4,069.23	4,069.23	14.53	257.03	-62.51	2,152.73	-4,494.94	4,814.39	4,542.86	271.52	17.731		
4,200.00	4,177.38	4,168.38	4,168.38	14.89	263.30	-62.64	2,152.73	-4,494.94	4,808.36	4,530.21	278.15	17.287		
4,300.00	4,276.53	4,267.53	4,267.53	15.25	269.56	-62.78	2,152.73	-4,494.94	4,802.36	4,517.59	284.77	16.864		
4,400.00	4,375.68	4,366.68	4,366.68	15.62	275.82	-62.92	2,152.73	-4,494.94	4,796.39	4,505.00	291.40	16.460		
4,500.00	4,474.83	4,465.83	4,465.83	15.98	282.08	-63.05	2,152.73	-4,494.94	4,790.45	4,492.43	298.02	16.074		
4,600.00	4,573.99	4,564.99	4,564.99	16.35	288.35	-63.19	2,152.73	-4,494.94	4,784.54	4,479.89	304.65	15.705		
4,700.00	4,673.14	4,664.14	4,664.14	16.71	294.61	-63.33	2,152.73	-4,494.94	4,778.65	4,467.38	311.27	15.352		
4,800.00	4,772.29	4,763.29	4,763.29	17.07	300.87	-63.47	2,152.73	-4,494.94	4,772.79	4,454.89	317.90	15.013		
4,900.00	4,871.44	4,862.44	4,862.44	17.44	307.14	-63.61	2,152.73	-4,494.94	4,766.96	4,442.44	324.53	14.689		
5,000.00	4,970.59	4,961.59	4,961.59	17.80	313.40	-63.75	2,152.73	-4,494.94	4,761.16	4,430.01	331.15	14.378		
5,100.00	5,069.75	5,060.75	5,060.75	18.17	319.66	-63.89	2,152.73	-4,494.94	4,755.39	4,417.61	337.78	14.078		
5,134.20	5,103.66	5,094.66	5,094.66	18.29	321.80	-63.93	2,152.73	-4,494.94	4,753.42	4,413.38	340.04	13.979		
5,200.00	5,168.97	5,159.97	5,159.97	18.53	325.93	-63.97	2,152.73	-4,494.94	4,749.89	4,405.49	344.41	13.791		
5,300.00	5,268.47	5,259.47	5,259.47	18.89	332.21	-64.02	2,152.73	-4,494.94	4,745.50	4,394.44	351.05	13.518		
5,400.00	5,368.19	5,359.19	5,359.19	19.25	338.51	-64.06	2,152.73	-4,494.94	4,742.26	4,384.55	357.71	13.257		
5,500.00	5,468.08	5,459.08	5,459.08	19.61	344.82	-64.08	2,152.73	-4,494.94	4,740.18	4,375.80	364.38	13.009		
5,600.00	5,568.05	5,559.05	5,559.05	19.96	351.14	-64.09	2,152.73	-4,494.94	4,739.24	4,368.19	371.05	12.773		
5,631.95	5,600.00	5,591.00	5,591.00	20.07	353.16	-69.70	2,152.73	-4,494.94	4,739.18	4,366.00	373.18	12.700		
5,700.00	5,668.05	5,659.05	5,659.05	20.31	357.45	-69.70	2,152.73	-4,494.94	4,739.18	4,361.47	377.72	12.547		
5,761.99	5,730.04	5,721.04	5,721.04	20.53	361.37	-69.70	2,152.73	-4,494.94	4,739.18	4,357.33	381.85	12.411 CC		
5,800.00	5,768.02	5,759.02	5,759.02	20.66	363.77	-159.67	2,152.73	-4,494.94	4,740.36	4,355.98	384.38	12.333 ES		
5,850.00	5,817.70	5,808.70	5,808.70	20.83	366.91	-159.51	2,152.73	-4,494.94	4,745.51	4,357.82	387.69	12.241		
5,900.00	5,866.72	5,857.72	5,857.72	20.99	370.00	-159.22	2,152.73	-4,494.94	4,754.70	4,363.75	390.95	12.162		
5,950.00	5,914.69	5,905.69	5,905.69	21.15	373.03	-158.79	2,152.73	-4,494.94	4,767.87	4,373.72	394.14	12.097		
6,000.00	5,961.26	5,952.26	5,952.26	21.31	375.97	-158.21	2,152.73	-4,494.94	4,784.92	4,387.67	397.24	12.045		
6,050.00	6,006.07	5,997.07	5,997.07	21.45	378.80	-157.44	2,152.73	-4,494.94	4,805.72	4,405.50	400.22	12.008		
6,100.00	6,048.78	6,039.78	6,039.78	21.58	381.50	-156.46	2,152.73	-4,494.94	4,830.13	4,427.07	403.06	11.984		
6,150.00	6,089.06	6,080.06	6,080.06	21.70	384.05	-155.23	2,152.73	-4,494.94	4,857.97	4,452.23	405.74	11.973 SF		
6,200.00	6,126.62	6,117.62	6,117.62	21.81	386.42	-153.68	2,152.73	-4,494.94	4,889.02	4,480.80	408.23	11.976		
6,250.00	6,161.15	6,152.15	6,152.15	21.94	388.60	-151.73	2,152.73	-4,494.94	4,923.07	4,512.56	410.52	11.992		
6,300.00	6,192.40	6,183.40	6,183.40	22.09	390.57	-149.26	2,152.73	-4,494.94	4,959.86	4,547.27	412.59	12.021		
6,350.00	6,220.13	6,211.13	6,211.13	22.24	392.33	-146.09	2,152.73	-4,494.94	4,999.11	4,584.69	414.42	12.063		
6,400.00	6,244.14	6,235.14	6,235.14	22.38	393.84	-141.99	2,152.73	-4,494.94	5,040.54	4,624.53	416.01	12.116		
6,450.00	6,264.23	6,255.23	6,255.23	22.53	395.11	-136.62	2,152.73	-4,494.94	5,083.83	4,666.49	417.34	12.182		
6,500.00	6,280.25	6,271.25	6,271.25	22.68	396.12	-129.50	2,152.73	-4,494.94	5,128.65	4,710.25	418.40	12.258		
6,550.00	6,292.09	6,283.09	6,283.09	22.83	396.87	-120.10	2,152.73	-4,494.94	5,174.68	4,755.48	419.19	12.344		
6,600.00	6,299.65	6,290.65	6,290.65	22.97	397.35	-108.03	2,152.73	-4,494.94	5,221.55	4,801.84	419.71	12.441		
6,650.00	6,302.87	6,300.00	6,292.04	23.11	397.94	-93.58	2,152.73	-4,494.94	5,268.92	4,848.59	420.33	12.535		
6,661.99	6,303.00	6,300.00	6,292.04	23.14	397.94	-89.93	2,152.73	-4,494.94	5,280.31	4,859.97	420.34	12.562		
6,681.03	6,303.00	6,300.00	6,292.04	23.20	397.94	-89.93	2,152.73	-4,494.94	5,298.38	4,878.04	420.35	12.605		
6,700.00	6,303.00	6,300.00	6,292.04	23.25	397.94	-89.93	2,152.73	-4,494.94	5,316.38	4,896.03	420.36	12.647		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W06_FEDERAL V #003_1526867 - Depth Only - Depth Only													Offset Site Error:	0.00 usft
Survey Program:		6300-INC-ONLY					Rule Assigned:				Offset Well Error:	0.00 usft		
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance			Warning					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
6,800.00	6,303.00	6,300.00	6,292.04	23.57	397.94	-89.93	2,152.73	-4,494.94	5,411.37	4,990.96	420.41	12.872		
6,900.00	6,303.00	6,300.00	6,292.04	23.94	397.94	-89.93	2,152.73	-4,494.94	5,506.53	5,086.06	420.47	13.096		
7,000.00	6,303.00	6,300.00	6,292.04	24.35	397.94	-89.93	2,152.73	-4,494.94	5,601.86	5,181.32	420.54	13.321		
7,100.00	6,303.00	6,300.00	6,292.04	24.81	397.94	-89.93	2,152.73	-4,494.94	5,697.35	5,276.75	420.61	13.546		
7,200.00	6,303.00	6,300.00	6,292.04	25.30	397.94	-89.93	2,152.73	-4,494.94	5,793.00	5,372.32	420.67	13.771		
7,300.00	6,303.00	6,300.00	6,292.04	25.84	397.94	-89.93	2,152.73	-4,494.94	5,888.79	5,468.04	420.74	13.996		
7,400.00	6,303.00	6,300.00	6,292.04	26.41	397.94	-89.93	2,152.73	-4,494.94	5,984.71	5,563.89	420.82	14.222		
7,500.00	6,303.00	6,300.00	6,292.04	27.02	397.94	-89.93	2,152.73	-4,494.94	6,080.77	5,659.88	420.89	14.447		
7,600.00	6,303.00	6,300.00	6,292.04	27.66	397.94	-89.93	2,152.73	-4,494.94	6,176.95	5,755.98	420.97	14.673		
7,700.00	6,303.00	6,300.00	6,292.04	28.33	397.94	-89.93	2,152.73	-4,494.94	6,273.25	5,852.21	421.04	14.899		
7,800.00	6,303.00	6,300.00	6,292.04	29.02	397.94	-89.93	2,152.73	-4,494.94	6,369.67	5,948.55	421.12	15.125		
7,900.00	6,303.00	6,300.00	6,292.04	29.75	397.94	-89.93	2,152.73	-4,494.94	6,466.19	6,044.99	421.20	15.352		
8,000.00	6,303.00	6,300.00	6,292.04	30.49	397.94	-89.93	2,152.73	-4,494.94	6,562.82	6,141.54	421.28	15.578		
8,100.00	6,303.00	6,300.00	6,292.04	31.26	397.94	-89.93	2,152.73	-4,494.94	6,659.55	6,238.19	421.36	15.805		
8,200.00	6,303.00	6,300.00	6,292.04	32.05	397.94	-89.93	2,152.73	-4,494.94	6,756.37	6,334.93	421.44	16.032		
8,300.00	6,303.00	6,300.00	6,292.04	32.86	397.94	-89.93	2,152.73	-4,494.94	6,853.29	6,431.77	421.52	16.258		
8,400.00	6,303.00	6,300.00	6,292.04	33.69	397.94	-89.93	2,152.73	-4,494.94	6,950.29	6,528.69	421.60	16.485		
8,500.00	6,303.00	6,300.00	6,292.04	34.53	397.94	-89.93	2,152.73	-4,494.94	7,047.38	6,625.69	421.69	16.712		
8,600.00	6,303.00	6,300.00	6,292.04	35.39	397.94	-89.93	2,152.73	-4,494.94	7,144.54	6,722.77	421.77	16.940		
8,700.00	6,303.00	6,300.00	6,292.04	36.26	397.94	-89.93	2,152.73	-4,494.94	7,241.79	6,819.93	421.85	17.167		
8,800.00	6,303.00	6,300.00	6,292.04	37.15	397.94	-89.93	2,152.73	-4,494.94	7,339.10	6,917.17	421.93	17.394		
8,900.00	6,303.00	6,300.00	6,292.04	38.05	397.94	-89.93	2,152.73	-4,494.94	7,436.49	7,014.47	422.02	17.621		
9,000.00	6,303.00	6,300.00	6,292.04	38.96	397.94	-89.93	2,152.73	-4,494.94	7,533.95	7,111.85	422.10	17.849		
9,100.00	6,303.00	6,300.00	6,292.04	39.88	397.94	-89.93	2,152.73	-4,494.94	7,631.47	7,209.29	422.18	18.076		
9,200.00	6,303.00	6,300.00	6,292.04	40.81	397.94	-89.93	2,152.73	-4,494.94	7,729.06	7,306.79	422.27	18.304		
9,300.00	6,303.00	6,300.00	6,292.04	41.75	397.94	-89.93	2,152.73	-4,494.94	7,826.70	7,404.35	422.35	18.531		
9,400.00	6,303.00	6,300.00	6,292.04	42.70	397.94	-89.93	2,152.73	-4,494.94	7,924.41	7,501.97	422.44	18.759		
9,500.00	6,303.00	6,300.00	6,292.04	43.66	397.94	-89.93	2,152.73	-4,494.94	8,022.17	7,599.65	422.52	18.987		
9,600.00	6,303.00	6,300.00	6,292.04	44.63	397.94	-89.93	2,152.73	-4,494.94	8,119.99	7,697.39	422.60	19.214		
9,700.00	6,303.00	6,300.00	6,292.04	45.60	397.94	-89.93	2,152.73	-4,494.94	8,217.86	7,795.17	422.69	19.442		
9,800.00	6,303.00	6,300.00	6,292.04	46.58	397.94	-89.93	2,152.73	-4,494.94	8,315.78	7,893.01	422.77	19.670		
9,900.00	6,303.00	6,300.00	6,292.04	47.56	397.94	-89.93	2,152.73	-4,494.94	8,413.75	7,990.89	422.86	19.897		
10,000.00	6,303.00	6,300.00	6,292.04	48.56	397.94	-89.93	2,152.73	-4,494.94	8,511.76	8,088.82	422.94	20.125		
10,100.00	6,303.00	6,300.00	6,292.04	49.55	397.94	-89.93	2,152.73	-4,494.94	8,609.83	8,186.80	423.02	20.353		
10,200.00	6,303.00	6,300.00	6,292.04	50.55	397.94	-89.93	2,152.73	-4,494.94	8,707.93	8,284.82	423.11	20.581		
10,300.00	6,303.00	6,300.00	6,292.04	51.56	397.94	-89.93	2,152.73	-4,494.94	8,806.08	8,382.89	423.19	20.809		
10,400.00	6,303.00	6,300.00	6,292.04	52.57	397.94	-89.93	2,152.73	-4,494.94	8,904.27	8,480.99	423.28	21.036		
10,500.00	6,303.00	6,300.00	6,292.04	53.59	397.94	-89.93	2,152.73	-4,494.94	9,002.50	8,579.14	423.36	21.264		
10,600.00	6,303.00	6,300.00	6,292.04	54.61	397.94	-89.93	2,152.73	-4,494.94	9,100.77	8,677.32	423.45	21.492		
10,700.00	6,303.00	6,300.00	6,292.04	55.63	397.94	-89.93	2,152.73	-4,494.94	9,199.07	8,775.54	423.53	21.720		
10,800.00	6,303.00	6,300.00	6,292.04	56.66	397.94	-89.93	2,152.73	-4,494.94	9,297.42	8,873.80	423.62	21.948		
10,900.00	6,303.00	6,300.00	6,292.04	57.69	397.94	-89.93	2,152.73	-4,494.94	9,395.79	8,972.09	423.70	22.176		
11,000.00	6,303.00	6,300.00	6,292.04	58.73	397.94	-89.93	2,152.73	-4,494.94	9,494.20	9,070.42	423.78	22.403		
11,100.00	6,303.00	6,300.00	6,292.04	59.77	397.94	-89.93	2,152.73	-4,494.94	9,592.65	9,168.78	423.87	22.631		
11,200.00	6,303.00	6,300.00	6,292.04	60.81	397.94	-89.93	2,152.73	-4,494.94	9,691.12	9,267.17	423.95	22.859		
11,300.00	6,303.00	6,300.00	6,292.04	61.85	397.94	-89.93	2,152.73	-4,494.94	9,789.63	9,365.59	424.04	23.087		
11,400.00	6,303.00	6,300.00	6,292.04	62.90	397.94	-89.93	2,152.73	-4,494.94	9,888.16	9,464.04	424.12	23.314		
11,500.00	6,303.00	6,300.00	6,292.04	63.95	397.94	-89.93	2,152.73	-4,494.94	9,986.73	9,562.52	424.21	23.542		
11,600.00	6,303.00	6,300.00	6,292.04	65.00	397.94	-89.93	2,152.73	-4,494.94	10,085.32	9,661.03	424.29	23.770		
11,700.00	6,303.00	6,300.00	6,292.04	66.05	397.94	-89.93	2,152.73	-4,494.94	10,183.94	9,759.57	424.38	23.997		
11,800.00	6,303.00	6,300.00	6,292.04	67.11	397.94	-89.93	2,152.73	-4,494.94	10,282.59	9,858.13	424.46	24.225		
11,900.00	6,303.00	6,300.00	6,292.04	68.17	397.94	-89.93	2,152.73	-4,494.94	10,381.27	9,956.72	424.55	24.452		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W06_FEDERAL V #003_1526867 - Depth Only - Depth Only													Offset Site Error: 0.00 usft
Survey Program: 6300-INC-ONLY							Rule Assigned:						Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance				Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
12,000.00	6,303.00	6,300.00	6,292.04	69.23	397.94	-89.93	2,152.73	-4,494.94	10,479.96	10,055.33	424.63	24.680	
12,100.00	6,303.00	6,300.00	6,292.04	70.29	397.94	-89.93	2,152.73	-4,494.94	10,578.69	10,153.97	424.72	24.907	



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W07_PRE-ONGARD WELL #001_1527282 - Depth Only - Depth Only													Offset Site Error: 0.00 usft
Survey Program: 7450-INC-ONLY													Offset Well Error: 0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
1,200.00	1,200.00	1,167.00	1,167.00	4.07	73.71	-105.52	-489.02	-1,761.13	1,827.77	1,749.98	77.78	23.498	CC
1,300.00	1,299.99	1,266.99	1,266.99	4.43	80.03	-99.94	-489.02	-1,761.13	1,827.99	1,743.54	84.46	21.644	
1,400.00	1,399.91	1,366.91	1,366.91	4.79	86.34	-100.05	-489.02	-1,761.13	1,828.68	1,737.55	91.12	20.068	
1,500.00	1,499.69	1,466.69	1,466.69	5.14	92.64	-100.24	-489.02	-1,761.13	1,829.83	1,732.05	97.78	18.713	
1,600.00	1,599.27	1,566.27	1,566.27	5.50	98.93	-100.50	-489.02	-1,761.13	1,831.48	1,727.05	104.43	17.538	
1,697.75	1,696.34	1,663.34	1,663.34	5.85	105.07	-100.81	-489.02	-1,761.13	1,833.62	1,722.71	110.91	16.533	
1,700.00	1,698.57	1,665.57	1,665.57	5.86	105.21	-100.82	-489.02	-1,761.13	1,833.67	1,722.61	111.06	16.511	
1,800.00	1,797.73	1,764.73	1,764.73	6.22	111.47	-101.22	-489.02	-1,761.13	1,836.18	1,718.50	117.68	15.603	
1,900.00	1,896.88	1,863.88	1,863.88	6.57	117.73	-101.61	-489.02	-1,761.13	1,838.77	1,714.47	124.30	14.793	
2,000.00	1,996.03	1,963.03	1,963.03	6.93	123.99	-102.00	-489.02	-1,761.13	1,841.45	1,710.53	130.92	14.066	
2,100.00	2,095.18	2,062.18	2,062.18	7.28	130.26	-102.40	-489.02	-1,761.13	1,844.22	1,706.68	137.54	13.408	
2,200.00	2,194.33	2,161.33	2,161.33	7.64	136.52	-102.79	-489.02	-1,761.13	1,847.07	1,702.91	144.16	12.812	
2,300.00	2,293.49	2,260.49	2,260.49	8.00	142.78	-103.18	-489.02	-1,761.13	1,850.02	1,699.23	150.79	12.269	
2,400.00	2,392.64	2,359.64	2,359.64	8.36	149.05	-103.56	-489.02	-1,761.13	1,853.05	1,695.64	157.41	11.772	
2,500.00	2,491.79	2,458.79	2,458.79	8.72	155.31	-103.95	-489.02	-1,761.13	1,856.16	1,692.13	164.03	11.316	
2,600.00	2,590.94	2,557.94	2,557.94	9.09	161.57	-104.34	-489.02	-1,761.13	1,859.36	1,688.70	170.66	10.895	
2,700.00	2,690.10	2,657.10	2,657.10	9.45	167.84	-104.72	-489.02	-1,761.13	1,862.65	1,685.37	177.28	10.507	
2,800.00	2,789.25	2,756.25	2,756.25	9.81	174.10	-105.10	-489.02	-1,761.13	1,866.02	1,682.11	183.91	10.147	
2,900.00	2,888.40	2,855.40	2,855.40	10.17	180.36	-105.48	-489.02	-1,761.13	1,869.47	1,678.94	190.53	9.812	
3,000.00	2,987.55	2,954.55	2,954.55	10.53	186.62	-105.86	-489.02	-1,761.13	1,873.01	1,675.85	197.16	9.500	
3,100.00	3,086.70	3,053.70	3,053.70	10.89	192.89	-106.24	-489.02	-1,761.13	1,876.63	1,672.85	203.78	9.209	
3,200.00	3,185.86	3,152.86	3,152.86	11.26	199.15	-106.62	-489.02	-1,761.13	1,880.34	1,669.93	210.41	8.937	
3,300.00	3,285.01	3,252.01	3,252.01	11.62	205.41	-107.00	-489.02	-1,761.13	1,884.12	1,667.09	217.03	8.681	
3,400.00	3,384.16	3,351.16	3,351.16	11.98	211.68	-107.37	-489.02	-1,761.13	1,887.99	1,664.34	223.66	8.441	
3,500.00	3,483.31	3,450.31	3,450.31	12.35	217.94	-107.74	-489.02	-1,761.13	1,891.94	1,661.66	230.28	8.216	
3,600.00	3,582.46	3,549.46	3,549.46	12.71	224.20	-108.11	-489.02	-1,761.13	1,895.97	1,659.07	236.91	8.003	
3,700.00	3,681.62	3,648.62	3,648.62	13.07	230.46	-108.48	-489.02	-1,761.13	1,900.09	1,656.55	243.53	7.802	
3,800.00	3,780.77	3,747.77	3,747.77	13.44	236.73	-108.85	-489.02	-1,761.13	1,904.28	1,654.12	250.16	7.612	
3,900.00	3,879.92	3,846.92	3,846.92	13.80	242.99	-109.22	-489.02	-1,761.13	1,908.55	1,651.76	256.79	7.432	
4,000.00	3,979.07	3,946.07	3,946.07	14.16	249.25	-109.58	-489.02	-1,761.13	1,912.90	1,649.48	263.41	7.262	
4,100.00	4,078.23	4,045.23	4,045.23	14.53	255.52	-109.95	-489.02	-1,761.13	1,917.32	1,647.29	270.04	7.100	
4,200.00	4,177.38	4,144.38	4,144.38	14.89	261.78	-110.31	-489.02	-1,761.13	1,921.83	1,645.17	276.66	6.946	
4,300.00	4,276.53	4,243.53	4,243.53	15.25	268.04	-110.67	-489.02	-1,761.13	1,926.41	1,643.12	283.29	6.800	
4,400.00	4,375.68	4,342.68	4,342.68	15.62	274.31	-111.03	-489.02	-1,761.13	1,931.07	1,641.15	289.91	6.661	
4,500.00	4,474.83	4,441.83	4,441.83	15.98	280.57	-111.38	-489.02	-1,761.13	1,935.80	1,639.26	296.54	6.528	
4,600.00	4,573.99	4,540.99	4,540.99	16.35	286.83	-111.74	-489.02	-1,761.13	1,940.61	1,637.45	303.17	6.401	
4,700.00	4,673.14	4,640.14	4,640.14	16.71	293.09	-112.09	-489.02	-1,761.13	1,945.50	1,635.71	309.79	6.280	
4,800.00	4,772.29	4,739.29	4,739.29	17.07	299.36	-112.44	-489.02	-1,761.13	1,950.46	1,634.04	316.42	6.164	
4,900.00	4,871.44	4,838.44	4,838.44	17.44	305.62	-112.79	-489.02	-1,761.13	1,955.49	1,632.45	323.04	6.053	
5,000.00	4,970.59	4,937.59	4,937.59	17.80	311.88	-113.14	-489.02	-1,761.13	1,960.60	1,630.93	329.67	5.947	
5,100.00	5,069.75	5,036.75	5,036.75	18.17	318.15	-113.48	-489.02	-1,761.13	1,965.78	1,629.48	336.30	5.845	
5,134.20	5,103.66	5,070.66	5,070.66	18.29	320.29	-113.60	-489.02	-1,761.13	1,967.56	1,629.00	338.56	5.812	
5,200.00	5,168.97	5,135.97	5,135.97	18.53	324.41	-113.86	-489.02	-1,761.13	1,970.80	1,627.87	342.93	5.747	
5,300.00	5,268.47	5,235.47	5,235.47	18.89	330.70	-114.18	-489.02	-1,761.13	1,974.88	1,625.31	349.57	5.649	
5,400.00	5,368.19	5,335.19	5,335.19	19.25	337.00	-114.41	-489.02	-1,761.13	1,977.92	1,621.69	356.23	5.552	
5,500.00	5,468.08	5,435.08	5,435.08	19.61	343.31	-114.56	-489.02	-1,761.13	1,979.90	1,617.00	362.90	5.456	
5,600.00	5,568.05	5,535.05	5,535.05	19.96	349.62	-114.63	-489.02	-1,761.13	1,980.79	1,611.23	369.56	5.360	
5,631.95	5,600.00	5,567.00	5,567.00	20.07	351.64	-120.25	-489.02	-1,761.13	1,980.85	1,609.15	371.70	5.329	
5,700.00	5,668.05	5,635.05	5,635.05	20.31	355.94	-120.25	-489.02	-1,761.13	1,980.85	1,604.61	376.23	5.265	
5,761.99	5,730.04	5,697.04	5,697.04	20.53	359.85	-120.25	-489.02	-1,761.13	1,980.85	1,600.48	380.37	5.208	
5,800.00	5,768.02	5,735.02	5,735.02	20.66	362.25	149.71	-489.02	-1,761.13	1,981.93	1,599.04	382.90	5.176	ES
5,850.00	5,817.70	5,784.70	5,784.70	20.83	365.39	149.55	-489.02	-1,761.13	1,986.68	1,600.47	386.20	5.144	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W07_PRE-ONGARD WELL #001_1527282 - Depth Only - Depth Only													Offset Site Error: 0.00 usft
Survey Program: 7450-INC-ONLY													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
5,900.00	5,866.72	5,833.72	5,833.72	20.99	368.49	149.26	-489.02	-1,761.13	1,995.15	1,605.69	389.46	5.123	
5,950.00	5,914.69	5,881.69	5,881.69	21.15	371.52	148.82	-489.02	-1,761.13	2,007.31	1,614.66	392.65	5.112	
6,000.00	5,961.26	5,928.26	5,928.26	21.31	374.46	148.21	-489.02	-1,761.13	2,023.09	1,627.34	395.75	5.112 SF	
6,050.00	6,006.07	5,973.07	5,973.07	21.45	377.29	147.42	-489.02	-1,761.13	2,042.38	1,643.66	398.72	5.122	
6,100.00	6,048.78	6,015.78	6,015.78	21.58	379.99	146.41	-489.02	-1,761.13	2,065.08	1,663.53	401.55	5.143	
6,150.00	6,089.06	6,056.06	6,056.06	21.70	382.53	145.13	-489.02	-1,761.13	2,091.04	1,686.82	404.22	5.173	
6,200.00	6,126.62	6,093.62	6,093.62	21.81	384.90	143.53	-489.02	-1,761.13	2,120.09	1,713.38	406.70	5.213	
6,250.00	6,161.15	6,128.15	6,128.15	21.94	387.08	141.53	-489.02	-1,761.13	2,152.04	1,743.05	408.98	5.262	
6,300.00	6,192.40	6,159.40	6,159.40	22.09	389.06	139.03	-489.02	-1,761.13	2,186.67	1,775.63	411.04	5.320	
6,350.00	6,220.13	6,187.13	6,187.13	22.24	390.81	135.89	-489.02	-1,761.13	2,223.76	1,810.89	412.87	5.386	
6,400.00	6,244.14	6,211.14	6,211.14	22.38	392.33	131.94	-489.02	-1,761.13	2,263.02	1,848.58	414.44	5.460	
6,450.00	6,264.23	6,231.23	6,231.23	22.53	393.60	126.97	-489.02	-1,761.13	2,304.19	1,888.43	415.76	5.542	
6,500.00	6,280.25	6,247.25	6,247.25	22.68	394.61	120.70	-489.02	-1,761.13	2,346.96	1,930.15	416.81	5.631	
6,550.00	6,292.09	6,259.09	6,259.09	22.83	395.36	112.92	-489.02	-1,761.13	2,391.00	1,973.42	417.58	5.726	
6,600.00	6,299.65	6,266.65	6,266.65	22.97	395.83	103.52	-489.02	-1,761.13	2,435.99	2,017.91	418.08	5.827	
6,650.00	6,302.87	6,269.87	6,269.87	23.11	396.04	92.73	-489.02	-1,761.13	2,481.57	2,063.29	418.29	5.933	
6,661.99	6,303.00	6,270.00	6,270.00	23.14	396.04	90.00	-489.02	-1,761.13	2,492.56	2,074.26	418.30	5.959	
6,681.03	6,303.00	6,270.00	6,270.00	23.20	396.04	90.00	-489.02	-1,761.13	2,510.04	2,091.74	418.30	6.001	
6,700.00	6,303.00	6,270.00	6,270.00	23.25	396.04	90.00	-489.02	-1,761.13	2,527.51	2,109.20	418.30	6.042	
6,800.00	6,303.00	6,270.00	6,270.00	23.57	396.04	90.00	-489.02	-1,761.13	2,619.93	2,201.61	418.32	6.263	
6,900.00	6,303.00	6,270.00	6,270.00	23.94	396.04	90.00	-489.02	-1,761.13	2,712.89	2,294.55	418.34	6.485	
7,000.00	6,303.00	6,270.00	6,270.00	24.35	396.04	90.00	-489.02	-1,761.13	2,806.33	2,387.97	418.36	6.708	
7,100.00	6,303.00	6,270.00	6,270.00	24.81	396.04	90.00	-489.02	-1,761.13	2,900.21	2,481.82	418.39	6.932	
7,200.00	6,303.00	6,270.00	6,270.00	25.30	396.04	90.00	-489.02	-1,761.13	2,994.49	2,576.07	418.42	7.157	
7,300.00	6,303.00	6,270.00	6,270.00	25.84	396.04	90.00	-489.02	-1,761.13	3,089.13	2,670.67	418.45	7.382	
7,400.00	6,303.00	6,270.00	6,270.00	26.41	396.04	90.00	-489.02	-1,761.13	3,184.09	2,765.60	418.49	7.609	
7,500.00	6,303.00	6,270.00	6,270.00	27.02	396.04	90.00	-489.02	-1,761.13	3,279.36	2,860.83	418.52	7.836	
7,600.00	6,303.00	6,270.00	6,270.00	27.66	396.04	90.00	-489.02	-1,761.13	3,374.90	2,956.33	418.56	8.063	
7,700.00	6,303.00	6,270.00	6,270.00	28.33	396.04	90.00	-489.02	-1,761.13	3,470.69	3,052.09	418.60	8.291	
7,800.00	6,303.00	6,270.00	6,270.00	29.02	396.04	90.00	-489.02	-1,761.13	3,566.71	3,148.07	418.64	8.520	
7,900.00	6,303.00	6,270.00	6,270.00	29.75	396.04	90.00	-489.02	-1,761.13	3,662.94	3,244.26	418.68	8.749	
8,000.00	6,303.00	6,270.00	6,270.00	30.49	396.04	90.00	-489.02	-1,761.13	3,759.37	3,340.65	418.72	8.978	
8,100.00	6,303.00	6,270.00	6,270.00	31.26	396.04	90.00	-489.02	-1,761.13	3,855.98	3,437.22	418.76	9.208	
8,200.00	6,303.00	6,270.00	6,270.00	32.05	396.04	90.00	-489.02	-1,761.13	3,952.76	3,533.96	418.81	9.438	
8,300.00	6,303.00	6,270.00	6,270.00	32.86	396.04	90.00	-489.02	-1,761.13	4,049.70	3,630.85	418.85	9.669	
8,400.00	6,303.00	6,270.00	6,270.00	33.69	396.04	90.00	-489.02	-1,761.13	4,146.78	3,727.89	418.89	9.899	
8,500.00	6,303.00	6,270.00	6,270.00	34.53	396.04	90.00	-489.02	-1,761.13	4,244.00	3,825.06	418.94	10.130	
8,600.00	6,303.00	6,270.00	6,270.00	35.39	396.04	90.00	-489.02	-1,761.13	4,341.35	3,922.36	418.98	10.362	
8,700.00	6,303.00	6,270.00	6,270.00	36.26	396.04	90.00	-489.02	-1,761.13	4,438.81	4,019.78	419.03	10.593	
8,800.00	6,303.00	6,270.00	6,270.00	37.15	396.04	90.00	-489.02	-1,761.13	4,536.38	4,117.31	419.07	10.825	
8,900.00	6,303.00	6,270.00	6,270.00	38.05	396.04	90.00	-489.02	-1,761.13	4,634.06	4,214.94	419.12	11.057	
9,000.00	6,303.00	6,270.00	6,270.00	38.96	396.04	90.00	-489.02	-1,761.13	4,731.83	4,312.67	419.17	11.289	
9,100.00	6,303.00	6,270.00	6,270.00	39.88	396.04	90.00	-489.02	-1,761.13	4,829.70	4,410.48	419.21	11.521	
9,200.00	6,303.00	6,270.00	6,270.00	40.81	396.04	90.00	-489.02	-1,761.13	4,927.65	4,508.39	419.26	11.753	
9,300.00	6,303.00	6,270.00	6,270.00	41.75	396.04	90.00	-489.02	-1,761.13	5,025.68	4,606.37	419.31	11.986	
9,400.00	6,303.00	6,270.00	6,270.00	42.70	396.04	90.00	-489.02	-1,761.13	5,123.78	4,704.43	419.36	12.218	
9,500.00	6,303.00	6,270.00	6,270.00	43.66	396.04	90.00	-489.02	-1,761.13	5,221.96	4,802.56	419.41	12.451	
9,600.00	6,303.00	6,270.00	6,270.00	44.63	396.04	90.00	-489.02	-1,761.13	5,320.21	4,900.76	419.45	12.684	
9,700.00	6,303.00	6,270.00	6,270.00	45.60	396.04	90.00	-489.02	-1,761.13	5,418.52	4,999.02	419.50	12.916	
9,800.00	6,303.00	6,270.00	6,270.00	46.58	396.04	90.00	-489.02	-1,761.13	5,516.89	5,097.34	419.55	13.149	
9,900.00	6,303.00	6,270.00	6,270.00	47.56	396.04	90.00	-489.02	-1,761.13	5,615.32	5,195.72	419.61	13.382	
10,000.00	6,303.00	6,270.00	6,270.00	48.56	396.04	90.00	-489.02	-1,761.13	5,713.81	5,294.15	419.66	13.615	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W07_PRE-ONGARD WELL #001_1527282 - Depth Only - Depth Only											Offset Site Error: 0.00 usft
Survey Program: 7450-INC-ONLY											Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	
10,100.00	6,303.00	6,270.00	6,270.00	49.55	396.04	90.00	-489.02	-1,761.13	5,812.34	5,392.63	13.849
10,200.00	6,303.00	6,270.00	6,270.00	50.55	396.04	90.00	-489.02	-1,761.13	5,910.93	5,491.17	14.082
10,300.00	6,303.00	6,270.00	6,270.00	51.56	396.04	90.00	-489.02	-1,761.13	6,009.56	5,589.75	14.315
10,400.00	6,303.00	6,270.00	6,270.00	52.57	396.04	90.00	-489.02	-1,761.13	6,108.23	5,688.37	14.548
10,500.00	6,303.00	6,270.00	6,270.00	53.59	396.04	90.00	-489.02	-1,761.13	6,206.95	5,787.03	14.781
10,600.00	6,303.00	6,270.00	6,270.00	54.61	396.04	90.00	-489.02	-1,761.13	6,305.71	5,885.74	15.015
10,700.00	6,303.00	6,270.00	6,270.00	55.63	396.04	90.00	-489.02	-1,761.13	6,404.51	5,984.48	15.248
10,800.00	6,303.00	6,270.00	6,270.00	56.66	396.04	90.00	-489.02	-1,761.13	6,503.34	6,083.26	15.481
10,900.00	6,303.00	6,270.00	6,270.00	57.69	396.04	90.00	-489.02	-1,761.13	6,602.21	6,182.07	15.714
11,000.00	6,303.00	6,270.00	6,270.00	58.73	396.04	90.00	-489.02	-1,761.13	6,701.12	6,280.92	15.948
11,100.00	6,303.00	6,270.00	6,270.00	59.77	396.04	90.00	-489.02	-1,761.13	6,800.05	6,379.80	16.181
11,200.00	6,303.00	6,270.00	6,270.00	60.81	396.04	90.00	-489.02	-1,761.13	6,899.02	6,478.71	16.414
11,300.00	6,303.00	6,270.00	6,270.00	61.85	396.04	90.00	-489.02	-1,761.13	6,998.01	6,577.65	16.647
11,400.00	6,303.00	6,270.00	6,270.00	62.90	396.04	90.00	-489.02	-1,761.13	7,097.03	6,676.61	16.881
11,500.00	6,303.00	6,270.00	6,270.00	63.95	396.04	90.00	-489.02	-1,761.13	7,196.08	6,775.60	17.114
11,600.00	6,303.00	6,270.00	6,270.00	65.00	396.04	90.00	-489.02	-1,761.13	7,295.16	6,874.62	17.347
11,700.00	6,303.00	6,270.00	6,270.00	66.05	396.04	90.00	-489.02	-1,761.13	7,394.26	6,973.66	17.580
11,800.00	6,303.00	6,270.00	6,270.00	67.11	396.04	90.00	-489.02	-1,761.13	7,493.39	7,072.72	17.813
11,900.00	6,303.00	6,270.00	6,270.00	68.17	396.04	90.00	-489.02	-1,761.13	7,592.53	7,171.81	18.046
12,000.00	6,303.00	6,270.00	6,270.00	69.23	396.04	90.00	-489.02	-1,761.13	7,691.70	7,270.92	18.279
12,100.00	6,303.00	6,270.00	6,270.00	70.29	396.04	90.00	-489.02	-1,761.13	7,790.89	7,370.05	18.513
12,200.00	6,303.00	6,270.00	6,270.00	71.35	396.04	90.00	-489.02	-1,761.13	7,890.11	7,469.20	18.745
12,300.00	6,303.00	6,270.00	6,270.00	72.42	396.04	90.00	-489.02	-1,761.13	7,989.34	7,568.37	18.978
12,400.00	6,303.00	6,270.00	6,270.00	73.49	396.04	90.00	-489.02	-1,761.13	8,088.59	7,667.55	19.211
12,500.00	6,303.00	6,270.00	6,270.00	74.55	396.04	90.00	-489.02	-1,761.13	8,187.86	7,766.76	19.444
12,600.00	6,303.00	6,270.00	6,270.00	75.62	396.04	90.00	-489.02	-1,761.13	8,287.14	7,865.98	19.677
12,700.00	6,303.00	6,270.00	6,270.00	76.70	396.04	90.00	-489.02	-1,761.13	8,386.44	7,965.22	19.910
12,800.00	6,303.00	6,270.00	6,270.00	77.77	396.04	90.00	-489.02	-1,761.13	8,485.76	8,064.47	20.142
12,900.00	6,303.00	6,270.00	6,270.00	78.84	396.04	90.00	-489.02	-1,761.13	8,585.10	8,163.74	20.375
13,000.00	6,303.00	6,270.00	6,270.00	79.92	396.04	90.00	-489.02	-1,761.13	8,684.45	8,263.02	20.607
13,100.00	6,303.00	6,270.00	6,270.00	81.00	396.04	90.00	-489.02	-1,761.13	8,783.81	8,362.32	20.840
13,200.00	6,303.00	6,270.00	6,270.00	82.08	396.04	90.00	-489.02	-1,761.13	8,883.19	8,461.63	21.072
13,300.00	6,303.00	6,270.00	6,270.00	83.16	396.04	90.00	-489.02	-1,761.13	8,982.59	8,560.96	21.304
13,400.00	6,303.00	6,270.00	6,270.00	84.24	396.04	90.00	-489.02	-1,761.13	9,081.99	8,660.30	21.537
13,500.00	6,303.00	6,270.00	6,270.00	85.32	396.04	90.00	-489.02	-1,761.13	9,181.41	8,759.64	21.769
13,600.00	6,303.00	6,270.00	6,270.00	86.40	396.04	90.00	-489.02	-1,761.13	9,280.84	8,859.01	22.001
13,700.00	6,303.00	6,270.00	6,270.00	87.49	396.04	90.00	-489.02	-1,761.13	9,380.29	8,958.38	22.233
13,800.00	6,303.00	6,270.00	6,270.00	88.57	396.04	90.00	-489.02	-1,761.13	9,479.74	9,057.76	22.465
13,900.00	6,303.00	6,270.00	6,270.00	89.66	396.04	90.00	-489.02	-1,761.13	9,579.21	9,157.16	22.697
14,000.00	6,303.00	6,270.00	6,270.00	90.74	396.04	90.00	-489.02	-1,761.13	9,678.69	9,256.57	22.929
14,100.00	6,303.00	6,270.00	6,270.00	91.83	396.04	90.00	-489.02	-1,761.13	9,778.18	9,355.98	23.160
14,200.00	6,303.00	6,270.00	6,270.00	92.92	396.04	90.00	-489.02	-1,761.13	9,877.68	9,455.41	23.392
14,300.00	6,303.00	6,270.00	6,270.00	94.01	396.04	90.00	-489.02	-1,761.13	9,977.19	9,554.84	23.623
14,400.00	6,303.00	6,270.00	6,270.00	95.10	396.04	90.00	-489.02	-1,761.13	10,076.70	9,654.29	23.855
14,500.00	6,303.00	6,270.00	6,270.00	96.19	396.04	90.00	-489.02	-1,761.13	10,176.23	9,753.74	24.086
14,600.00	6,303.00	6,270.00	6,270.00	97.28	396.04	90.00	-489.02	-1,761.13	10,275.77	9,853.20	24.317
14,700.00	6,303.00	6,270.00	6,270.00	98.37	396.04	90.00	-489.02	-1,761.13	10,375.32	9,952.67	24.549
14,800.00	6,303.00	6,270.00	6,270.00	99.46	396.04	90.00	-489.02	-1,761.13	10,474.87	10,052.15	24.780

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W09_GOVERNMENT AB #002_1521480 - Inc Only - Inc Only													Offset Site Error: 0.00 usft
Survey Program: 300-INC-ONLY													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
12,300.00	6,303.00	6,265.28	6,264.00	72.42	138.84	-90.00	900.84	10,122.63	3,977.62	3,814.46	163.16	24.379	
12,400.00	6,303.00	6,265.28	6,264.00	73.49	138.84	-90.00	900.84	10,122.63	3,877.97	3,714.71	163.26	23.754	
12,500.00	6,303.00	6,265.28	6,264.00	74.55	138.84	-90.00	900.84	10,122.63	3,778.34	3,614.98	163.36	23.129	
12,600.00	6,303.00	6,265.28	6,264.00	75.62	138.84	-90.00	900.84	10,122.63	3,678.73	3,515.26	163.47	22.504	
12,700.00	6,303.00	6,265.28	6,264.00	76.70	138.84	-90.00	900.84	10,122.63	3,579.14	3,415.56	163.58	21.880	
12,800.00	6,303.00	6,265.28	6,264.00	77.77	138.84	-90.00	900.84	10,122.63	3,479.57	3,315.87	163.70	21.256	
12,900.00	6,303.00	6,265.28	6,264.00	78.84	138.84	-90.00	900.84	10,122.63	3,380.03	3,216.20	163.83	20.631	
13,000.00	6,303.00	6,265.28	6,264.00	79.92	138.84	-90.00	900.84	10,122.63	3,280.52	3,116.55	163.97	20.007	
13,100.00	6,303.00	6,265.28	6,264.00	81.00	138.84	-90.00	900.84	10,122.63	3,181.03	3,016.92	164.11	19.383	
13,200.00	6,303.00	6,265.28	6,264.00	82.08	138.84	-90.00	900.84	10,122.63	3,081.58	2,917.31	164.27	18.759	
13,300.00	6,303.00	6,265.28	6,264.00	83.16	138.84	-90.00	900.84	10,122.63	2,982.17	2,817.73	164.44	18.135	
13,400.00	6,303.00	6,265.28	6,264.00	84.24	138.84	-90.00	900.84	10,122.63	2,882.80	2,718.18	164.62	17.512	
13,500.00	6,303.00	6,265.28	6,264.00	85.32	138.84	-90.00	900.84	10,122.63	2,783.47	2,618.65	164.82	16.888	
13,600.00	6,303.00	6,265.28	6,264.00	86.40	138.84	-90.00	900.84	10,122.63	2,684.20	2,519.16	165.04	16.264	
13,700.00	6,303.00	6,265.28	6,264.00	87.49	138.84	-90.00	900.84	10,122.63	2,584.98	2,419.70	165.28	15.640	
13,800.00	6,303.00	6,265.28	6,264.00	88.57	138.84	-90.00	900.84	10,122.63	2,485.82	2,320.28	165.54	15.016	
13,900.00	6,303.00	6,265.28	6,264.00	89.66	138.84	-90.00	900.84	10,122.63	2,386.73	2,220.90	165.83	14.392	
14,000.00	6,303.00	6,265.28	6,264.00	90.74	138.84	-90.00	900.84	10,122.63	2,287.72	2,121.57	166.16	13.768	
14,100.00	6,303.00	6,265.28	6,264.00	91.83	138.84	-90.00	900.84	10,122.63	2,188.80	2,022.28	166.52	13.144	
14,200.00	6,303.00	6,265.28	6,264.00	92.92	138.84	-90.00	900.84	10,122.63	2,089.99	1,923.06	166.93	12.520	
14,300.00	6,303.00	6,265.28	6,264.00	94.01	138.84	-90.00	900.84	10,122.63	1,991.29	1,823.90	167.39	11.896	
14,400.00	6,303.00	6,265.28	6,264.00	95.10	138.84	-90.00	900.84	10,122.63	1,892.73	1,724.81	167.92	11.272	
14,500.00	6,303.00	6,265.28	6,264.00	96.19	138.84	-90.00	900.84	10,122.63	1,794.33	1,625.81	168.52	10.647	
14,600.00	6,303.00	6,265.28	6,264.00	97.28	138.84	-90.00	900.84	10,122.63	1,696.12	1,526.90	169.22	10.023	
14,700.00	6,303.00	6,265.28	6,264.00	98.37	138.84	-90.00	900.84	10,122.63	1,598.13	1,428.09	170.03	9.399	
14,800.00	6,303.00	6,265.28	6,264.00	99.46	138.84	-90.00	900.84	10,122.63	1,500.40	1,329.41	170.99	8.775	
14,900.00	6,303.00	6,265.28	6,264.00	100.56	138.84	-90.00	900.84	10,122.63	1,402.99	1,230.88	172.11	8.152	
15,000.00	6,303.00	6,265.28	6,264.00	101.65	138.84	-90.00	900.84	10,122.63	1,305.98	1,132.52	173.46	7.529	
15,100.00	6,303.00	6,265.28	6,264.00	102.74	138.84	-90.00	900.84	10,122.63	1,209.45	1,034.37	175.07	6.908	
15,200.00	6,303.00	6,265.28	6,264.00	103.84	138.84	-90.00	900.84	10,122.63	1,113.53	936.50	177.04	6.290	
15,300.00	6,303.00	6,265.28	6,264.00	104.93	138.84	-90.00	900.84	10,122.63	1,018.40	838.95	179.45	5.675	
15,400.00	6,303.00	6,265.28	6,264.00	106.03	138.84	-90.00	900.84	10,122.63	924.30	741.86	182.44	5.066	
15,500.00	6,303.00	6,265.28	6,264.00	107.13	138.84	-90.00	900.84	10,122.63	831.58	645.39	186.19	4.466	
15,600.00	6,303.00	6,265.28	6,264.00	108.22	138.84	-90.00	900.84	10,122.63	740.75	549.80	190.95	3.879	
15,700.00	6,303.00	6,265.28	6,264.00	109.32	138.84	-90.00	900.84	10,122.63	652.61	455.56	197.05	3.312	
15,800.00	6,303.00	6,265.28	6,264.00	110.42	138.84	-90.00	900.84	10,122.63	568.41	363.52	204.89	2.774	
15,900.00	6,303.00	6,265.28	6,264.00	111.52	138.84	-90.00	900.84	10,122.63	490.18	275.30	214.89	2.281	
16,000.00	6,303.00	6,265.28	6,264.00	112.62	138.84	-90.00	900.84	10,122.63	421.27	194.13	227.14	1.855	
16,100.00	6,303.00	6,265.28	6,264.00	113.72	138.84	-90.00	900.84	10,122.63	366.96	126.44	240.52	1.526	
16,200.00	6,303.00	6,265.28	6,264.00	114.82	138.84	-90.00	900.84	10,122.63	334.44	83.12	251.32	1.331	Level 3
16,264.05	6,303.00	6,265.28	6,264.00	115.52	138.84	-90.00	900.84	10,122.63	328.25	73.90	254.35	1.291	Level 3, CC, ES, SF
16,300.00	6,303.00	6,265.28	6,264.00	115.92	138.84	-90.00	900.84	10,122.63	330.21	75.94	254.27	1.299	Level 3
16,400.00	6,303.00	6,265.28	6,264.00	117.02	138.84	-90.00	900.84	10,122.63	355.29	107.23	248.05	1.432	Level 3
16,500.00	6,303.00	6,265.28	6,264.00	118.12	138.84	-90.00	900.84	10,122.63	404.25	167.28	236.97	1.706	
16,600.00	6,303.00	6,265.28	6,264.00	119.22	138.84	-90.00	900.84	10,122.63	469.69	244.18	225.51	2.083	
16,700.00	6,303.00	6,265.28	6,264.00	120.32	138.84	-90.00	900.84	10,122.63	545.71	330.06	215.65	2.531	
16,800.00	6,303.00	6,265.28	6,264.00	121.43	138.84	-90.00	900.84	10,122.63	628.48	420.79	207.69	3.026	
16,900.00	6,303.00	6,265.28	6,264.00	122.53	138.84	-90.00	900.84	10,122.63	715.67	514.27	201.40	3.553	
16,921.74	6,303.00	6,265.28	6,264.00	122.77	138.84	-90.00	900.84	10,122.63	735.05	534.83	200.22	3.671	
16,922.61	6,303.00	6,265.28	6,264.00	122.78	138.84	-90.00	900.84	10,122.63	735.83	533.92	201.92	3.644	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W10_GOVERNMENT AB #003_1521774 - Inc Only - Inc Only													Offset Site Error: 0.00 usft
Survey Program: 350-INC-ONLY													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
10,100.00	6,303.00	6,274.30	6,274.00	49.55	117.72	-90.00	882.67	7,450.88	3,507.59	3,366.80	140.79	24.914	
10,200.00	6,303.00	6,274.30	6,274.00	50.55	117.72	-90.00	882.67	7,450.88	3,408.04	3,267.19	140.85	24.196	
10,300.00	6,303.00	6,274.30	6,274.00	51.56	117.72	-90.00	882.67	7,450.88	3,308.52	3,167.60	140.92	23.478	
10,400.00	6,303.00	6,274.30	6,274.00	52.57	117.72	-90.00	882.67	7,450.88	3,209.03	3,068.03	141.00	22.760	
10,500.00	6,303.00	6,274.30	6,274.00	53.59	117.72	-90.00	882.67	7,450.88	3,109.57	2,968.49	141.08	22.042	
10,600.00	6,303.00	6,274.30	6,274.00	54.61	117.72	-90.00	882.67	7,450.88	3,010.14	2,868.98	141.16	21.324	
10,700.00	6,303.00	6,274.30	6,274.00	55.63	117.72	-90.00	882.67	7,450.88	2,910.76	2,769.50	141.26	20.606	
10,800.00	6,303.00	6,274.30	6,274.00	56.66	117.72	-90.00	882.67	7,450.88	2,811.42	2,670.06	141.36	19.889	
10,900.00	6,303.00	6,274.30	6,274.00	57.69	117.72	-90.00	882.67	7,450.88	2,712.13	2,570.65	141.47	19.171	
11,000.00	6,303.00	6,274.30	6,274.00	58.73	117.72	-90.00	882.67	7,450.88	2,612.89	2,471.29	141.60	18.453	
11,100.00	6,303.00	6,274.30	6,274.00	59.77	117.72	-90.00	882.67	7,450.88	2,513.71	2,371.98	141.73	17.736	
11,200.00	6,303.00	6,274.30	6,274.00	60.81	117.72	-90.00	882.67	7,450.88	2,414.60	2,272.71	141.88	17.018	
11,300.00	6,303.00	6,274.30	6,274.00	61.85	117.72	-90.00	882.67	7,450.88	2,315.56	2,173.51	142.06	16.300	
11,400.00	6,303.00	6,274.30	6,274.00	62.90	117.72	-90.00	882.67	7,450.88	2,216.62	2,074.37	142.25	15.583	
11,500.00	6,303.00	6,274.30	6,274.00	63.95	117.72	-90.00	882.67	7,450.88	2,117.77	1,975.30	142.47	14.865	
11,600.00	6,303.00	6,274.30	6,274.00	65.00	117.72	-90.00	882.67	7,450.88	2,019.03	1,876.32	142.71	14.147	
11,700.00	6,303.00	6,274.30	6,274.00	66.05	117.72	-90.00	882.67	7,450.88	1,920.43	1,777.43	143.00	13.430	
11,800.00	6,303.00	6,274.30	6,274.00	67.11	117.72	-90.00	882.67	7,450.88	1,821.97	1,678.65	143.33	12.712	
11,900.00	6,303.00	6,274.30	6,274.00	68.17	117.72	-90.00	882.67	7,450.88	1,723.70	1,579.99	143.71	11.994	
12,000.00	6,303.00	6,274.30	6,274.00	69.23	117.72	-90.00	882.67	7,450.88	1,625.64	1,481.47	144.16	11.276	
12,100.00	6,303.00	6,274.30	6,274.00	70.29	117.72	-90.00	882.67	7,450.88	1,527.82	1,383.12	144.70	10.559	
12,200.00	6,303.00	6,274.30	6,274.00	71.35	117.72	-90.00	882.67	7,450.88	1,430.32	1,284.97	145.34	9.841	
12,300.00	6,303.00	6,274.30	6,274.00	72.42	117.72	-90.00	882.67	7,450.88	1,333.17	1,187.06	146.11	9.124	
12,400.00	6,303.00	6,274.30	6,274.00	73.49	117.72	-90.00	882.67	7,450.88	1,236.49	1,089.43	147.06	8.408	
12,500.00	6,303.00	6,274.30	6,274.00	74.55	117.72	-90.00	882.67	7,450.88	1,140.38	992.16	148.22	7.694	
12,600.00	6,303.00	6,274.30	6,274.00	75.62	117.72	-90.00	882.67	7,450.88	1,044.99	895.33	149.67	6.982	
12,700.00	6,303.00	6,274.30	6,274.00	76.70	117.72	-90.00	882.67	7,450.88	950.56	799.07	151.49	6.275	
12,800.00	6,303.00	6,274.30	6,274.00	77.77	117.72	-90.00	882.67	7,450.88	857.39	703.57	153.81	5.574	
12,900.00	6,303.00	6,274.30	6,274.00	78.84	117.72	-90.00	882.67	7,450.88	765.94	609.13	156.81	4.885	
13,000.00	6,303.00	6,274.30	6,274.00	79.92	117.72	-90.00	882.67	7,450.88	676.92	516.21	160.71	4.212	
13,100.00	6,303.00	6,274.30	6,274.00	81.00	117.72	-90.00	882.67	7,450.88	591.41	425.60	165.81	3.567	
13,200.00	6,303.00	6,274.30	6,274.00	82.08	117.72	-90.00	882.67	7,450.88	511.20	338.74	172.46	2.964	
13,300.00	6,303.00	6,274.30	6,274.00	83.16	117.72	-90.00	882.67	7,450.88	439.18	258.30	180.88	2.428	
13,400.00	6,303.00	6,274.30	6,274.00	84.24	117.72	-90.00	882.67	7,450.88	380.04	189.40	190.64	1.994	
13,500.00	6,303.00	6,274.30	6,274.00	85.32	117.72	-90.00	882.67	7,450.88	340.56	140.89	199.67	1.706	
13,592.24	6,303.00	6,274.30	6,274.00	86.32	117.72	-90.00	882.67	7,450.88	327.83	123.81	204.02	1.607 CC	
13,600.00	6,303.00	6,274.30	6,274.00	86.40	117.72	-90.00	882.67	7,450.88	327.92	123.80	204.12	1.607 ES, SF	
13,700.00	6,303.00	6,274.30	6,274.00	87.49	117.72	-90.00	882.67	7,450.88	345.09	143.41	201.67	1.711	
13,800.00	6,303.00	6,274.30	6,274.00	88.57	117.72	-90.00	882.67	7,450.88	388.12	193.58	194.54	1.995	
13,900.00	6,303.00	6,274.30	6,274.00	89.66	117.72	-90.00	882.67	7,450.88	449.65	263.32	186.34	2.413	
14,000.00	6,303.00	6,274.30	6,274.00	90.74	117.72	-90.00	882.67	7,450.88	523.20	344.19	179.02	2.923	
14,100.00	6,303.00	6,274.30	6,274.00	91.83	117.72	-90.00	882.67	7,450.88	604.39	431.34	173.06	3.492	
14,200.00	6,303.00	6,274.30	6,274.00	92.92	117.72	-90.00	882.67	7,450.88	690.54	522.18	168.36	4.102	
14,300.00	6,303.00	6,274.30	6,274.00	94.01	117.72	-90.00	882.67	7,450.88	780.00	615.33	164.67	4.737	
14,400.00	6,303.00	6,274.30	6,274.00	95.10	117.72	-90.00	882.67	7,450.88	871.75	709.99	161.76	5.389	
14,500.00	6,303.00	6,274.30	6,274.00	96.19	117.72	-90.00	882.67	7,450.88	965.14	805.71	159.44	6.053	
14,600.00	6,303.00	6,274.30	6,274.00	97.28	117.72	-90.00	882.67	7,450.88	1,059.74	902.17	157.57	6.726	
14,700.00	6,303.00	6,274.30	6,274.00	98.37	117.72	-90.00	882.67	7,450.88	1,155.25	999.20	156.05	7.403	
14,800.00	6,303.00	6,274.30	6,274.00	99.46	117.72	-90.00	882.67	7,450.88	1,251.46	1,096.66	154.80	8.084	
14,900.00	6,303.00	6,274.30	6,274.00	100.56	117.72	-90.00	882.67	7,450.88	1,348.23	1,194.46	153.77	8.768	
15,000.00	6,303.00	6,274.30	6,274.00	101.65	117.72	-90.00	882.67	7,450.88	1,445.43	1,292.53	152.90	9.453	
15,100.00	6,303.00	6,274.30	6,274.00	102.74	117.72	-90.00	882.67	7,450.88	1,542.99	1,390.81	152.17	10.140	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W10_GOVERNMENT AB #003_1521774 - Inc Only - Inc Only												Offset Site Error:	0.00 usft
Survey Program: 350-INC-ONLY												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Separation Factor	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
15,200.00	6,303.00	6,274.30	6,274.00	103.84	117.72	-90.00	882.67	7,450.88	1,640.84	1,489.28	151.56	10.826	
15,300.00	6,303.00	6,274.30	6,274.00	104.93	117.72	-90.00	882.67	7,450.88	1,738.94	1,587.90	151.04	11.513	
15,400.00	6,303.00	6,274.30	6,274.00	106.03	117.72	-90.00	882.67	7,450.88	1,837.25	1,686.65	150.59	12.200	
15,500.00	6,303.00	6,274.30	6,274.00	107.13	117.72	-90.00	882.67	7,450.88	1,935.72	1,785.51	150.21	12.887	
15,600.00	6,303.00	6,274.30	6,274.00	108.22	117.72	-90.00	882.67	7,450.88	2,034.35	1,884.47	149.88	13.573	
15,700.00	6,303.00	6,274.30	6,274.00	109.32	117.72	-90.00	882.67	7,450.88	2,133.10	1,983.50	149.60	14.259	
15,800.00	6,303.00	6,274.30	6,274.00	110.42	117.72	-90.00	882.67	7,450.88	2,231.97	2,082.61	149.35	14.944	
15,900.00	6,303.00	6,274.30	6,274.00	111.52	117.72	-90.00	882.67	7,450.88	2,330.93	2,181.78	149.15	15.629	
16,000.00	6,303.00	6,274.30	6,274.00	112.62	117.72	-90.00	882.67	7,450.88	2,429.98	2,281.01	148.96	16.312	
16,100.00	6,303.00	6,274.30	6,274.00	113.72	117.72	-90.00	882.67	7,450.88	2,529.10	2,380.29	148.81	16.996	
16,200.00	6,303.00	6,274.30	6,274.00	114.82	117.72	-90.00	882.67	7,450.88	2,628.29	2,479.61	148.68	17.678	
16,300.00	6,303.00	6,274.30	6,274.00	115.92	117.72	-90.00	882.67	7,450.88	2,727.53	2,578.97	148.56	18.359	
16,400.00	6,303.00	6,274.30	6,274.00	117.02	117.72	-90.00	882.67	7,450.88	2,826.83	2,678.37	148.47	19.040	
16,500.00	6,303.00	6,274.30	6,274.00	118.12	117.72	-90.00	882.67	7,450.88	2,926.18	2,777.80	148.39	19.720	
16,600.00	6,303.00	6,274.30	6,274.00	119.22	117.72	-90.00	882.67	7,450.88	3,025.57	2,877.25	148.32	20.399	
16,700.00	6,303.00	6,274.30	6,274.00	120.32	117.72	-90.00	882.67	7,450.88	3,125.00	2,976.74	148.26	21.077	
16,800.00	6,303.00	6,274.30	6,274.00	121.43	117.72	-90.00	882.67	7,450.88	3,224.47	3,076.25	148.22	21.755	
16,900.00	6,303.00	6,274.30	6,274.00	122.53	117.72	-90.00	882.67	7,450.88	3,323.97	3,175.78	148.19	22.431	
16,921.74	6,303.00	6,274.30	6,274.00	122.77	117.72	-90.00	882.67	7,450.88	3,345.60	3,197.42	148.18	22.578	
16,922.61	6,303.00	6,274.30	6,274.00	122.78	117.72	-90.00	882.67	7,450.88	3,346.47	3,194.28	152.19	21.989	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W11_GOVERNMENT AB #006_1527846 - Inc Only - Inc Only													Offset Site Error: 0.00 usft
Survey Program: 156-INC-NOLY													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
8,800.00	6,303.00	6,292.90	6,290.48	37.15	159.02	-90.26	3,532.05	6,168.53	4,621.45	4,433.71	187.75	24.615	
8,900.00	6,303.00	6,292.89	6,290.48	38.05	159.02	-90.26	3,532.05	6,168.53	4,545.58	4,357.15	188.43	24.123	
9,000.00	6,303.00	6,292.89	6,290.48	38.96	159.02	-90.26	3,532.05	6,168.53	4,470.66	4,281.50	189.16	23.634	
9,100.00	6,303.00	6,292.88	6,290.47	39.88	159.02	-90.26	3,532.05	6,168.53	4,396.74	4,206.80	189.94	23.148	
9,200.00	6,303.00	6,292.88	6,290.47	40.81	159.02	-90.26	3,532.05	6,168.53	4,323.87	4,133.11	190.76	22.667	
9,300.00	6,303.00	6,292.88	6,290.47	41.75	159.02	-90.26	3,532.05	6,168.53	4,252.09	4,060.47	191.62	22.190	
9,400.00	6,303.00	6,292.87	6,290.46	42.70	159.02	-90.26	3,532.05	6,168.53	4,181.48	3,988.95	192.54	21.718	
9,500.00	6,303.00	6,292.87	6,290.46	43.66	159.02	-90.26	3,532.05	6,168.53	4,112.09	3,918.60	193.49	21.252	
9,600.00	6,303.00	6,292.87	6,290.45	44.63	159.02	-90.26	3,532.05	6,168.53	4,043.98	3,849.49	194.50	20.792	
9,700.00	6,303.00	6,292.86	6,290.45	45.60	159.02	-90.26	3,532.05	6,168.53	3,977.22	3,781.68	195.55	20.339	
9,800.00	6,303.00	6,292.86	6,290.45	46.58	159.02	-90.26	3,532.05	6,168.53	3,911.88	3,715.24	196.64	19.893	
9,900.00	6,303.00	6,292.85	6,290.44	47.56	159.02	-90.26	3,532.05	6,168.53	3,848.02	3,650.24	197.78	19.456	
10,000.00	6,303.00	6,292.85	6,290.44	48.56	159.02	-90.26	3,532.05	6,168.53	3,785.73	3,586.77	198.97	19.027	
10,100.00	6,303.00	6,292.85	6,290.44	49.55	159.02	-90.26	3,532.05	6,168.53	3,725.09	3,524.89	200.20	18.607	
10,200.00	6,303.00	6,292.84	6,290.43	50.55	159.02	-90.26	3,532.05	6,168.53	3,666.17	3,464.70	201.47	18.197	
10,300.00	6,303.00	6,292.84	6,290.43	51.56	159.02	-90.26	3,532.05	6,168.53	3,609.05	3,406.27	202.78	17.798	
10,400.00	6,303.00	6,292.84	6,290.42	52.57	159.02	-90.26	3,532.05	6,168.53	3,553.84	3,349.71	204.13	17.410	
10,500.00	6,303.00	6,292.83	6,290.42	53.59	159.02	-90.26	3,532.05	6,168.53	3,500.61	3,295.09	205.52	17.033	
10,600.00	6,303.00	6,292.83	6,290.42	54.61	159.02	-90.26	3,532.05	6,168.53	3,449.46	3,242.52	206.94	16.669	
10,700.00	6,303.00	6,292.82	6,290.41	55.63	159.02	-90.26	3,532.05	6,168.53	3,400.48	3,192.09	208.39	16.318	
10,800.00	6,303.00	6,292.82	6,290.41	56.66	159.02	-90.26	3,532.05	6,168.53	3,353.77	3,143.90	209.86	15.981	
10,900.00	6,303.00	6,292.82	6,290.41	57.69	159.02	-90.26	3,532.05	6,168.53	3,309.42	3,098.05	211.36	15.658	
11,000.00	6,303.00	6,292.81	6,290.40	58.73	159.02	-90.26	3,532.05	6,168.53	3,267.53	3,054.65	212.88	15.349	
11,100.00	6,303.00	6,292.81	6,290.40	59.77	159.02	-90.26	3,532.05	6,168.53	3,228.19	3,013.79	214.41	15.056	
11,200.00	6,303.00	6,292.81	6,290.39	60.81	159.02	-90.26	3,532.05	6,168.53	3,191.51	2,975.57	215.94	14.779	
11,300.00	6,303.00	6,292.80	6,290.39	61.85	159.02	-90.26	3,532.05	6,168.53	3,157.57	2,940.09	217.48	14.519	
11,400.00	6,303.00	6,292.80	6,290.39	62.90	159.02	-90.26	3,532.05	6,168.53	3,126.45	2,907.45	219.01	14.276	
11,500.00	6,303.00	6,292.79	6,290.38	63.95	159.02	-90.26	3,532.05	6,168.53	3,098.26	2,877.73	220.52	14.050	
11,600.00	6,303.00	6,292.79	6,290.38	65.00	159.02	-90.26	3,532.05	6,168.53	3,073.06	2,851.04	222.02	13.841	
11,700.00	6,303.00	6,292.79	6,290.38	66.05	159.02	-90.26	3,532.05	6,168.53	3,050.93	2,827.44	223.49	13.651	
11,800.00	6,303.00	6,292.78	6,290.37	67.11	159.02	-90.26	3,532.05	6,168.53	3,031.95	2,807.01	224.93	13.479	
11,900.00	6,303.00	6,292.78	6,290.37	68.17	159.02	-90.26	3,532.05	6,168.53	3,016.16	2,789.83	226.33	13.326	
12,000.00	6,303.00	6,292.78	6,290.36	69.23	159.02	-90.26	3,532.05	6,168.53	3,003.61	2,775.93	227.68	13.192	
12,100.00	6,303.00	6,292.77	6,290.36	70.29	159.02	-90.26	3,532.05	6,168.53	2,994.36	2,765.38	228.98	13.077	
12,200.00	6,303.00	6,292.77	6,290.36	71.35	159.02	-90.26	3,532.05	6,168.53	2,988.42	2,758.21	230.22	12.981	
12,300.00	6,303.00	6,292.76	6,290.35	72.42	159.02	-90.26	3,532.05	6,168.53	2,985.83	2,754.44	231.39	12.904	
12,327.52	6,303.00	6,292.76	6,290.35	72.71	159.02	-90.26	3,532.05	6,168.53	2,985.70	2,754.00	231.70	12.886 CC, ES	
12,400.00	6,303.00	6,292.76	6,290.35	73.49	159.02	-90.26	3,532.05	6,168.53	2,986.58	2,754.09	232.49	12.846	
12,500.00	6,303.00	6,292.76	6,290.35	74.55	159.02	-90.26	3,532.05	6,168.53	2,990.68	2,757.16	233.52	12.807	
12,600.00	6,303.00	6,292.75	6,290.34	75.62	159.02	-90.26	3,532.05	6,168.53	2,998.11	2,763.63	234.48	12.786	
12,700.00	6,303.00	6,292.75	6,290.34	76.70	159.02	-90.26	3,532.05	6,168.53	3,008.85	2,773.50	235.35	12.785 SF	
12,800.00	6,303.00	6,292.75	6,290.33	77.77	159.02	-90.26	3,532.05	6,168.53	3,022.86	2,786.71	236.14	12.801	
12,900.00	6,303.00	6,292.74	6,290.33	78.84	159.02	-90.26	3,532.05	6,168.53	3,040.09	2,803.23	236.86	12.835	
13,000.00	6,303.00	6,292.74	6,290.33	79.92	159.02	-90.26	3,532.05	6,168.53	3,060.50	2,823.01	237.49	12.887	
13,100.00	6,303.00	6,292.74	6,290.32	81.00	159.02	-90.26	3,532.05	6,168.53	3,084.01	2,845.97	238.04	12.956	
13,200.00	6,303.00	6,292.73	6,290.32	82.08	159.02	-90.26	3,532.05	6,168.53	3,110.57	2,872.05	238.52	13.041	
13,300.00	6,303.00	6,292.73	6,290.32	83.16	159.02	-90.26	3,532.05	6,168.53	3,140.08	2,901.17	238.91	13.143	
13,400.00	6,303.00	6,292.72	6,290.31	84.24	159.02	-90.26	3,532.05	6,168.53	3,172.48	2,933.24	239.24	13.261	
13,500.00	6,303.00	6,292.72	6,290.31	85.32	159.02	-90.26	3,532.05	6,168.53	3,207.67	2,968.17	239.50	13.393	
13,600.00	6,303.00	6,292.72	6,290.31	86.40	159.02	-90.26	3,532.05	6,168.53	3,245.55	3,005.86	239.69	13.541	
13,700.00	6,303.00	6,292.71	6,290.30	87.49	159.02	-90.26	3,532.05	6,168.53	3,286.05	3,046.23	239.82	13.702	
13,800.00	6,303.00	6,292.71	6,290.30	88.57	159.02	-90.26	3,532.05	6,168.53	3,329.06	3,089.17	239.89	13.877	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W11_GOVERNMENT AB #006_1527846 - Inc Only - Inc Only											Offset Site Error: 0.00 usft
Survey Program: 156-INC-ONLY											Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	
13,900.00	6,303.00	6,292.71	6,290.29	89.66	159.02	-90.26	3,532.05	6,168.53	3,374.48	3,134.57	14.066
14,000.00	6,303.00	6,292.70	6,290.29	90.74	159.02	-90.26	3,532.05	6,168.53	3,422.22	3,182.34	14.267
14,100.00	6,303.00	6,292.70	6,290.29	91.83	159.02	-90.25	3,532.05	6,168.53	3,472.19	3,232.39	14.479
14,200.00	6,303.00	6,292.69	6,290.28	92.92	159.02	-90.25	3,532.05	6,168.53	3,524.29	3,284.60	14.704
14,300.00	6,303.00	6,292.69	6,290.28	94.01	159.02	-90.25	3,532.05	6,168.53	3,578.42	3,338.89	14.939
14,400.00	6,303.00	6,292.69	6,290.28	95.10	159.02	-90.25	3,532.05	6,168.53	3,634.50	3,395.15	15.185
14,500.00	6,303.00	6,292.68	6,290.27	96.19	159.02	-90.25	3,532.05	6,168.53	3,692.44	3,453.31	15.441
14,600.00	6,303.00	6,292.68	6,290.27	97.28	159.02	-90.25	3,532.05	6,168.53	3,752.14	3,513.26	15.707
14,700.00	6,303.00	6,292.68	6,290.26	98.37	159.02	-90.25	3,532.05	6,168.53	3,813.54	3,574.92	15.982
14,800.00	6,303.00	6,292.67	6,290.26	99.46	159.02	-90.25	3,532.05	6,168.53	3,876.54	3,638.20	16.265
14,900.00	6,303.00	6,292.67	6,290.26	100.56	159.01	-90.25	3,532.05	6,168.53	3,941.07	3,703.04	16.557
15,000.00	6,303.00	6,292.66	6,290.25	101.65	159.01	-90.25	3,532.05	6,168.53	4,007.06	3,769.34	16.856
15,100.00	6,303.00	6,292.66	6,290.25	102.74	159.01	-90.25	3,532.05	6,168.53	4,074.44	3,837.05	17.163
15,200.00	6,303.00	6,292.66	6,290.25	103.84	159.01	-90.25	3,532.05	6,168.53	4,143.13	3,906.08	17.478
15,300.00	6,303.00	6,292.65	6,290.24	104.93	159.01	-90.25	3,532.05	6,168.53	4,213.08	3,976.37	17.799
15,400.00	6,303.00	6,292.65	6,290.24	106.03	159.01	-90.25	3,532.05	6,168.53	4,284.22	4,047.87	18.126
15,500.00	6,303.00	6,292.65	6,290.23	107.13	159.01	-90.25	3,532.05	6,168.53	4,356.49	4,120.50	18.460
15,600.00	6,303.00	6,292.64	6,290.23	108.22	159.01	-90.25	3,532.05	6,168.53	4,429.85	4,194.21	18.799
15,700.00	6,303.00	6,292.64	6,290.23	109.32	159.01	-90.25	3,532.05	6,168.53	4,504.22	4,268.95	19.144
15,800.00	6,303.00	6,292.63	6,290.22	110.42	159.01	-90.25	3,532.05	6,168.53	4,579.58	4,344.66	19.495
15,900.00	6,303.00	6,292.63	6,290.22	111.52	159.01	-90.25	3,532.05	6,168.53	4,655.86	4,421.31	19.850
16,000.00	6,303.00	6,292.63	6,290.22	112.62	159.01	-90.25	3,532.05	6,168.53	4,733.02	4,498.83	20.210
16,100.00	6,303.00	6,292.62	6,290.21	113.72	159.01	-90.25	3,532.05	6,168.53	4,811.03	4,577.20	20.575
16,200.00	6,303.00	6,292.62	6,290.21	114.82	159.01	-90.25	3,532.05	6,168.53	4,889.84	4,656.36	20.944
16,300.00	6,303.00	6,292.62	6,290.20	115.92	159.01	-90.25	3,532.05	6,168.53	4,969.41	4,736.29	21.317
16,400.00	6,303.00	6,292.61	6,290.20	117.02	159.01	-90.25	3,532.05	6,168.53	5,049.70	4,816.93	21.694
16,500.00	6,303.00	6,292.61	6,290.20	118.12	159.01	-90.25	3,532.05	6,168.53	5,130.69	4,898.26	22.074
16,600.00	6,303.00	6,292.60	6,290.19	119.22	159.01	-90.25	3,532.05	6,168.53	5,212.34	4,980.25	22.459
16,700.00	6,303.00	6,292.60	6,290.19	120.32	159.01	-90.25	3,532.05	6,168.53	5,294.62	5,062.87	22.846
16,800.00	6,303.00	6,292.60	6,290.19	121.43	159.01	-90.25	3,532.05	6,168.53	5,377.50	5,146.08	23.237
16,900.00	6,303.00	6,292.59	6,290.18	122.53	159.01	-90.25	3,532.05	6,168.53	5,460.95	5,229.86	23.631
16,921.74	6,303.00	6,292.59	6,290.18	122.77	159.01	-90.25	3,532.05	6,168.53	5,479.17	5,248.14	23.717
16,922.61	6,303.00	6,292.59	6,290.18	122.78	159.01	-90.25	3,532.05	6,168.53	5,479.90	5,247.55	23.585



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W12_GOVERNMENT AB #007_1527847 - Inc Only - Inc Only													Offset Site Error:	0.00 usft	
Survey Program:		155-INC-ONLY					Rule Assigned:							Offset Well Error:	0.00 usft
Reference	Offset	Semi Major Axis			Highside		Offset Wellbore Centre		Distance		Minimum		Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Separation (usft)	Factor			
9,600.00	6,303.00	6,298.43	6,295.20	44.63	170.27	-90.46	3,541.76	7,489.02	5,030.62	4,829.07	201.55	24.960			
9,700.00	6,303.00	6,298.43	6,295.19	45.60	170.27	-90.46	3,541.76	7,489.02	4,950.51	4,748.21	202.30	24.471			
9,800.00	6,303.00	6,298.42	6,295.18	46.58	170.27	-90.46	3,541.76	7,489.02	4,871.13	4,668.04	203.09	23.985			
9,900.00	6,303.00	6,298.41	6,295.18	47.56	170.27	-90.46	3,541.76	7,489.02	4,792.53	4,588.61	203.92	23.502			
10,000.00	6,303.00	6,298.41	6,295.17	48.56	170.27	-90.46	3,541.76	7,489.02	4,714.73	4,509.94	204.79	23.022			
10,100.00	6,303.00	6,298.40	6,295.16	49.55	170.27	-90.46	3,541.76	7,489.02	4,637.79	4,432.09	205.70	22.546			
10,200.00	6,303.00	6,298.39	6,295.16	50.55	170.27	-90.46	3,541.77	7,489.02	4,561.74	4,355.08	206.66	22.074			
10,300.00	6,303.00	6,298.39	6,295.15	51.56	170.27	-90.46	3,541.77	7,489.02	4,486.63	4,278.98	207.66	21.606			
10,400.00	6,303.00	6,298.38	6,295.14	52.57	170.27	-90.46	3,541.77	7,489.02	4,412.51	4,203.81	208.70	21.143			
10,500.00	6,303.00	6,298.37	6,295.14	53.59	170.27	-90.46	3,541.77	7,489.02	4,339.43	4,129.64	209.78	20.685			
10,600.00	6,303.00	6,298.37	6,295.13	54.61	170.27	-90.46	3,541.77	7,489.02	4,267.44	4,056.52	210.92	20.233			
10,700.00	6,303.00	6,298.36	6,295.12	55.63	170.27	-90.46	3,541.77	7,489.02	4,196.60	3,984.51	212.09	19.787			
10,800.00	6,303.00	6,298.35	6,295.12	56.66	170.27	-90.46	3,541.77	7,489.02	4,126.96	3,913.65	213.31	19.347			
10,900.00	6,303.00	6,298.35	6,295.11	57.69	170.27	-90.46	3,541.77	7,489.02	4,058.60	3,844.02	214.58	18.915			
11,000.00	6,303.00	6,298.34	6,295.11	58.73	170.27	-90.46	3,541.77	7,489.02	3,991.57	3,775.68	215.89	18.489			
11,100.00	6,303.00	6,298.33	6,295.10	59.77	170.27	-90.46	3,541.77	7,489.02	3,925.94	3,708.70	217.24	18.072			
11,200.00	6,303.00	6,298.33	6,295.09	60.81	170.27	-90.46	3,541.77	7,489.02	3,861.78	3,643.15	218.64	17.663			
11,300.00	6,303.00	6,298.32	6,295.09	61.85	170.27	-90.46	3,541.77	7,489.02	3,799.18	3,579.10	220.08	17.263			
11,400.00	6,303.00	6,298.32	6,295.08	62.90	170.27	-90.46	3,541.77	7,489.02	3,738.20	3,516.65	221.56	16.872			
11,500.00	6,303.00	6,298.31	6,295.07	63.95	170.27	-90.46	3,541.77	7,489.02	3,678.93	3,455.86	223.08	16.492			
11,600.00	6,303.00	6,298.30	6,295.07	65.00	170.27	-90.46	3,541.77	7,489.02	3,621.46	3,396.82	224.64	16.121			
11,700.00	6,303.00	6,298.30	6,295.06	66.05	170.27	-90.46	3,541.77	7,489.02	3,565.86	3,339.63	226.23	15.762			
11,800.00	6,303.00	6,298.29	6,295.05	67.11	170.27	-90.46	3,541.77	7,489.02	3,512.22	3,284.37	227.86	15.414			
11,900.00	6,303.00	6,298.28	6,295.05	68.17	170.27	-90.46	3,541.77	7,489.02	3,460.65	3,231.14	229.51	15.078			
12,000.00	6,303.00	6,298.28	6,295.04	69.23	170.27	-90.46	3,541.77	7,489.02	3,411.23	3,180.04	231.19	14.755			
12,100.00	6,303.00	6,298.27	6,295.03	70.29	170.27	-90.46	3,541.77	7,489.02	3,364.06	3,131.17	232.89	14.445			
12,200.00	6,303.00	6,298.26	6,295.03	71.35	170.27	-90.46	3,541.77	7,489.02	3,319.23	3,084.62	234.61	14.148			
12,300.00	6,303.00	6,298.26	6,295.02	72.42	170.27	-90.46	3,541.77	7,489.02	3,276.84	3,040.51	236.33	13.865			
12,400.00	6,303.00	6,298.25	6,295.01	73.49	170.27	-90.46	3,541.77	7,489.02	3,236.98	2,998.92	238.07	13.597			
12,500.00	6,303.00	6,298.24	6,295.01	74.55	170.27	-90.46	3,541.77	7,489.02	3,199.76	2,959.96	239.80	13.344			
12,600.00	6,303.00	6,298.24	6,295.00	75.62	170.27	-90.46	3,541.77	7,489.02	3,165.26	2,923.74	241.52	13.106			
12,700.00	6,303.00	6,298.23	6,294.99	76.70	170.27	-90.46	3,541.77	7,489.02	3,133.57	2,890.34	243.22	12.884			
12,800.00	6,303.00	6,298.22	6,294.99	77.77	170.27	-90.46	3,541.77	7,489.02	3,104.78	2,859.87	244.90	12.678			
12,900.00	6,303.00	6,298.22	6,294.98	78.84	170.27	-90.46	3,541.77	7,489.02	3,078.96	2,832.41	246.55	12.488			
13,000.00	6,303.00	6,298.21	6,294.98	79.92	170.27	-90.46	3,541.77	7,489.02	3,056.21	2,808.04	248.17	12.315			
13,100.00	6,303.00	6,298.20	6,294.97	81.00	170.27	-90.46	3,541.77	7,489.02	3,036.58	2,786.85	249.73	12.159			
13,200.00	6,303.00	6,298.20	6,294.96	82.08	170.27	-90.46	3,541.77	7,489.02	3,020.13	2,768.89	251.24	12.021			
13,300.00	6,303.00	6,298.19	6,294.96	83.16	170.27	-90.46	3,541.77	7,489.02	3,006.92	2,754.23	252.69	11.900			
13,400.00	6,303.00	6,298.19	6,294.95	84.24	170.27	-90.46	3,541.77	7,489.02	2,996.99	2,742.93	254.07	11.796			
13,500.00	6,303.00	6,298.18	6,294.94	85.32	170.26	-90.46	3,541.77	7,489.02	2,990.38	2,735.01	255.37	11.710			
13,600.00	6,303.00	6,298.17	6,294.94	86.40	170.26	-90.46	3,541.77	7,489.02	2,987.10	2,730.51	256.59	11.642			
13,648.05	6,303.00	6,298.17	6,294.93	86.92	170.26	-90.46	3,541.77	7,489.02	2,986.71	2,729.56	257.15	11.615 CC			
13,700.00	6,303.00	6,298.17	6,294.93	87.49	170.26	-90.46	3,541.77	7,489.02	2,987.16	2,729.44	257.73	11.590 ES			
13,800.00	6,303.00	6,298.16	6,294.92	88.57	170.26	-90.46	3,541.77	7,489.02	2,990.57	2,731.80	258.77	11.557			
13,900.00	6,303.00	6,298.15	6,294.92	89.66	170.26	-90.46	3,541.77	7,489.02	2,997.32	2,737.60	259.72	11.540 SF			
14,000.00	6,303.00	6,298.15	6,294.91	90.74	170.26	-90.46	3,541.77	7,489.02	3,007.38	2,746.80	260.58	11.541			
14,100.00	6,303.00	6,298.14	6,294.90	91.83	170.26	-90.46	3,541.77	7,489.02	3,020.71	2,759.37	261.34	11.559			
14,200.00	6,303.00	6,298.13	6,294.90	92.92	170.26	-90.46	3,541.77	7,489.02	3,037.28	2,775.28	262.00	11.593			
14,300.00	6,303.00	6,298.13	6,294.89	94.01	170.26	-90.46	3,541.77	7,489.02	3,057.04	2,794.47	262.57	11.643			
14,400.00	6,303.00	6,298.12	6,294.88	95.10	170.26	-90.46	3,541.77	7,489.02	3,079.92	2,816.87	263.04	11.709			
14,500.00	6,303.00	6,298.11	6,294.88	96.19	170.26	-90.46	3,541.77	7,489.02	3,105.84	2,842.42	263.43	11.790			
14,600.00	6,303.00	6,298.11	6,294.87	97.28	170.26	-90.46	3,541.77	7,489.02	3,134.75	2,871.03	263.72	11.887			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W12_GOVERNMENT AB #007_1527847 - Inc Only - Inc Only													Offset Site Error:	0.00 usft	
Survey Program: 155-INC-ONLY														Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Rule Assigned: Distance			Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)				
14,700.00	6,303.00	6,298.10	6,294.86	98.37	170.26	-90.46	3,541.77	7,489.02	3,166.55	2,902.62	263.93	11.998			
14,800.00	6,303.00	6,298.09	6,294.86	99.46	170.26	-90.46	3,541.77	7,489.02	3,201.16	2,937.10	264.06	12.123			
14,900.00	6,303.00	6,298.09	6,294.85	100.56	170.26	-90.46	3,541.77	7,489.02	3,238.49	2,974.37	264.12	12.262			
15,000.00	6,303.00	6,298.08	6,294.85	101.65	170.26	-90.46	3,541.77	7,489.02	3,278.45	3,014.34	264.10	12.414			
15,100.00	6,303.00	6,298.08	6,294.84	102.74	170.26	-90.46	3,541.77	7,489.02	3,320.94	3,056.91	264.02	12.578			
15,200.00	6,303.00	6,298.07	6,294.83	103.84	170.26	-90.46	3,541.77	7,489.02	3,365.86	3,101.97	263.88	12.755			
15,300.00	6,303.00	6,298.06	6,294.83	104.93	170.26	-90.46	3,541.77	7,489.02	3,413.12	3,149.43	263.69	12.944			
15,400.00	6,303.00	6,298.06	6,294.82	106.03	170.26	-90.46	3,541.77	7,489.02	3,462.63	3,199.18	263.45	13.144			
15,500.00	6,303.00	6,298.05	6,294.81	107.13	170.26	-90.46	3,541.77	7,489.02	3,514.28	3,251.12	263.16	13.354			
15,600.00	6,303.00	6,298.04	6,294.81	108.22	170.26	-90.46	3,541.77	7,489.02	3,567.99	3,305.16	262.83	13.575			
15,700.00	6,303.00	6,298.04	6,294.80	109.32	170.26	-90.46	3,541.77	7,489.02	3,623.67	3,361.20	262.47	13.806			
15,800.00	6,303.00	6,298.03	6,294.79	110.42	170.26	-90.46	3,541.77	7,489.02	3,681.22	3,419.14	262.08	14.046			
15,900.00	6,303.00	6,298.02	6,294.79	111.52	170.26	-90.46	3,541.77	7,489.02	3,740.55	3,478.89	261.66	14.296			
16,000.00	6,303.00	6,298.02	6,294.78	112.62	170.26	-90.46	3,541.77	7,489.02	3,801.60	3,540.38	261.22	14.553			
16,100.00	6,303.00	6,298.01	6,294.77	113.72	170.26	-90.46	3,541.77	7,489.02	3,864.26	3,603.51	260.75	14.820			
16,200.00	6,303.00	6,298.00	6,294.77	114.82	170.26	-90.46	3,541.77	7,489.02	3,928.47	3,668.20	260.28	15.093			
16,300.00	6,303.00	6,298.00	6,294.76	115.92	170.26	-90.46	3,541.77	7,489.02	3,994.16	3,734.37	259.79	15.375			
16,400.00	6,303.00	6,297.99	6,294.75	117.02	170.26	-90.46	3,541.77	7,489.02	4,061.24	3,801.96	259.28	15.663			
16,500.00	6,303.00	6,297.98	6,294.75	118.12	170.26	-90.46	3,541.77	7,489.02	4,129.66	3,870.88	258.77	15.959			
16,600.00	6,303.00	6,297.98	6,294.74	119.22	170.26	-90.46	3,541.77	7,489.02	4,199.34	3,941.08	258.26	16.260			
16,700.00	6,303.00	6,297.97	6,294.74	120.32	170.26	-90.46	3,541.77	7,489.02	4,270.23	4,012.49	257.74	16.568			
16,800.00	6,303.00	6,297.97	6,294.73	121.43	170.26	-90.46	3,541.77	7,489.02	4,342.26	4,085.04	257.22	16.881			
16,900.00	6,303.00	6,297.96	6,294.72	122.53	170.26	-90.46	3,541.77	7,489.02	4,415.39	4,158.69	256.70	17.201			
16,921.74	6,303.00	6,297.96	6,294.72	122.77	170.26	-90.46	3,541.77	7,489.02	4,431.42	4,174.84	256.59	17.271			
16,922.61	6,303.00	6,297.96	6,294.72	122.78	170.26	-90.46	3,541.77	7,489.02	4,432.07	4,174.60	257.47	17.214			



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W13_GOVERNMENT AB #008_1527863 - Inc Only - Inc Only													Offset Site Error: 0.00 usft
Survey Program: 150-INC-ONLY													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
11,300.00	6,303.00	6,316.74	6,314.78	61.85	147.18	-90.86	3,400.67	8,835.61	4,657.39	4,469.30	188.09	24.762	
11,400.00	6,303.00	6,316.72	6,314.77	62.90	147.18	-90.86	3,400.67	8,835.61	4,578.48	4,389.30	189.18	24.201	
11,500.00	6,303.00	6,316.71	6,314.75	63.95	147.18	-90.86	3,400.67	8,835.61	4,500.42	4,310.09	190.33	23.646	
11,600.00	6,303.00	6,316.70	6,314.74	65.00	147.18	-90.86	3,400.67	8,835.61	4,423.24	4,231.72	191.52	23.096	
11,700.00	6,303.00	6,316.68	6,314.73	66.05	147.18	-90.86	3,400.67	8,835.61	4,346.99	4,154.24	192.75	22.552	
11,800.00	6,303.00	6,316.67	6,314.71	67.11	147.18	-90.86	3,400.67	8,835.61	4,271.72	4,077.68	194.03	22.016	
11,900.00	6,303.00	6,316.66	6,314.70	68.17	147.18	-90.86	3,400.67	8,835.61	4,197.48	4,002.12	195.36	21.486	
12,000.00	6,303.00	6,316.64	6,314.69	69.23	147.18	-90.86	3,400.67	8,835.61	4,124.33	3,927.59	196.74	20.964	
12,100.00	6,303.00	6,316.63	6,314.67	70.29	147.17	-90.86	3,400.67	8,835.61	4,052.33	3,854.16	198.16	20.449	
12,200.00	6,303.00	6,316.62	6,314.66	71.35	147.17	-90.86	3,400.67	8,835.61	3,981.54	3,781.90	199.64	19.944	
12,300.00	6,303.00	6,316.60	6,314.65	72.42	147.17	-90.86	3,400.67	8,835.61	3,912.02	3,710.86	201.16	19.447	
12,400.00	6,303.00	6,316.59	6,314.63	73.49	147.17	-90.86	3,400.67	8,835.61	3,843.85	3,641.12	202.73	18.961	
12,500.00	6,303.00	6,316.58	6,314.62	74.55	147.17	-90.86	3,400.67	8,835.61	3,777.09	3,572.74	204.35	18.484	
12,600.00	6,303.00	6,316.56	6,314.61	75.62	147.17	-90.86	3,400.67	8,835.61	3,711.83	3,505.82	206.01	18.018	
12,700.00	6,303.00	6,316.55	6,314.59	76.70	147.17	-90.86	3,400.67	8,835.61	3,648.14	3,440.42	207.72	17.563	
12,800.00	6,303.00	6,316.54	6,314.58	77.77	147.17	-90.86	3,400.67	8,835.61	3,586.11	3,376.64	209.48	17.119	
12,900.00	6,303.00	6,316.52	6,314.57	78.84	147.17	-90.86	3,400.67	8,835.61	3,525.83	3,314.56	211.27	16.689	
13,000.00	6,303.00	6,316.51	6,314.56	79.92	147.17	-90.86	3,400.67	8,835.61	3,467.38	3,254.27	213.11	16.270	
13,100.00	6,303.00	6,316.50	6,314.54	81.00	147.17	-90.86	3,400.67	8,835.61	3,410.86	3,195.88	214.98	15.866	
13,200.00	6,303.00	6,316.48	6,314.53	82.08	147.17	-90.86	3,400.67	8,835.61	3,356.38	3,139.49	216.89	15.475	
13,300.00	6,303.00	6,316.47	6,314.52	83.16	147.17	-90.86	3,400.67	8,835.61	3,304.02	3,085.20	218.82	15.099	
13,400.00	6,303.00	6,316.46	6,314.50	84.24	147.17	-90.86	3,400.67	8,835.61	3,253.89	3,033.12	220.77	14.739	
13,500.00	6,303.00	6,316.44	6,314.49	85.32	147.17	-90.86	3,400.67	8,835.61	3,206.10	2,983.35	222.75	14.393	
13,600.00	6,303.00	6,316.43	6,314.48	86.40	147.17	-90.86	3,400.67	8,835.61	3,160.75	2,936.02	224.73	14.065	
13,700.00	6,303.00	6,316.42	6,314.46	87.49	147.17	-90.86	3,400.67	8,835.61	3,117.95	2,891.23	226.72	13.753	
13,800.00	6,303.00	6,316.40	6,314.45	88.57	147.17	-90.86	3,400.67	8,835.61	3,077.80	2,849.10	228.70	13.458	
13,900.00	6,303.00	6,316.39	6,314.44	89.66	147.17	-90.86	3,400.67	8,835.61	3,040.41	2,809.74	230.67	13.181	
14,000.00	6,303.00	6,316.38	6,314.42	90.74	147.17	-90.86	3,400.67	8,835.61	3,005.89	2,773.27	232.62	12.922	
14,100.00	6,303.00	6,316.37	6,314.41	91.83	147.17	-90.86	3,400.67	8,835.61	2,974.33	2,739.80	234.53	12.682	
14,200.00	6,303.00	6,316.35	6,314.40	92.92	147.17	-90.86	3,400.67	8,835.61	2,945.83	2,709.42	236.41	12.461	
14,300.00	6,303.00	6,316.34	6,314.38	94.01	147.17	-90.86	3,400.67	8,835.61	2,920.47	2,682.24	238.23	12.259	
14,400.00	6,303.00	6,316.33	6,314.37	95.10	147.17	-90.86	3,400.68	8,835.61	2,898.35	2,658.35	240.00	12.077	
14,500.00	6,303.00	6,316.31	6,314.36	96.19	147.17	-90.86	3,400.68	8,835.61	2,879.53	2,637.84	241.69	11.914	
14,600.00	6,303.00	6,316.30	6,314.34	97.28	147.17	-90.86	3,400.68	8,835.61	2,864.08	2,620.79	243.29	11.772	
14,700.00	6,303.00	6,316.29	6,314.33	98.37	147.17	-90.85	3,400.68	8,835.61	2,852.06	2,607.24	244.81	11.650	
14,800.00	6,303.00	6,316.27	6,314.32	99.46	147.17	-90.85	3,400.68	8,835.61	2,843.50	2,597.27	246.23	11.548	
14,900.00	6,303.00	6,316.26	6,314.30	100.56	147.17	-90.85	3,400.68	8,835.61	2,838.44	2,590.90	247.55	11.466	
14,993.68	6,303.00	6,316.25	6,314.29	101.58	147.17	-90.85	3,400.68	8,835.61	2,836.90	2,588.22	248.68	11.408 CC	
15,000.00	6,303.00	6,316.25	6,314.29	101.65	147.17	-90.85	3,400.68	8,835.61	2,836.90	2,588.15	248.75	11.405 ES	
15,100.00	6,303.00	6,316.23	6,314.28	102.74	147.17	-90.85	3,400.68	8,835.61	2,838.89	2,589.06	249.83	11.363	
15,200.00	6,303.00	6,316.22	6,314.26	103.84	147.17	-90.85	3,400.68	8,835.61	2,844.39	2,593.59	250.79	11.342	
15,300.00	6,303.00	6,316.21	6,314.25	104.93	147.17	-90.85	3,400.68	8,835.61	2,853.39	2,601.75	251.63	11.339 SF	
15,400.00	6,303.00	6,316.19	6,314.24	106.03	147.16	-90.85	3,400.68	8,835.61	2,865.85	2,613.50	252.35	11.357	
15,500.00	6,303.00	6,316.18	6,314.22	107.13	147.16	-90.85	3,400.68	8,835.61	2,881.72	2,628.78	252.94	11.393	
15,600.00	6,303.00	6,316.17	6,314.21	108.22	147.16	-90.85	3,400.68	8,835.61	2,900.97	2,647.56	253.41	11.448	
15,700.00	6,303.00	6,316.15	6,314.20	109.32	147.16	-90.85	3,400.68	8,835.61	2,923.50	2,669.74	253.76	11.521	
15,800.00	6,303.00	6,316.14	6,314.19	110.42	147.16	-90.85	3,400.68	8,835.61	2,949.26	2,695.26	254.00	11.611	
15,900.00	6,303.00	6,316.13	6,314.17	111.52	147.16	-90.85	3,400.68	8,835.61	2,978.15	2,724.03	254.12	11.719	
16,000.00	6,303.00	6,316.11	6,314.16	112.62	147.16	-90.85	3,400.68	8,835.61	3,010.09	2,755.95	254.15	11.844	
16,100.00	6,303.00	6,316.10	6,314.15	113.72	147.16	-90.85	3,400.68	8,835.61	3,044.98	2,790.91	254.07	11.985	
16,200.00	6,303.00	6,316.09	6,314.13	114.82	147.16	-90.85	3,400.68	8,835.61	3,082.72	2,828.81	253.91	12.141	
16,300.00	6,303.00	6,316.07	6,314.12	115.92	147.16	-90.85	3,400.68	8,835.61	3,123.21	2,869.55	253.66	12.312	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W13_GOVERNMENT AB #008_1527863 - Inc Only - Inc Only													Offset Site Error: 0.00 usft
Survey Program: 150-INC-ONLY													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
16,400.00	6,303.00	6,316.06	6,314.11	117.02	147.16	-90.85	3,400.68	8,835.61	3,166.34	2,913.00	253.34	12.498	
16,500.00	6,303.00	6,316.05	6,314.09	118.12	147.16	-90.85	3,400.68	8,835.61	3,212.01	2,959.06	252.95	12.698	
16,600.00	6,303.00	6,316.04	6,314.08	119.22	147.16	-90.85	3,400.68	8,835.61	3,260.10	3,007.60	252.50	12.911	
16,700.00	6,303.00	6,316.02	6,314.07	120.32	147.16	-90.85	3,400.68	8,835.61	3,310.51	3,058.52	251.99	13.137	
16,800.00	6,303.00	6,316.01	6,314.05	121.43	147.16	-90.85	3,400.68	8,835.61	3,363.15	3,111.71	251.44	13.376	
16,900.00	6,303.00	6,316.00	6,314.04	122.53	147.16	-90.85	3,400.68	8,835.61	3,417.90	3,167.06	250.84	13.626	
16,921.74	6,303.00	6,315.99	6,314.04	122.77	147.16	-90.85	3,400.68	8,835.61	3,430.07	3,179.37	250.71	13.682	
16,922.61	6,303.00	6,315.99	6,314.04	122.78	147.16	-90.85	3,400.68	8,835.61	3,430.56	3,179.41	251.15	13.659	



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W14_ GOVERNMENT AB #009_1527964 - MWD/Inc - MWD/Inc													Offset Site Error: 0.00 usft
Survey Program: 100-OWSG MWD Rev 5													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
15,600.00	6,303.00	6,678.00	6,603.96	108.22	15.72	-96.67	3,452.90	10,161.43	2,987.65	2,867.84	119.80	24.938	
15,700.00	6,303.00	6,678.00	6,603.96	109.32	15.72	-96.67	3,452.90	10,161.43	2,965.14	2,843.51	121.63	24.377	
15,800.00	6,303.00	6,678.00	6,603.96	110.42	15.72	-96.67	3,452.90	10,161.43	2,945.86	2,822.48	123.38	23.876	
15,900.00	6,303.00	6,678.00	6,603.96	111.52	15.72	-96.67	3,452.90	10,161.43	2,929.87	2,804.84	125.03	23.433	
16,000.00	6,303.00	6,678.00	6,603.96	112.62	15.72	-96.67	3,452.90	10,161.43	2,917.22	2,790.64	126.58	23.046	
16,100.00	6,303.00	6,678.00	6,603.96	113.72	15.72	-96.67	3,452.90	10,161.43	2,907.96	2,779.94	128.02	22.715	
16,200.00	6,303.00	6,678.00	6,603.96	114.82	15.72	-96.67	3,452.90	10,161.43	2,902.11	2,772.78	129.34	22.439	
16,300.00	6,303.00	6,678.00	6,603.96	115.92	15.72	-96.67	3,452.90	10,161.43	2,899.71	2,769.18	130.53	22.215	
16,319.81	6,303.00	6,678.00	6,603.96	116.14	15.72	-96.67	3,452.90	10,161.43	2,899.64	2,768.89	130.75	22.177	CC, ES
16,400.00	6,303.00	6,678.00	6,603.96	117.02	15.72	-96.67	3,452.90	10,161.43	2,900.75	2,769.16	131.59	22.044	
16,500.00	6,303.00	6,678.00	6,603.96	118.12	15.72	-96.67	3,452.90	10,161.43	2,905.23	2,772.72	132.52	21.924	
16,600.00	6,303.00	6,678.00	6,603.96	119.22	15.72	-96.67	3,452.90	10,161.43	2,913.14	2,779.84	133.31	21.853	
16,700.00	6,303.00	6,678.00	6,603.96	120.32	15.72	-96.67	3,452.90	10,161.43	2,924.46	2,790.49	133.96	21.830	SF
16,800.00	6,303.00	6,678.00	6,603.96	121.43	15.72	-96.67	3,452.90	10,161.43	2,939.13	2,804.65	134.48	21.855	
16,900.00	6,303.00	6,678.00	6,603.96	122.53	15.72	-96.67	3,452.90	10,161.43	2,957.11	2,822.24	134.87	21.926	
16,921.74	6,303.00	6,678.00	6,603.96	122.77	15.72	-96.67	3,452.90	10,161.43	2,961.46	2,826.52	134.94	21.947	
16,922.61	6,303.00	6,678.00	6,603.96	122.78	15.72	-96.67	3,452.90	10,161.43	2,961.63	2,826.61	135.02	21.934	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W15_GOVERNMENT AB FEDERAL #011_1540853 - MWD - MWD												Offset Site Error: 0.00 usft	
Survey Program: 359-OWSG MWD Rev 5		Reference Offset						Rule Assigned: Distance				Offset Well Error: 0.00 usft	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
12,300.00	6,303.00	6,296.92	6,294.34	72.42	19.62	-90.16	2,121.25	7,258.88	1,919.97	1,841.14	78.83	24.356	
12,400.00	6,303.00	6,296.36	6,293.79	73.49	19.62	-90.14	2,121.25	7,258.88	1,864.03	1,782.67	81.36	22.912	
12,500.00	6,303.00	6,295.81	6,293.23	74.55	19.62	-90.12	2,121.24	7,258.89	1,811.88	1,727.94	83.94	21.586	
12,600.00	6,303.00	6,295.25	6,292.68	75.62	19.62	-90.10	2,121.24	7,258.89	1,763.86	1,677.31	86.55	20.380	
12,700.00	6,303.00	6,294.70	6,292.12	76.70	19.62	-90.08	2,121.24	7,258.89	1,720.32	1,631.16	89.16	19.296	
12,800.00	6,303.00	6,294.14	6,291.56	77.77	19.62	-90.06	2,121.24	7,258.90	1,681.61	1,589.89	91.72	18.334	
12,900.00	6,303.00	6,293.58	6,291.00	78.84	19.62	-90.04	2,121.24	7,258.90	1,648.06	1,553.86	94.20	17.495	
13,000.00	6,303.00	6,293.02	6,290.45	79.92	19.62	-90.02	2,121.24	7,258.90	1,620.00	1,523.44	96.56	16.778	
13,100.00	6,303.00	6,292.46	6,289.89	81.00	19.62	-90.00	2,121.24	7,258.91	1,597.72	1,498.98	98.73	16.182	
13,200.00	6,303.00	6,291.90	6,289.33	82.08	19.62	-89.98	2,121.24	7,258.91	1,581.46	1,480.77	100.69	15.706	
13,300.00	6,303.00	6,291.34	6,288.77	83.16	19.61	-89.95	2,121.24	7,258.91	1,571.40	1,469.02	102.38	15.349	
13,400.00	6,303.00	6,290.78	6,288.21	84.24	19.61	-89.93	2,121.24	7,258.92	1,567.67	1,463.89	103.78	15.106	
13,408.51	6,303.00	6,290.73	6,288.16	84.33	19.61	-89.93	2,121.24	7,258.92	1,567.65	1,463.77	103.88	15.091	CC, ES
13,500.00	6,303.00	6,290.22	6,287.64	85.32	19.61	-89.91	2,121.24	7,258.92	1,570.32	1,465.46	104.86	14.976	
13,600.00	6,303.00	6,289.66	6,287.08	86.40	19.61	-89.89	2,121.24	7,258.92	1,579.30	1,473.70	105.60	14.955	SF
13,700.00	6,303.00	6,289.09	6,286.52	87.49	19.61	-89.87	2,121.24	7,258.92	1,594.52	1,488.49	106.03	15.039	
13,800.00	6,303.00	6,288.53	6,285.96	88.57	19.61	-89.85	2,121.24	7,258.93	1,615.79	1,509.66	106.13	15.224	
13,900.00	6,303.00	6,287.97	6,285.39	89.66	19.61	-89.83	2,121.24	7,258.93	1,642.89	1,536.94	105.95	15.507	
14,000.00	6,303.00	6,287.40	6,284.83	90.74	19.61	-89.81	2,121.24	7,258.93	1,675.52	1,570.02	105.50	15.881	
14,100.00	6,303.00	6,286.84	6,284.26	91.83	19.61	-89.79	2,121.23	7,258.94	1,713.38	1,608.55	104.83	16.344	
14,200.00	6,303.00	6,286.27	6,283.69	92.92	19.61	-89.77	2,121.23	7,258.94	1,756.12	1,652.15	103.97	16.891	
14,300.00	6,303.00	6,285.70	6,283.13	94.01	19.61	-89.75	2,121.23	7,258.94	1,803.40	1,700.44	102.96	17.516	
14,400.00	6,303.00	6,285.14	6,282.56	95.10	19.61	-89.73	2,121.23	7,258.95	1,854.87	1,753.05	101.82	18.216	
14,500.00	6,303.00	6,284.57	6,281.99	96.19	19.61	-89.71	2,121.23	7,258.95	1,910.19	1,809.59	100.61	18.987	
14,600.00	6,303.00	6,284.00	6,281.42	97.28	19.61	-89.69	2,121.23	7,258.95	1,969.04	1,869.71	99.33	19.824	
14,700.00	6,303.00	6,283.43	6,280.86	98.37	19.61	-89.67	2,121.23	7,258.96	2,031.11	1,933.10	98.01	20.723	
14,800.00	6,303.00	6,282.86	6,280.29	99.46	19.61	-89.64	2,121.23	7,258.96	2,096.12	1,999.43	96.69	21.680	
14,900.00	6,303.00	6,282.29	6,279.72	100.56	19.61	-89.62	2,121.23	7,258.96	2,163.79	2,068.43	95.36	22.691	
15,000.00	6,303.00	6,281.72	6,279.14	101.65	19.61	-89.60	2,121.23	7,258.96	2,233.89	2,139.85	94.04	23.754	
15,100.00	6,303.00	6,281.15	6,278.57	102.74	19.61	-89.58	2,121.23	7,258.97	2,306.20	2,213.45	92.75	24.865	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W16_GOVERNMENT AB FEDERAL #014_1540854 - MWD - MWD											Offset Site Error: 0.00 usft
Survey Program: 155-OWSG MWD Rev 5											Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	
11,600.00	6,303.00	6,340.71	6,338.14	65.00	19.46	-91.53	2,270.84	6,236.47	1,895.77	1,817.69	24.280
11,700.00	6,303.00	6,339.39	6,336.82	66.05	19.46	-91.49	2,270.87	6,236.49	1,856.49	1,776.39	23.179
11,800.00	6,303.00	6,338.07	6,335.50	67.11	19.46	-91.45	2,270.90	6,236.51	1,821.85	1,739.78	22.201
11,900.00	6,303.00	6,336.76	6,334.18	68.17	19.46	-91.40	2,270.93	6,236.53	1,792.12	1,708.16	21.346
12,000.00	6,303.00	6,335.44	6,332.87	69.23	19.46	-91.36	2,270.95	6,236.54	1,767.56	1,681.81	20.613
12,100.00	6,303.00	6,334.14	6,331.56	70.29	19.46	-91.31	2,270.98	6,236.56	1,748.38	1,660.97	20.002
12,200.00	6,303.00	6,332.83	6,330.26	71.35	19.46	-91.27	2,271.01	6,236.58	1,734.76	1,645.85	19.511
12,300.00	6,303.00	6,331.53	6,328.96	72.42	19.46	-91.23	2,271.03	6,236.59	1,726.83	1,636.60	19.138
12,387.22	6,303.00	6,330.39	6,327.82	73.35	19.46	-91.19	2,271.06	6,236.61	1,724.63	1,633.41	18.907 CC
12,400.00	6,303.00	6,330.23	6,327.66	73.49	19.46	-91.18	2,271.06	6,236.61	1,724.68	1,633.33	18.880 ES
12,500.00	6,303.00	6,328.93	6,326.36	74.55	19.46	-91.14	2,271.09	6,236.63	1,728.31	1,636.06	18.734
12,600.00	6,303.00	6,327.64	6,325.07	75.62	19.46	-91.10	2,271.12	6,236.64	1,737.70	1,644.76	18.697 SF
12,700.00	6,303.00	6,326.35	6,323.78	76.70	19.46	-91.06	2,271.14	6,236.66	1,752.76	1,659.35	18.765
12,800.00	6,303.00	6,325.06	6,322.49	77.77	19.46	-91.01	2,271.17	6,236.68	1,773.33	1,679.67	18.933
12,900.00	6,303.00	6,323.78	6,321.21	78.84	19.46	-90.97	2,271.20	6,236.69	1,799.23	1,705.51	19.198
13,000.00	6,303.00	6,322.50	6,319.93	79.92	19.46	-90.93	2,271.22	6,236.71	1,830.24	1,736.64	19.555
13,100.00	6,303.00	6,321.22	6,318.65	81.00	19.46	-90.89	2,271.25	6,236.73	1,866.09	1,772.78	19.999
13,200.00	6,303.00	6,319.94	6,317.38	82.08	19.46	-90.84	2,271.28	6,236.74	1,906.52	1,813.64	20.526
13,300.00	6,303.00	6,318.67	6,316.10	83.16	19.46	-90.80	2,271.30	6,236.76	1,951.25	1,858.91	21.131
13,400.00	6,303.00	6,317.40	6,314.84	84.24	19.46	-90.76	2,271.33	6,236.78	1,999.97	1,908.27	21.810
13,500.00	6,303.00	6,316.14	6,313.57	85.32	19.46	-90.72	2,271.36	6,236.79	2,052.41	1,961.44	22.559
13,600.00	6,303.00	6,314.87	6,312.31	86.40	19.46	-90.67	2,271.38	6,236.81	2,108.30	2,018.10	23.373
13,700.00	6,303.00	6,313.62	6,311.05	87.49	19.46	-90.63	2,271.41	6,236.83	2,167.36	2,077.98	24.249

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W17_GOVERNMENT AB FEDERAL #013_1540920 - MWD - MWD												Offset Site Error:	0.00 usft
Survey Program: 267-OWSG MWD Rev 5												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
14,700.00	6,303.00	6,308.59	6,306.10	98.37	25.42	-90.74	2,281.11	10,092.69	2,302.57	2,205.99	96.58	23.841	
14,800.00	6,303.00	6,308.84	6,306.35	99.46	25.42	-90.75	2,281.10	10,092.69	2,236.77	2,137.27	99.51	22.479	
14,900.00	6,303.00	6,309.09	6,306.60	100.56	25.42	-90.76	2,281.10	10,092.69	2,173.59	2,071.05	102.54	21.198	
15,000.00	6,303.00	6,309.34	6,306.84	101.65	25.42	-90.77	2,281.10	10,092.69	2,113.25	2,007.59	105.66	20.000	
15,100.00	6,303.00	6,309.59	6,307.09	102.74	25.42	-90.77	2,281.09	10,092.69	2,056.01	1,947.14	108.87	18.885	
15,200.00	6,303.00	6,309.83	6,307.34	103.84	25.42	-90.78	2,281.09	10,092.69	2,002.13	1,890.00	112.13	17.855	
15,300.00	6,303.00	6,310.08	6,307.59	104.93	25.42	-90.79	2,281.09	10,092.69	1,951.89	1,836.46	115.43	16.910	
15,400.00	6,303.00	6,310.33	6,307.83	106.03	25.42	-90.80	2,281.08	10,092.69	1,905.57	1,786.86	118.72	16.051	
15,500.00	6,303.00	6,310.57	6,308.08	107.13	25.42	-90.81	2,281.08	10,092.69	1,863.48	1,741.51	121.97	15.278	
15,600.00	6,303.00	6,310.82	6,308.32	108.22	25.42	-90.82	2,281.07	10,092.69	1,825.90	1,700.75	125.14	14.590	
15,700.00	6,303.00	6,311.06	6,308.57	109.32	25.42	-90.82	2,281.07	10,092.69	1,793.11	1,664.92	128.19	13.988	
15,800.00	6,303.00	6,311.31	6,308.82	110.42	25.42	-90.83	2,281.07	10,092.69	1,765.38	1,634.34	131.05	13.471	
15,900.00	6,303.00	6,311.56	6,309.06	111.52	25.42	-90.84	2,281.06	10,092.69	1,742.96	1,609.28	133.68	13.038	
16,000.00	6,303.00	6,311.80	6,309.31	112.62	25.42	-90.85	2,281.06	10,092.69	1,726.06	1,590.02	136.03	12.689	
16,100.00	6,303.00	6,312.05	6,309.55	113.72	25.42	-90.86	2,281.06	10,092.69	1,714.82	1,576.76	138.06	12.421	
16,200.00	6,303.00	6,312.29	6,309.80	114.82	25.42	-90.86	2,281.05	10,092.70	1,709.37	1,569.64	139.73	12.233	
16,243.29	6,303.00	6,312.40	6,309.90	115.29	25.42	-90.87	2,281.05	10,092.70	1,708.82	1,568.49	140.34	12.177	CC, ES
16,300.00	6,303.00	6,312.54	6,310.04	115.92	25.42	-90.87	2,281.05	10,092.70	1,709.76	1,568.75	141.02	12.125	
16,400.00	6,303.00	6,312.78	6,310.29	117.02	25.42	-90.88	2,281.04	10,092.70	1,715.99	1,574.09	141.90	12.093	SF
16,500.00	6,303.00	6,313.02	6,310.53	118.12	25.42	-90.89	2,281.04	10,092.70	1,728.00	1,585.61	142.39	12.136	
16,600.00	6,303.00	6,313.27	6,310.77	119.22	25.42	-90.90	2,281.04	10,092.70	1,745.66	1,603.17	142.49	12.251	
16,700.00	6,303.00	6,313.51	6,311.02	120.32	25.42	-90.91	2,281.03	10,092.70	1,768.80	1,626.58	142.22	12.437	
16,800.00	6,303.00	6,313.76	6,311.26	121.43	25.42	-90.91	2,281.03	10,092.70	1,797.22	1,655.60	141.61	12.691	
16,900.00	6,303.00	6,314.00	6,311.50	122.53	25.42	-90.92	2,281.03	10,092.70	1,830.67	1,689.95	140.71	13.010	
16,921.74	6,303.00	6,314.05	6,311.56	122.77	25.42	-90.92	2,281.03	10,092.70	1,838.58	1,698.10	140.48	13.088	
16,922.61	6,303.00	6,314.05	6,311.56	122.78	25.42	-90.92	2,281.03	10,092.70	1,838.90	1,698.24	140.66	13.073	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W18_GOVERNMENT AB FEDERAL #012_1541049 - MWD - MWD													Offset Site Error: 0.00 usft
Survey Program: 144-OWSG MWD Rev 5													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Offset Wellbore Centre		Distance		Minimum	Separation	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Separation (usft)	Factor	
13,800.00	6,303.00	6,748.49	6,626.97	88.57	24.40	-100.74	2,342.03	9,014.01	2,265.79	2,171.49	94.29	24.029	
13,900.00	6,303.00	6,755.51	6,633.78	89.66	24.43	-100.96	2,340.36	9,014.52	2,206.97	2,110.04	96.94	22.767	
14,000.00	6,303.00	6,762.53	6,640.58	90.74	24.46	-101.18	2,338.69	9,015.02	2,151.18	2,051.55	99.63	21.592	
14,100.00	6,303.00	6,769.55	6,647.38	91.83	24.49	-101.40	2,337.03	9,015.53	2,098.65	1,996.31	102.34	20.506	
14,200.00	6,303.00	6,776.57	6,654.19	92.92	24.52	-101.63	2,335.36	9,016.03	2,049.63	1,944.57	105.06	19.509	
14,300.00	6,303.00	6,783.60	6,660.99	94.01	24.55	-101.85	2,333.70	9,016.53	2,004.37	1,896.62	107.75	18.602	
14,400.00	6,303.00	6,784.00	6,661.38	95.10	24.55	-101.86	2,333.60	9,016.56	1,963.16	1,852.73	110.44	17.777	
14,500.00	6,303.00	6,784.00	6,661.38	96.19	24.55	-101.86	2,333.60	9,016.56	1,926.27	1,813.23	113.04	17.041	
14,600.00	6,303.00	6,784.00	6,661.38	97.28	24.55	-101.86	2,333.60	9,016.56	1,893.94	1,778.42	115.52	16.395	
14,700.00	6,303.00	6,784.00	6,661.38	98.37	24.55	-101.86	2,333.60	9,016.56	1,866.41	1,748.57	117.84	15.839	
14,800.00	6,303.00	6,784.00	6,661.38	99.46	24.55	-101.86	2,333.60	9,016.56	1,843.90	1,723.94	119.96	15.371	
14,900.00	6,303.00	6,784.00	6,661.38	100.56	24.55	-101.86	2,333.60	9,016.56	1,826.60	1,704.75	121.85	14.990	
15,000.00	6,303.00	6,784.00	6,661.38	101.65	24.55	-101.86	2,333.60	9,016.56	1,814.65	1,691.18	123.48	14.696	
15,100.00	6,303.00	6,784.00	6,661.38	102.74	24.55	-101.86	2,333.60	9,016.56	1,808.17	1,683.35	124.81	14.487	
15,167.54	6,303.00	6,784.00	6,661.38	103.48	24.55	-101.86	2,333.60	9,016.56	1,806.90	1,681.36	125.54	14.393 CC	
15,200.00	6,303.00	6,784.00	6,661.38	103.84	24.55	-101.86	2,333.60	9,016.56	1,807.20	1,681.36	125.84	14.361 ES	
15,300.00	6,303.00	6,784.00	6,661.38	104.93	24.55	-101.86	2,333.60	9,016.56	1,811.75	1,685.21	126.54	14.317 SF	
15,400.00	6,303.00	6,784.00	6,661.38	106.03	24.55	-101.86	2,333.60	9,016.56	1,821.80	1,694.87	126.93	14.353	
15,500.00	6,303.00	6,784.00	6,661.38	107.13	24.55	-101.86	2,333.60	9,016.56	1,837.24	1,710.23	127.01	14.466	
15,600.00	6,303.00	6,784.00	6,661.38	108.22	24.55	-101.86	2,333.60	9,016.56	1,857.94	1,731.15	126.79	14.654	
15,700.00	6,303.00	6,784.00	6,661.38	109.32	24.55	-101.86	2,333.60	9,016.56	1,883.73	1,757.43	126.30	14.915	
15,800.00	6,303.00	6,784.00	6,661.38	110.42	24.55	-101.86	2,333.60	9,016.56	1,914.40	1,788.84	125.56	15.247	
15,900.00	6,303.00	6,784.00	6,661.38	111.52	24.55	-101.86	2,333.60	9,016.56	1,949.72	1,825.11	124.61	15.646	
16,000.00	6,303.00	6,784.00	6,661.38	112.62	24.55	-101.86	2,333.60	9,016.56	1,989.45	1,865.97	123.48	16.111	
16,100.00	6,303.00	6,784.00	6,661.38	113.72	24.55	-101.86	2,333.60	9,016.56	2,033.32	1,911.12	122.20	16.639	
16,200.00	6,303.00	6,784.00	6,661.38	114.82	24.55	-101.86	2,333.60	9,016.56	2,081.08	1,960.27	120.81	17.227	
16,300.00	6,303.00	6,784.00	6,661.38	115.92	24.55	-101.86	2,333.60	9,016.56	2,132.46	2,013.14	119.32	17.872	
16,400.00	6,303.00	6,784.00	6,661.38	117.02	24.55	-101.86	2,333.60	9,016.56	2,187.21	2,069.43	117.77	18.571	
16,500.00	6,303.00	6,784.00	6,661.38	118.12	24.55	-101.86	2,333.60	9,016.56	2,245.08	2,128.89	116.18	19.323	
16,600.00	6,303.00	6,784.00	6,661.38	119.22	24.55	-101.86	2,333.60	9,016.56	2,305.83	2,191.26	114.58	20.125	
16,700.00	6,303.00	6,784.00	6,661.38	120.32	24.55	-101.86	2,333.60	9,016.56	2,369.25	2,256.29	112.96	20.974	
16,800.00	6,303.00	6,784.00	6,661.38	121.43	24.55	-101.86	2,333.60	9,016.56	2,435.13	2,323.77	111.36	21.868	
16,900.00	6,303.00	6,784.00	6,661.38	122.53	24.55	-101.86	2,333.60	9,016.56	2,503.27	2,393.49	109.77	22.804	
16,921.74	6,303.00	6,784.00	6,661.38	122.77	24.55	-101.86	2,333.60	9,016.56	2,518.36	2,408.93	109.43	23.013	
16,922.61	6,303.00	6,784.00	6,661.38	122.78	24.55	-101.86	2,333.60	9,016.56	2,518.97	2,408.63	110.33	22.830	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation




Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Reference Depths are relative to 3274+30 @ 3304.00usft
 Offset Depths are relative to Offset Datum
 Central Meridian is -104.33333334

Coordinates are relative to: (B07) Koala 9 Fed Com 113H
 Coordinate System is US State Plane 1983, New Mexico Eastern Zone
 Grid Convergence at Surface is: 0.08°

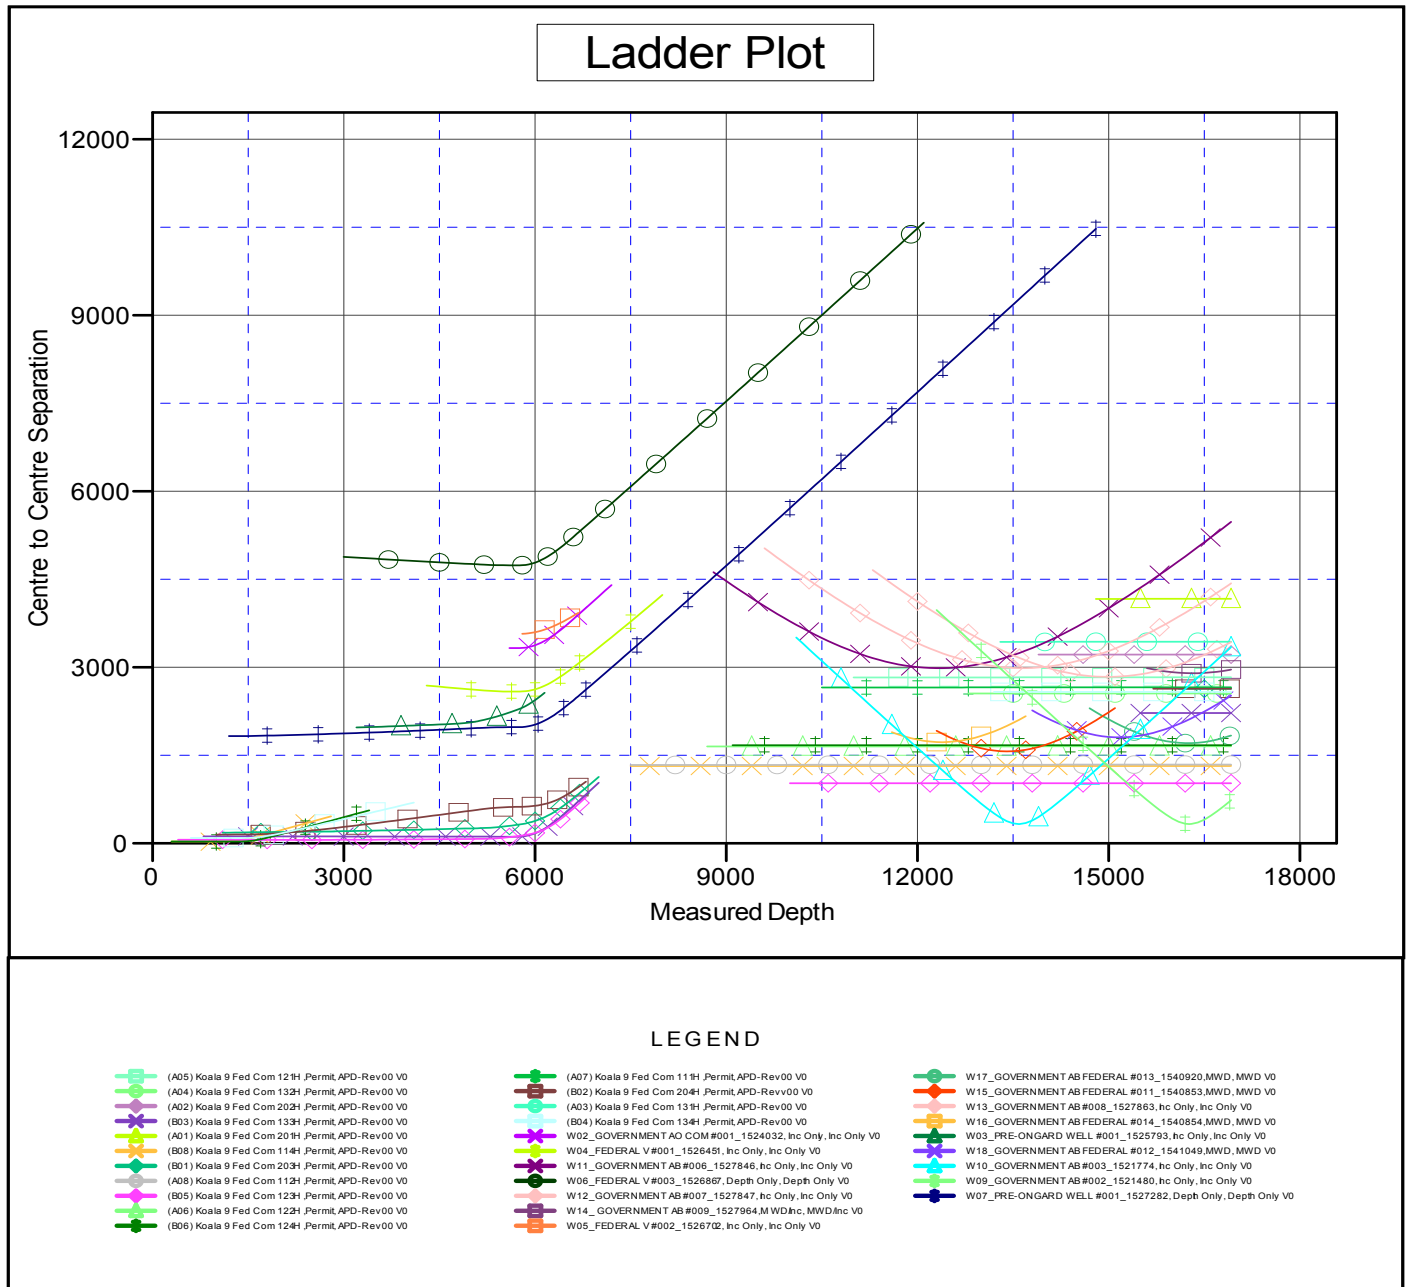

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation




Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (B07) Koala 9 Fed Com 113H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3274+30 @ 3304.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3274+30 @ 3304.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(B07) Koala 9 Fed Com 113H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Reference Depths are relative to 3274+30 @ 3304.00usft
 Offset Depths are relative to Offset Datum
 Central Meridian is -104.33333334

Coordinates are relative to: (B07) Koala 9 Fed Com 113H
 Coordinate System is US State Plane 1983, New Mexico Eastern Zone
 Grid Convergence at Surface is: 0.08°

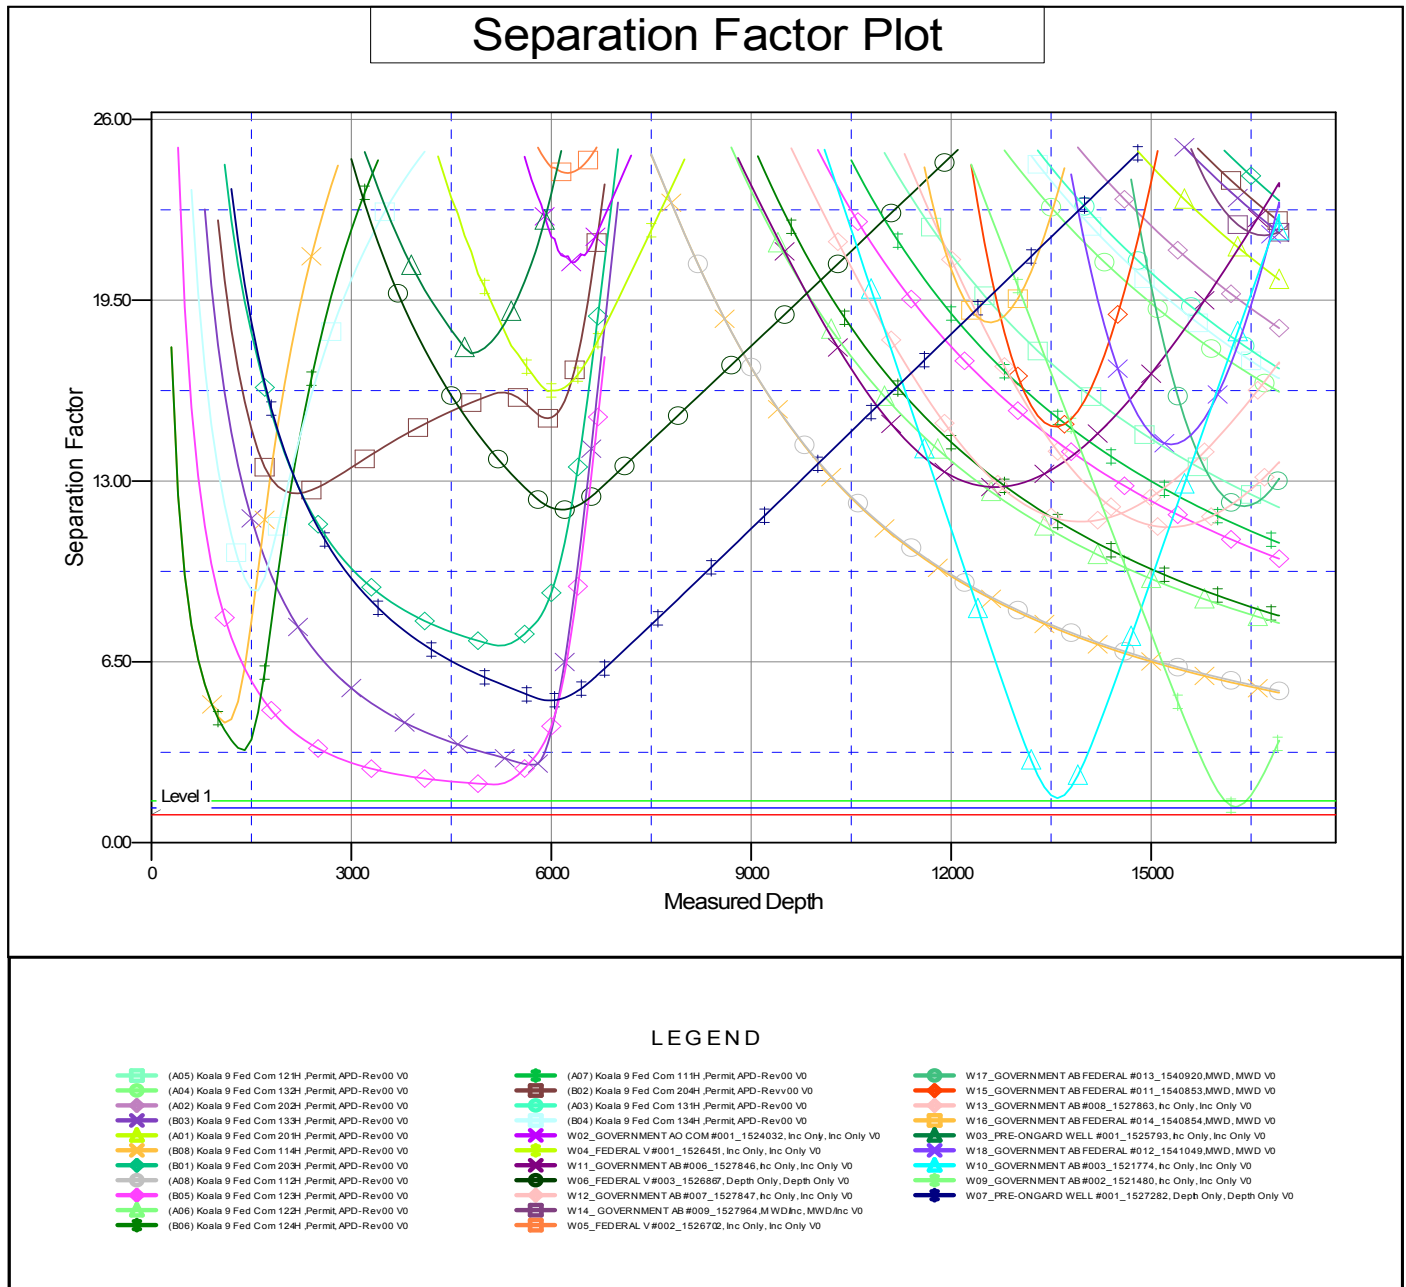

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Permian Resources - Koala 9 Fed Com 113H

1. Geologic Formations

Formation	Elevation	TVD	Target
Rustler	-3077	227	No
Top of Salt	-2936	368	No
Capitan	NP	NP	No
Tansill	-2600	704	No
Yates	-2525	779	No
Seven Rivers	-2150	1154	No
Queen	-1480	1824	No
Grayburg	-1250	2054	No
San Andres	-900	2404	No
Delaware Mountain Group	-325	2979	No
Bone Spring Lime	1350	4654	No
1st Bone Spring Sand	2800	6104	Yes
2nd Bone Spring Sand	NP	NP	No
3rd Bone Spring Sand	NP	NP	No
Wolfcamp XY	NP	NP	No

2. Blowout Prevention

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	x	Tested to:
12.25	13-5/8"	5M	Annular	x	2500 psi
			Blind Ram	x	5000 psi
			Pipe Ram	x	
			Double Ram		
			Other*		
8.75	13-5/8"	5M	Annular	x	2500 psi
			Blind Ram	x	5000 psi
			Pipe Ram	x	
			Double Ram		
			Other*		

Equipment: BOPE with working pressure ratings in excess of anticipated maximum surface pressure will be utilized for well control from drill out of surface casing to TMD. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. All BOPE connections shall be flanged, welded or clamped. All choke lines shall be straight unless targeted with running tees or tee blocks are used, and choke lines shall be anchored to prevent whip and reduce vibrations. All valves in the choke line & the choke manifold shall be full opening as to not cause restrictions and to allow for straight fluid paths to minimize potential erosion. All gauges utilized in the well control system shall be of a type designed for drilling fluid service. A top drive inside BOP valve will be utilized at all times. Subs equipped with full opening valves sized to fit the drill pipe and collars will be available on the rig floor in the open position. The key to operate said valve equipped subs will be on the rig floor at all times. The accumulator system will have sufficient capacity to open the HCR and close all three sets of rams plus the annular preventer while retaining at least 300 psi above precharge on the closing manifold (accumulator system shall be capable of doing so without using the closing unit pumps). The fluid reservoir capacity will be double the usable fluid volume of the accumulator system capacity, and the fluid level will be maintained at the manufacturer's recommended level. Prior to connecting the closing unit to the BOP stack, an accumulator precharge pressure test shall be performed to ensure the precharge pressure is within 100 psi of the desired precharge pressure (only nitrogen gas will be used to precharge). Two independent power sources will be made available at all times to power the closing unit pumps so that the pumps can automatically start when the closing valve manifold pressure has decreased to the preset level. Closing unit pumps will be sized to allow opening of HCR and closing of annular preventer on 5" drill pipe achieving at least 200 psi above precharge pressure with the accumulator system isolated from service in less than two minutes. A valve shall be installed in the closing line as close to the annular preventer as possible to act as a locking device; the valve shall be maintained in the open position and shall be closed only when the power source for the accumulator system is inoperative. Remote controls capable of opening and closing all preventers & the HCR shall be readily accessible to the driller; master controls with the same capability will be operable at the accumulator. The wellhead will be a multibowl speed head allowing for hangoff of intermediate casing & isolation of the 133/8 x 95/8 annulus without breaking the connection between the BOP & wellhead to install an additional casing head. A wear bushing will be installed & inspected frequently to guard against internal wear to wellhead. VBRs (variablebore rams) will be run in upper rambody of BOP stack to provide redundancy to annular preventer while RIH w/ production casing;

Requesting Variance? YES

Variance request: Flex hose and offline cement variances, see attachments in section 8.

Testing Procedure: The BOP test shall be performed before drilling out of the surface casing shoe and will occur at a minimum: a. when initially installed b. whenever any seal subject to test pressure is broken c. following related repairs d. at 30 day intervals e. checked daily as to mechanical operating conditions. The ram type preventer(s) will be tested using a test plug to 250 psi (low) and 5,000 psi (high) (casinghead WP) with a test plug upon its installation onto the 13 surface casing. If a test plug is not used, the ram type preventer(s) shall be tested to 70% of the minimum internal yield pressure of the casing. The annular type preventer(s) shall be tested to 3500 psi. Pressure will be maintained for at least 10 minutes or until provisions of the test are met, whichever is longer. A Sundry Notice (Form 3160 5), along with a copy of the BOP test report, shall be submitted to the local BLM office within 5 working days following the test. If the bleed line is connected into the buffer tank (header), all BOP equipment including the buffer tank and associated valves will be rated at the required BOP pressure. The BLM office will be provided with a minimum of four (4) hours notice of BOP testing to allow witnessing. The BOP Configuration, choke manifold layout, and accumulator system, will be in compliance with Onshore Order 2 for a 5,000 psi system. A remote accumulator and a multi-bowl system will be used, please see attachment in section 8 for multi-bowl procedure. Pressures, capacities, and specific placement and use of the manual and/or hydraulic controls, accumulator controls, bleed lines, etc., will be identified at the time of the BLM 'witnessed BOP test. Any remote controls will be capable of both opening and closing all preventers and shall be readily accessible.

Choke Diagram Attachment: 5 M Choe Manifold

BOP Diagram Attachment: BOP Schematic

3. Casing

String	Hole Size	Casing Size	Top	Bottom	Top TVD	Bottom TVD	Length	Grade	Weight	Connection	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
Surface	17.5	13.375	0	378	0	378	378	J55	54.5	BTC	6.05	3.07	Dry	7.54	Dry	7.07
Intermediate	12.25	9.625	0	2929	0	2929	2929	J55	36	BTC	3.63	1.83	Dry	3.11	Dry	2.75
Production	8.75	5.5	0	6661	0	6303	6661	P110RY	17	GeoConn	2.28	2.38	Dry	2.64	Dry	2.64
Production	7.875	5.5	6661	16921	6303	6303	10260	P110RY	17	GeoConn	2.28	2.38	Dry	2.64	Dry	2.64
BLM Min Safety Factor											1.125	1		1.6		1.6

Non API casing spec sheets and casing design assumptions attached.

4. Cement

String	Lead/Tail	Top MD	Bottom MD	Quantity (sx)	Yield	Density	Cu Ft	Excess %	Cement Type	Additives
Surface	Tail	0	378	300	1.34	14.8	400	50%	Class C	Accelerator
Intermediate	Lead	0	2340	510	2.08	12.7	1060	50%	Class C	Salt, Extender, and LCM
Intermediate	Tail	2340	2929	210	1.34	14.8	280	50%	Class C	Accelerator
Production	Lead	2429	5761	480	2.41	11.5	1140	40%	Class H	POZ, Extender, Fluid Loss, Dispersant, Retarder
Production	Tail	5761	16921	1460	1.73	12.5	2510	25%	Class H	POZ, Extender, Fluid Loss, Dispersant, Retarder

5. Circulating Medium

Mud System Type: Closed

Will an air or gas system be used: No

Describe what will be on location to control well or mitigate other conditions: Sufficient quantities of mud materials will be on the well site at all times for the purpose of assuring well control and maintaining wellbore integrity. Surface interval will employ fresh water mud. The intermediate hole will utilize a saturated brine fluid to inhibit salt washout. The production hole will employ brine based and oil base fluid to inhibit formation reactivity and of the appropriate density to maintain well control.

Describe the mud monitoring system utilized: Centrifuge separation system. Open tank monitoring with EDR will be used for drilling fluids and return volumes. Open tank monitoring will be used for cement and cuttings return volumes. Mud properties will be monitored at least every 24 hours using industry accepted mud check practices.

Cuttings Volume: 7750 Cu Ft

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight	Max Weight
0	378	Water Based Mud	8.6	9.5
378	2929	Salt Saturated	10	10
2929	6661	Brine	9	10
6661	16921	OBM	9	10

6. Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Will utilize MWD/LWD (Gamma Ray logging) from intermediate hole to TD of the well.

List of open and cased hole logs run in the well:

DIRECTIONAL SURVEY, GAMMA RAY LOG,

Coring operation description for the well:

N/A

7. Pressure

Anticipated Bottom Hole Pressure	3280	psi
Anticipated Surface Pressure	1890.9	psi
Anticipated Bottom Hole Temperature	122	°F
Anticipated Abnormal pressure, temp, or geo hazards	No	

8. Other Information


Well Plan and AC Report: attached

Batching Drilling Procedure: attached


WBD: attached

Flex Hose Specs: attached


Offline Cementing Procedure Attached:

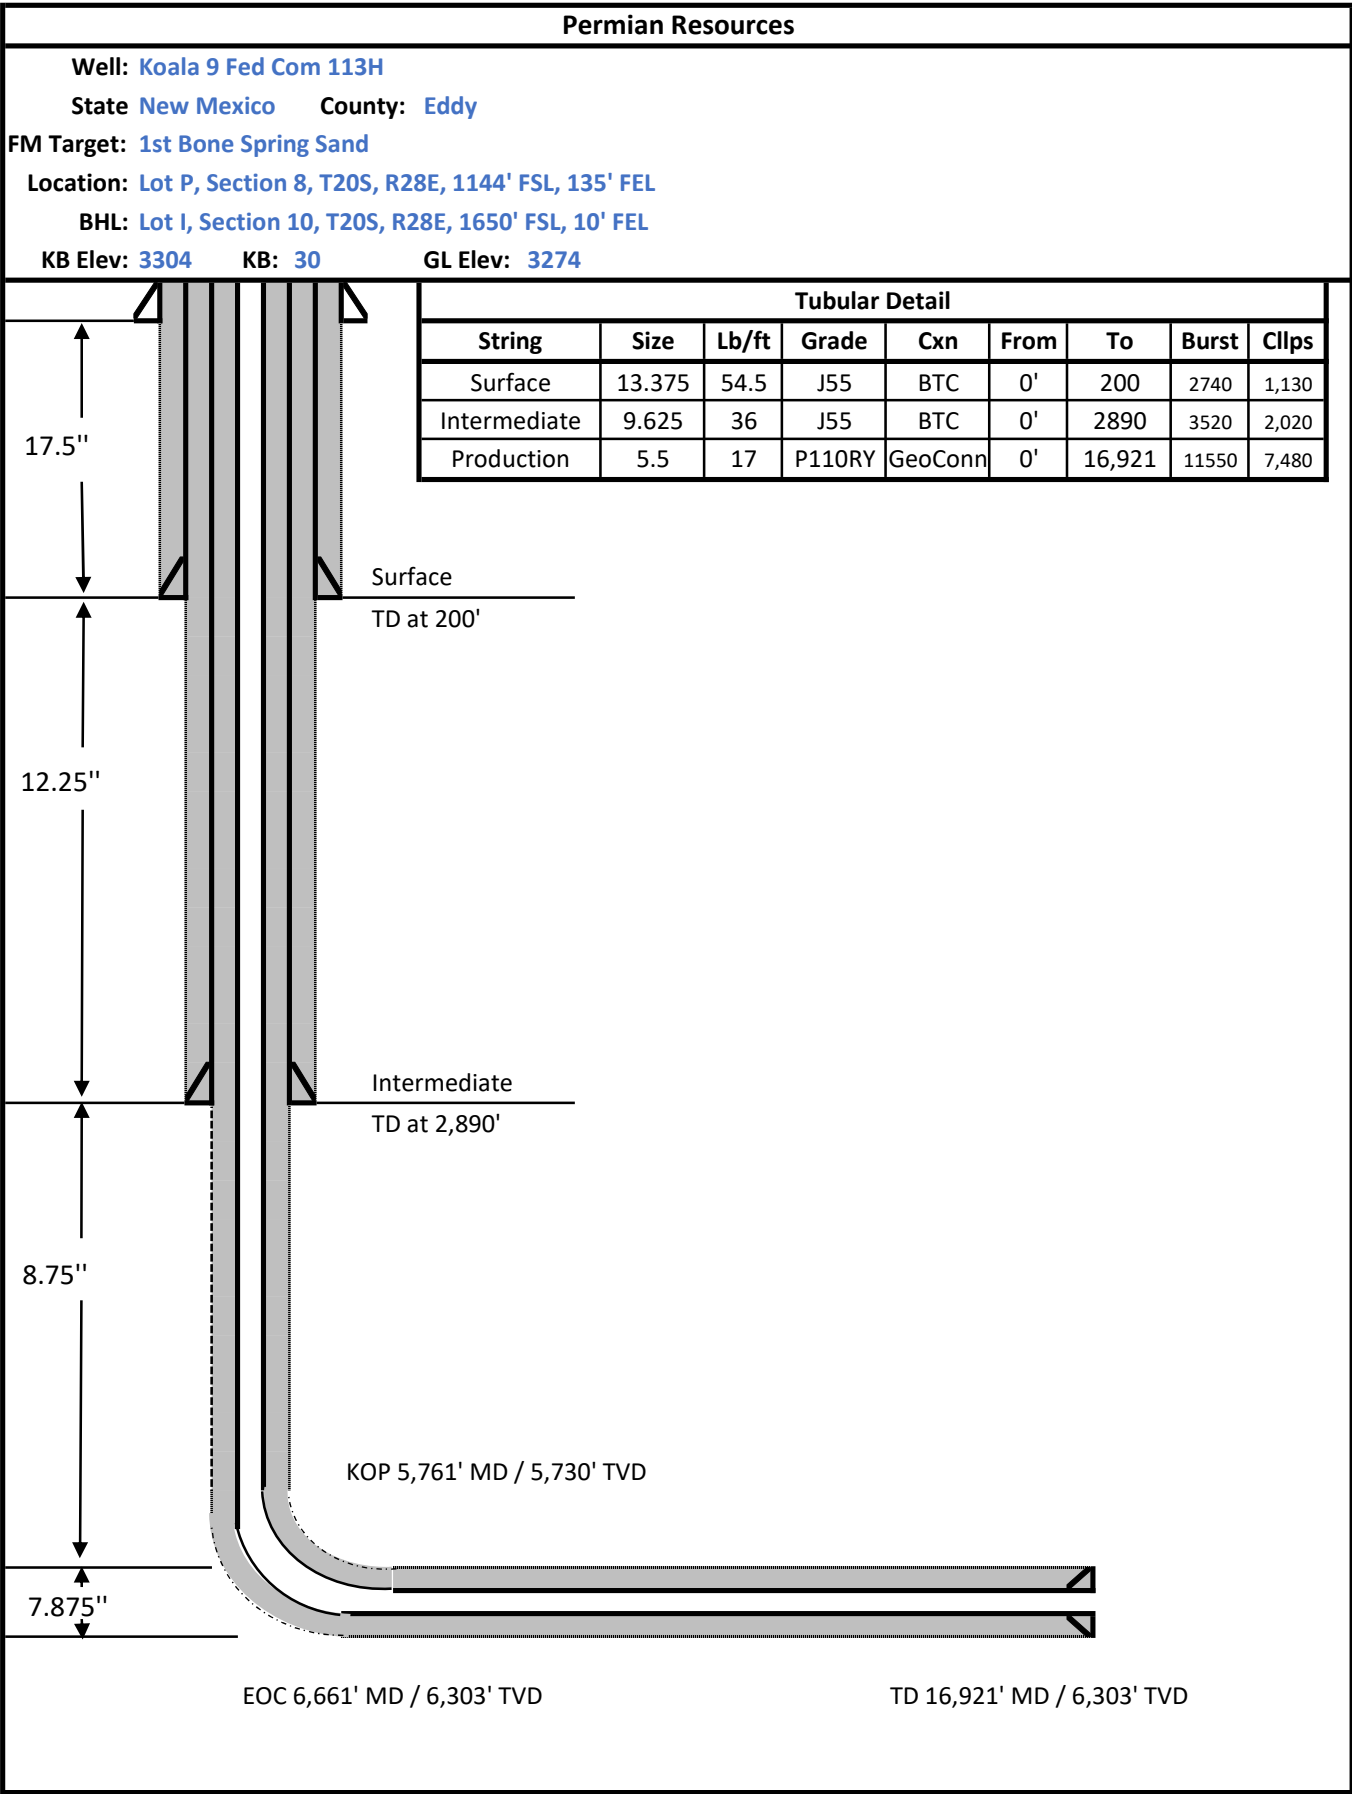

5,000 psi BOP Schematic

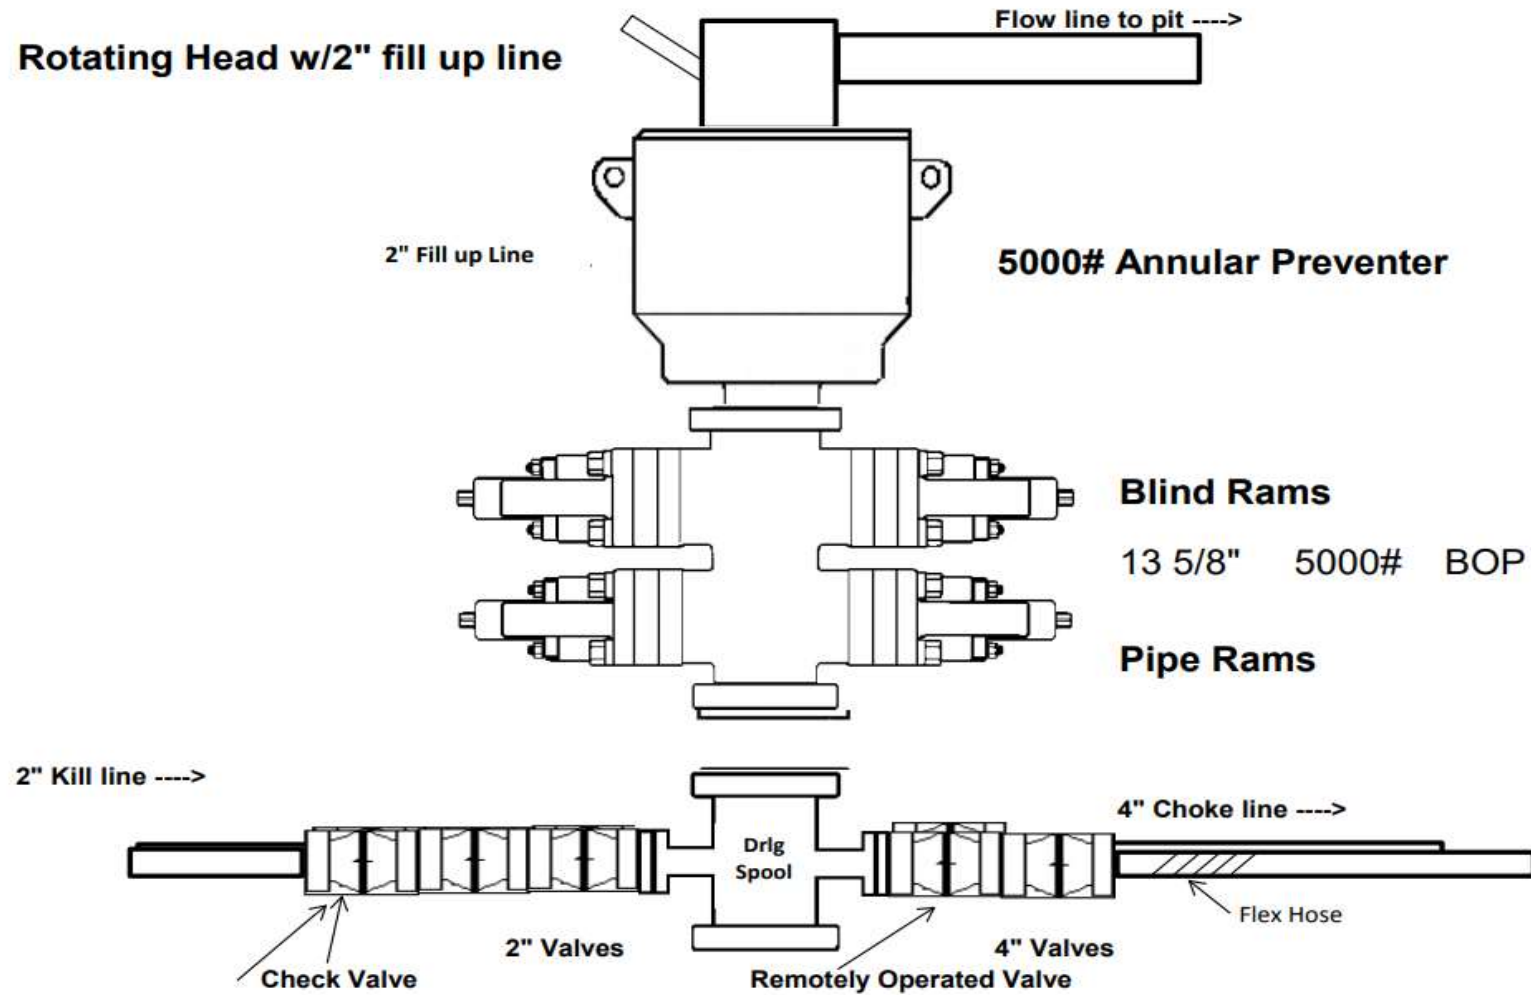

5M Choke Manifold Equipment (WITH MGS + CLOSED LOOP)

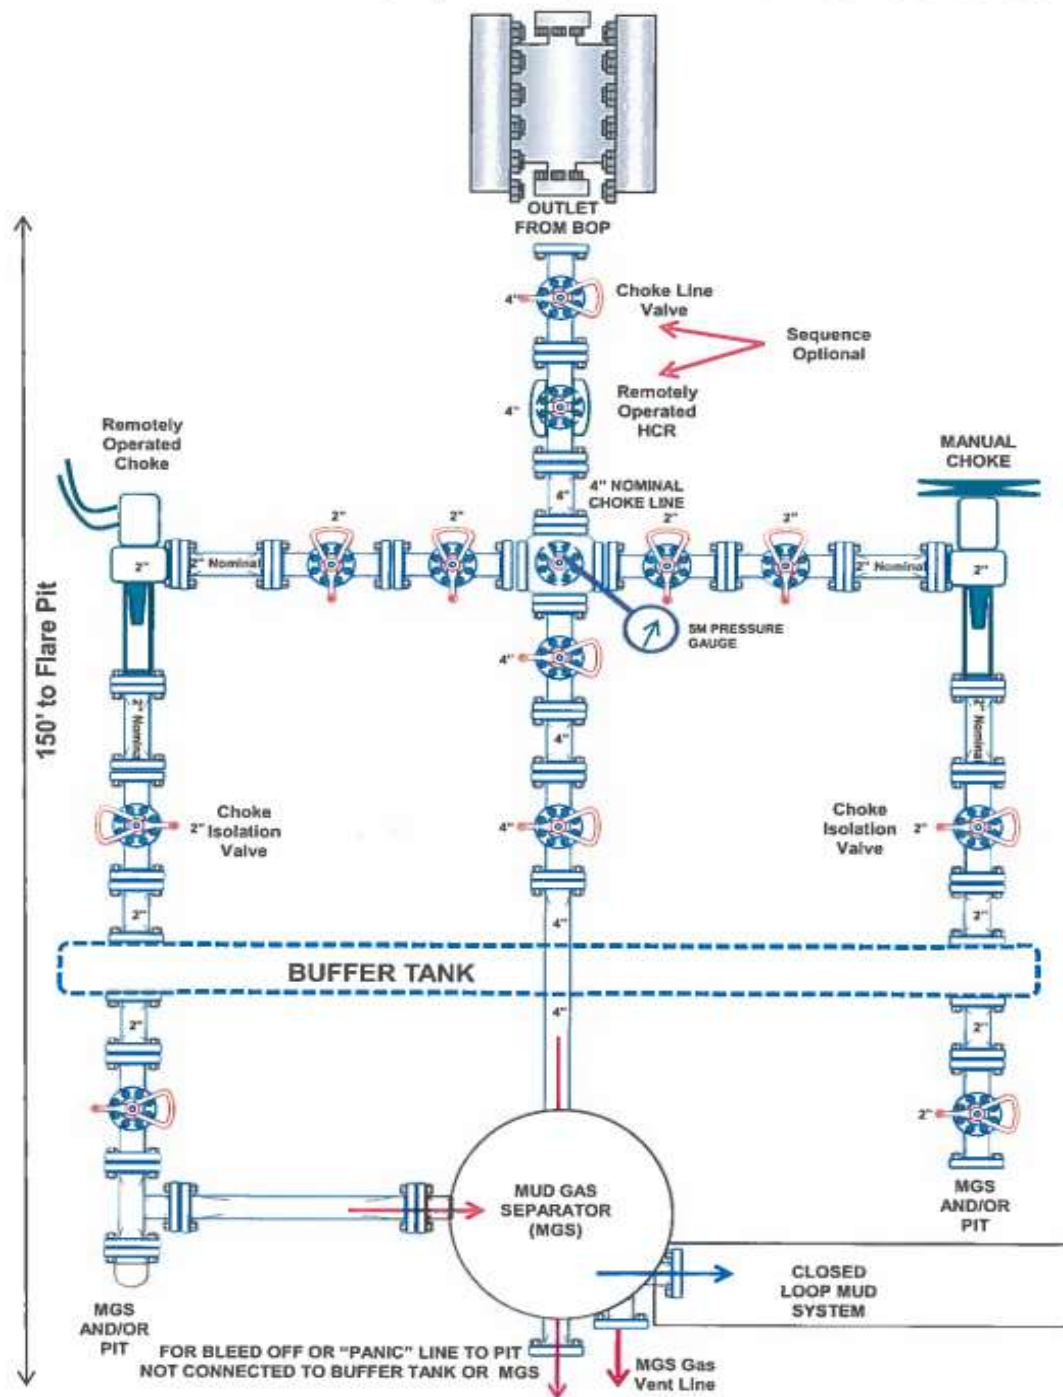



ContiTech

CONTITECH RUBBER Industrial Kft.	No:QC-DB- 210/ 2014 Page: 9 / 113
-------------------------------------	--------------------------------------

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 504	
PURCHASER: ContiTech Oil & Marine Corp.				P.O. N°: 4500409659	
CONTITECH RUBBER order N°: 538236		HOSE TYPE: 3" ID		Choke and Kill Hose	
HOSE SERIAL N°: 67255		NOMINAL / ACTUAL LENGTH:		10,67 m / 10,77 m	
W.P.: 68,9 MPa 10000 psi		T.P.: 103,4 MPa 15000 psi		Duration: 60 min	
Pressure test with water at ambient temperature					
See attachment. (1 page)					
↑ 10 mm = 10 Min. → 10 mm = 20 MPa					
COUPLINGS Type		Serial N°		Quality	
3" coupling with		9251 9254		AISI 4130	
4 1/16" 10K API b.w. Flange end				AISI 4130	
				A0578N	
				035608	
Not Designed For Well Testing				API Spec 16 C	
				Temperature rate: "B"	
All metal parts are flawless					
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.					
COUNTRY OF ORIGIN HUNGARY/EU					
Date:		Inspector		Quality Control	
20. March 2014.				ContiTech Rubber Industrial Oil Quality Control Dept.  	

CentTech Rubber Industrial Kft., Budapest 10, H-8728 Szigliget | H-8721 Földvár 552 Szigliget, Hungary
Phone: +36 87 584 737 | Fax: +36 82 546 738 | e-mail: info@bud.centtech.hu | Internet: www.centtech-rubber.hu; www.centtech.hu
The Court of Company Law or Registry Court | Registry Court No: Cg.99-09-00293 | EU VAT No: HU11537209
Barna Zsuzsanna Csizsar, Budapest | H-10266-26830003

No. 501, 504, 505

Page: 1 / 1






CONTITECH RUBBER Industrial Kft.	No:QC-DB- 210/ 2014
	Page: 15 / 113
	ContiTech

Hose Data Sheet

CRI Order No.	538236
Customer	ContiTech Oil & Marine Corp.
Customer Order No.	4500409659
Item No.	1
Hose Type	Flexible Hose
Standard	API SPEC 16 C
Inside dia in inches	3
Length	35 ft
Type of coupling one end	FLANGE 4.1/16" 10K API SPEC 6A TYPE 6BX FLANGE C/W BX155 R.GR.SOUR
Type of coupling other end	FLANGE 4.1/16" 10K API SPEC 6A TYPE 6BX FLANGE C/W BX155 R.GR.SOUR
H2S service NACE MR0175	Yes
Working Pressure	10 000 psi
Design Pressure	10 000 psi
Test Pressure	15 000 psi
Safety Factor	2,25
Marking	USUAL PHOENIX
Cover	NOT FIRE RESISTANT
Outside protection	St. steel outer wrap
Internal stripwound tube	No
Lining	OIL + GAS RESISTANT SOUR
Safety clamp	No
Lifting collar	No
Element C	No
Safety chain	No
Safety wire rope	No
Max. design temperature [°C]	100
Min. design temperature [°C]	-20
Min. Bend Radius operating [m]	0,90
Min. Bend Radius storage [m]	0,90
Electrical continuity	The Hose is electrically continuous
Type of packing	WOODEN CRATE ISPM-15

Printed: TIRETECH2\CsontosG - 2014.03.10 15:22:17

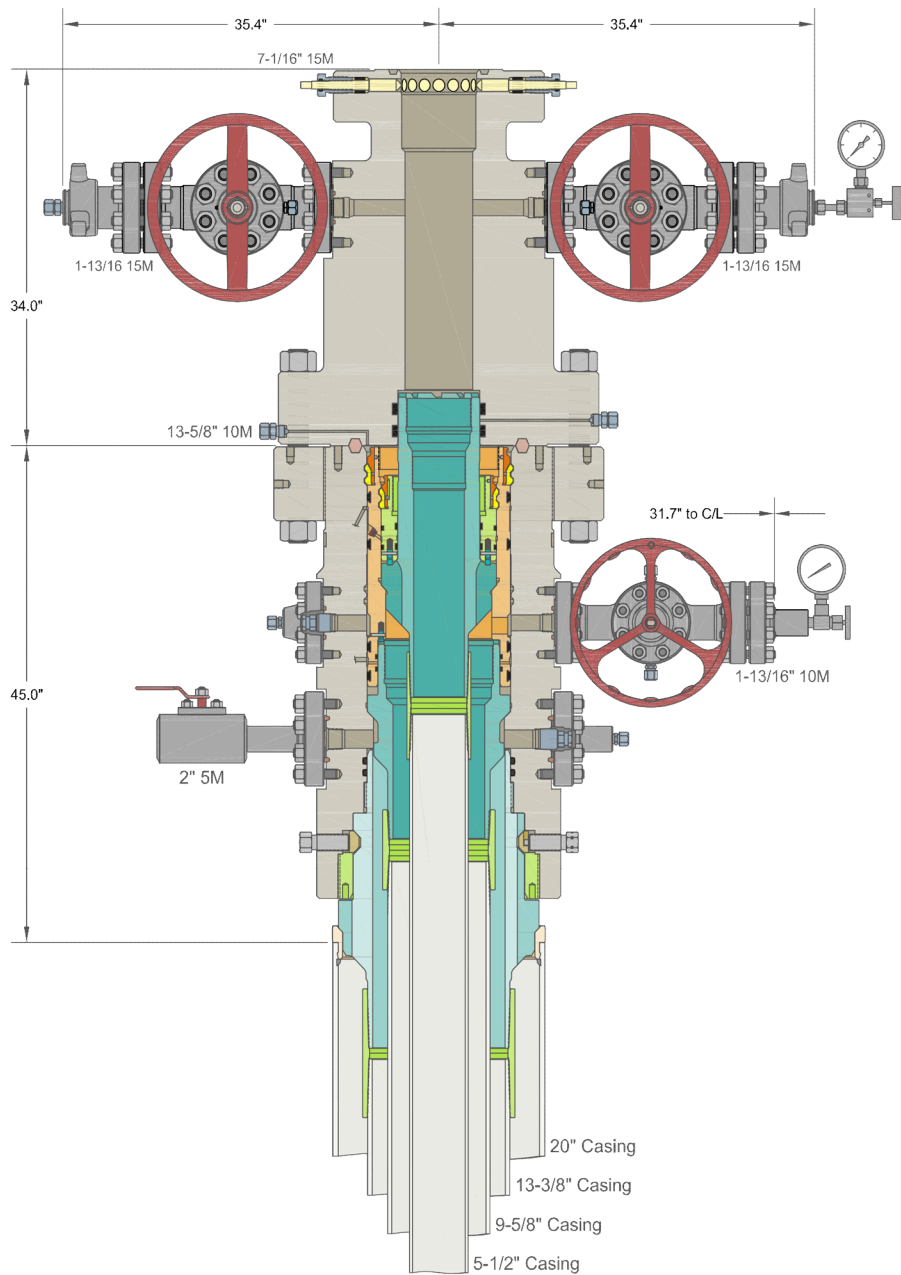

INFORMATION CONTAINED HEREIN IS THE PROPERTY OF CACTUS WELLHEAD, LLC. REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PERMISSIBLE ONLY AS PROVIDED BY CONTRACT OR AS EXPRESSLY AUTHORIZED BY CACTUS WELLHEAD, LLC.

ALL DIMENSIONS APPROXIMATE

CACTUS WELLHEAD LLC		CENTENNIAL RESOURCE DEVELOPMENT LEE CO, NM	
20" x 13-3/8" x 9-5/8" x 5-1/2" 10M MBU-3T-CFL-R-DBLO System With 13-5/8" 10M x 7-1/16" 15M CTH-DBLHPS Tubing Head, 20" Landing Ring & Pin Down Mandrel Casing Hangers	DRAWN	DLE	10JUN20
	APPRV		
DRAWING NO.		HBE0000338	

Permian Resources Casing Design Criteria

A sundry will be requested if any lesser grade or different size casing is substituted. All casing will be centralized as specified in On Shore Order II. Casing will be tested as specified in On Shore Order II.

Casing Design Assumptions:

Surface

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate I

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.

- (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate or Intermediate II

- 1) Burst Design Loads
 - a) Gas Kick Profile
 - (1) Internal: Load profile based on influx encountered in lateral portion of wellbore with a maximum influx volume of 150 bbl and a kick intensity of 1.5 ppg using maximum anticipated MW of 9.9 ppg.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the deepest TVD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Production

- 1) Burst Design Loads
 - a) Injection Down Casing
 - (1) Internal: Surface pressure plus injection fluid gradient.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test (Drilling)
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - c) Casing Pressure Test (Production)
 - (1) Internal: The design pressure test should be the greater of the planned test pressure prior to simulation down the casing, the regulatory test pressure, and the expected gas lift system pressure. The design test fluid should be the fluid associated with the pressure test having the greatest pressure.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - d) Tubing Leak
 - (1) Internal: SITP plus a packer fluid gradient to the top of packer.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
 - b) Full Evacuation
 - (1) Internal: Full void pipe.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Permian Resources

Multi-Well Pad Batch Drilling Procedure

Surface Casing - PR intends to Batch set all 13-3/8" casing to a depth approved in the APD. 17-1/2" Surface Holes will be batch drilled by a rig. Appropriate notifications will be made prior to spudding the well, running and cementing casing and prior to skidding to the rig to the next well on pad.

1. Drill 17-1/2" Surface hole to Approved Depth with Rig and perform wellbore cleanup cycles. Trip out and rack back drilling BHA.
2. Run and land 13-3/8" 54.5# J55 BTC casing see Illustration 1-1 Below to depth approved in APD.
3. Set packoff and test to 5k psi
4. Offline Cement
5. Install wellhead with pressure gauge and nightcap. Nightcap is shown on final wellhead Stack up Illustration #2-2.
6. Skid Rig to adjacent well to drill Surface hole.
7. Surface casing test will be performed by the rig in order to allow ample time for Cement to develop 500psi compressive strength. Casing test to 0.22 psi/ft or 1500 psi whichever is

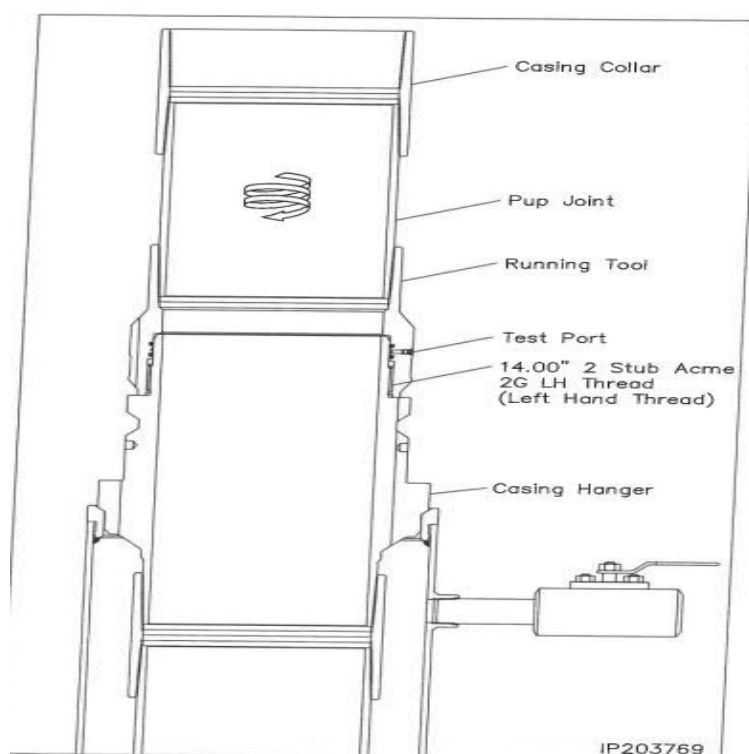


Illustration 1-1

Intermediate Casing – PR intends to Batch set all intermediate casing strings to a depth approved in the APD, typically set into Lamar. 12-1/4" Intermediate Holes will be batch drilled by the rig. Appropriate notifications will be made prior Testing BOPE, and prior to running/cementing all casing strings.

1. Rig will remove the nightcap and install and test BOPE.
2. Test Surface casing per COA WOC timing (.22 psi/ft or 1500 psi whichever is greater) - not to exceed 70% casing burst. Cement must have achieved 500psi compressive strength prior to test.
3. Install wear bushing then drill out 13-3/8" shoe-track plus 20' and conduct FIT to minimum of the MW equivalent anticipated to control the formation pressure to the next casing point.
4. Drill Intermediate hole to approved casing point. Trip out of hole with BHA to run Casing.
5. Remove wear bushing then run and land Intermediate Casing with mandrel hanger in wellhead.
6. Cement casing to surface with floats holding.
7. Washout stack then run wash tool in wellhead and wash hanger and pack-off setting area.
8. Install pack-off and test void to 5,000 psi for 15 minutes. Nightcap shown on final wellhead stack up illustration 2-2 on page 3.
9. Test casing per COA WOC timing (.22 psi/ft or 1500 psi whichever is greater) - not to exceed 70% casing burst. Cement must have achieved 500psi compressive strength prior to test.
10. Install nightcap – skid rig to adjacent well to drill Intermediate hole.

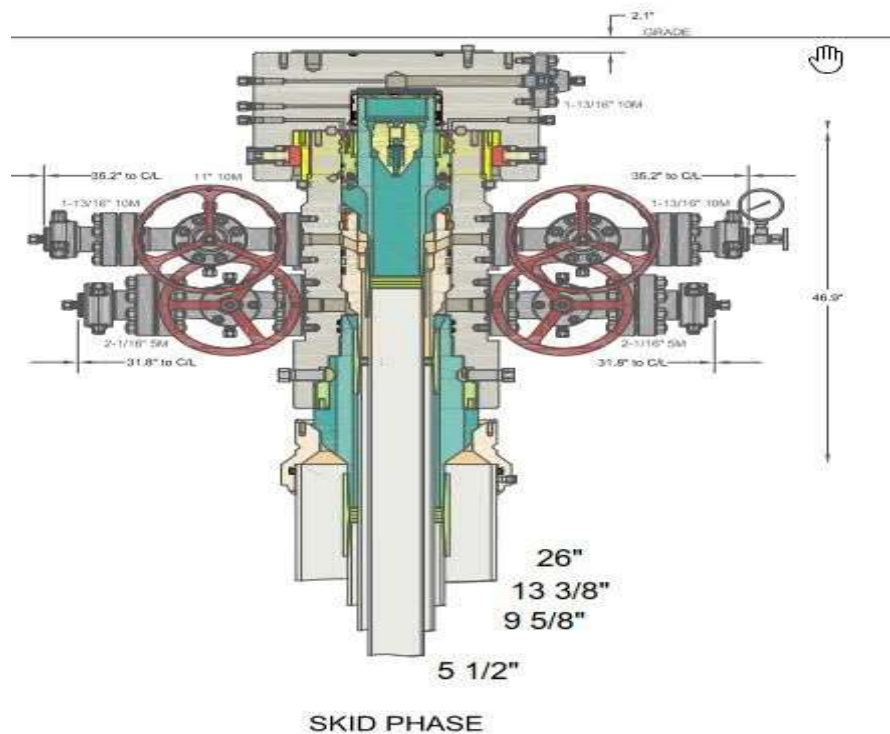



Illustration 2-2

Production Casing – PR intends to Batch set all Production casings with Rig. Appropriate notifications will be made prior Testing BOPE, and prior to running/cementing all casing strings.


1. Big Rig will remove the nightcap and install and test BOPE.
2. Install wear bushing then drill Intermediate shoe-track plus 20' and conduct FIT to minimum MW equivalent to control the formation pressure to TD of well.
3. Drill Vertical hole to KOP – Trip out for Curve BHA.
4. Drill Curve, landing in production interval – Trip for Lateral BHA.
5. Drill Lateral / Production hole to Permitted BHL, perform cleanup cycles and trip out to run 5 1/2" Production Casing.
6. Remove wear bushing then run 5-1/2" production casing to TD landing casing mandrel in wellhead.
7. Cement 5-1/2" Production string with floats holding.
8. Run in with wash tool and wash wellhead area – install pack-off and test void to 5,000psi for 15 minutes.
9. Install BPV in 5-1/2" mandrel hanger – Nipple down BOPE and install nightcap.
10. Test nightcap void to 5,000psi for 30 minutes per illustration 2-2
11. Skid rig to adjacent well on pad to drill production hole.

Permian Resources Offline Cementing Procedure 13-3/8" & 9-5/8" Casing


1. Drill hole to Total Depth with Rig and perform wellbore cleanup cycles.
2. Run and casing to Depth.
3. Land casing with mandrel.
4. Circulate 1.5 csg capacity.
5. Flow test – Confirm well is static and floats are holding.
6. Set Annular packoff and pressure test. Test to 5k.
7. Nipple down BOP and install cap flange.
8. Skid rig to next well on pad
9. Remove cap flange (confirm well is static before removal)
 - a) If well is not static use the casing outlet valves to kill well
 - b) Drillers method will be used in well control event
 - c) High pressure return line will be rigged up to lower casing valve and run to choke manifold to control annular pressure
 - d) Kill mud will be circulated once influx is circulated out of hole
 - e) Confirm well is static and remove cap flange to start offline cement operations
10. Install offline cement tool.
11. Rig up cementers.
12. Circulate bottoms up with cement truck
13. Commence planned cement job, take returns through the annulus wellhead valve
14. After plug is bumped confirm floats hold and well is static
15. Rig down cementers and equipment
16. Install night cap with pressure gauge to monitor.

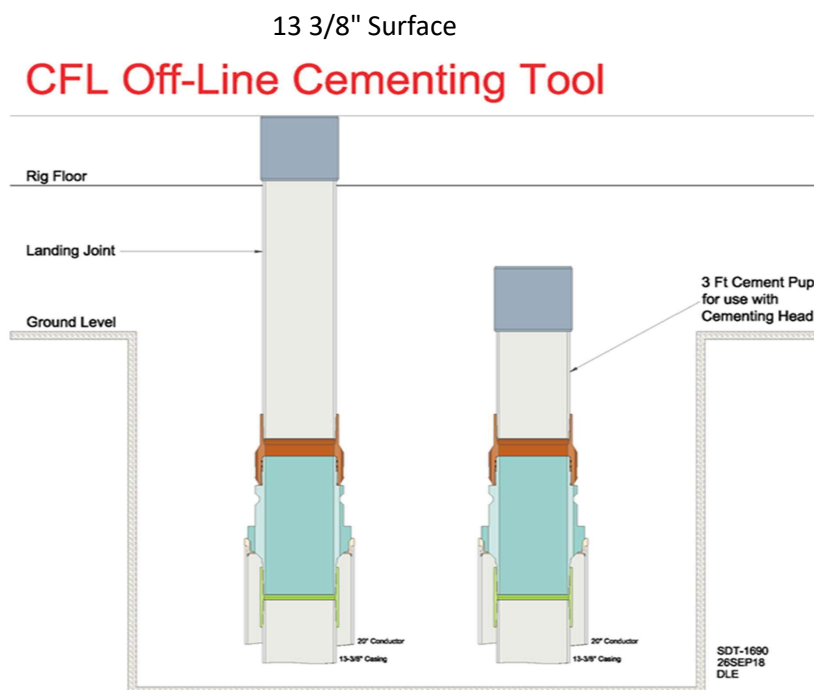


9 5/8" Intermediate

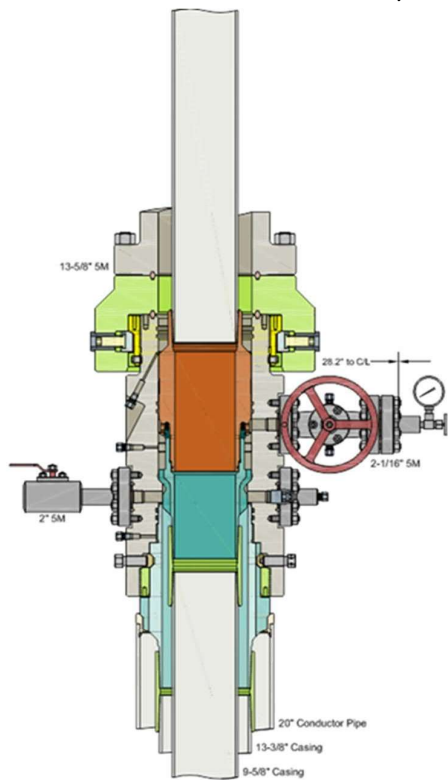

Run 9-5/8" Casing
Land Casing on 9-5/8" Mandrel Hanger
Cement 9-5/8" Casing
Retrieve Running Tool

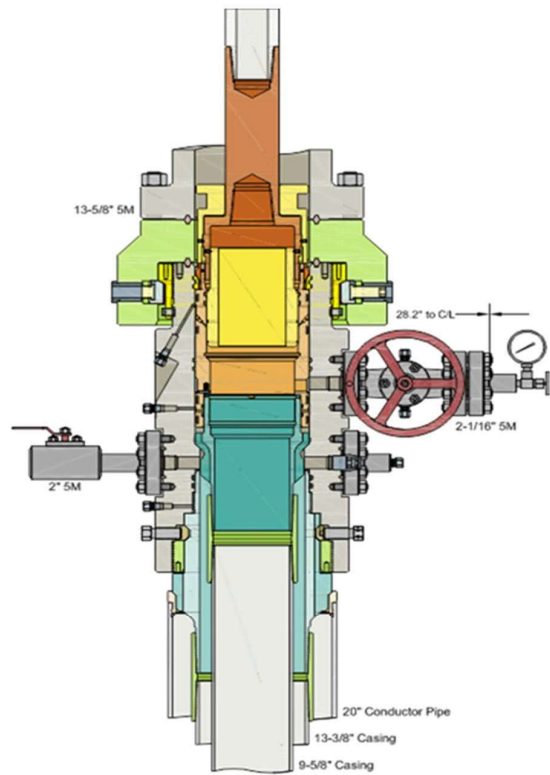


Run 13-5/8" Packoff
Test Upper and Lower Seals
Engage Lockring
Retrieve Running Tool

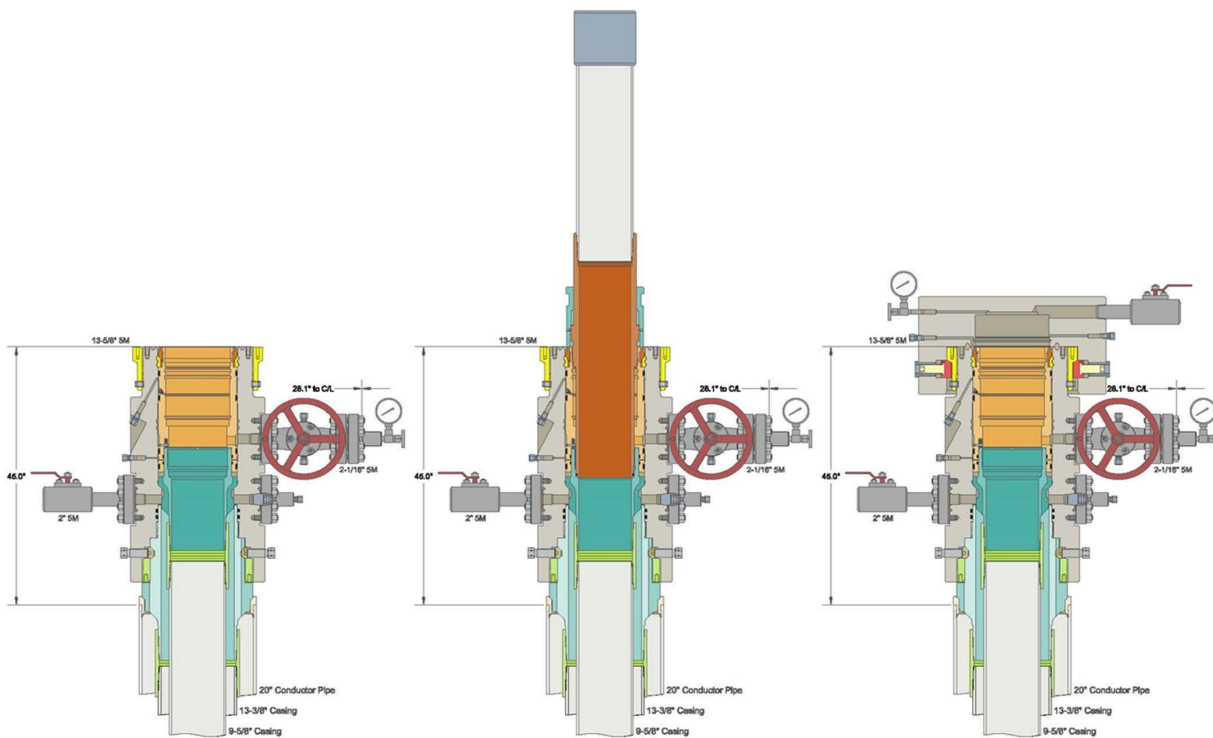

Metal One Corp. 	GEOCONN-SC Pipe: SeAH P110RY 95%PBW (SMYS110ksi) *1 Coupling: P110RY (SMYS110ksi) Connection Data Sheet	Page Date Rev.	MAI GC 5.5 17 SeAH P110RY 95%RBW+SC-Cplg6.050 P110RY 3-Feb-21 0
---	--	----------------------	--

GEOCONN-SC

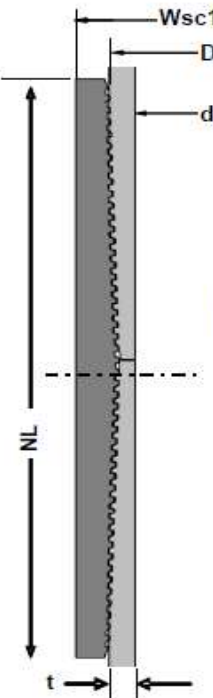

Geometry		Imperial		S.I.	
Pipe Body					
Grade *1	P110RY	-	P110RY	-	
SMYS	110	ksi	110	ksi	
Pipe OD (D)	5.500	in	139.70	mm	
Weight	17.00	lb/ft	25.33	kg/m	
Wall Thickness (t)	0.304	in	7.72	mm	
Pipe ID (d)	4.892	in	124.26	mm	
Drift Dia.	4.767	in	121.08	mm	
Connection					
Coupling SMYS	110	ksi	110	ksi	
SC-Coupling OD (Wsc1)	6.050	in	153.67	mm	
Coupling Length (NL)	8.350	in	212.09	mm	
Make up Loss	4.125	in	104.78	mm	
Pipe Critical Area	4.96	in ²	3,202	mm ²	
Box Critical Area	6.10	in ²	3,937	mm ²	
Thread Taper	1 / 16 (3/4" per ft)				
Number of Threads	5 TPI				

Performance		Imperial		S.I.	
Performance Properties for Pipe Body					
S.M.Y.S. *1	546	kips	2,428	kN	
M.I.Y.P. *1	11,550	psi	79.66	MPa	
Collapse Strength *1	7,480	psi	51.59	MPa	
Note S.M.Y.S.= Specified Minimum YIELD Strength of Pipe body M.I.Y.P. = Minimum Internal Yield Pressure of Pipe body *1: SeAH P110RY 95%RBW: SMYS110ksi, MIYP11,550psi					
Performance Properties for Connection					
Min. Connection Joint Strength	100%		of S.M.Y.S.		
Min. Compression Yield	100%		of S.M.Y.S.		
Internal Pressure	100%		of M.I.Y.P.		
External Pressure	100%		of Collapse Strength		
Max. DLS (deg. /100ft)	>90				
Recommended Torque					
Min.	10,800	ft-lb	14,600	N-m	
Opti.	12,000	ft-lb	16,200	N-m	
Max.	13,200	ft-lb	17,800	N-m	
Operational Max.	15,600	ft-lb	21,100	N-m	
Note : Operational Max. torque can be applied for high torque application					

Legal Notice

The use of this information is at the reader/user's risk and no warranty is implied or expressed by Metal One Corporation or its parents, subsidiaries or affiliates (herein collectively referred to as "Metal One") with respect to the use of information contained herein. The information provided on this Connection Data Sheet is for informational purposes only, and was prepared by reference to engineering information that is specific to the subject products, without regard to safety-related factors, all of which are the sole responsibility of the operators and users of the subject connectors. Metal One assumes no responsibility for any errors with respect to this information.

Statements regarding the suitability of products for certain types of applications are based on Metal One's knowledge of typical requirements that are often placed on Metal One products in standard well configurations. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

The products described in this Connection Data Sheet are not recommended for use in deep water offshore applications. For more information, please refer to http://www.mto.co.jp/mto-con/ Images/top/WebsiteTerms_Active_20333287_1.pdf the contents of which are incorporated by reference into this Connection Data Sheet.



CONTITECH RUBBER Industrial Kft.	No:QC-DB- 210/ 2014
	Page: 15 / 113
	ContiTech

Hose Data Sheet

CRI Order No.	538236
Customer	ContiTech Oil & Marine Corp.
Customer Order No.	4500409659
Item No.	1
Hose Type	Flexible Hose
Standard	API SPEC 16 C
Inside dia in inches	3
Length	35 ft
Type of coupling one end	FLANGE 4.1/16" 10K API SPEC 6A TYPE 6BX FLANGE C/W BX155 R.GR.SOUR
Type of coupling other end	FLANGE 4.1/16" 10K API SPEC 6A TYPE 6BX FLANGE C/W BX155 R.GR.SOUR
H2S service NACE MR0175	Yes
Working Pressure	10 000 psi
Design Pressure	10 000 psi
Test Pressure	15 000 psi
Safety Factor	2,25
Marking	USUAL PHOENIX
Cover	NOT FIRE RESISTANT
Outside protection	St. steel outer wrap
Internal stripwound tube	No
Lining	OIL + GAS RESISTANT SOUR
Safety clamp	No
Lifting collar	No
Element C	No
Safety chain	No
Safety wire rope	No
Max. design temperature [°C]	100
Min. design temperature [°C]	-20
Min. Bend Radius operating [m]	0,90
Min. Bend Radius storage [m]	0,90
Electrical continuity	The Hose is electrically continuous
Type of packing	WOODEN CRATE ISPM-15

Printed: TIRETECHZICsontosG - 2014.03.10 15:22:17

Permian Resources

Multi-Well Pad Batch Drilling Procedure

Surface Casing - PR intends to Batch set all 13-3/8" casing to a depth approved in the APD. 17-1/2" Surface Holes will be batch drilled by a rig. Appropriate notifications will be made prior to spudding the well, running and cementing casing and prior to skidding to the rig to the next well on pad.

1. Drill 17-1/2" Surface hole to Approved Depth with Rig and perform wellbore cleanup cycles. Trip out and rack back drilling BHA.
2. Run and land 13-3/8" 54.5# J55 BTC casing see Illustration 1-1 Below to depth approved in APD.
3. Set packoff and test to 5k psi
4. Offline Cement
5. Install wellhead with pressure gauge and nightcap. Nightcap is shown on final wellhead Stack up Illustration #2-2.
6. Skid Rig to adjacent well to drill Surface hole.
7. Surface casing test will be performed by the rig in order to allow ample time for Cement to develop 500psi compressive strength. Casing test to 0.22 psi/ft or 1500 psi whichever is

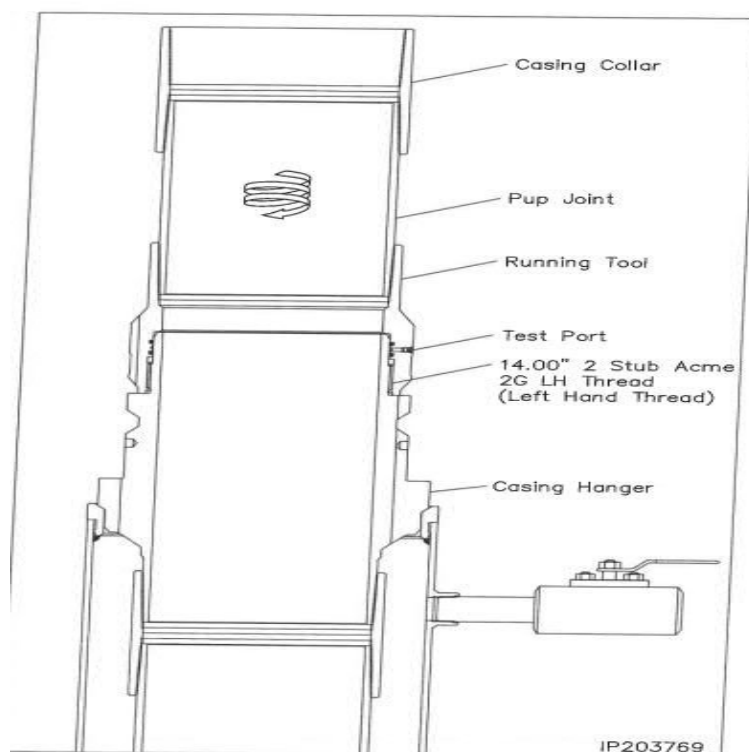


Illustration 1-1

Intermediate Casing – PR intends to Batch set all intermediate casing strings to a depth approved in the APD, typically set into Lamar. 12-1/4" Intermediate Holes will be batch drilled by the rig. Appropriate notifications will be made prior Testing BOPE, and prior to running/cementing all casing strings.

1. Rig will remove the nightcap and install and test BOPE.
2. Test Surface casing per COA WOC timing (.22 psi/ft or 1500 psi whichever is greater) - not to exceed 70% casing burst. Cement must have achieved 500psi compressive strength prior to test.
3. Install wear bushing then drill out 13-3/8" shoe-track plus 20' and conduct FIT to minimum of the MW equivalent anticipated to control the formation pressure to the next casing point.
4. Drill Intermediate hole to approved casing point. Trip out of hole with BHA to run Casing.
5. Remove wear bushing then run and land Intermediate Casing with mandrel hanger in wellhead.
6. Cement casing to surface with floats holding.
7. Washout stack then run wash tool in wellhead and wash hanger and pack-off setting area.
8. Install pack-off and test void to 5,000 psi for 15 minutes. Nightcap shown on final wellhead stack up illustration 2-2 on page 3.
9. Test casing per COA WOC timing (.22 psi/ft or 1500 psi whichever is greater) - not to exceed 70% casing burst. Cement must have achieved 500psi compressive strength prior to test.
10. Install nightcap – skid rig to adjacent well to drill Intermediate hole.

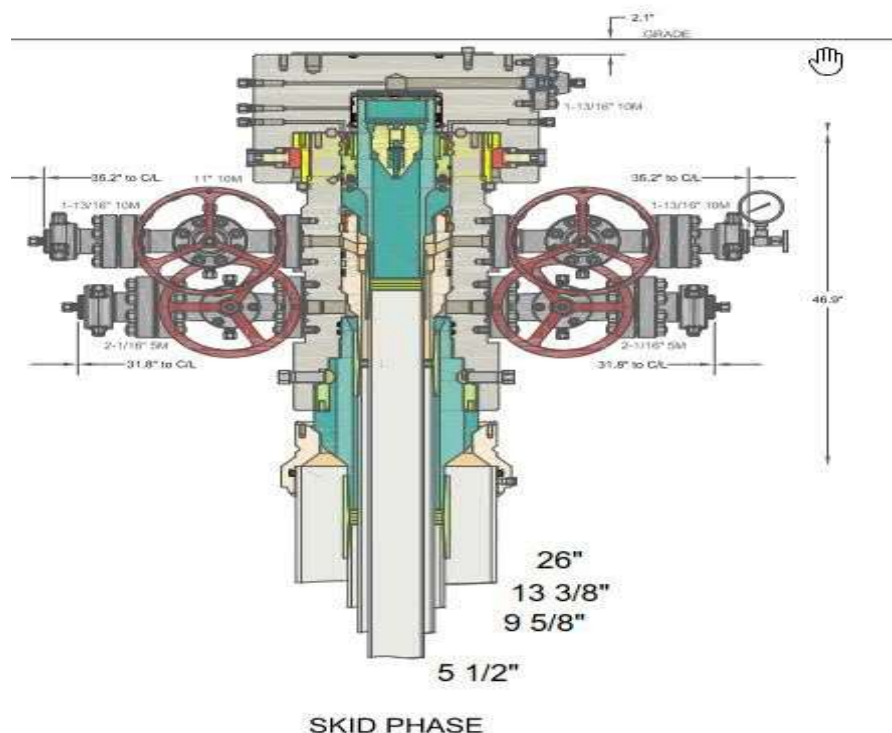



Illustration 2-2

Production Casing – PR intends to Batch set all Production casings with Rig. Appropriate notifications will be made prior Testing BOPE, and prior to running/cementing all casing strings.


1. Big Rig will remove the nightcap and install and test BOPE.
2. Install wear bushing then drill Intermediate shoe-track plus 20' and conduct FIT to minimum MW equivalent to control the formation pressure to TD of well.
3. Drill Vertical hole to KOP – Trip out for Curve BHA.
4. Drill Curve, landing in production interval – Trip for Lateral BHA.
5. Drill Lateral / Production hole to Permitted BHL, perform cleanup cycles and trip out to run 5 1/2" Production Casing.
6. Remove wear bushing then run 5-1/2" production casing to TD landing casing mandrel in wellhead.
7. Cement 5-1/2" Production string with floats holding.
8. Run in with wash tool and wash wellhead area – install pack-off and test void to 5,000psi for 15 minutes.
9. Install BPV in 5-1/2" mandrel hanger – Nipple down BOPE and install nightcap.
10. Test nightcap void to 5,000psi for 30 minutes per illustration 2-2
11. Skid rig to adjacent well on pad to drill production hole.

Permian Resources Offline Cementing Procedure 13-3/8" & 9-5/8" Casing


1. Drill hole to Total Depth with Rig and perform wellbore cleanup cycles.
2. Run and casing to Depth.
3. Land casing with mandrel.
4. Circulate 1.5 csg capacity.
5. Flow test – Confirm well is static and floats are holding.
6. Set Annular packoff and pressure test. Test to 5k.
7. Nipple down BOP and install cap flange.
8. Skid rig to next well on pad
9. Remove cap flange (confirm well is static before removal)
 - a) If well is not static use the casing outlet valves to kill well
 - b) Drillers method will be used in well control event
 - c) High pressure return line will be rigged up to lower casing valve and run to choke manifold to control annular pressure
 - d) Kill mud will be circulated once influx is circulated out of hole
 - e) Confirm well is static and remove cap flange to start offline cement operations
10. Install offline cement tool.
11. Rig up cementers.
12. Circulate bottoms up with cement truck
13. Commence planned cement job, take returns through the annulus wellhead valve
14. After plug is bumped confirm floats hold and well is static
15. Rig down cementers and equipment
16. Install night cap with pressure gauge to monitor.

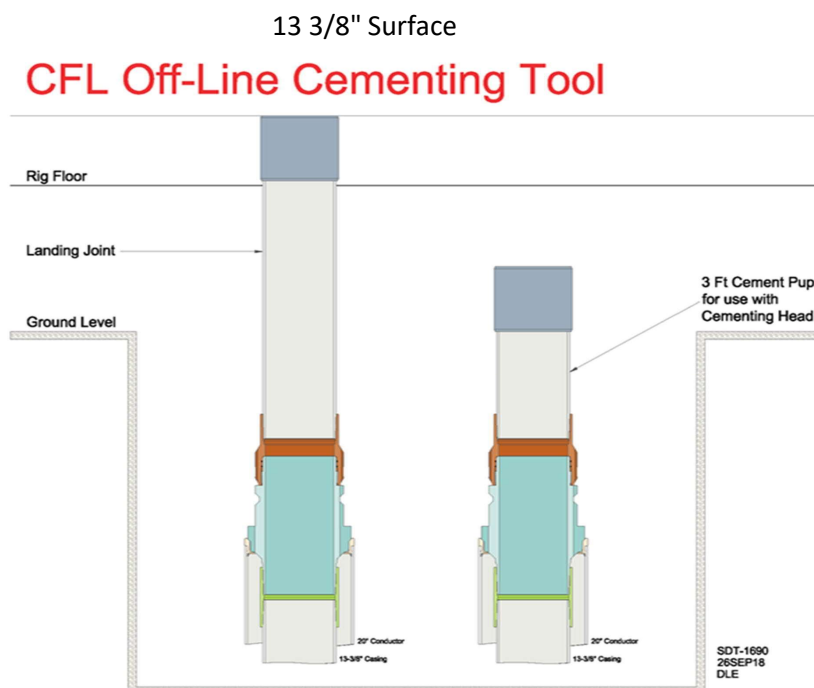


9 5/8" Intermediate

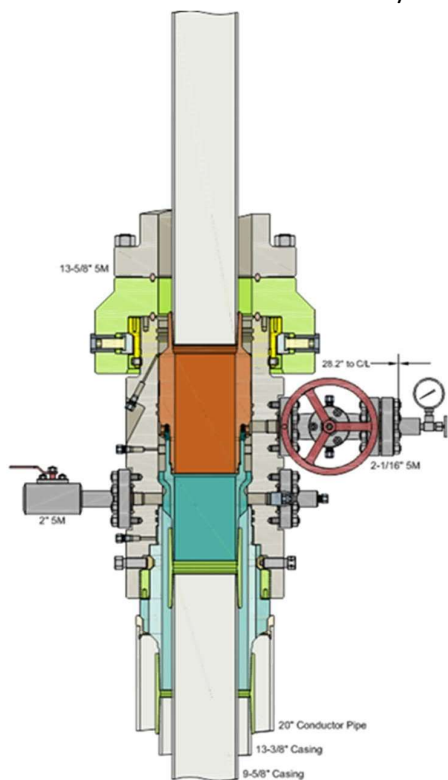

Run 9-5/8" Casing
Land Casing on 9-5/8" Mandrel Hanger
Cement 9-5/8" Casing
Retrieve Running Tool

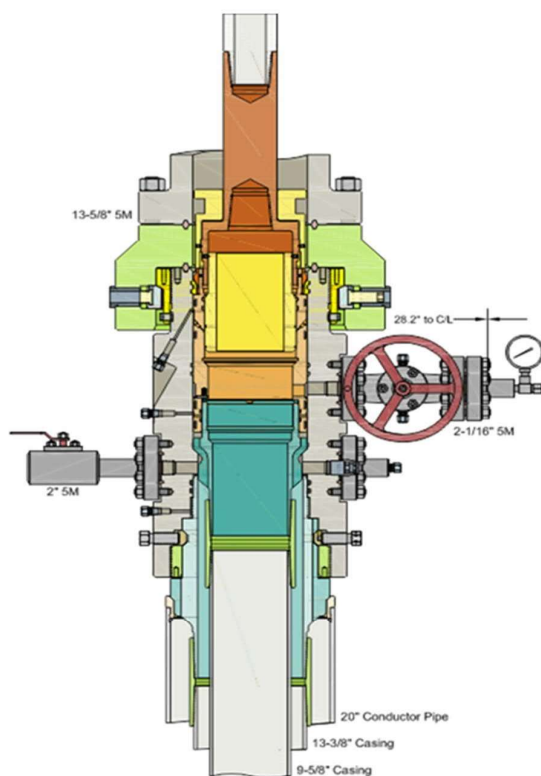

Run 13-5/8" Packoff
Test Upper and Lower Seals
Engage Lockring
Retrieve Running Tool

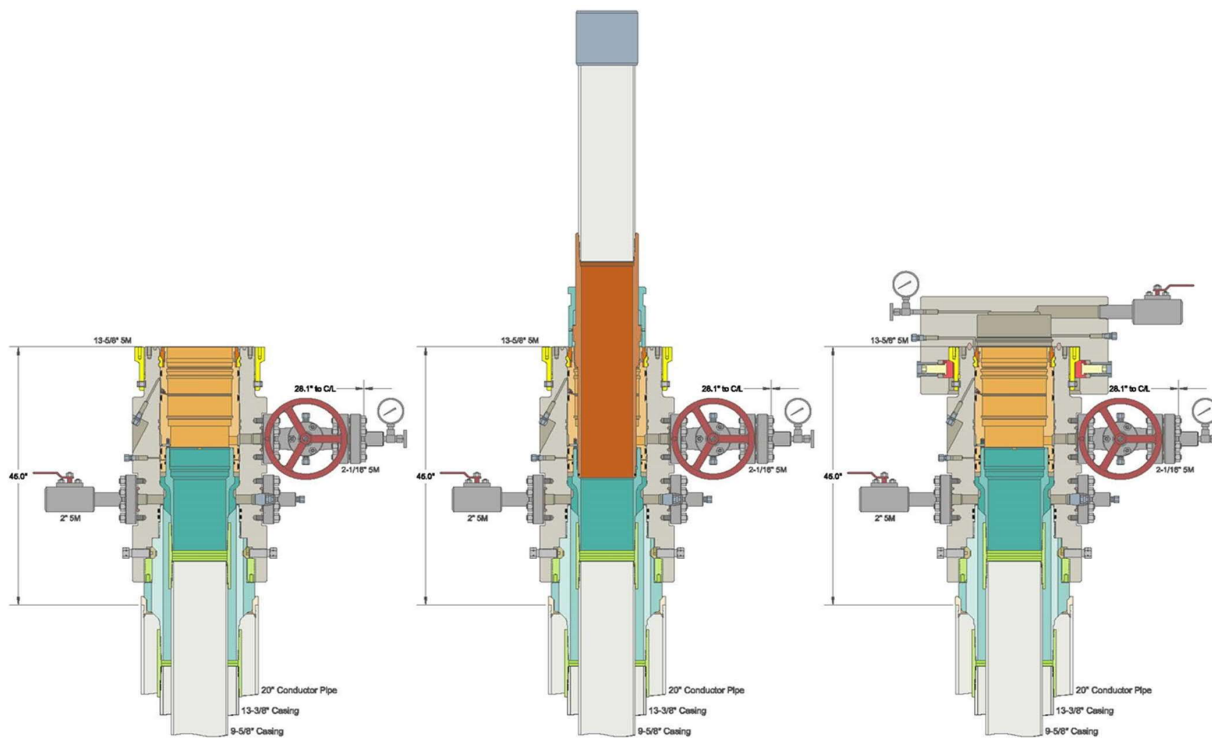



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Info Data

08/31/2023

APD ID: 10400085812

Submission Date: 06/03/2022

Operator Name: COLGATE OPERATING LLC

Well Name: KOALA 9 FED COM

Well Number: 113H

Well Type: OIL WELL

Well Work Type: Drill

Highlighted data
reflects the most
recent changes
[Show Final Text](#)

Bond

Federal/Indian APD: FED

BLM Bond number: NMB001382

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 260959

CONDITIONS

Operator: Permian Resources Operating, LLC 1001 17th Street, Suite 1800 Denver, CO 80202	OGRID: 372165
	Action Number: 260959
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
ward.rikala	Notify OCD 24 hours prior to casing & cement	9/6/2023
ward.rikala	Will require a File As Drilled C-102 and a Directional Survey with the C-104	9/6/2023
ward.rikala	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string	9/6/2023
ward.rikala	Cement is required to circulate on both surface and intermediate1 strings of casing	9/6/2023
ward.rikala	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system	9/6/2023