<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV 1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division** 1220 S. St Francis Dr. **Santa Fe, NM 87505** 

Form C-101 August 1, 2011

Permit 352680

APPLICATION FOR PERMIT	TO DRILL, RE-ENTE	R, DEEPEN, PLUGE	BACK, OR ADD A ZONE

,	74 1 107 (1011) OK 114111 10 DIALLI] (2 1111 1 J DIALLI] (2 1111 1 J DIALLI] (3 1111 1 J DIALLI] (4 1111 1 J DIALLI] (5 1111 1 J DIALLI] (6 1111 1 J DIALLI] (7 1111 1								
1. Operator Name and Address	2. OGRID Number								
AMEREDEV OPERATING, LLC	372224								
2901 Via Fortuna	2901 Via Fortuna								
Austin, TX 78746		30-025-52129							
4. Property Code	5. Property Name	6. Well No.							
320055	AMEN CORNER 26 36 27 STATE COM	182H							

7 Surface Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County	
В	27	26S	36E	В	200	N	2370	E	Lea	

8. Proposed Bottom Hole Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
F	34	26S	36E	3	50	S	2310	W	Lea

9. Pool Information

WC-025 G-08 S263620C;LWR BONE SPRIN	98150

Additional Well Information

11. Work Type	12. Well Type	13. Cable/Rotary	14. Lease Type	15. Ground Level Elevation
New Well	OIL		State	2906
16. Multiple	17. Proposed Depth	18. Formation	19. Contractor	20. Spud Date
N	17723	2nd Bone Spring Carbonate		1/15/2024
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

#### ☑ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

21. Floposed casing and cement Flogram											
Туре	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC					
Surf	17.5	13.375	54.5	1745	1373	0					
Int1	12.25	10.75	45.5	5106	1352	0					
Prod	8 75	5.5	17	17723	5774	0					

#### Casing/Cement Program: Additional Comments

g-	· · · · · · · · · · · · · · · · · ·

22. Proposed Blowout Prevention Program

Туре	Working Pressure	Test Pressure	Manufacturer	
Double Ram	5000	5000	TBD	

knowledge and b	have complied with 19.15.14.9 (A) N	true and complete to the best of my  IMAC ⊠ and/or 19.15.14.9 (B) NMAC		OIL CONSERVATI	ION DIVISION
Printed Name:	Electronically filed by Christie Har	nna	Approved By:	Paul F Kautz	
Title:	Regulatory		Title:	Geologist	
Email Address: channa@ameredev.com		Approved Date:	10/19/2023	Expiration Date: 10/19/2025	
Date: 10/18/2023 Phone: 737-300-4723			Conditions of Appr	oval Attached	

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720 District II 811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720 District III

1000 Rio Brazos Road, Aztec, NM 87410

Phone: (505) 334-6178 Fax: (505) 334-6170

<u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505

**FORM C-102** Revised August 1, 2011 Submit one copy to appropriate District Office

AMENDED REPORT


# WELL LOCATION AND ACREAGE DEDICATION PLAT

<sup>1</sup> API Numbo	<sup>1</sup> API Number		<sup>3</sup> Pool Name							
30-025-		98150	WC-025 G-08 S263620C; LWR BONE SPRING							
<sup>4</sup> Property Code		<sup>5</sup> Pr	operty Name	<sup>6</sup> Well Number						
320055		AMEN CORNER	26 36 27 STATE COM	182H						
<sup>7</sup> OGRID No.		<sup>8</sup> O <sub>I</sub>	perator Name	<sup>9</sup> Elevation						
372224		AMEREDEV	OPERATING, LLC.	2906'						

<sup>10</sup>Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County		
В	27	26-S	36-E	-	200'	NORTH	2370'	EAST	LEA		
	<sup>11</sup> Bottom Hole Location If Different From Surface										
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County		
3	34	26-S	36-E	-	50'	SOUTH	2310'	WEST	LEA		
12Dedicated Acres	<sup>13</sup> Joint or 1	nfill 14Co	nsolidation Co	de <sup>15</sup> Ord	er No.						
233.66			C								

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

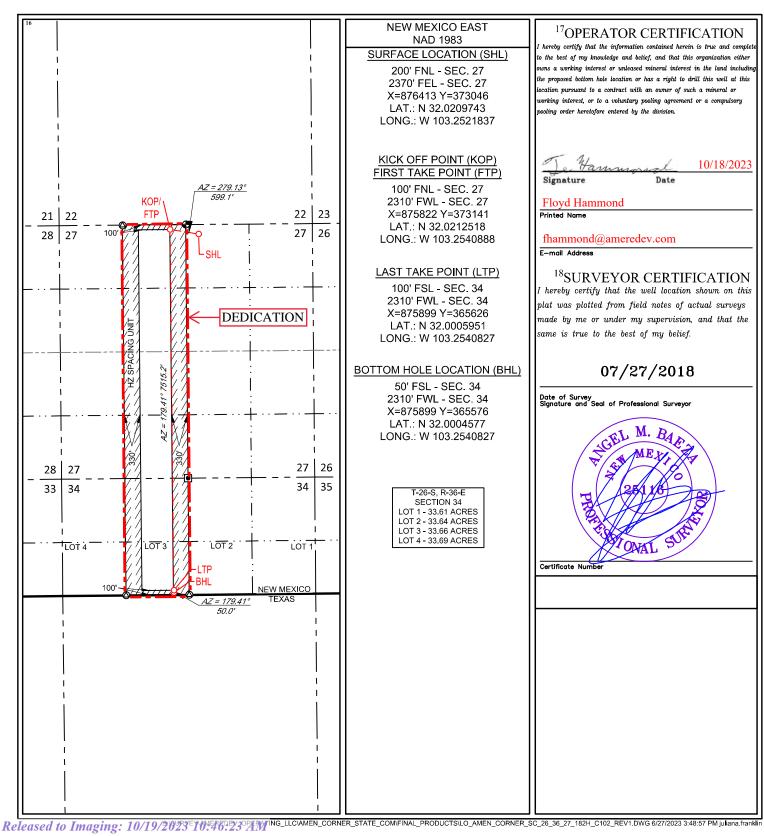

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

# **State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division** 1220 S. St Francis Dr. **Santa Fe, NM 87505**

Form APD Conditions


Permit 352680

#### PERMIT CONDITIONS OF APPROVAL

Operator Name and Address:	API Number:
AMEREDEV OPERATING, LLC [372224]	30-025-52129
2901 Via Fortuna	Well:
Austin, TX 78746	AMEN CORNER 26 36 27 STATE COM #182H

OCD Reviewer	Condition
pkautz	Notify OCD 24 hours prior to casing & cement
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system
pkautz	Cement is required to circulate on both surface and intermediate1 strings of casing
pkautz	If cement does not circulate on any string , a CBL is required for that string of casing.
pkautz	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud

Page 4 of 23

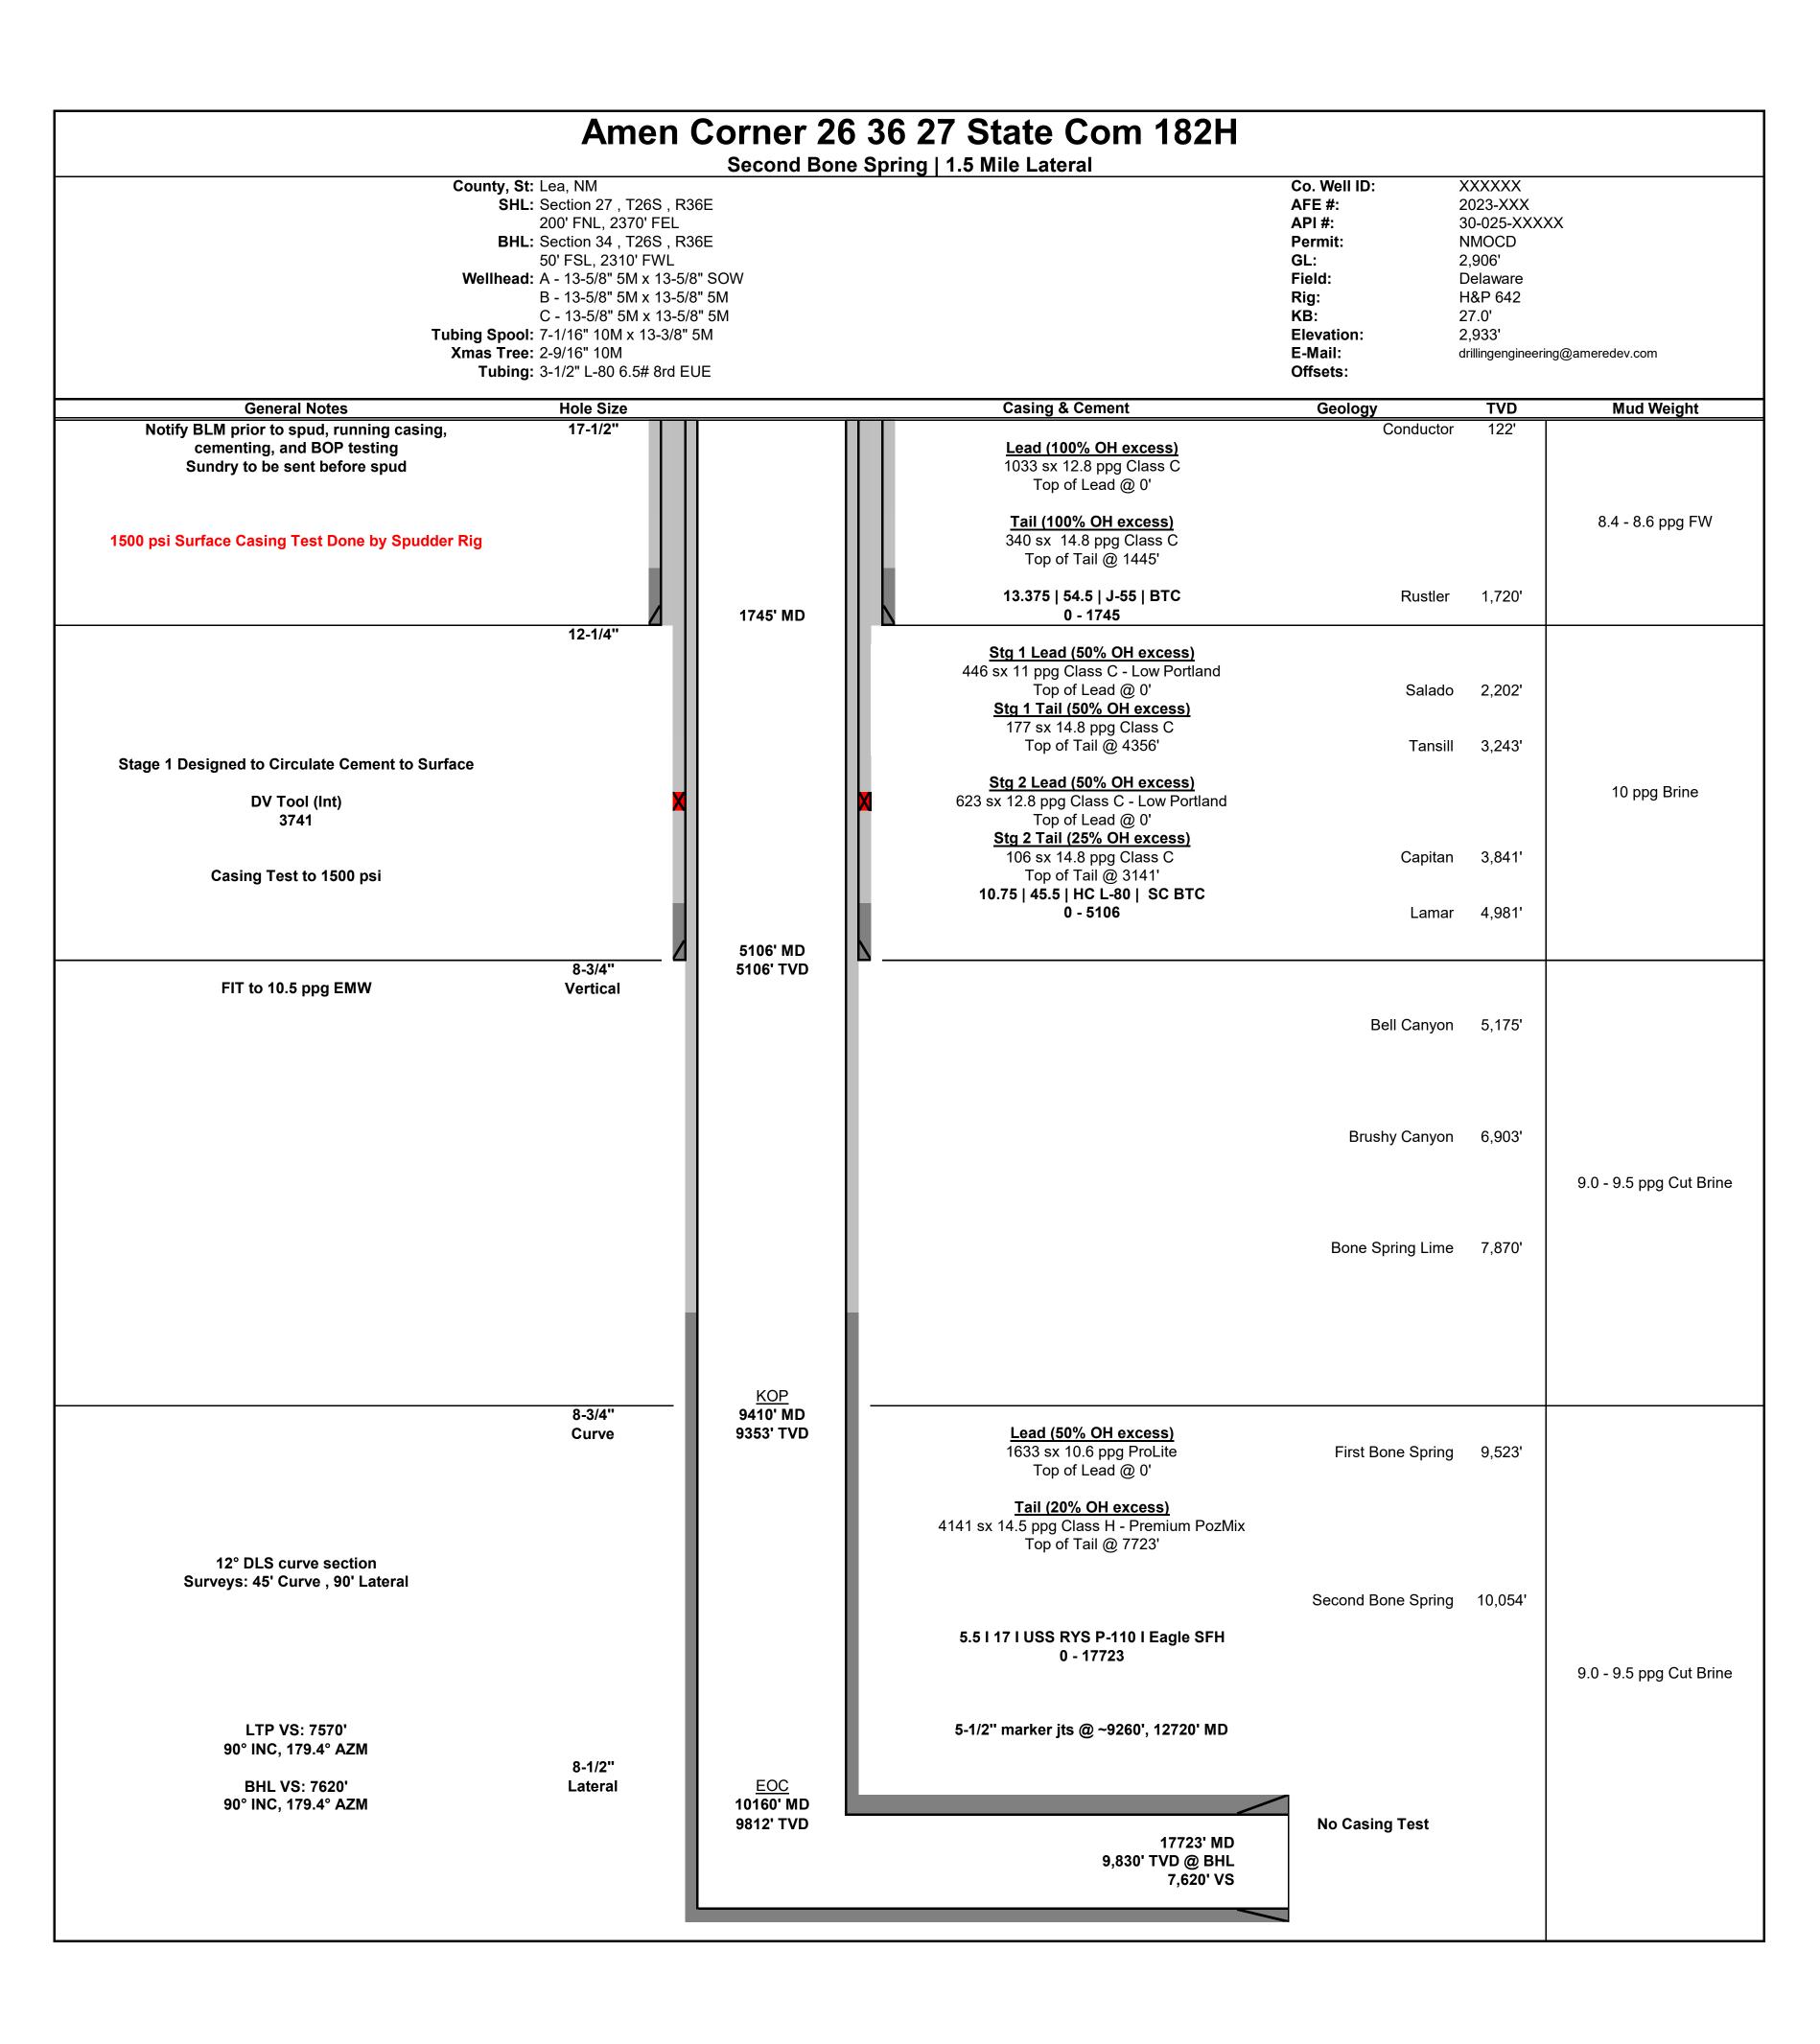



# **Ameredev Operating**

Lea County, NM (N83-NME)

AMEN CORNER ST COM PROJECT

AMEN CORNER 26 36 27 ST COM 182H

**OWB** 

Plan: PWP0

# **Standard Planning Report - Geographic**

24 August, 2023



TVD Reference:

MD Reference:

North Reference:

Database: AUS-COMPASS - EDM\_15 - 32bit

Company: Ameredev Operating
Project: Lea County, NM (N83-NME)
Site: AMEN CORNER ST COM PROJECT

Wellbore: OWB Design: PWP0

Well:

Local Co-ordinate Reference:

**Survey Calculation Method:** 

Well AMEN CORNER ST COM 26 36 27

179.41

#182H

KB=25' @ 2931.0usft KB=25' @ 2931.0usft

Grid

Minimum Curvature

Project Lea County, NM (N83-NME)

Map System:US State Plane 1983Geo Datum:North American Datum 1983Map Zone:New Mexico Eastern Zone

System Datum:

Mean Sea Level

Site AMEN CORNER ST COM PROJECT

 Site Position:
 Northing:
 373,452.33 usft
 Latitude:
 32.0221652

 From:
 Lat/Long
 Easting:
 873,738.68 usft
 Longitude:
 -103.2607997

Position Uncertainty: 0.0 usft Slot Radius: 13-3/16 "

AMEN CORNER ST COM 26 36 27 #182H

Well AMEN CORNER ST COM 26 36 27 #182H

 Well Position
 +N/-S
 0.0 usft
 Northing:
 373,045.70 usft
 Latitude:
 32.0209743

 +E/-W
 0.0 usft
 Easting:
 876,413.44 usft
 Longitude:
 -103.2521837

Position Uncertainty

3.0 usft Wellhead Elevation: usft Ground Level: 2,906.0 usft

Grid Convergence: 0.57 °

Wellbore OWB

 Magnetics
 Model Name
 Sample Date (°)
 Declination (°)
 Dip Angle (°)
 Field Strength (nT)

 IGRF2020
 6/29/2023
 6.14
 59.69
 47,196.34994024

PWP0 Design **Audit Notes:** Version: Phase: **PROTOTYPE** 0.0 Tie On Depth: Vertical Section: Depth From (TVD) +E/-W Direction +N/-S (usft) (usft) (usft) (°)

0.0

Plan Survey Tool Program Date 8/24/2023

Depth From Depth To

(usft) (usft) Survey (Wellbore) Tool Name Remarks

0.0

1 0.0 17,723.2 PWP0 (OWB) MWD

OWSG MWD - Standard

0.0



Database: AUS-COMPASS - EDM\_15 - 32bit

Company: Ameredev Operating
Project: Lea County, NM (N83-NME)
Site: AMEN CORNER ST COM PROJECT
Well: AMEN CORNER ST COM 26 36 27 #182H

Wellbore: OWB
Design: PWP0

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Well AMEN CORNER ST COM 26 36 27

#182H

KB=25' @ 2931.0usft KB=25' @ 2931.0usft

Grid

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,900.0	8.00	313.72	1,898.7	19.3	-20.1	2.00	2.00	0.00	313.72	
7,435.2	8.00	313.72	7,380.0	551.7	-576.9	0.00	0.00	0.00	0.00	
7,835.2	0.00	0.00	7,778.7	571.0	-597.0	2.00	-2.00	0.00	180.00	
9,409.5	0.00	0.00	9,353.0	571.0	-597.0	0.00	0.00	0.00	0.00	
10,159.5	90.00	179.41	9,830.5	93.5	-592.1	12.00	12.00	23.92	179.41	
17,723.2	90.00	179.41	9,830.0	-7,469.8	-514.0	0.00	0.00	0.00	0.00	BHL (ACSC #182H



AUS-COMPASS - EDM\_15 - 32bit Database:

Ameredev Operating Company: Lea County, NM (N83-NME) Project: AMEN CORNER ST COM PROJECT Site: AMEN CORNER ST COM 26 36 27 #182H Well:

Wellbore: OWB PWP0 Design:

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference: **Survey Calculation Method:** 

Well AMEN CORNER ST COM 26 36 27

#182H

KB=25' @ 2931.0usft KB=25' @ 2931.0usft

Grid

Design:	PWP								
Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.0	0.00	0.00	0.0	0.0	0.0	373,045.70	876,413.44	32.0209743	-103.2521837
100.0	0.00	0.00	100.0	0.0	0.0	373,045.70	876,413.44	32.0209743	-103.2521837
200.0	0.00	0.00	200.0	0.0	0.0	373,045.70	876,413.44	32.0209743	-103.2521837
300.0	0.00	0.00	300.0	0.0	0.0	373,045.70	876,413.44	32.0209743	-103.2521837
400.0	0.00	0.00	400.0	0.0	0.0	373,045.70	876,413.44	32.0209743	-103.2521837
500.0	0.00	0.00	500.0	0.0	0.0	373,045.70	876,413.44	32.0209743	-103.2521837
600.0	0.00	0.00	600.0	0.0	0.0	373,045.70	876,413.44	32.0209743	-103.2521837
700.0	0.00	0.00	700.0	0.0	0.0	373,045.70	876,413.44	32.0209743	-103.2521837
800.0	0.00	0.00	800.0	0.0	0.0	373,045.70	876,413.44	32.0209743	-103.2521837
900.0	0.00	0.00	900.0	0.0	0.0	373,045.70	876,413.44	32.0209743	-103.2521837
1,000.0	0.00	0.00	1,000.0	0.0	0.0	373,045.70	876,413.44	32.0209743	-103.2521837
1,100.0	0.00	0.00	1,100.0	0.0	0.0	373,045.70	876,413.44	32.0209743	-103.2521837
1,200.0	0.00	0.00	1,200.0	0.0	0.0	373,045.70	876,413.44	32.0209743	-103.2521837
1,300.0 1,400.0	0.00	0.00 0.00	1,300.0	0.0	0.0	373,045.70 373,045.70	876,413.44	32.0209743	-103.2521837 -103.2521837
1,500.0	0.00	0.00	1,400.0 1,500.0	0.0 0.0	0.0 0.0	373,045.70 373,045.70	876,413.44 876,413.44	32.0209743 32.0209743	-103.2521837
		0.00	1,500.0	0.0	0.0	373,045.70	070,413.44	32.0209743	-103.2321037
Start Bui		242.70	4 000 0	4.0	4.0	272 040 04	070 440 40	22 0200777	400 0504077
1,600.0 1,695.2	2.00 3.90	313.72 313.72	1,600.0 1,695.0	1.2 4.6	-1.3 -4.8	373,046.91 373,050.29	876,412.18	32.0209777	-103.2521877 -103.2521990
	3.90	313.72	1,695.0	4.0	-4.8	373,050.29	876,408.64	32.0209871	-103.2521990
Rustler	4.00	040.70	4 000 0	4.0	5.0	070 050 50	070 400 40	00 0000077	400.0504000
1,700.0	4.00	313.72	1,699.8	4.8	-5.0	373,050.53	876,408.40	32.0209877	-103.2521998
1,800.0 1,900.0	6.00 8.00	313.72	1,799.5	10.8 19.3	-11.3	373,056.55	876,402.10	32.0210045	-103.2522199
		313.72	1,898.7	19.5	-20.1	373,064.97	876,393.29	32.0210278	-103.2522481
2,000.0	35.2 hold at 19 8.00	313.72	1,997.7	28.9	-30.2	373,074.59	876,383.24	32.0210546	-103.2522802
2,100.0	8.00	313.72	2,096.8	38.5	-40.3	373,084.21	876,373.18	32.0210813	-103.2523123
2,160.8	8.00	313.72	2,157.0	44.4	-46.4	373,090.06	876,367.06	32.0210975	-103.2523123
Salado	0.00	010.72	2,107.0	77.7	-10.4	070,000.00	070,007.00	02.0210070	-100.2020013
2,200.0	8.00	313.72	2,195.8	48.1	-50.3	373,093.83	876,363.12	32.0211080	-103.2523445
2,300.0	8.00	313.72	2,193.8	57.7	-60.4	373,103.45	876,353.06	32.0211347	-103.2523766
2,400.0	8.00	313.72	2,393.8	67.4	-70.4	373,113.07	876,343.00	32.0211614	-103.2524088
2,500.0	8.00	313.72	2,492.9	77.0	-80.5	373,122.69	876,332.95	32.0211881	-103.2524409
2,600.0	8.00	313.72	2,591.9	86.6	-90.6	373,132.31	876,322.89	32.0212149	-103.2524730
2,700.0	8.00	313.72	2,690.9	96.2	-100.6	373,141.93	876,312.83	32.0212416	-103.2525052
2,800.0	8.00	313.72	2,789.9	105.8	-110.7	373,151.55	876,302.77	32.0212683	-103.2525373
2,900.0	8.00	313.72	2,889.0	115.5	-120.7	373,161.17	876,292.72	32.0212950	-103.2525694
3,000.0	8.00	313.72	2,988.0	125.1	-130.8	373,170.79	876,282.66	32.0213217	-103.2526016
3,100.0	8.00	313.72	3,087.0	134.7	-140.8	373,180.41	876,272.60	32.0213484	-103.2526337
3,144.4	8.00	313.72	3,131.0	139.0	-145.3	373,184.68	876,268.14	32.0213603	-103.2526480
Tansill									
3,200.0	8.00	313.72	3,186.1	144.3	-150.9	373,190.03	876,262.54	32.0213752	-103.2526658
3,300.0	8.00	313.72	3,285.1	153.9	-161.0	373,199.65	876,252.49	32.0214019	-103.2526980
3,400.0	8.00	313.72	3,384.1	163.6	-171.0	373,209.27	876,242.43	32.0214286	-103.2527301
3,500.0	8.00	313.72	3,483.1	173.2	-181.1	373,218.89	876,232.37	32.0214553	-103.2527623
3,600.0	8.00	313.72	3,582.2	182.8	-191.1	373,228.51	876,222.31	32.0214820	-103.2527944
3,700.0	8.00	313.72	3,681.2	192.4	-201.2	373,238.12	876,212.26	32.0215087	-103.2528265
3,800.0	8.00	313.72	3,780.2	202.0	-211.2	373,247.74	876,202.20	32.0215354	-103.2528587
3,821.0	8.00	313.72	3,801.0	204.1	-213.4	373,249.76	876,200.09	32.0215411	-103.2528654
Capitan									
3,900.0	8.00	313.72	3,879.2	211.7	-221.3	373,257.36	876,192.14	32.0215622	-103.2528908
4,000.0	8.00	313.72	3,978.3	221.3	-231.4	373,266.98	876,182.08	32.0215889	-103.2529229
4,100.0	8.00	313.72	4,077.3	230.9	-241.4	373,276.60	876,172.03	32.0216156	-103.2529551
4,200.0	8.00	313.72	4,176.3	240.5	-251.5	373,286.22	876,161.97	32.0216423	-103.2529872



Database: AUS-COMPASS - EDM\_15 - 32bit

Company: Ameredev Operating
Project: Lea County, NM (N83-NME)
Site: AMEN CORNER ST COM PROJECT
Well: AMEN CORNER ST COM 26 36 27 #182H

Wellbore: OWB
Design: PWP0

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Well AMEN CORNER ST COM 26 36 27

#182H

KB=25' @ 2931.0usft KB=25' @ 2931.0usft

Grid

Design.	FVVF	-							
Planned Survey	,								
Measured			Vertical			Мар	Мар		
Depth	Inclination	Azimuth	Depth	+N/-S	+E/-W	Northing	Easting		
(usft)	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)	Latitude	Longitude
4,300.0	8.00	313.72	4,275.3	250.1	-261.5	373,295.84	876,151.91	32.0216690	-103.2530193
4,400.0		313.72	4,374.4	259.8	-271.6	373,305.46	876,141.85	32.0216957	-103.2530515
4,500.0		313.72	4,473.4	269.4	-281.6	373,315.08	876,131.80	32.0217225	-103.2530836
4,600.0		313.72	4,572.4	279.0	-291.7	373,324.70	876,121.74	32.0217492	-103.2531158
4,700.0		313.72	4,671.5	288.6	-301.8	373,334.32	876,111.68	32.0217759	-103.2531479
4,800.0		313.72	4,770.5	298.2	-311.8	373,343.94	876,101.62	32.0218026	-103.2531800
4,900.0		313.72	4,869.5	307.9	-321.9	373,353.56	876,091.56	32.0218293	-103.2532122
4,926.8		313.72	4,896.0	310.4	-324.6	373,356.13	876,088.87	32.0218365	-103.2532208
Lamar									
5,000.0	8.00	313.72	4,968.5	317.5	-331.9	373,363.18	876,081.51	32.0218560	-103.2532443
5,100.0		313.72	5,067.6	327.1	-342.0	373,372.80	876,071.45	32.0218828	-103.2532764
5,128.7		313.72	5,096.0	329.9	-344.9	373,375.56	876,068.56	32.0218904	-103.2532857
Bell Car			,			,	•		
5,200.0	-	313.72	5,166.6	336.7	-352.0	373,382.42	876,061.39	32.0219095	-103.2533086
5,300.0		313.72	5,265.6	346.3	-362.1	373,392.04	876,051.33	32.0219362	-103.2533407
5,400.0		313.72	5,364.6	356.0	-372.2	373,401.66	876,041.28	32.0219629	-103.2533728
5,500.0		313.72	5,463.7	365.6	-382.2	373,411.28	876,031.22	32.0219896	-103.2534050
5,600.0		313.72	5,562.7	375.2	-392.3	373,420.90	876,021.16	32.0220163	-103.2534371
5,700.0	8.00	313.72	5,661.7	384.8	-402.3	373,430.52	876,011.10	32.0220430	-103.2534693
5,800.0	8.00	313.72	5,760.7	394.4	-412.4	373,440.14	876,001.05	32.0220698	-103.2535014
5,900.0	8.00	313.72	5,859.8	404.1	-422.5	373,449.76	875,990.99	32.0220965	-103.2535335
6,000.0	8.00	313.72	5,958.8	413.7	-432.5	373,459.38	875,980.93	32.0221232	-103.2535657
6,100.0	8.00	313.72	6,057.8	423.3	-442.6	373,468.99	875,970.87	32.0221499	-103.2535978
6,200.0	8.00	313.72	6,156.9	432.9	-452.6	373,478.61	875,960.82	32.0221766	-103.2536299
6,300.0	8.00	313.72	6,255.9	442.5	-462.7	373,488.23	875,950.76	32.0222033	-103.2536621
6,400.0	8.00	313.72	6,354.9	452.2	-472.7	373,497.85	875,940.70	32.0222301	-103.2536942
6,500.0	8.00	313.72	6,453.9	461.8	-482.8	373,507.47	875,930.64	32.0222568	-103.2537264
6,600.0	8.00	313.72	6,553.0	471.4	-492.9	373,517.09	875,920.59	32.0222835	-103.2537585
6,700.0	8.00	313.72	6,652.0	481.0	-502.9	373,526.71	875,910.53	32.0223102	-103.2537906
6,740.4	8.00	313.72	6,692.0	484.9	-507.0	373,530.60	875,906.46	32.0223210	-103.2538036
Brushy	Canyon								
6,800.0	8.00	313.72	6,751.0	490.6	-513.0	373,536.33	875,900.47	32.0223369	-103.2538228
6,900.0	8.00	313.72	6,850.0	500.2	-523.0	373,545.95	875,890.41	32.0223636	-103.2538549
7,000.0	8.00	313.72	6,949.1	509.9	-533.1	373,555.57	875,880.36	32.0223904	-103.2538870
7,100.0	8.00	313.72	7,048.1	519.5	-543.1	373,565.19	875,870.30	32.0224171	-103.2539192
7,200.0	8.00	313.72	7,147.1	529.1	-553.2	373,574.81	875,860.24	32.0224438	-103.2539513
7,300.0	8.00	313.72	7,246.1	538.7	-563.3	373,584.43	875,850.18	32.0224705	-103.2539835
7,400.0	8.00	313.72	7,345.2	548.3	-573.3	373,594.05	875,840.12	32.0224972	-103.2540156
7,435.2	8.00	313.72	7,380.0	551.7	-576.9	373,597.43	875,836.59	32.0225066	-103.2540269
Start Dr	op -2.00								
7,500.0	•	313.72	7,444.3	557.5	-582.8	373,603.17	875,830.59	32.0225225	-103.2540460
7,600.0	4.70	313.72	7,543.8	564.3	-590.0	373,610.03	875,823.41	32.0225416	-103.2540690
7,681.4	3.08	313.72	7,625.0	568.1	-594.0	373,613.85	875,819.42	32.0225522	-103.2540817
Bone Sr	ring Lime								
7,700.0		313.72	7,643.6	568.8	-594.7	373,614.50	875,818.74	32.0225540	-103.2540839
7,800.0		313.72	7,743.5	570.9	-596.8	373,616.55	875,816.60	32.0225597	-103.2540908
7,835.2		0.00	7,778.7	571.0	-597.0	373,616.70	875,816.44	32.0225601	-103.2540913
	74.3 hold at 78								
7,900.0		0.00	7,843.5	571.0	-597.0	373,616.70	875,816.44	32.0225601	-103.2540913
8,000.0		0.00	7,943.5	571.0	-597.0	373,616.70	875,816.44	32.0225601	-103.2540913
8,100.0		0.00	8,043.5	571.0	-597.0	373,616.70	875,816.44	32.0225601	-103.2540913
8,200.0		0.00	8,143.5	571.0	-597.0	373,616.70	875,816.44	32.0225601	-103.2540913
8,300.0		0.00	8,243.5	571.0	-597.0	373,616.70	875,816.44	32.0225601	-103.2540913
5,550.0	0.00	0.00	-,= .0.0	Jv	200		,		



Database: AUS-COMPASS - EDM\_15 - 32bit

Company: Ameredev Operating
Project: Lea County, NM (N83-NME)
Site: AMEN CORNER ST COM PROJECT

Well: AMEN CORNER ST COM 26 36 27 #182H

Wellbore: OWB
Design: PWP0

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Well AMEN CORNER ST COM 26 36 27

#182H

KB=25' @ 2931.0usft KB=25' @ 2931.0usft

Grid

Design.	FVVF								
Planned Surve	v								
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
9.400		0.00	0.242.5	571.0	-597.0	272 646 70	075 046 44		-103.2540913
8,400. 8,500.		0.00	8,343.5 8,443.5	571.0 571.0	-597.0 -597.0	373,616.70 373,616.70	875,816.44 875,816.44	32.0225601 32.0225601	-103.2540913
8,600.		0.00	8,543.5	571.0 571.0	-597.0 -597.0	373,616.70	875,816.44	32.0225601	-103.2540913
8,700.		0.00	8,643.5	571.0 571.0	-597.0 -597.0	373,616.70	875,816.44	32.0225601	-103.2540913
8,800.		0.00	8,743.5	571.0 571.0	-597.0 -597.0	373,616.70	875,816.44	32.0225601	-103.2540913
8,900.		0.00	8,843.5	571.0 571.0	-597.0 -597.0	373,616.70	875,816.44	32.0225601	-103.2540913
9,000.		0.00	8,943.5	571.0	-597.0	373,616.70	875,816.44	32.0225601	-103.2540913
9,100.		0.00	9,043.5	571.0	-597.0	373,616.70	875,816.44	32.0225601	-103.2540913
9,200.		0.00	9,143.5	571.0	-597.0	373,616.70	875,816.44	32.0225601	-103.2540913
9,300.		0.00	9,243.5	571.0	-597.0	373,616.70	875,816.44	32.0225601	-103.2540913
9,372.		0.00	9,316.0	571.0	-597.0	373,616.70	875,816.44	32.0225601	-103.2540913
	one Spring		-,			,	,-		
9,400.		0.00	9,343.5	571.0	-597.0	373,616.70	875,816.44	32.0225601	-103.2540913
9,409.		0.00	9,353.0	571.0	-597.0	373,616.70	875,816.44	32.0225601	-103.2540913
	LS 12.00 TFO 1		-,			,	,-		
9,500.		179.41	9,443.0	562.4	-596.9	373,608.14	875,816.53	32.0225366	-103.2540913
9,600.		179.41	9,538.5	533.5	-596.6	373,579.19	875,816.83	32.0224570	-103.2540912
9,700.		179.41	9,625.9	485.3	-596.1	373,531.01	875,817.32	32.0223246	-103.2540912
9,800.	46.86	179.41	9,701.4	420.0	-595.4	373,465.70	875,818.00	32.0221451	-103.2540911
9,900.	58.86	179.41	9,761.7	340.4	-594.6	373,386.13	875,818.82	32.0219263	-103.2540910
10,000.	70.86	179.41	9,804.1	250.1	-593.7	373,295.77	875,819.75	32.0216780	-103.2540909
10,026.	2 74.01	179.41	9,812.0	225.1	-593.4	373,270.75	875,820.01	32.0216092	-103.2540909
Second	Bone Spring								
10,100.	82.86	179.41	9,826.8	152.9	-592.7	373,198.57	875,820.75	32.0214108	-103.2540908
10,158.	89.82	179.41	9,830.5	95.1	-592.1	373,140.77	875,821.35	32.0212519	-103.2540908
FTP (A	CSC #182H)								
10,159.	90.00	179.41	9,830.5	93.5	-592.1	373,139.23	875,821.37	32.0212477	-103.2540908
Start 7	63.7 hold at 10	0159.5 MD							
10,200.	90.00	179.41	9,830.5	53.0	-591.7	373,098.73	875,821.78	32.0211363	-103.2540907
10,300.	90.00	179.41	9,830.5	-47.0	-590.6	372,998.73	875,822.82	32.0208615	-103.2540906
10,400.		179.41	9,830.4	-147.0	-589.6	372,898.74	875,823.85	32.0205866	-103.2540905
10,500.		179.41	9,830.4	-247.0	-588.6	372,798.75	875,824.88	32.0203117	-103.2540904
10,600.		179.41	9,830.4	-347.0	-587.5	372,698.75	875,825.91	32.0200369	-103.2540903
10,700.		179.41	9,830.4	-446.9	-586.5	372,598.76	875,826.94	32.0197620	-103.2540902
10,800.		179.41	9,830.4	-546.9	-585.5	372,498.76	875,827.97	32.0194871	-103.2540901
10,900.		179.41	9,830.4	-646.9	-584.4	372,398.77	875,829.01	32.0192123	-103.2540900
11,000.		179.41	9,830.4	-746.9	-583.4	372,298.77	875,830.04	32.0189374	-103.2540899
11,100.		179.41	9,830.4	-846.9	-582.4	372,198.78	875,831.07	32.0186626	-103.2540898
11,200.		179.41	9,830.4	-946.9	-581.3	372,098.78	875,832.10	32.0183877	-103.2540897
11,300. 11,400.		179.41 179.41	9,830.4 9,830.4	-1,046.9 -1,146.9	-580.3 -579.3	371,998.79 371,898.79	875,833.13 875,834.16	32.0181128 32.0178380	-103.2540896 -103.2540894
11,500.		179.41	9,830.4	-1,140.9	-579.3 -578.2	371,798.80	875,835.20	32.0175631	-103.2540893
11,600.		179.41	9,830.4	-1,240.9	-577.2	371,698.80	875,836.23	32.0173031	-103.2540892
11,700.		179.41	9,830.4	-1,446.9	-576.2	371,598.81	875,837.26	32.0172032	-103.2540891
11,800.		179.41	9,830.4	-1,546.9	-575.2	371,498.81	875,838.29	32.0167385	-103.2540890
11,900.		179.41	9,830.4	-1,646.9	-574.1	371,398.82	875,839.32	32.0164636	-103.2540889
12,000.		179.41	9,830.4	-1,746.9	-573.1	371,298.83	875,840.35	32.0161888	-103.2540888
12,100.		179.41	9,830.3	-1,846.9	-572.1	371,198.83	875,841.39	32.0159139	-103.2540887
12,200.		179.41	9,830.3	-1,946.9	-571.0	371,098.84	875,842.42	32.0156390	-103.2540886
12,300.		179.41	9,830.3	-2,046.9	-570.0	370,998.84	875,843.45	32.0153642	-103.2540885
12,400.		179.41	9,830.3	-2,146.9	-569.0	370,898.85	875,844.48	32.0150893	-103.2540884
12,500.		179.41	9,830.3	-2,246.9	-567.9	370,798.85	875,845.51	32.0148144	-103.2540883
12,600.	90.00	179.41	9,830.3	-2,346.8	-566.9	370,698.86	875,846.54	32.0145396	-103.2540882



Database: AUS-COMPASS - EDM\_15 - 32bit

Company: Ameredev Operating
Project: Lea County, NM (N83-NME)
Site: AMEN CORNER ST COM PROJECT

Well: AMEN CORNER ST COM 26 36 27 #182H

Wellbore: OWB
Design: PWP0

Local Co-ordinate Reference:

#182H

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Well AMEN CORNER ST COM 26 36 27

KB=25' @ 2931.0usft KB=25' @ 2931.0usft

Grid

Planned Survey	,								
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
12,700.0	90.00	179.41	9,830.3	-2,446.8	-565.9	370,598.86	875,847.57	32.0142647	-103.2540881
12,800.0	90.00	179.41	9,830.3	-2,546.8	-564.8	370,498.87	875,848.61	32.0139899	-103.2540880
12,900.0	90.00	179.41	9,830.3	-2,646.8	-563.8	370,398.87	875,849.64	32.0137150	-103.2540879
13,000.0	90.00	179.41	9,830.3	-2,746.8	-562.8	370,298.88	875,850.67	32.0134401	-103.2540877
13,100.0	90.00	179.41	9,830.3	-2,846.8	-561.7	370,198.88	875,851.70	32.0131653	-103.2540876
13,200.0	90.00	179.41	9,830.3	-2,946.8	-560.7	370,098.89	875,852.73	32.0128904	-103.2540875
13,300.0	90.00	179.41	9,830.3	-3,046.8	-559.7	369,998.89	875,853.76	32.0126155	-103.2540874
13,400.0	90.00	179.41	9,830.3	-3,146.8	-558.6	369,898.90	875,854.80	32.0123407	-103.2540873
13,500.0	90.00	179.41	9,830.3	-3,246.8	-557.6	369,798.90	875,855.83	32.0120658	-103.2540872
13,600.0	90.00	179.41	9,830.3	-3,346.8	-556.6	369,698.91	875,856.86	32.0117909	-103.2540871
13,700.0	90.00	179.41	9,830.2	-3,446.8	-555.5	369,598.92	875,857.89	32.0115161	-103.2540870
13,800.0	90.00	179.41	9,830.2	-3,546.8	-554.5	369,498.92	875,858.92	32.0112412	-103.2540869
13,900.0	90.00	179.41	9,830.2	-3,646.8	-553.5	369,398.93	875,859.95	32.0109663	-103.2540868
14,000.0	90.00	179.41	9,830.2	-3,746.8	-552.5	369,298.93	875,860.99	32.0106915	-103.2540867
14,100.0	90.00	179.41	9,830.2	-3,846.8	-551.4	369,198.94	875,862.02	32.0104166	-103.2540866
14,200.0	90.00	179.41	9,830.2	-3,946.8	-550.4	369,098.94	875,863.05	32.0101417	-103.2540865
14,300.0	90.00	179.41	9,830.2	-4,046.8	-549.4	368,998.95	875,864.08	32.0098669	-103.2540864
14,400.0	90.00	179.41	9,830.2	-4,146.7	-548.3	368,898.95	875,865.11	32.0095920	-103.2540863
14,500.0	90.00	179.41	9,830.2	-4,246.7	-547.3	368,798.96	875,866.14	32.0093172	-103.2540861
14,600.0	90.00	179.41	9,830.2	-4,346.7	-546.3	368,698.96	875,867.18	32.0090423	-103.2540860
14,700.0	90.00	179.41	9,830.2	-4,446.7	-545.2	368,598.97	875,868.21	32.0087674	-103.2540859
14,800.0	90.00	179.41	9,830.2	-4,546.7	-544.2	368,498.97	875,869.24	32.0084926	-103.2540858
14,900.0	90.00	179.41	9,830.2	-4,646.7	-543.2	368,398.98	875,870.27	32.0082177	-103.2540857
15,000.0	90.00	179.41	9,830.2	-4,746.7	-542.1	368,298.98	875,871.30	32.0079428	-103.2540856
15,100.0	90.00	179.41	9,830.2	-4,846.7	-541.1	368,198.99	875,872.33	32.0076680	-103.2540855
15,200.0	90.00	179.41	9,830.2	-4,946.7	-540.1	368,099.00	875,873.37	32.0073931	-103.2540854
15,300.0	90.00	179.41	9,830.1	-5,046.7	-539.0	367,999.00	875,874.40	32.0071182	-103.2540853
15,400.0	90.00	179.41	9,830.1	-5,146.7	-538.0	367,899.01	875,875.43	32.0068434	-103.2540852
15,500.0	90.00	179.41	9,830.1	-5,246.7	-537.0	367,799.01	875,876.46	32.0065685	-103.2540851
15,600.0	90.00	179.41	9,830.1	-5,346.7	-535.9	367,699.02	875,877.49	32.0062936	-103.2540850
15,700.0	90.00	179.41	9,830.1	-5,446.7	-534.9	367,599.02	875,878.52	32.0060188	-103.2540849
15,800.0	90.00	179.41	9,830.1	-5,546.7	-533.9	367,499.03	875,879.56	32.0057439	-103.2540848
15,900.0	90.00	179.41	9,830.1	-5,646.7	-532.9	367,399.03	875,880.59	32.0054690	-103.2540847
16,000.0	90.00	179.41	9,830.1	-5,746.7	-531.8	367,299.04	875,881.62	32.0051942	-103.2540845
16,100.0	90.00	179.41	9,830.1	-5,846.7	-530.8	367,199.04	875,882.65	32.0049193	-103.2540844
16,200.0	90.00	179.41	9,830.1	-5,946.7	-529.8	367,099.05	875,883.68	32.0046445	-103.2540843
16,300.0	90.00	179.41	9,830.1	-6,046.6 -6,146.6	-528.7 -527.7	366,999.05 366,899.06	875,884.71	32.0043696	-103.2540842
16,400.0 16,500.0	90.00 90.00	179.41 179.41	9,830.1 9,830.1	-6,146.6 -6,246.6	-521.7 -526.7	366,799.06	875,885.75 875.886.78	32.0040947 32.0038199	-103.2540841 -103.2540840
16,600.0	90.00	179.41	9,830.1	-6,346.6	-525.6	366,699.07	875,887.81	32.0035450	-103.2540839
16,700.0	90.00	179.41	9,830.1	-6,446.6	-525.6 -524.6	366,599.08	875,888.84	32.0033430	-103.2540838
16,800.0	90.00	179.41	9,830.1	-6,546.6	-523.6	366,499.08	875,889.87	32.0032701	-103.2540837
16,900.0	90.00	179.41	9,830.1	-6,646.6	-522.5	366,399.09	875,890.90	32.0029933	-103.2540836
17,000.0	90.00	179.41	9,830.0	-6,746.6	-521.5	366,299.09	875,891.93	32.0024455	-103.2540835
17,100.0	90.00	179.41	9,830.0	-6,846.6	-520.5	366,199.10	875,892.97	32.0021707	-103.2540834
17,100.0	90.00	179.41	9,830.0	-6,946.6	-519.4	366,099.10	875,894.00	32.0021707	-103.2540833
17,300.0	90.00	179.41	9,830.0	-7,046.6	-518.4	365,999.11	875,895.03	32.0016209	-103.2540831
17,400.0	90.00	179.41	9,830.0	-7,146.6	-517.4	365,899.11	875,896.06	32.0013461	-103.2540830
17,500.0	90.00	179.41	9,830.0	-7,140.0	-516.3	365,799.12	875,897.09	32.0010712	-103.2540829
17,600.0	90.00	179.41	9,830.0	-7,346.6	-515.3	365,699.12	875,898.12	32.0007963	-103.2540828
17,673.2	90.00	179.41	9,830.0	-7,419.8	-514.6	365,625.92	875,898.88	32.0005951	-103.2540827
	SC #182H)		,			, <del>-</del>	,		
17,700.0	90.00	179.41	9,830.0	-7,446.6	-514.3	365,599.13	875,899.16	32.0005215	-103.2540827
,. 55.0	33.30		-,000.0	.,	30	222,0000	2.2,3000		



Database: AUS-COMPASS - EDM\_15 - 32bit

Company: Ameredev Operating
Project: Lea County, NM (N83-NME)
Site: AMEN CORNER ST COM PROJECT
Well: AMEN CORNER ST COM 26 36 27 #182H

Wellbore: OWB
Design: PWP0

Local Co-ordinate Reference:

TVD Reference:
MD Reference:

**Survey Calculation Method:** 

North Reference:

Well AMEN CORNER ST COM 26 36 27

#182H

KB=25' @ 2931.0usft KB=25' @ 2931.0usft

Grid

Planned Survey	/								
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
17,723.2	90.00	179.41	9,830.0	-7,469.8	-514.0	365,575.94	875,899.40	32.0004577	-103.2540827
TD at 17	723.2 - BHL (A	CSC #182H)							

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
FTP (ACSC #182H) - plan misses targe - Point	0.00 t center by 0.8	0.00 usft at 10158	9,830.0 .0usft MD (9	95.1 830.5 TVD, 95	-591.5 5.0 N, -592.1 E	373,140.75 E)	875,821.96	32.0212518	-103.2540888
BHL (ACSC #182H) - plan hits target ce - Point	0.00 nter	0.00	9,830.0	-7,469.8	-514.0	365,575.94	875,899.40	32.0004577	-103.2540827
LTP (ACSC #182H) - plan hits target ce - Point	0.00 nter	0.00	9,830.0	-7,419.8	-514.5	365,625.92	875,898.90	32.0005951	-103.2540827

Formations						
	Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
	1,695.2	1,695.0	Rustler		0.00	
	2,160.8	2,157.0	Salado		0.00	
	3,144.4	3,131.0	Tansill		0.00	
	3,821.0	3,801.0	Capitan		0.00	
	4,926.8	4,896.0	Lamar		0.00	
	5,128.7	5,096.0	Bell Canyon		0.00	
	6,740.4	6,692.0	Brushy Canyon		0.00	
	7,681.4	7,625.0	Bone Spring Lime		0.00	
	9,372.5	9,316.0	First Bone Spring		0.00	
	10,026.2	9,812.0	Second Bone Spring		0.00	

Plan Annotations					
Measured	Vertical	Local Coordinates			
Depth	Depth	+N/-S	+E/-W		
(usft)	(usft)	(usft)	(usft)	Comment	
1,500.0	1,500.0	0.0	0.0	Start Build 2.00	
1,900.0	1,898.7	19.3	-20.1	Start 5535.2 hold at 1900.0 MD	
7,435.2	7,380.0	551.7	-576.9	Start Drop -2.00	
7,835.2	7,778.7	571.0	-597.0	Start 1574.3 hold at 7835.2 MD	
9,409.5	9,353.0	571.0	-597.0	Start DLS 12.00 TFO 179.41	
10,159.5	9,830.5	93.5	-592.1	Start 7563.7 hold at 10159.5 MD	
17,723.2	9,830.0	-7,469.8	-514.0	TD at 17723.2	



# H<sub>2</sub>S Drilling Operation Plan

# 1. All Company and Contract personnel admitted on location must be trained by a qualified H<sub>2</sub>S safety instructor to the following:

- a. Characteristics of H<sub>2</sub>S
- b. Physical effects and hazards
- c. Principal and operation of H<sub>2</sub>s detectors, warning system and briefing areas
- d. Evacuation procedure, routes and first aid
- e. Proper use of safety equipment and life support systems
- f. Essential personnel meeting Medical Evaluation criteria will receive additional training on the proper use of 30 minute pressure demand air packs.

#### 2. Briefing Area:

- a. Two perpendicular areas will be designated by signs and readily accessible.
- **b.** Upon location entry there will be a designated area to establish all safety compliance criteria (1.) has been met.

# 3. H<sub>2</sub>S Detection and Alarm Systems:

- a.  $H_2S$  sensors/detectors shall be located on the drilling rig floor, in the base of the sub structure/cellar area, and on the mud pits in the shale shaker area. Additional  $H_2S$  detectors may be placed as deemed necessary. All detectors will be set to initiate visual alarm at 10 ppm and visual with audible at 14 ppm and all equipment will be calibrated every 30 days or as needed.
- **b.** An audio alarm will be installed on the derrick floor and in the top doghouse.

## 4. Protective Equipment for Essential Personnel:

#### a. Breathing Apparatus:

- i. Rescue Packs (SCBA) 1 Unit shall be placed at each briefing area.
- ii. Two (SCBA) Units will be stored in safety trailer on location.
- iii. Work/Escape packs 1 Unit will be available on rig floor in doghouse for emergency evacuation for driller.

# b. Auxiliary Rescue Equipment:

- i. Stretcher
- ii. 2 OSHA full body harnesses
- iii. 100 ft. 5/8" OSHA approved rope
- iv. 1 20# class ABC fire extinguisher

# 5. Windsock and/or Wind Streamers:

- a. Windsock at mud pit area should be high enough to be visible.
- **b.** Windsock on the rig floor should be high enough to be visible.

## 6. Communication:

- a. While working under mask scripting boards will be used for communication where applicable.
- **b.** Hand signals will be used when script boards are not applicable.



# H<sub>2</sub>S Drilling Operation Plan

- c. Two way radios will be used to communicate off location in case of emergency help is required. In most cases cellular telephones will be available at Drilling Foreman's Office.
- 7. <u>Drill Stem Testing:</u> No Planned DST at this time.

# 8. Mud program:

a. If H2S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H2S scavengers if necessary.

# 9. Metallurgy:

- a. All drill strings, casing, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H₂S service.
- **b.** Drilling Contractor supervisor will be required to be familiar with the effect H<sub>2</sub>S has on tubular goods and other mechanical equipment provided through contractor.



# H<sub>2</sub>S Contingency Plan

#### **Emergency Procedures**

In the event of a release of H<sub>2</sub>S, the first responder(s) must:

- Isolate the area and prevent entry by other persons into the 100 ppm ROE.
- Evacuate any public places encompassed by the 100 ppm ROE.
- Be equipped with H<sub>2</sub>S monitors and air packs in order to control the release.
- Use the "buddy system" to ensure no injuries occur during the response.
- Take precautions to avoid personal injury during this operation.
- Contact Operator and/or local officials the aid in operation. See list of phone numbers attached.
- Have received training in the:
  - o Detection of H₂S and
  - o Measures for protection against the gas,
  - o Equipment used for protection and emergency response.

#### **Ignition of Gas Source**

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO<sub>2</sub>). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally, the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas.

## Characteristics of H<sub>2</sub>S and SO<sub>2</sub>

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H <sub>2</sub> S	1.189 Air=1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO <sub>2</sub>	2.21 Air=1	2 ppm	N/A	1000 ppm

# **Contacting Authorities**

Ameredev Operating LLC personnel must liaise with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available including direction to site. The following call list of essential and potential responders has been prepared for use during a release. Ameredev Operating LLC's response must be in coordination with the State of New Mexico's "Hazardous Materials Emergency Response Plan" (HMER)



# H<sub>2</sub>S Contingency Plan

Ameredev Operating LLC – Emergency Phone 737-300-4799						
Key Personnel:						
Name	Title	Office	Mobile			
Floyd Hammond	Chief Operating officer	737-300-4724	512-783-6810			
Shane McNeely	Operations Engineer	737-300-4729	432-413-8593			
Dayeed Khan	Construction Manager	737-300-4733	281-928-4692			

<u>Artesia</u>	
Ambulance	911
State Police	575-748-9718
City Police	575-746-5000
Sheriff's Office	575-887-7551
Fire Department	575-746-5051
Artesia General Hospital	575-748-3333
New Mexico Oil Conservation Division	575-626-0830
Carlsbad	
Ambulance	911
State Police	575-885-3138
City Police	575-885-2111
Sheriff's Office	575-887-7551
Fire Department	575-885-3125
Carlsbad Medical Center	575-887-4100
Hobbs Hospital	575-492-5000
BLM Hobbs Field Office	575-689-5981
BLM Carlsbad Field Office	575-361-2822
New Mexico Oil Conservation Division	575-626-0830
Santa Fe	
Department of Homeland Security and Emergency Management (Santa Fe)	505-476-9600
New Mexico State Emergency Operations Center	505-476-9635
<u>National</u>	
National Emergency Response Center (Washington, D.C.)	800-424-8802
Medical	
Aerocare - R3, Box 49F; Lubbock, TX	800-627-2376
Med Flight Air Amb - 2301 Yale Blvd S.E., #D3; Albuquerque, NM	505-842-4433
Lifeguard Air Emergency Services- 2505 Clark Carr Loop S.E.; Albuquerque, NM	505-243-2343

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Electronically Via E-permitting

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

# NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

# Section 1 – Plan Description Effective May 25, 2021

Operator:	Ameredev II,	Ameredev II, LLC		OGRID: 372224		<u>1</u> 0/17/2023 _	
I. Type: ⊠ Original □	Amendment due	to □ 19.15.27.	9.D(6)(a) NMAC	□ 19.15.27.9.	D(6)(b) NMAC □ O	ther.	
Other, please describe:							
I. Well(s): Provide the recompleted from a sin					of wells proposed to	be drilled or proposed	
Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D	
Amen Corner 26 36 27 State Com 182H	30025-		200' FNL & 2370' FEL	680	3,412	2,610	
Amen Corner 26 36 27 State Com 183H	30025-		230' FSL & 1075' FEL	680	3,412	2,610	
Amen Corner 26 36 27 State Com 262H	30025-		230' FSL & 1680' FWL	680	3,412	2,610	
Amen Corner 26 36 27 State Com 263H	30025-		200' FNL & 2330' FEL	680	3,412	2,610	
V. Central Delivery Poi	int Name:				[See 19.15.27.9(	D)(1) NMAC]	

**V. Anticipated Schedule:** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Amen Corner 26 36 27 State Com 182H	30025-	01/15/2024	03/02/2024	04/02/2024	04/30/2024	05/03/2024
Amen Corner 26 36 27 State Com 183H	30025-	01/15/2024	03/02/2024	04/02/2024	04/30/2024	05/03/2024
Amen Corner 26 36 27 State Com 262H	30025-	01/15/2024	03/02/2024	04/02/2024	04/30/2024	05/03/2024
Amen Corner 26 36 27 State Com 263H	30025-	01/15/2024	03/02/2024	04/02/2024	04/30/2024	05/03/2024

VI. Separation Equipment: 
☐ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

# Section 2 – Enhanced Plan EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☑ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production
--

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

# X. Natural Gas Gathering System (NGGS):

Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. $\square$ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the
production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of
the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capac	ity. The natural	gas gathering	system $\square$	will □ v	vill not hav	e capacity	to gather	100% of t	he anticipated	d natural	gas
production volum	e from the well	prior to the da	te of first p	production	ı <b>.</b>						

XIII. L	ine Pressure. Operator $\Box$	does   does not a	inticipate that its	existing well(s) c	onnected to the sar	ne segment,	or portion,	of the
natural	gas gathering system(s) de	scribed above will	continue to meet	anticipated increa	ases in line pressur	e caused by	the new we	ell(s).

Attach Operator's plan to manage production in response to the increased lir	
	c pressure

XIV. Confidentiality:  Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provide	ed in
Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information of the	ation
for which confidentiality is asserted and the basis for such assertion.	

(i)

# Section 3 - Certifications Effective May 25, 2021

Operator certifies that, a	fter reasonable inquiry and based on the available information at the time of submittal:
one hundred percent of	e to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering
hundred percent of the a into account the current	able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. box, Operator will select one of the following:
Well Shut-In. □ Opera D of 19.15.27.9 NMAC	tor will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection C; or
0 0	Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential sees for the natural gas until a natural gas gathering system is available, including:
(a)	power generation on lease;
(b)	power generation for grid;
(c)	compression on lease;
(d)	liquids removal on lease;
(e)	reinjection for underground storage;
(f)	reinjection for temporary storage;
(g)	reinjection for enhanced oil recovery; fuel cell production; and
(h)	THE CELL DISORUCION: AND

# **Section 4 - Notices**

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

other alternative beneficial uses approved by the division.

- (a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or
- (b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.
- 2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: Casca Gu
Printed Name: Cesca Yu
Title: Engineer
E-mail Address: cyu@ameredev.com
Date: 10/17/2023
Phone: 512-775-1417
OIL CONSERVATION DIVISION
(Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

# Natural Gas Management Plan

# VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.

- Separation equipment is sized to allow for retention time and velocity to adequately separate oil, gas, and water at anticipated peak rates.
- All central tank battery equipment is designed to efficiently capture the remaining gas from the liquid phase.
- Valves and meters are designed to service without flow interruption or venting of gas.

# VII. <u>Operational Practices: Attach a complete description of the actions Operator will</u> take to comply with the requirements of Subsection A through F 19.15.27.8 NMAC.

# 19.15.27.8 (A)

Ameredev's field operations are designed with the goal of minimizing flaring and preventing venting of natural gas. If capturing the gas is not possible then the gas is combusted/flared using properly sized flares or combustors in accordance with state air permit rules.

# 19.15.27.8 (B) Venting and Flaring during drilling operations

- A properly-sized flare stack will be located at a minimum 100' from the nearest surface hole location on the pad.
- All natural gas produced during drilling operations will be flared. Venting will only occur if there is an equipment malfunction and/or to avoid risk of an immediate and substantial adverse impact on safety, public health, or the environment.

# 19.15.27.8 (C) Venting and Flaring during completions or recompletions operations.

- During all phases of flowback, wells will flow through a sand separator, or other appropriate flowback separation equipment, and the well stream will be directed to a central tank battery (CTB) through properly sized flowlines
- The CTB will have properly sized separation equipment for maximum anticipated flowrates
- Multiple stages of separation will be used to separate gas from liquids. All gas will be routed to a sales outlet. Fluids will be routed to tanks equipped with a closed loop system that will recover any residual gas from the tanks and route such gas to a sales outlet.

# 19.15.27.8 (D) Venting and Flaring during production operations.

• During production, the well stream will be routed to the CTB where multiple stages of separation will separate gas from liquids. All gas will be routed to a sales outlet. Fluids will be routed to tanks with a closed

loop system that will recover any residual gas from the tanks and route such gas to a sales outlet, minimizing tank emissions.

- Flares are equipped with auto-ignition systems and continuous pilot operations.
- Automatic gauging equipment is installed on all tanks.

# 19.15.27.8 (E) Performance Standards

- Production equipment will be designed to handle maximum anticipated rates and pressure.
- Automatic gauging equipment is installed on all tanks to minimize venting
- All flared gas will be combusted in a flare stack that is properly sized and designed to ensure proper combustion.
- •Flares are equipped with continuous pilots and auto-ignitors along with remote monitoring of the pilot status
- Weekly AVOs and monthly LDAR inspections will be performed on all wells and facilities that produce more than 60 Mcfd.
- Gas/H2S detectors will be installed throughout the facilities and wellheads to detect leaks and enable timely repairs.

# 19.15.27.8 (F) Measurement or estimation of vented and flared natural gas

- All high pressure flared gas is measured by equipment conforming to API 14.10.
- No meter bypasses are installed.
- When metering is not practical due to low pressure/low rate, the vented or flared volume will be estimated through flare flow curves with the assistance of air emissions consultants, as necessary.

# VIII. <u>Best Management Practices: Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.</u>

- Ameredev will use best management practices to vent as minimally as possible during well intervention operations and downhole well maintenance
- All natural gas is routed into the gas gathering system and directed to one of Ameredev's multiple gas sales outlets.
- All venting events will be recorded and all start-up, shutdown, maintenance logs will be kept for control equipment
- All control equipment will be maintained to provide highest run-time possible
- All procedures are drafted to keep venting and flaring to the absolute minimum