

I. REQUEST FOR ALLOWABLE MINERAL AUTHORIZATION TO TRANSPORT

¹ Operator name and Address EOG RESOURCES INC PO BOX 2267 MIDLAND, TEXAS 79702		² OGRID Number 7377
		³ Reason for Filing Code/ Effective Date NW 03/20/2022
⁴ API Number 30 - 015-47685	⁵ Pool Name PURPLE SAGE; WOLFCAMP (GAS)	⁶ Pool Code 98220
⁷ Property Code 329773	⁸ Property Name DIRE WOLF 12 FED	⁹ Well Number 714H

II. ¹⁰ Surface Location

Ul or lot no. M	Section 12	Township 26S	Range 30E	Lot Idn	Feet from the 912	North/South Line SOUTH	Feet from the 711	East/West line WEST	County EDDY
--------------------	---------------	-----------------	--------------	---------	----------------------	---------------------------	----------------------	------------------------	----------------

¹¹ Bottom Hole Location

UL or lot no. M	Section 13	Township 26S	Range 30E	Lot Idn	Feet from the 341	North/South line SOUTH	Feet from the 315	East/West line WEST	County EDDY
¹² Lse Code S	¹³ Producing Method Code FLOWING	¹⁴ Gas Connection Date	¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date		

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
372812	EOGRM	OIL
151618	ENTERPRISE FIELD SERVICES	GAS
298751	REGENCY FIELD SERVICES	GAS
36785	DCP MIDSTREAM	GAS

IV. Well Completion Data

²¹ Spud Date 11/19/2021	²² Ready Date 03/20/2022	²³ TD 18,688	²⁴ PBDT 18,661	²⁵ Perforations 11,420 - 18,661	²⁶ DHC, MC
²⁷ Hole Size		²⁸ Casing & Tubing Size	²⁹ Depth Set		³⁰ Sacks Cement
12 1/4"		9 5/8"	1076'		540 SXS CL C/CIRC
8 3/4"		7 5/8"	10,760'		1770 SXS CL C & H/CIRC
6 3/4"		5 1/2"	18,669'		735 SXS CL C TOC 10,844' CBL PRESSURE TEST ATTACHED

V. Well Test Data

³¹ Date New Oil 03/20/2022	³² Gas Delivery Date 03/20/2022	³³ Test Date 04/05/2022	³⁴ Test Length 24 HRS	³⁵ Tbg. Pressure	³⁶ Csg. Pressure 1550
³⁷ Choke Size 44	³⁸ Oil 739	³⁹ Water 4172	⁴⁰ Gas 2789		⁴¹ Test Method
⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief. Signature: Kay Maddox			OIL CONSERVATION DIVISION		
Printed name: Kay Maddox			Approved by: PATRICIA MARTINEZ		
Title: SENIOR REGULATORY SPECIALIST			Title: PETROLEUM SPECIALIST		
E-mail Address: kay_maddox@eogresources.com			Approval Date: 12/8/2023		
Date: 04/06/2022		Phone: 432-638-8475			

DISTRICT I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

DISTRICT II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

As-Completed Plat
Revised August 1, 2011
Submit one copy to appropriate
District Office
☐ AMENDED REPORT

AS-COMPLETED PLAT

API Number 30-015- 47685	Pool Code 98220	Pool Name PURPLE SAGE; WOLFCAMP (GAS)
Property Code 329773	Property Name DIRE WOLF 12 FED	Well Number 714H
OGRID No. 7377	Operator Name EOG RESOURCES, INC.	Elevation 3189'


Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	12	26 S	30 E		912	SOUTH	711	WEST	EDDY

Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	13	26 S	30 E		341	SOUTH	315	WEST	EDDY
Dedicated Acres 960.00	Joint or Infill	Consolidated Code	Order No.						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

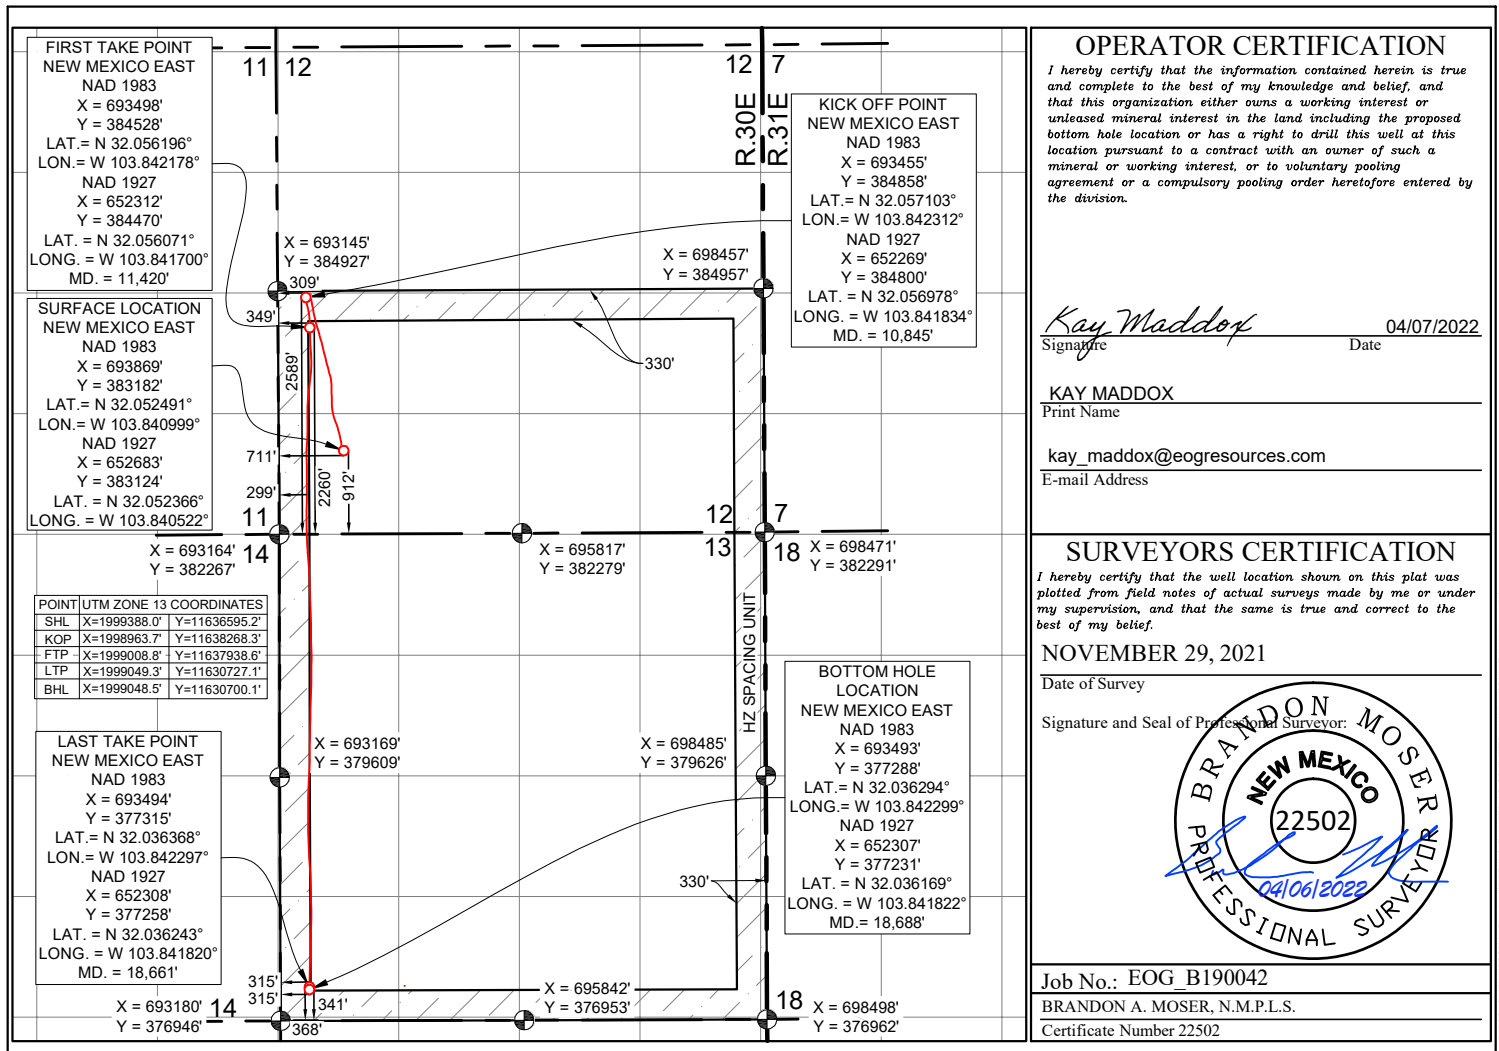



Midland

Eddy County, NM (NAD 83 NME)

Dire Wolf 12 Fed

#714H

OH

Design: OH

Final PVA

10 January, 2022



Final PVA

Company:	Midland	Local Co-ordinate Reference:	Well #714H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB = 26' @ 3215.0usft
Site:	Dire Wolf 12 Fed	MD Reference:	KB = 26' @ 3215.0usft
Well:	#714H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	PEDM

Project	Eddy County, NM (NAD 83 NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Dire Wolf 12 Fed		
Site Position:		Northing:	384,633.00 usft
From:	Map	Easting:	697,688.00 usft
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 3' 23.153 N
		Longitude:	103° 49' 43.144 W
		Grid Convergence:	0.27 °

Well		#714H				
Well Position	+N/-S	0.0 usft	Northing:	383,182.00 usft	Latitude:	32° 3' 8.968 N
	+E/-W	0.0 usft	Easting:	693,869.00 usft	Longitude:	103° 50' 27.597 W
Position Uncertainty		0.0 usft	Wellhead Elevation:	usft	Ground Level:	3,189.0 usft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	12/25/2021	6.59	59.69	47,311.55367849

Design	OH				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.0	0.0	0.0	183.50	

Survey Program	Date	1/10/2022		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
182.0	18,688.0	Driltech MWD (OH)	EOG MWD+IFR1	MWD + IFR1



Final PVA

Company:	Midland	Local Co-ordinate Reference:	Well #714H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB = 26' @ 3215.0usft
Site:	Dire Wolf 12 Fed	MD Reference:	KB = 26' @ 3215.0usft
Well:	#714H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	PEDM

Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	DLeg (°/100usft)	Build (°/100usft)	Turn (°/100usft)	High to Plan (usft)	Right to Plan (usft)	
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.0	0.0	
182.0	0.88	260.52	182.0	-0.2	-1.4	0.48	0.48	0.00	-1.4	0.0	
297.0	1.05	252.69	297.0	-0.7	-3.3	0.19	0.15	-6.81	-3.3	-0.3	
356.0	1.14	249.00	356.0	-1.1	-4.3	0.19	0.15	-6.25	-4.4	-0.6	
413.0	1.23	242.85	413.0	-1.5	-5.4	0.27	0.16	-10.79	-5.5	-1.1	
472.0	1.32	238.46	471.9	-2.2	-6.5	0.23	0.15	-7.44	-6.7	-1.6	
560.0	1.41	238.63	559.9	-3.3	-8.3	0.10	0.10	0.19	-8.8	-1.5	
658.0	1.58	245.93	657.9	-4.5	-10.6	0.26	0.17	7.45	-11.5	-0.2	
753.0	1.76	247.33	752.8	-5.6	-13.1	0.19	0.19	1.47	-14.3	0.1	
849.0	1.76	245.05	848.8	-6.7	-15.8	0.07	0.00	-2.37	-17.2	-0.6	
944.0	1.67	236.17	943.8	-8.1	-18.3	0.29	-0.09	-9.35	-19.7	-3.4	
1,016.0	1.58	227.47	1,015.7	-9.4	-19.9	0.36	-0.12	-12.08	-21.0	-6.5	
1,140.0	0.70	178.34	1,139.7	-11.3	-21.1	1.00	-0.71	-39.62	-10.7	-21.5	
1,235.0	3.08	355.44	1,234.7	-9.3	-21.3	3.98	2.51	186.42	7.8	22.0	
1,330.0	6.24	355.70	1,329.3	-1.6	-21.9	3.33	3.33	0.27	2.9	21.5	
1,425.0	8.96	356.93	1,423.5	10.9	-22.7	2.87	2.86	1.29	-3.5	20.6	
1,521.0	10.90	357.02	1,518.1	27.4	-23.6	2.02	2.02	0.09	-11.1	19.0	
1,616.0	13.01	1.41	1,611.0	47.1	-23.8	2.42	2.22	4.62	-17.6	17.5	
1,711.0	15.29	355.96	1,703.1	70.3	-24.4	2.78	2.40	-5.74	-27.4	12.4	
1,806.0	17.23	347.61	1,794.3	96.5	-28.3	3.19	2.04	-8.79	-37.2	6.3	
1,902.0	18.72	346.65	1,885.6	125.4	-34.9	1.58	1.55	-1.00	-45.4	5.6	
1,997.0	21.45	347.79	1,974.8	157.2	-42.1	2.90	2.87	1.20	-53.7	6.4	
2,091.0	21.62	345.95	2,062.3	190.8	-49.9	0.74	0.18	-1.96	-61.4	4.7	
2,186.0	20.83	343.48	2,150.8	224.0	-59.0	1.26	-0.83	-2.60	-65.4	3.4	
2,281.0	20.30	342.52	2,239.8	255.9	-68.7	0.66	-0.56	-1.01	-65.1	4.8	
2,377.0	17.67	337.60	2,330.6	285.3	-79.3	3.20	-2.74	-5.12	-59.3	4.4	
2,471.0	17.49	338.56	2,420.2	311.6	-89.9	0.36	-0.19	1.02	-48.0	11.4	



Final PVA

Company:	Midland	Local Co-ordinate Reference:	Well #714H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB = 26' @ 3215.0usft
Site:	Dire Wolf 12 Fed	MD Reference:	KB = 26' @ 3215.0usft
Well:	#714H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	PEDM

Survey										
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	DLeg (°/100usft)	Build (°/100usft)	Turn (°/100usft)	High to Plan (usft)	Right to Plan (usft)
2,566.0	19.60	344.01	2,510.2	340.2	-99.5	2.87	2.22	5.74	-33.5	19.1
2,660.0	19.95	344.27	2,598.7	370.8	-108.2	0.38	0.37	0.28	-21.5	21.3
2,756.0	20.30	346.47	2,688.8	402.8	-116.5	0.87	0.36	2.29	-9.0	23.1
2,851.0	18.81	350.87	2,778.4	433.9	-122.8	2.20	-1.57	4.63	5.1	22.0
2,945.0	18.46	352.62	2,867.4	463.6	-127.1	0.70	-0.37	1.86	19.3	18.2
3,040.0	19.16	356.05	2,957.4	494.1	-130.1	1.38	0.74	3.61	33.6	11.3
3,136.0	20.65	358.78	3,047.6	526.7	-131.6	1.83	1.55	2.84	45.3	1.7
3,231.0	19.25	0.01	3,136.9	559.1	-131.9	1.54	-1.47	1.29	56.2	-8.5
3,326.0	18.72	0.54	3,226.7	590.1	-131.8	0.59	-0.56	0.56	68.5	-18.9
3,420.0	21.18	357.28	3,315.1	622.1	-132.5	2.87	2.62	-3.47	80.6	-23.8
3,515.0	19.69	359.83	3,404.1	655.3	-133.3	1.83	-1.57	2.68	89.6	-35.9
3,610.0	20.30	1.68	3,493.4	687.7	-132.9	0.92	0.64	1.95	99.1	-48.9
3,706.0	21.53	359.30	3,583.1	722.0	-132.6	1.56	1.28	-2.48	110.4	-55.0
3,800.0	20.92	349.79	3,670.7	755.8	-135.8	3.72	-0.65	-10.12	127.1	-43.1
3,896.0	18.98	346.80	3,761.0	787.8	-142.4	2.28	-2.02	-3.11	141.0	-38.0
3,992.0	17.49	345.07	3,852.1	817.0	-149.7	1.65	-1.55	-1.80	156.8	-33.2
4,087.0	19.69	345.51	3,942.2	846.3	-157.4	2.32	2.32	0.46	170.7	-32.9
4,182.0	20.04	345.33	4,031.5	877.5	-165.5	0.37	0.37	-0.19	182.8	-31.2
4,277.0	19.69	345.95	4,120.9	908.8	-173.5	0.43	-0.37	0.65	194.5	-32.0
4,372.0	19.51	345.15	4,210.4	939.6	-181.5	0.34	-0.19	-0.84	207.3	-28.4
4,467.0	19.42	345.07	4,299.9	970.2	-189.6	0.10	-0.09	-0.08	220.0	-26.6
4,562.0	18.19	344.63	4,389.9	999.8	-197.6	1.30	-1.29	-0.46	233.9	-23.5
4,657.0	19.95	346.38	4,479.6	1,029.8	-205.3	1.95	1.85	1.84	246.5	-28.9
4,752.0	21.09	347.97	4,568.6	1,062.3	-212.7	1.34	1.20	1.67	256.7	-35.2
4,847.0	19.86	347.00	4,657.6	1,094.8	-219.9	1.34	-1.29	-1.02	268.2	-31.6
4,942.0	17.75	345.59	4,747.5	1,124.5	-227.1	2.27	-2.22	-1.48	282.6	-25.2
5,037.0	18.72	344.80	4,837.8	1,153.2	-234.7	1.05	1.02	-0.83	297.3	-20.0



Final PVA

Company:	Midland	Local Co-ordinate Reference:	Well #714H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB = 26' @ 3215.0usft
Site:	Dire Wolf 12 Fed	MD Reference:	KB = 26' @ 3215.0usft
Well:	#714H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	PEDM

Survey										
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	DLeg (°/100usft)	Build (°/100usft)	Turn (°/100usft)	High to Plan (usft)	Right to Plan (usft)
5,131.0	21.36	344.45	4,926.1	1,184.3	-243.3	2.81	2.81	-0.37	306.2	-16.3
5,226.0	21.18	344.54	5,014.6	1,217.5	-252.5	0.19	-0.19	0.09	309.5	-14.9
5,322.0	22.06	344.98	5,103.8	1,251.6	-261.8	0.93	0.92	0.46	308.5	-15.6
5,417.0	22.59	344.63	5,191.7	1,286.5	-271.3	0.58	0.56	-0.37	303.1	-12.5
5,512.0	21.53	343.57	5,279.8	1,320.8	-281.0	1.19	-1.12	-1.12	294.7	-5.6
5,607.0	21.27	342.96	5,368.2	1,354.0	-291.0	0.36	-0.27	-0.64	283.7	-0.9
5,702.0	20.74	341.81	5,456.9	1,386.4	-301.3	0.71	-0.56	-1.21	269.8	6.5
5,798.0	19.95	346.03	5,546.9	1,418.5	-310.6	1.74	-0.82	4.40	253.4	-11.7
5,894.0	18.54	349.29	5,637.6	1,449.4	-317.4	1.85	-1.47	3.40	234.5	-25.8
5,988.0	18.72	348.41	5,726.6	1,478.8	-323.2	0.36	0.19	-0.94	215.1	-22.9
6,084.0	18.02	349.29	5,817.7	1,508.5	-329.0	0.78	-0.73	0.92	191.6	-26.5
6,179.0	14.94	351.22	5,908.8	1,535.1	-333.6	3.29	-3.24	2.03	167.7	-32.8
6,275.0	15.21	349.11	6,001.5	1,559.6	-337.9	0.64	0.28	-2.20	144.7	-27.1
6,370.0	14.24	348.14	6,093.4	1,583.3	-342.6	1.05	-1.02	-1.02	121.0	-24.7
6,465.0	13.18	347.88	6,185.7	1,605.3	-347.3	1.12	-1.12	-0.27	98.6	-24.1
6,560.0	11.87	347.44	6,278.4	1,625.5	-351.7	1.38	-1.38	-0.46	78.2	-23.2
6,655.0	11.60	348.05	6,371.4	1,644.4	-355.8	0.31	-0.28	0.64	58.6	-23.9
6,750.0	9.40	354.03	6,464.8	1,661.4	-358.6	2.58	-2.32	6.29	38.6	-28.8
6,845.0	6.86	352.54	6,558.9	1,674.8	-360.2	2.68	-2.67	-1.57	26.0	-27.8
6,940.0	6.86	351.83	6,653.2	1,686.0	-361.7	0.09	0.00	-0.75	15.0	-27.5
7,035.0	5.27	352.80	6,747.7	1,695.9	-363.0	1.68	-1.67	1.02	4.5	-27.6
7,130.0	4.22	353.42	6,842.3	1,703.7	-364.0	1.11	-1.11	0.65	-3.6	-27.6
7,225.0	2.64	3.96	6,937.2	1,709.4	-364.2	1.78	-1.66	11.09	-14.2	-25.8
7,319.0	2.90	358.16	7,031.1	1,713.9	-364.2	0.41	0.28	-6.17	-16.1	-27.4
7,415.0	1.05	322.65	7,127.0	1,717.1	-364.8	2.22	-1.93	-36.99	0.0	-33.0
7,509.0	1.14	273.35	7,221.0	1,717.8	-366.2	0.98	0.10	-52.45	23.5	-22.2
7,605.0	1.05	269.74	7,317.0	1,717.9	-368.1	0.12	-0.09	-3.76	23.0	-20.8

Company: Midland
Project: Eddy County, NM (NAD 83 NME)
Site: Dire Wolf 12 Fed
Well: #714H
Wellbore: OH
Design: OH

Local Co-ordinate Reference: Well #714H
TVD Reference: KB = 26' @ 3215.0usft
MD Reference: KB = 26' @ 3215.0usft
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: PEDM

Survey										
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	DLeg (°/100usft)	Build (°/100usft)	Turn (°/100usft)	High to Plan (usft)	Right to Plan (usft)
7,701.0	1.41	262.10	7,412.9	1,717.7	-370.1	0.41	0.37	-7.96	23.5	-17.6
7,796.0	1.41	261.48	7,507.9	1,717.4	-372.4	0.02	0.00	-0.65	21.4	-17.4
7,891.0	1.32	261.83	7,602.9	1,717.0	-374.7	0.10	-0.09	0.37	19.0	-17.5
7,986.0	1.32	249.44	7,697.9	1,716.5	-376.8	0.30	0.00	-13.04	20.2	-13.3
8,082.0	1.14	245.66	7,793.8	1,715.7	-378.7	0.21	-0.19	-3.94	18.9	-12.0
8,177.0	0.79	236.96	7,888.8	1,715.0	-380.1	0.40	-0.37	-9.16	18.9	-9.1
8,272.0	0.88	223.95	7,983.8	1,714.1	-381.2	0.22	0.09	-13.69	19.1	-4.8
8,367.0	1.32	241.44	8,078.8	1,713.0	-382.6	0.58	0.46	18.41	15.0	-10.1
8,462.0	0.88	251.55	8,173.8	1,712.3	-384.3	0.50	-0.46	10.64	11.2	-12.4
8,558.0	1.23	276.69	8,269.8	1,712.2	-386.0	0.60	0.36	26.19	3.2	-15.6
8,653.0	1.32	270.27	8,364.7	1,712.3	-388.1	0.18	0.09	-6.76	2.8	-15.3
8,748.0	0.97	259.29	8,459.7	1,712.1	-390.0	0.43	-0.37	-11.56	3.8	-14.7
8,843.0	0.79	230.54	8,554.7	1,711.6	-391.3	0.50	-0.19	-30.26	9.0	-11.4
8,938.0	0.44	261.39	8,649.7	1,711.1	-392.1	0.49	-0.37	32.47	1.0	-14.1
9,032.0	0.79	220.97	8,743.7	1,710.6	-392.9	0.57	0.37	-43.00	9.0	-10.4
9,127.0	0.70	219.91	8,838.7	1,709.6	-393.7	0.10	-0.09	-1.12	7.9	-10.2
9,222.0	0.62	222.55	8,933.7	1,708.8	-394.5	0.09	-0.08	2.78	6.4	-10.5
9,317.0	0.97	238.63	9,028.7	1,708.0	-395.5	0.43	0.37	16.93	1.9	-11.7
9,412.0	1.67	241.18	9,123.7	1,706.9	-397.4	0.74	0.74	2.68	-0.8	-11.8
9,507.0	0.97	255.86	9,218.6	1,706.1	-399.4	0.81	-0.74	15.45	-5.9	-10.8
9,601.0	2.37	223.43	9,312.6	1,704.4	-401.5	1.74	1.49	-34.50	-1.8	-12.7
9,696.0	1.58	232.39	9,407.5	1,702.2	-403.9	0.89	-0.83	9.43	-7.0	-12.0
9,791.0	1.76	236.96	9,502.5	1,700.6	-406.1	0.24	0.19	4.81	-10.7	-11.3
9,886.0	2.02	227.47	9,597.4	1,698.7	-408.6	0.43	0.27	-9.99	-11.8	-13.1
9,981.0	0.97	230.28	9,692.4	1,697.1	-410.4	1.11	-1.11	2.96	-14.9	-12.5
10,076.0	0.88	227.38	9,787.4	1,696.0	-411.6	0.11	-0.09	-3.05	-15.8	-13.2
10,170.0	1.49	216.13	9,881.4	1,694.6	-412.9	0.69	0.65	-11.97	-14.8	-16.2

Company:	Midland	Local Co-ordinate Reference:	Well #714H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB = 26' @ 3215.0usft
Site:	Dire Wolf 12 Fed	MD Reference:	KB = 26' @ 3215.0usft
Well:	#714H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	PEDM

Survey										
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	DLeg (°/100usft)	Build (°/100usft)	Turn (°/100usft)	High to Plan (usft)	Right to Plan (usft)
10,265.0	1.93	192.14	9,976.3	1,692.0	-413.9	0.87	0.46	-25.25	-9.7	-21.4
10,360.0	1.41	180.97	10,071.3	1,689.3	-414.3	0.64	-0.55	-11.76	-8.1	-23.1
10,455.0	1.67	168.58	10,166.3	1,686.7	-414.0	0.44	0.27	-13.04	-5.5	-24.6
10,550.0	1.23	185.72	10,261.2	1,684.4	-413.8	0.65	-0.46	18.04	-14.8	-21.5
10,645.0	1.23	177.99	10,356.2	1,682.3	-413.9	0.17	0.00	-8.14	-13.8	-23.4
10,722.0	1.23	183.52	10,433.2	1,680.7	-413.9	0.15	0.00	7.18	-17.7	-21.9
10,778.0	1.32	199.43	10,489.2	1,679.5	-414.2	0.65	0.16	28.41	-24.2	-16.0
10,845.0	4.96	174.54	10,556.1	1,675.9	-414.2	5.68	5.44	-37.14	-18.8	-25.1
KOP, MD:10845.0', TVD:10556.1',N/S:1675.9', E/W:-414.2', INC:4.96										
10,874.0	6.60	172.45	10,584.9	1,673.0	-413.8	5.68	5.64	-7.22	-20.7	-25.9
10,969.0	24.09	171.75	10,676.2	1,648.2	-410.3	18.41	18.41	-0.74	-40.0	-25.9
11,064.0	34.29	168.67	10,759.0	1,602.6	-402.2	10.85	10.74	-3.24	-62.5	-23.6
11,159.0	39.57	166.12	10,834.9	1,547.0	-389.7	5.79	5.56	-2.68	-78.0	-14.8
11,254.0	48.01	173.42	10,903.5	1,482.4	-378.4	10.34	8.88	7.68	-83.1	5.6
11,337.3	56.25	177.32	10,954.6	1,416.9	-373.2	10.56	9.90	4.69	-79.4	15.0
FTP Crossing, MD:11337.3', TVD:10954.6',N/S:1416.9', E/W:-373.2', INC:56.25										
11,349.0	57.42	177.81	10,961.0	1,407.1	-372.8	10.56	9.97	4.15	-78.5	15.8
11,444.0	61.03	179.39	11,009.6	1,325.5	-370.8	4.06	3.80	1.66	-62.5	19.1
11,539.0	67.62	177.55	11,050.7	1,240.0	-368.5	7.15	6.94	-1.94	-34.3	21.4
11,634.0	75.18	177.37	11,081.0	1,150.1	-364.5	7.96	7.96	-0.19	-4.8	24.3
11,729.0	88.99	176.58	11,094.1	1,056.4	-359.5	14.56	14.54	-0.83	8.7	28.9
11,823.0	88.81	178.43	11,095.9	962.5	-355.4	1.98	-0.19	1.97	10.8	32.7
11,918.0	90.31	184.49	11,096.6	867.6	-357.9	6.57	1.58	6.38	11.9	29.8
12,013.0	89.52	186.51	11,096.7	773.0	-367.0	2.28	-0.83	2.13	12.4	20.3
12,108.0	89.60	186.60	11,097.5	678.6	-377.8	0.13	0.08	0.09	13.4	9.1
12,203.0	90.13	186.25	11,097.7	584.2	-388.4	0.67	0.56	-0.37	14.0	-1.8
12,298.0	87.05	181.85	11,100.0	489.5	-395.2	5.65	-3.24	-4.63	16.6	-8.9



Final PVA

Company:	Midland	Local Co-ordinate Reference:	Well #714H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB = 26' @ 3215.0usft
Site:	Dire Wolf 12 Fed	MD Reference:	KB = 26' @ 3215.0usft
Well:	#714H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	PEDM

Survey										
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	DLeg (°/100usft)	Build (°/100usft)	Turn (°/100usft)	High to Plan (usft)	Right to Plan (usft)
12,392.0	94.35	179.30	11,098.9	395.6	-396.1	8.23	7.77	-2.71	15.8	-10.3
12,488.0	91.19	180.45	11,094.2	299.7	-395.9	3.50	-3.29	1.20	11.5	-10.4
12,582.0	88.11	181.06	11,094.8	205.8	-397.1	3.34	-3.28	0.65	12.4	-12.0
12,677.0	94.09	183.52	11,093.0	110.9	-400.9	6.81	6.29	2.59	11.0	-16.2
12,772.0	86.70	182.47	11,092.3	16.1	-405.9	7.86	-7.78	-1.11	10.5	-21.6
12,867.0	85.65	178.60	11,098.7	-78.7	-406.8	4.21	-1.11	-4.07	17.3	-22.8
12,962.0	91.36	178.69	11,101.2	-173.6	-404.5	6.01	6.01	0.09	20.1	-20.9
13,057.0	90.31	179.57	11,099.8	-268.5	-403.1	1.44	-1.11	0.93	19.0	-19.8
13,152.0	90.57	180.71	11,099.0	-363.5	-403.3	1.23	0.27	1.20	18.6	-20.5
13,248.0	91.10	180.36	11,097.6	-459.5	-404.2	0.66	0.55	-0.36	17.6	-21.7
13,343.0	90.57	180.36	11,096.3	-554.5	-404.8	0.56	-0.56	0.00	16.5	-22.7
13,437.0	90.40	180.36	11,095.5	-648.5	-405.4	0.18	-0.18	0.00	16.1	-23.7
13,533.0	89.78	179.83	11,095.3	-744.5	-405.6	0.85	-0.65	-0.55	16.2	-24.2
13,628.0	89.25	180.45	11,096.1	-839.5	-405.8	0.86	-0.56	0.65	17.4	-24.8
13,723.0	90.66	178.51	11,096.2	-934.5	-404.9	2.52	1.48	-2.04	17.8	-24.3
13,818.0	90.31	175.88	11,095.4	-1,029.4	-400.3	2.79	-0.37	-2.77	17.3	-20.0
13,913.0	93.30	176.05	11,092.4	-1,124.1	-393.6	3.15	3.15	0.18	14.6	-13.8
14,008.0	93.83	175.35	11,086.5	-1,218.6	-386.5	0.92	0.56	-0.74	9.1	-7.0
14,103.0	91.80	177.11	11,081.8	-1,313.3	-380.3	2.83	-2.14	1.85	4.7	-1.1
14,198.0	91.28	177.37	11,079.3	-1,408.1	-375.7	0.61	-0.55	0.27	2.5	3.0
14,294.0	88.37	177.72	11,079.6	-1,504.1	-371.6	3.05	-3.03	0.36	3.1	6.8
14,389.0	86.53	177.99	11,083.8	-1,598.9	-368.0	1.96	-1.94	0.28	7.7	10.0
14,484.0	88.29	177.37	11,088.1	-1,693.7	-364.2	1.96	1.85	-0.65	12.3	13.4
14,579.0	90.57	178.60	11,089.0	-1,788.6	-360.8	2.73	2.40	1.29	13.6	16.4
14,674.0	92.59	179.48	11,086.4	-1,883.6	-359.2	2.32	2.13	0.93	11.3	17.6
14,769.0	91.63	179.39	11,082.9	-1,978.5	-358.3	1.01	-1.01	-0.09	8.2	18.2
14,864.0	89.60	178.25	11,081.9	-2,073.5	-356.4	2.45	-2.14	-1.20	7.5	19.8



Final PVA

Company:	Midland	Local Co-ordinate Reference:	Well #714H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB = 26' @ 3215.0usft
Site:	Dire Wolf 12 Fed	MD Reference:	KB = 26' @ 3215.0usft
Well:	#714H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	PEDM

Survey										
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	DLeg (°/100usft)	Build (°/100usft)	Turn (°/100usft)	High to Plan (usft)	Right to Plan (usft)
14,959.0	89.16	178.87	11,082.9	-2,168.4	-354.0	0.80	-0.46	0.65	8.8	21.8
15,055.0	87.49	179.22	11,085.7	-2,264.4	-352.4	1.78	-1.74	0.36	12.0	23.0
15,149.0	92.24	181.50	11,085.9	-2,358.3	-353.0	5.60	5.05	2.43	12.5	22.0
15,244.0	91.89	180.27	11,082.5	-2,453.3	-354.4	1.35	-0.37	-1.29	9.4	20.2
15,339.0	89.52	180.71	11,081.4	-2,548.3	-355.2	2.54	-2.49	0.46	8.6	19.0
15,434.0	93.65	182.03	11,078.7	-2,643.2	-357.5	4.56	4.35	1.39	6.3	16.4
15,529.0	94.26	182.21	11,072.2	-2,737.9	-361.0	0.67	0.64	0.19	0.1	12.5
15,624.0	91.63	181.06	11,067.3	-2,832.7	-363.7	3.02	-2.77	-1.21	-4.5	9.4
15,720.0	89.52	181.41	11,066.3	-2,928.7	-365.8	2.23	-2.20	0.36	-5.1	6.9
15,815.0	91.10	181.41	11,065.8	-3,023.6	-368.1	1.66	1.66	0.00	-5.3	4.2
15,910.0	89.96	180.62	11,064.9	-3,118.6	-369.8	1.46	-1.20	-0.83	-5.8	2.2
16,005.0	88.99	179.92	11,065.8	-3,213.6	-370.2	1.26	-1.02	-0.74	-4.6	1.3
16,100.0	90.57	181.41	11,066.2	-3,308.6	-371.4	2.29	1.66	1.57	-3.9	-0.1
16,195.0	90.48	181.33	11,065.3	-3,403.6	-373.6	0.13	-0.09	-0.08	-4.4	-2.8
16,290.0	89.25	182.03	11,065.5	-3,498.5	-376.4	1.49	-1.29	0.74	-3.9	-5.9
16,385.0	90.48	183.79	11,065.7	-3,593.4	-381.2	2.26	1.29	1.85	-3.3	-11.1
16,480.0	90.84	181.85	11,064.7	-3,688.3	-385.9	2.08	0.38	-2.04	-4.1	-16.2
16,575.0	89.69	180.97	11,064.2	-3,783.2	-388.2	1.52	-1.21	-0.93	-4.2	-18.9
16,670.0	91.54	180.53	11,063.2	-3,878.2	-389.5	2.00	1.95	-0.46	-4.9	-20.5
16,764.0	93.91	180.27	11,058.7	-3,972.1	-390.1	2.54	2.52	-0.28	-9.0	-21.6
16,860.0	93.21	179.75	11,052.8	-4,067.9	-390.2	0.91	-0.73	-0.54	-14.6	-21.9
16,955.0	91.36	178.34	11,049.0	-4,162.8	-388.6	2.45	-1.95	-1.48	-18.1	-20.7
17,050.0	88.99	177.72	11,048.7	-4,257.8	-385.3	2.58	-2.49	-0.65	-18.1	-17.8
17,145.0	90.57	178.34	11,049.1	-4,352.7	-382.0	1.79	1.66	0.65	-17.4	-14.9
17,240.0	91.28	177.99	11,047.5	-4,447.6	-379.0	0.83	0.75	-0.37	-18.6	-12.3
17,335.0	89.25	175.26	11,047.1	-4,542.5	-373.4	3.58	-2.14	-2.87	-18.7	-7.0
17,430.0	92.51	175.97	11,045.6	-4,637.2	-366.1	3.51	3.43	0.75	-19.8	-0.2

Company:	Midland	Local Co-ordinate Reference:	Well #714H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB = 26' @ 3215.0usft
Site:	Dire Wolf 12 Fed	MD Reference:	KB = 26' @ 3215.0usft
Well:	#714H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	PEDM

Survey										
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	DLeg (°/100usft)	Build (°/100usft)	Turn (°/100usft)	High to Plan (usft)	Right to Plan (usft)
17,525.0	93.74	178.69	11,040.4	-4,731.9	-361.7	3.14	1.29	2.86	-24.6	3.9
17,628.0	88.46	178.78	11,038.5	-4,834.8	-359.5	5.13	-5.13	0.09	-26.3	5.7
17,723.0	87.67	177.55	11,041.7	-4,929.7	-356.4	1.54	-0.83	-1.29	-22.7	8.4
17,818.0	89.34	180.62	11,044.2	-5,024.7	-354.9	3.68	1.76	3.23	-19.9	9.5
17,913.0	89.43	180.80	11,045.2	-5,119.6	-356.1	0.21	0.09	0.19	-18.6	8.0
18,008.0	91.54	179.83	11,044.4	-5,214.6	-356.6	2.44	2.22	-1.02	-19.0	7.1
18,104.0	91.10	181.33	11,042.2	-5,310.6	-357.6	1.63	-0.46	1.56	-20.9	5.7
18,199.0	92.86	182.56	11,038.9	-5,405.5	-360.8	2.26	1.85	1.29	-23.8	2.1
18,294.0	90.31	181.94	11,036.2	-5,500.4	-364.5	2.76	-2.68	-0.65	-26.1	-2.0
18,389.0	91.45	183.52	11,034.8	-5,595.2	-369.0	2.05	1.20	1.66	-27.3	-6.9
18,496.0	91.36	180.80	11,032.2	-5,702.1	-373.1	2.54	-0.08	-2.54	-29.5	-11.3
Last MWD Survey (MD=18496.0')										
18,688.0	91.36	180.80	11,027.6	-5,894.0	-375.8	0.00	0.00	0.00	-33.4	-14.8
Projection to Bit (MD=18688.0')										

Design Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
10,845.0	10,556.1	1,675.9	-414.2	KOP, MD:10845.0', TVD:10556.1', N/S:1675.9', E/W:-414.2', INC:4.96
11,337.3	10,954.6	1,416.9	-373.2	FTP Crossing, MD:11337.3', TVD:10954.6', N/S:1416.9', E/W:-373.2', INC:56.25
18,496.0	11,032.2	-5,702.1	-373.1	Last MWD Survey (MD=18496.0')
18,688.0	11,027.6	-5,894.0	-375.8	Projection to Bit (MD=18688.0')



Checked By: _____ Approved By: _____ Date: _____

I CERTIFY THIS SURVEY TO BE TRUE AND CORRECT TO THE BEST OF MY BELIEF AND KNOWLEDGE
KAY MADDOX 04/05/2022





Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone
System Datum: Mean Sea Level

3189.0		
KB = 26' @ 3215.0usft		
Northing	Easting	Latitude
383182.00	693869.00	32° 3' 8.968 N
		103° 50' 27.597 W

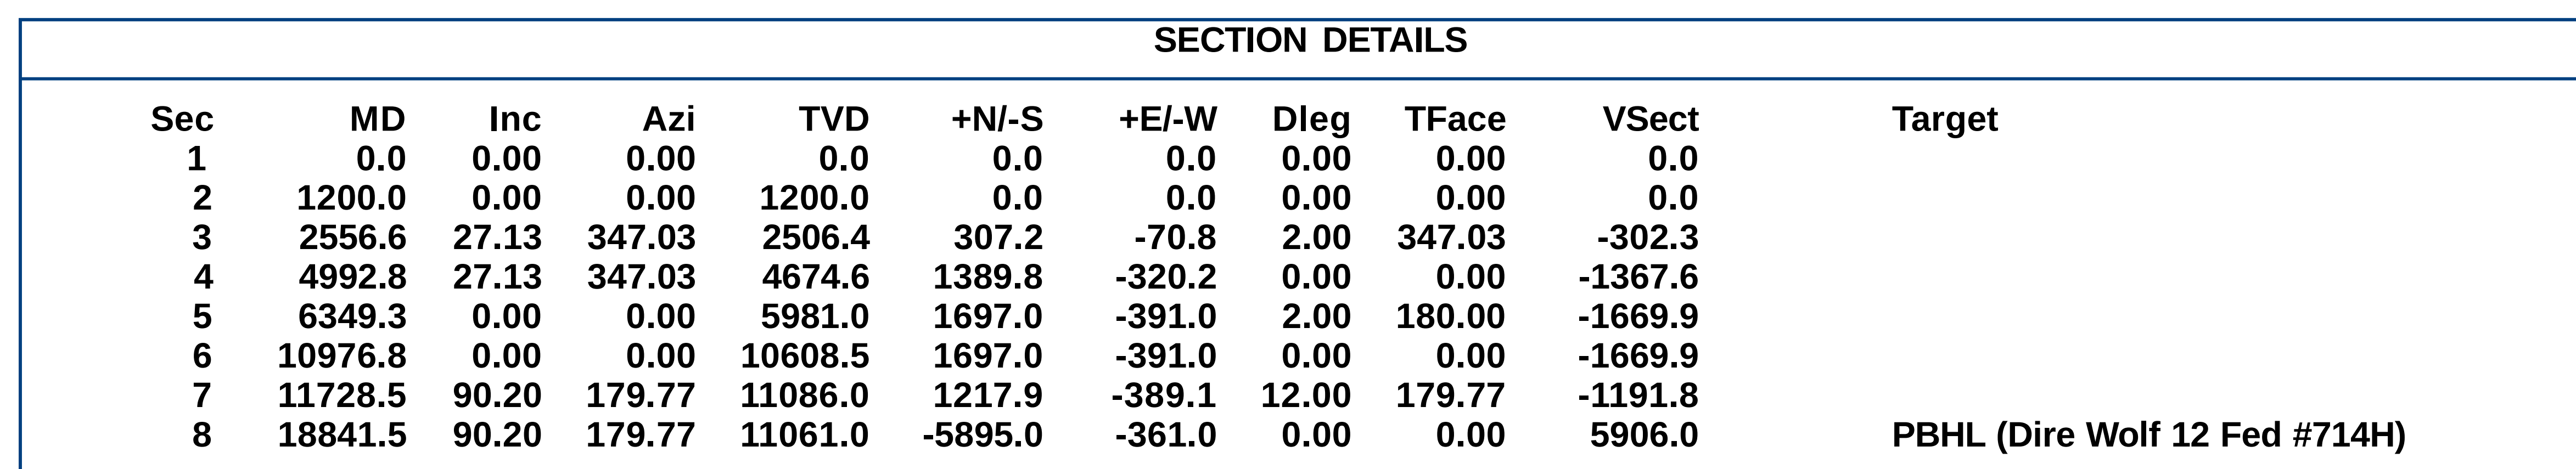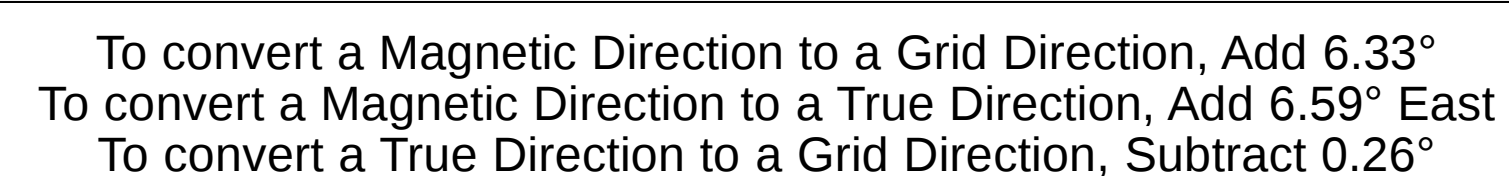

No casing data is available

Name	TVD	+N/-S	+E/-W	Northing	Easting
Brushy Top(Dire Wolf 12 Fed #714H)	5981.0	1697.0	-391.0	384879.0	693478.0
PBHL (Dire Wolf 12 Fed #714H)	11061.0	-5895.0	-361.0	377278.0	693508.0
FTP (Dire Wolf 12 Fed #714H)	11086.0	1417.0	-391.0	384599.0	693478.0

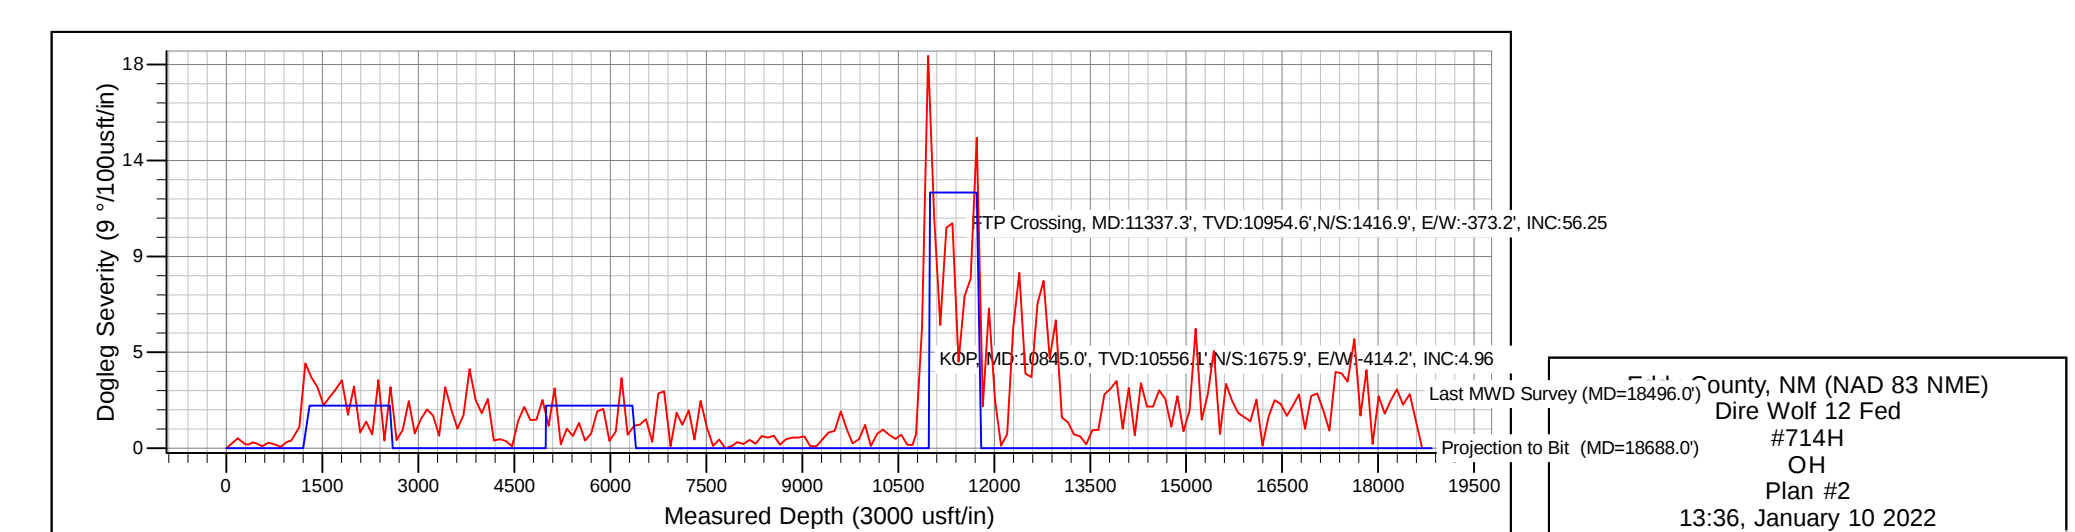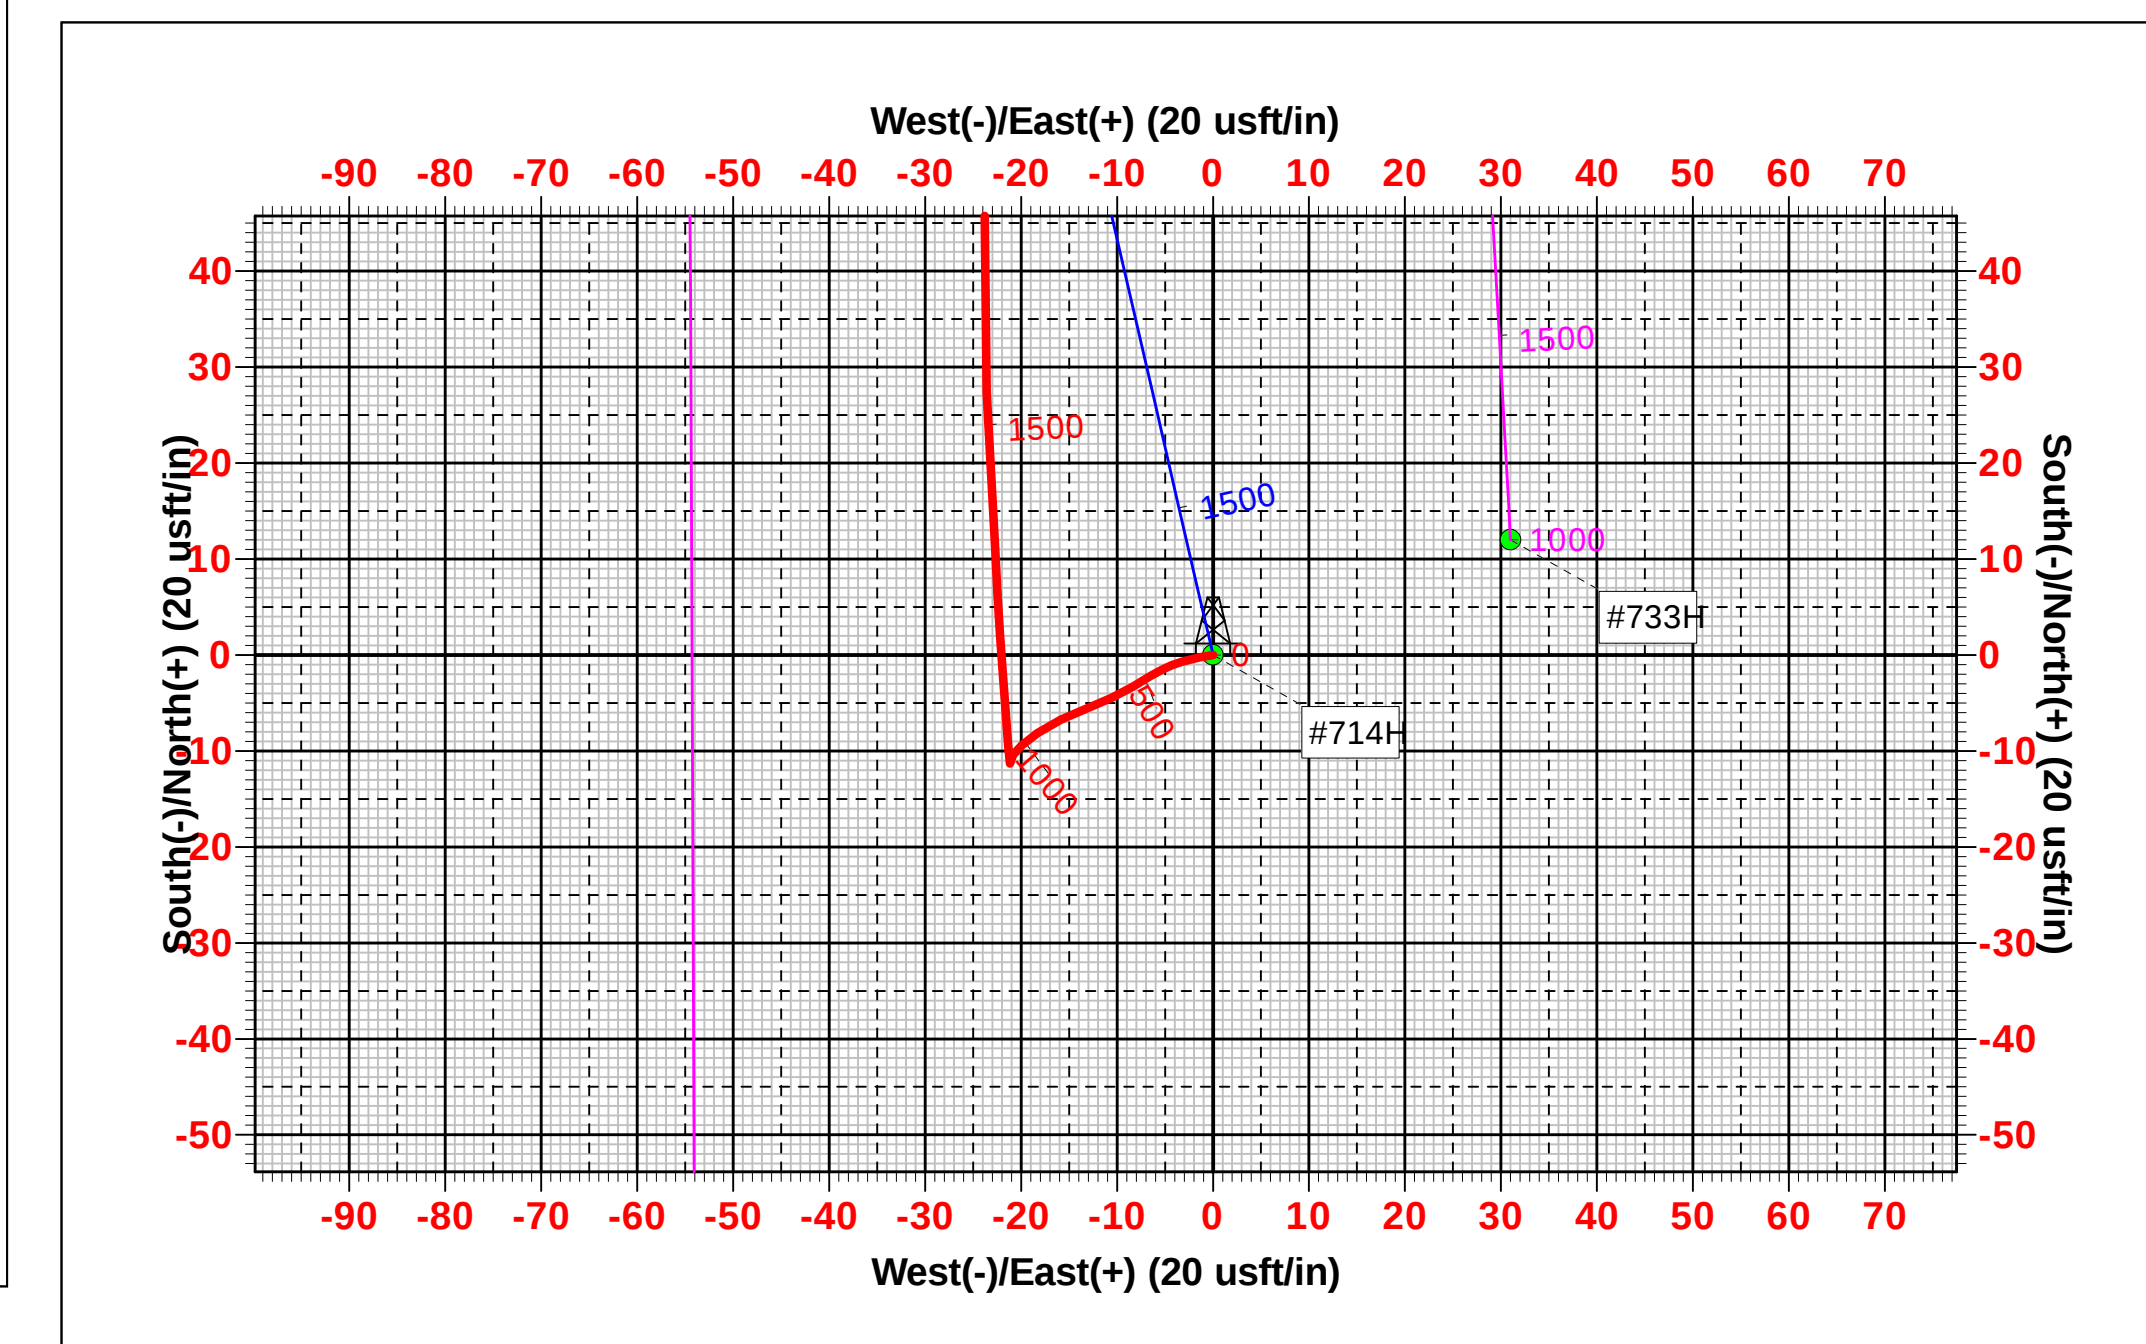

Intent ☐ As Drilled ☐

API #		
Operator Name:	Property Name:	Well Number

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

Well Name: DIRE WOLF 12 FED	Well Location: T26S / R30E / SEC 12 / SWSW / 32.052491 / -103.840999	County or Parish/State: EDDY / NM
Well Number: 714H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM94610	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001547685	Well Status: Drilling Well	Operator: EOG RESOURCES INCORPORATED

Notification

Sundry ID:	2665586	Type of Action:	First Production
Type of Submission:	Notification	Time Sundry Submitted:	10:00:31 AM
Date Sundry Submitted:	Apr 6, 2022		
First Production Date:	Mar 20, 2021		
US Well Number:	3001547685		
First Production Remarks:	01/05/2022 RIG RELEASED 01/07/2022 MIRU TEST VOID TO 5000 PSI, SEALS AND FLANGES TO 8500 PSI 02/11/2022 BEGIN PERF AND FRAC 02/20/2022 FINISH 26 STAGES PERF & FRAC, 11,420 – 18,661’ W/ 3 1/8” 1557 SHOTS, FRAC 18,129,791 LBS PROPPANT + 296,682 BBLS LOAD FLUID 02/21/2022 DRILLED OUT PLUGS AND CLEAN OUT WELLBORE 03/20/2022 OPENED WELL TO FLOWBACK – DATE OF FIRST PRODUCTION		
Disposition:	Accepted		
Accepted Date:	04/11/2022		

Submit To Appropriate District Office Two Copies <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 811 S. First St., Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505			Form C-105 Revised August 1, 2011					
WELL COMPLETION OR RECOMPLETION REPORT AND LOG										
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)								5. Lease Name or Unit Agreement Name		
								DIRE WOLF 12 FEDERAL		
								6. Well Number:		
								714H		
7. Type of Completion:										
☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER _____										
8. Name of Operator						9. OGRID				
EOG RESOURCES INC						7377				
10. Address of Operator						11. Pool name or Wildcat				
PO BOX 2267 MIDLAND, TEXAS 79702						PURPLE SAGE; WOLFCAMP (GAS)				
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County
Surface:	M	12	26S	30E		912	SOUTH	711	WEST	EDDY
BH:	M	13	26S	30E		341	SOUTH	315	WEST	EDDY
13. Date Spudded	14. Date T.D. Reached		15. Date Rig Released		16. Date Completed (Ready to Produce)			17. Elevations (DF and RKB, RT, GR, etc.)		
11/19/2021	01/04/2022		01/05/2022		03/20/2022			3189' GL		
18. Total Measured Depth of Well			19. Plug Back Measured Depth		20. Was Directional Survey Made?			21. Type Electric and Other Logs Run		
MD 18,688' TVD 11,027'			MD 18,661' TVD 11,027'		YES			None		
22. Producing Interval(s), of this completion - Top, Bottom, Name										
WOLFCAMP 11,420 - 18,661'										
CASING RECORD (Report all strings set in well)										
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED
9 5/8"		40# J-55		1076'		12 1/4"		540 SXS CL C/CIRC		
7 5/8"		29.7# ECP 110		10,760'		8 3/4"		1770 SXS CL C & H/CIRC		
5 1/2"		20# ECP 110		18,669'		6 3/4"		735 SXS CL H TOC 10,844' CBL		PRESSURE TEST ATTACHED
24. LINER RECORD						25. TUBING RECORD				
SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN	SIZE	DEPTH SET	PACKER SET			
26. Perforation record (interval, size, and number)						27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.				
11,420 - 18,661' 3 1/8", 1557 holes						DEPTH INTERVAL				
						AMOUNT AND KIND MATERIAL USED				
						11,420 - 18,661' FRAC W/18,129,791 lbs proppant, 296,682 bbls load fld				
PRODUCTION										
Date First Production		Production Method (Flowing, gas lift, pumping - Size and type pump)				Well Status (Prod. or Shut-in)				
03/20/2022		Flowing				Producing				
Date of Test	Hours Tested	Choke Size	Prod'n For Test Period	Oil - Bbl	Gas - MCF	Water - Bbl.	Gas - Oil Ratio			
04/05/2022	24	48		739	2789	4172	3774			
Flow Tubing Press.	Casing Pressure	Calculated 24-Hour Rate	Oil - Bbl.	Gas - MCF	Water - Bbl.	Oil Gravity - API - (Corr.)				
	1550					49				
29. Disposition of Gas (Sold, used for fuel, vented, etc.)								30. Test Witnessed By		
SOLD										
31. List Attachments										
C-102, C-104, C-103, Directional Survey, H spacing										
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.										
33. If an on-site burial was used at the well, report the exact location of the on-site burial:										
Latitude _____ Longitude _____ NAD 1927 1983										
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief										
Signature Kay Maddox			Name Kay Maddox			Title Senior Regulatory Specialist			Date 04/06/2022	
E-mail Address kay_maddox@eogresources.com										

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

Southeastern New Mexico			Northwestern New Mexico				
T. Anhy	Rustler	970'	T. Canyon	Brushy	5969'	T. Ojo Alamo	T. Penn A "
T. Salt		1265'	T. Strawn			T. Kirtland	T. Penn. "B"
B. Salt		3785'	T. Atoka			T. Fruitland	T. Penn. "C"
T. Yates			T. Miss			T. Pictured Cliffs	T. Penn. "D"
T. 7 Rivers			T. Devonian			T. Cliff House	T. Leadville
T. Queen			T. Silurian			T. Menefee	T. Madison
T. Grayburg			T. Montoya			T. Point Lookout	T. Elbert
T. San Andres			T. Simpson			T. Mancos	T. McCracken
T. Glorieta			T. McKee			T. Gallup	T. Ignacio Otzte
T. Paddock			T. Ellenburger			Base Greenhorn	T. Granite
T. Blinebry			T. Gr. Wash			T. Dakota	
T. Tubb			T. Delaware Sand			T. Morrison	
T. Drinkard			T. Bone Springs			T. Todilto	
T. Abo			T. 1st BS SAND	8607'		T. Entrada	
T. Wolfcamp	10,954'		T. 2nd BS SAND	9312'		T. Wingate	
T. Penn			T. 3rd BS SAND	10562'		T. Chinle	
T. Cisco (Bough C)			T.			T. Permian	

No. 1, from.....to.....
No. 2, from.....to.....
No. 3, from.....to.....
No. 4, from.....to.....

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

From	To	Thickness In Feet	Lithology

From	To	Thickness In Feet	Lithology

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 290755

ACKNOWLEDGMENTS

Operator: EOG RESOURCES INC P.O. Box 2267 Midland, TX 79702	OGRID: 7377
	Action Number: 290755
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 290755

CONDITIONS

Operator: EOG RESOURCES INC P.O. Box 2267 Midland, TX 79702	OGRID: 7377
	Action Number: 290755
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	None	12/8/2023