### SUBMIT IN TRIPLICATE®

(Other instructions on reverse side)

Form approved. Budget Bureau No. 42-R1425.

# UNITED STATES DEPARTMENT OF THE INTERIOR

30-045-23461

	GEO!	OGICAL SURVE	<b>Y</b> .		SF 07847	o
				IC DACK	6. IF INDIAN, A	LLOTTEE OR TRIBE NAME
APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK						
a. TYPE OF WORK				7. UNIT AGREE	MENT NAME	
b. Type of Well	(ILL IX)	DELFEIN C	] 1200	DACK [		
oir 🗌	GAS X OTHER			MULTIPLE ZONE	8. FARM OR LE	ASE NAME
WELL \	WELL X OTHER		1 0		Federal	J: ##
P. O. Wy	mala De	~ AAA O	seration (on	man.	9. WELL NO.	
. ADDRESS OF OPERATOR	1			8	1-A -	
1808 Cam	pbell Centre	Dallas, Texa			나 가 하는 것 :	POOL, OR WILDCAT
. LOCATION OF WELL ()	Report location clearly as	nd in accordance with	n any State requirements	s. <b>*</b> )		Mesaverde
At animot	At surface 1180' FSL & 800' FEL Section 11-27N-8W				11. SEC., T., R., AND SURVE	Y OR AREA
At proposed prod. zo					Sec. 11	-27 <b>N-8W</b>
4. DISTANCE IN MILES	AND DIRECTION FROM NE	CAREST TOWN OR POST	OFFICE*		12. COUNTY OR	PARISH 13. STATE
15 Miles S	South				San Juan	
15. DISTANCE FROM PROF LOCATION TO NEARES PROPERTY OR LEASE	ST LINE FT		16. NO. OF ACRES IN LE		OF ACRES ASSIGNI	320 - E
(Also to nearest dr	lg. unit line, if any)		19. PROPOSED DEPTH	20. ROT	TARY OR CABLE TOO	
18. DISTANCE FROM TROPOSED ESCATION			5500'	Ro	otary =	
	hether DF, RT, GR, etc.)				22. APPROX. I	ATE WORK WILL START
6620					- I Im	mediately
3.		PROPOSED CASIN	G AND CEMENTING F	PROGRAM		
	SIZE OF CASING	WEIGHT PER FO	OT SETTING DEP	тн	· QUANTITY O	P CEMENT
SIZE OF HOLE	8-5/8	23#	171		85 sx	
u=778						
9-7/8 6-1/4	_				512 sx	- <u> </u>
9-7/8 6-1/4	4-1/2	9.5#	5500			
	_					
	_					
6-1/4	4-1/2	9.5#	5500	- 5 - 5 - 3 - 3 - 3 - 3 - 3 - 3 - 3 - 3 - 3 - 3	512 sx	
6-1/4 Selectivel	y perforate and	9.5#	5500 Tracture the Me	esaverde fo	512 sx-	
6-1/4 Selectivel A 3000 psi	y perforate and WP and 6000 ps	9.5# d sandwater f	5500 Fracture the Me	saverde fo	ormation.	The state of the s
6-1/4 Selectivel A 3000 psi	y perforate and	9.5# d sandwater f	5500 Fracture the Me	saverde fo	ormation.	a characha antuch te control de la characha antuch control de la characha antuch control de la characha antuch control de la characha antuch
6-1/4  Selectivel  A 3000 psi blind and	y perforate and WP and 6000 perpipe rams will	9.5# d sandwater f	5500 Fracture the Me	saverde fo	ormation.	A control of the cont
6-1/4  Selectivel  A 3000 psi blind and	y perforate and WP and 6000 ps	9.5# d sandwater f	5500 Fracture the Me	saverde fo	ormation.	
6-1/4 Selectivel A 3000 psi	y perforate and WP and 6000 perpipe rams will	9.5# d sandwater f	5500 Fracture the Me	saverde fo	ormation.	and the control of th
6-1/4  Selectivel  A 3000 psi blind and	y perforate and WP and 6000 perpipe rams will	9.5# d sandwater f	5500 Fracture the Me	saverde fo	ormation.	
6-1/4  Selectivel  A 3000 psi blind and  This gas i	y perforate and WP and 6000 per pipe rams will selected.	9.5# d sandwater f si test doubl be used for	5500 Fracture the Me e gate prevent blow out preve	saverde fo	ormation.	
6-1/4  Selectivel A 3000 psi blind and This gas i	y perforate and WP and 6000 perpipe rams will	9.5# d sandwater f si test doubl be used for	5500 Fracture the Me e gate prevent blow out preve	saverde fo	ormation.	
6-1/4  Selectivel  A 3000 psi blind and  This gas i	y perforate and WP and 6000 per pipe rams will selected.	9.5# d sandwater f si test doubl be used for	5500 Fracture the Me e gate prevent blow out preve	saverde fo	ormation.	
6-1/4  Selectivel A 3000 psi blind and This gas i	y perforate and WP and 6000 per pipe rams will s dedicated.	9.5# d sandwater f si test doubl be used for	5500 Fracture the Me e gate prevent blow out preve	esaverde for	ormation.	proposed new product
Selectivel A 3000 psi blind and This gas i E/2 of Sec	y perforate and WP and 6000 peripe rams will s dedicated.  The PROPOSED PROGRAM: o drill or deepen direction	9.5# d sandwater f si test doubl be used for icated to thi	5500  Fracture the Me e gate prevent blow out preve	esaverde for ention on t	ormation.  ed with this well.	
Selectivel A 3000 psi blind and This gas i E/2 of Sec	y perforate and WP and 6000 peripe rams will s dedicated.  The PROPOSED PROGRAM: o drill or deepen direction	9.5# d sandwater f si test doubl be used for icated to thi	5500  Fracture the Me e gate prevent blow out preve	esaverde for ention on t	ormation.  ed with this well.	
Selectivel A 3000 psi blind and This gas i E/2 of Sec	y perforate and WP and 6000 peripe rams will s dedicated.  The PROPOSED PROGRAM: o drill or deepen direction	9.5# d sandwater f si test doubl be used for  icated to thi	s well.	esaverde for ention on t	ormation.  ed with this well.	
Selectivel A 3000 psi blind and This gas i  E/2 of Sec  IN ABOVE SPACE DESCRI	y perforate and WP and 6000 per pipe rams will s dedicated.  The Proposed Program: o drill or deepen direction.	9.5# d sandwater f si test doubl be used for icated to thi	s well.	esaverde for ention on t	ormation.  ed with this well.	
Selectivel A 3000 psi blind and This gas i  E/2 of Sec  IN ABOVE SPACE DESCRI	y perforate and WP and 6000 peripe rams will s dedicated.  The PROPOSED PROGRAM: o drill or deepen direction	9.5# d sandwater f si test doubl be used for  icated to thi	s well.	esaverde for ention on t	ormation.  ed with this well.	
Selectivel A 3000 psi blind and This gas i  E/2 of Sec  IN ABOVE SPACE DESCRIZONE. If proposal is to preventer program, if a  24.  (This space for Federal S	y perforate and WP and 6000 per pipe rams will s dedicated.  The Proposed Program: o drill or deepen direction.	9.5# d sandwater f si test doubl be used for  icated to thi	s well.	esaverde for ention on t	ormation.  ed with this well.	
Selectivel A 3000 psi blind and This gas i  E/2 of Sec  IN ABOVE SPACE DESCRI ZONE. If proposal is to preventer program, if a  24.	y perforate and WP and 6000 per pipe rams will s dedicated.  The Proposed Program: o drill or deepen direction.	9.5# d sandwater f si test doubl be used for  icated to thi	5500  Fracture the Me  The gate prevent blow out prevent	esaverde for ention on t	ormation.  ed with this well.	
Selectivel A 3000 psi blind and This gas i  E/2 of Sec  IN ABOVE SPACE DESCRITATION. If proposal is to preventer program, if a 24.  (This space for Ference of the permit No.	y perforate and WP and 6000 per pipe rams will s dedicated.  The PROPOSED PROGRAM: o drill or deepen directions.  Company.  Description of the period of the	9.5#  d sandwater f si test doubl be used for  icated to thi	5500  Fracture the Me  The gate prevent blow out prevent	esaverde for ention on t	ormation.  ed with this well.	
Selectivel A 3000 psi blind and This gas i  E/2 of Section Above space descriptione. If proposal is to preventer program, if a section of the space for Ferrenal No.	y perforate and WP and 6000 peripe rams will s dedicated.  Stion 11 is ded  GEO FROPOSED PROGRAM: O drill or deepen direction any.  COVAL, IF ANY:	9.5# d sandwater f si test doubl be used for icated to thi	s well.  see or plug back, give data on subsurface local data data data data data data data da	esaverde for ention on t	ormation.  ed with this well.  roductive zone and true vertice.	

\*See Instructions On Reverse Side

#### OIL CONSERVATION DIVISION

## STATE OF NEW MEXICO ENERGY AND MINERALS DEPARTMENT

P. O. BOX 2088

SANTA FE, NEW MEXICO 87501

Form C-102 Revised 10-1-28

must be from the cuter boundaries of the Section Operator Well No. FEDERAL "J" Unit Letter Township Range County 27N 8W San Juan Actual Footage Location of Well: 1180 South feet from the line and Ground Level Elev. Producing Formation Dedicated Acreage: 6620 Mesa Verde Acres 1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below. 2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty). 3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling. etc? Yes ☐ No If answer is "yes," type of consolidation \_\_\_\_ If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.)\_ No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commis-CERTIFICATION I hereby certify that the information coned herein is true and complete to the 0 Company Sec. 11 I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief. 8001 Date Surveyed 1320 1650 1980 2310 2000 1500 1000 500

#### OPERATIONS PLAN

#### Federal J 1-A

#### I. Location:

II. Field: Blanco Mesaverde Elevation: 6620' GR

#### Geology:

A.	Formation Tops:	OJO Alamo	1020'
		Kirkland	2200 <b>'</b>
		Picture Cliffs	2950 <b>'</b>
		Lewis	3070 <b>'</b>
		Chacra	3920 <b>'</b>
		Mesaverd <b>e</b>	4620'
		TOTAL DEPTH	550 <b>0'</b>

B. Logging Program: IES and GR - NDL

C. Coring Program: None

D. Natural Gauges: Will record all gauges in daily drilling report.

#### III. Drilling:

A. Mud Program: Mud from surface to TD.

#### IV. Materials:


Α.	Casing Progra	am: Hole Si	ze Depth	Casing Siz	e Weight
		9-7/8	" 171'	8-5/8"	23#
		6-1/4	" 5500 <b>'</b>	4-1/2"	9.5#

- B. Float Equipment: 8-5/8" surface casing Larkin guide shoe.
- C. Tubing: 4600' of 1-1/4" I.J. with B & R seating nipple on bottom of string.
- D. Wellhead Equipment: Casing head rector type "R" Nom 8" Body x 8-5/8" od. Female.


#### V. Cementing:


8-5/8" surface casing - use 85 sx and circulate to surface.


4-1/2" production casing - use 512 sx and circulate to surface.

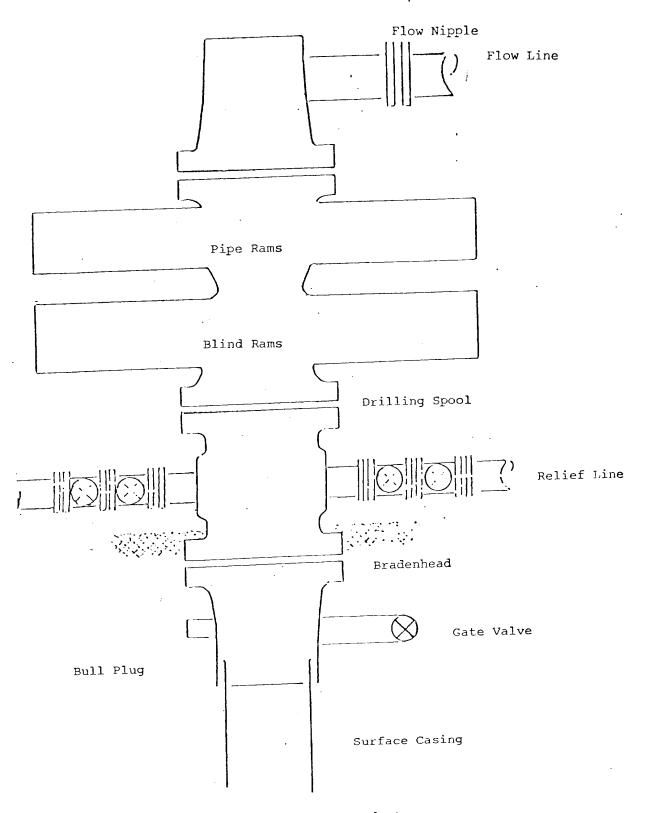

Series 900 Double Gate BOP, rated at 3000 psi Working Pressure. When gas drilling operations begin a Shaffer type 50 or equivalent rotating head is installed on top of the flow nipple and the flow line is converted into a blowie line.

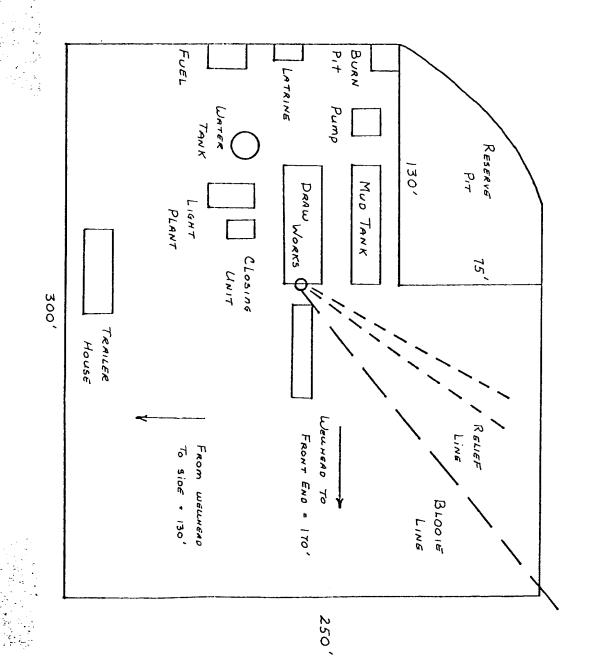

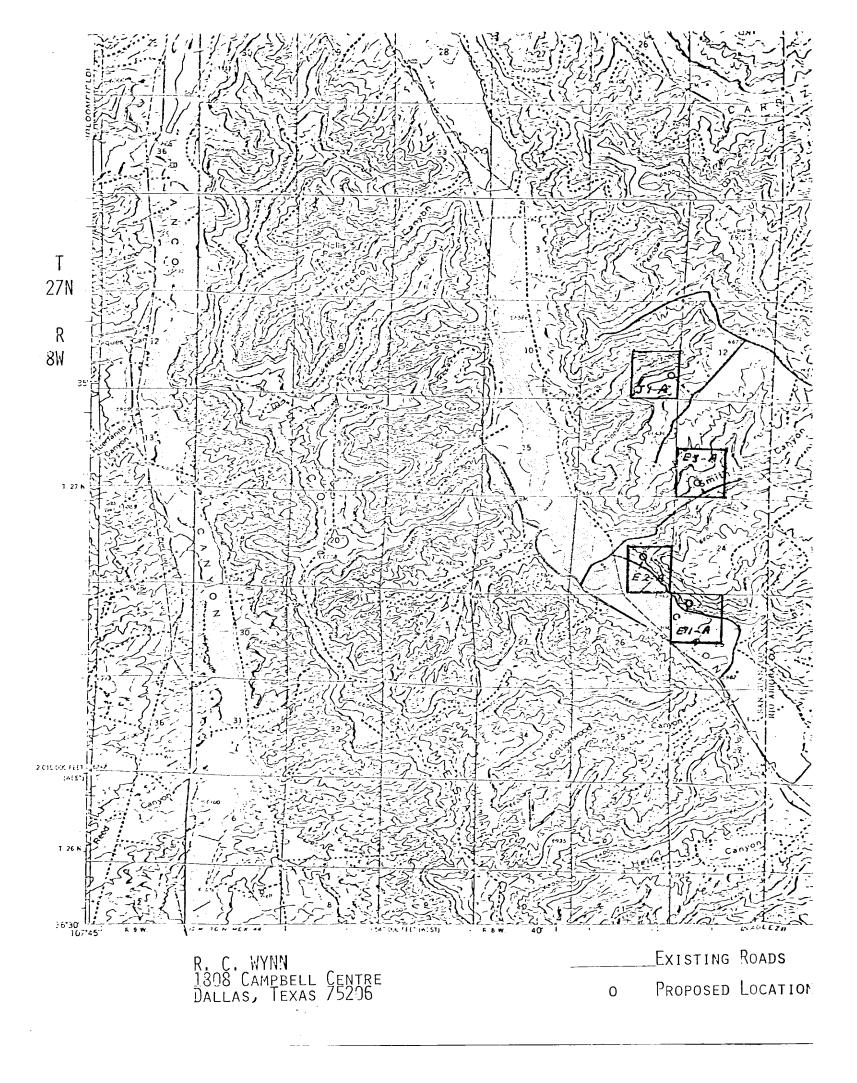

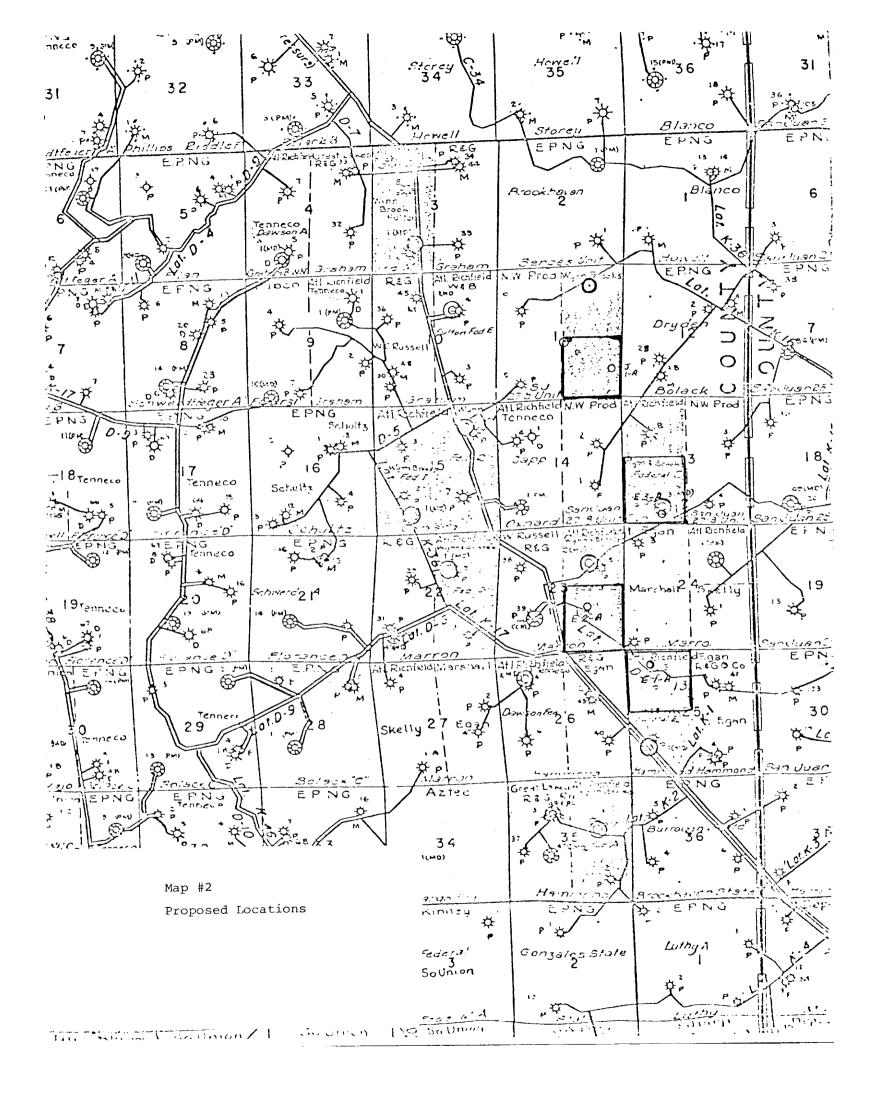

Law Offices of R. G. Wynn

Suite 1808 Gampbell Gentro Dollar, Toxas 15206

#### Multi-Point Surface Use Plan

#### Federal J 1-A

1. Existing Road -

Please refer to Map No. 1 which shows the existing roads. New roads which will be required have been marked on this map. All existing and new roads will be properly maintained during the duration of this project.

2. Planned Access Roads -

Please refer to Map No. 1. The grade of the access roads will be consistent with that of the local terrain. The road surface will not exceed twenty feet (20') in width. Upon completion of the project, the access road will be adequately drained to control soil erosion. Drainage facilities may include ditches, water bars, culverts or any other measure deemed necessary by trained Company personnel to insure proper drainage. Gates and/or cattleguards will be installed if necessary.

- 3. Location of Existing Wells-Please refer to Map No. 2.
- 4. Location of Tank Batteries, Production Facilities, and Production
  Gathering Service Lines Please refer to Maps No. 1 and No. 2. Map
  No. 2 shows the existing gas gathering lines.
  Map No. 1 shows the existing roads and new
  proposed access roads. All known production
  facilities are shown on these two maps.
- 5. Location and Type of Water Supply Water for the proposed project will be obtained from a water hole located at Largo Federal Canyon Well.
- 6. Source of Construction Materials No additional materials will be required to build either the access road or the proposed location.

7. Methods of Handling Waste Materials - All garbage and trash

materials will be put into a burn pit shown on the attached Location Plat No. 1. When clean-up operations are begun on the proposed project, the burn pit with its refuse will be buried to a depth of at least three feet (3'). A latrine, the location of which is also shown on Plat No. 1 will be provided for human waste. If large amounts of liquids are left in the reserve pit after completion of the project, the pit will be fenced until the liquids have had adequate time to dry. The location clean-up will not take place until such time as the reserve pit can be properly covered over to prevent run-off from carrying any of these materials into the watershed. No earthen pit will be located on natural drainages; all earthen pits will be so constructed as to prevent leakage from occurring.

8. Ancillary Facilities -

No camps or airstrips will be associated with this project.

9. Wellsite Layout -

Please refer to the attached Plat No. 1.

10. Plans for Restoration of the Surface - After completion of the proposed project, the location will be cleaned and leveled. The location will be left in such a condition that will enable reseeding operations to be carried out. Seed Mixture #2 will be used. The reseeding operation will be performed during the time period set forth by the regulatory body. The location production equipment will be painted green (Federal Standard #595-34127).

11. Other Information -

The terrain is high mesa overlooking Largo Canyon flat plateau surface with mostly grass cover.

No wildlife seen on site.

cuy

- 12. Operator's Representative R. C. Wynn, 1808 Campbell Centre, Dallas, Texas 75206
- 13. Certification -

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and, that the work associated with the operations proposed herein will be performed by R. C. Wynn and his contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

April 6, 1979

R. C. WYNN

RCW/pw

Form 9-331 (May 1963)		ITED STATES	SUBMIT IN TRIPLICATE.	
(114) 1805)	DEPARTME	NT OF THE INTER	IOR (Other instructions on reverse side)	5. LEASE DESIGNATION AND SERIAL NO.
	GEC	LOGICAL SURVEY		SF 078476
(Do not use t	INDRY NOTICE	S AND REPORTS	ON WELLS back to a different reservoir. proposals,)	6. IF INDIAN, ALLOTTEE OR TEIBE NAM!
1.	Use "APPLICATIO	N FOR PERMIT— for such	proposais.)	7. UNIT AGREEMENT NAME
OIL GAS WELL WELL	L X OTHER			
2. NAME OF OPERATOR				8. FARM OR LEASE NAME
AAA Oner	ating Company	Inc.		Federal J
3. ADDRESS OF OPERA	TOB			9. WELL NO.
Suite 18 4. LOCATION OF WELL See also space 17 At surface	308 Campbell Co (Report location clearl below.)	entre, Dallas, Ter y and in accordance with an	xas 75206 r State requirements.•	1-A  10. FIELD AND POOL, OR WILDCAT  Blanco Mesaverde
1180	FSL and 800'	FEL		11. SEC., T., R., M., OE BLK. AND SURVEY OR AREA
				Section 11-27N-8W
14. PERMIT NO.	1	5. ELEVATIONS (Show whether D 6620 GR	F, RT, GR, etc.)	12. COUNTY OR PARISH 13. STATE
		6620 GR		l San Juan   New Moxi
16.	Check Appro	priate Box To Indicate I	Nature of Notice, Report, or (	Other Data
	NOTICE OF INTENTION	TO:	SUBSEQ	TENT REPORT OF:
TEST WATER SHU	T-OFF PULL	OR ALTER CASING	WATER SHUT-OFF	REFAIRING WELL
FRACTURE TREAT	MULT	TIPLE COMPLETE	FRACTURE TREATMENT	ALTERING CASING
SHOOT OR ACIDIZ	i <del></del> i	<del></del>	SHOOTING OR ACIDIZING	ABANDONMENT*
REPAIR WELL  (Other) ODE:	rator Change	GE PLANS	(Other)(Note: Report result:	s of multiple completion on Well eletion Report and Log form.)
nent to this wor	e Operator from	n R.C.Wy		APR 18 1979
				OIL CON. COM. DIST. 3
				199, <u>1</u> 7, 1973
				T. G. STOLENSTONE
18. I hereby certify t	that the folegoing is tru			
SIGNED	Xw	TITLE F	resident	DATE 4-13-79
(This space for I	Sederal or State office u	se)		
APPROVED BY		TITLE		DATE

\*See Instructions on Reverse Side

Chimocc