

Well Name: STACK CATS 25-36 FEDERAL COM	Well Location: T22S / R32E / SEC 24 / SWSE /	County or Parish/State:
Well Number: 26H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM002379	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002551756	Well Status: Drilling Well	Operator: OXY USA INCORPORATED

Notice of Intent

Sundry ID: 2756261

Type of Submission: Notice of Intent

Date Sundry Submitted: 10/16/2023

Date proposed operation will begin: 12/01/2023

Type of Action: APD Change

Time Sundry Submitted: 07:13

Procedure Description: OXY USA INC. Respectfully requests approval to make changes to our approved APD, see the following change requests below: Update Bottom Hole: from Section 36 T22S, R32E, 20' from the South and 640' from the East, to the new location of Section 36, T22S, R32E, 20' From the South and 575' From the East. Update HSU from 640 acres to 320 acres, see updated plat attached. Update the production casing from 5.5" casing, to a tapered casing 7" to 5.5". See the changes on the attached drill plan.

NOI Attachments

Procedure Description

- StackCats25_36FedCom26H_TNSWedge461_7.000in_32.00ppf_P110CY_20231016071230.pdf
- I10860WEL00NM_C102_STACK_CATS_25_36_FED_COM_26H_20230809_20231016071213.pdf
- StackCats25_36FedCom26H_OfflineCementVariance_20231016071213.pdf
- StackCats25_36FedCom26H_DrillPlan_20231016071213.pdf
- StackCats25_36FedCom26H_DirectPlan_20231016071213.pdf
- StackCats25_36FedCom26H_CsgCriteria_20231016071213.pdf
- StackCats25_36FedCom26H_TNSWedge461_5.500in_20.00ppf_P110CY_20231016071213.pdf

Well Name: STACK CATS 25-36 FEDERAL COM	Well Location: T22S / R32E / SEC 24 / SWSE /	County or Parish/State:
Well Number: 26H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM002379	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002551756	Well Status: Drilling Well	Operator: OXY USA INCORPORATED

Conditions of Approval

Additional

STACK_CATS_25_36_FEDERAL_COM_26H___SUNDRY_COA_20231128150246.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SARAH MCKINNEY	Signed on: OCT 12, 2023 12:27 PM
Name: OXY USA INCORPORATED	
Title: Regulatory Analyst Sr	
Street Address: 5 GREENWAY PLAZA SUITE 110	
City: HOUSTON	State: TX
Phone: (713) 215-7295	
Email address: SARAH_MCKINNEY@OXY.COM	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: KEITH P IMMATTY	BLM POC Title: ENGINEER
BLM POC Phone: 5759884722	BLM POC Email Address: KIMMATTY@BLM.GOV
Disposition: Approved	Disposition Date: 02/05/2024
Signature: Keith Immatty	

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102 Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number	² Pool Code	³ Pool Name
⁴ Property Code	⁵ Property Name STACK CATS 25_36 FED COM	⁶ Well Number 26H
⁷ OGRID No. 16696	⁸ Operator Name OXY USA INC.	⁹ Elevation 3755'


¹⁰ Surface Location

UL or lot no. O	Section 24	Township 22S	Range 32E	Lot 1dn	Feet from the 956'	North/South line SOUTH	Feet from the 2310'	East/West line EAST	County LEA
--------------------	---------------	-----------------	--------------	---------	-----------------------	---------------------------	------------------------	------------------------	---------------

¹¹ Bottom Hole Location If Different From Surface

UL or lot no. P	Section 36	Township 22S	Range 32E	Lot 1dn	Feet from the 20'	North/South line SOUTH	Feet from the 575'	East/West line EAST	County LEA
¹² Dedicated Acres 320.00		¹³ Joint or Infill		¹⁴ Consolidation Code		¹⁵ Order No.			

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

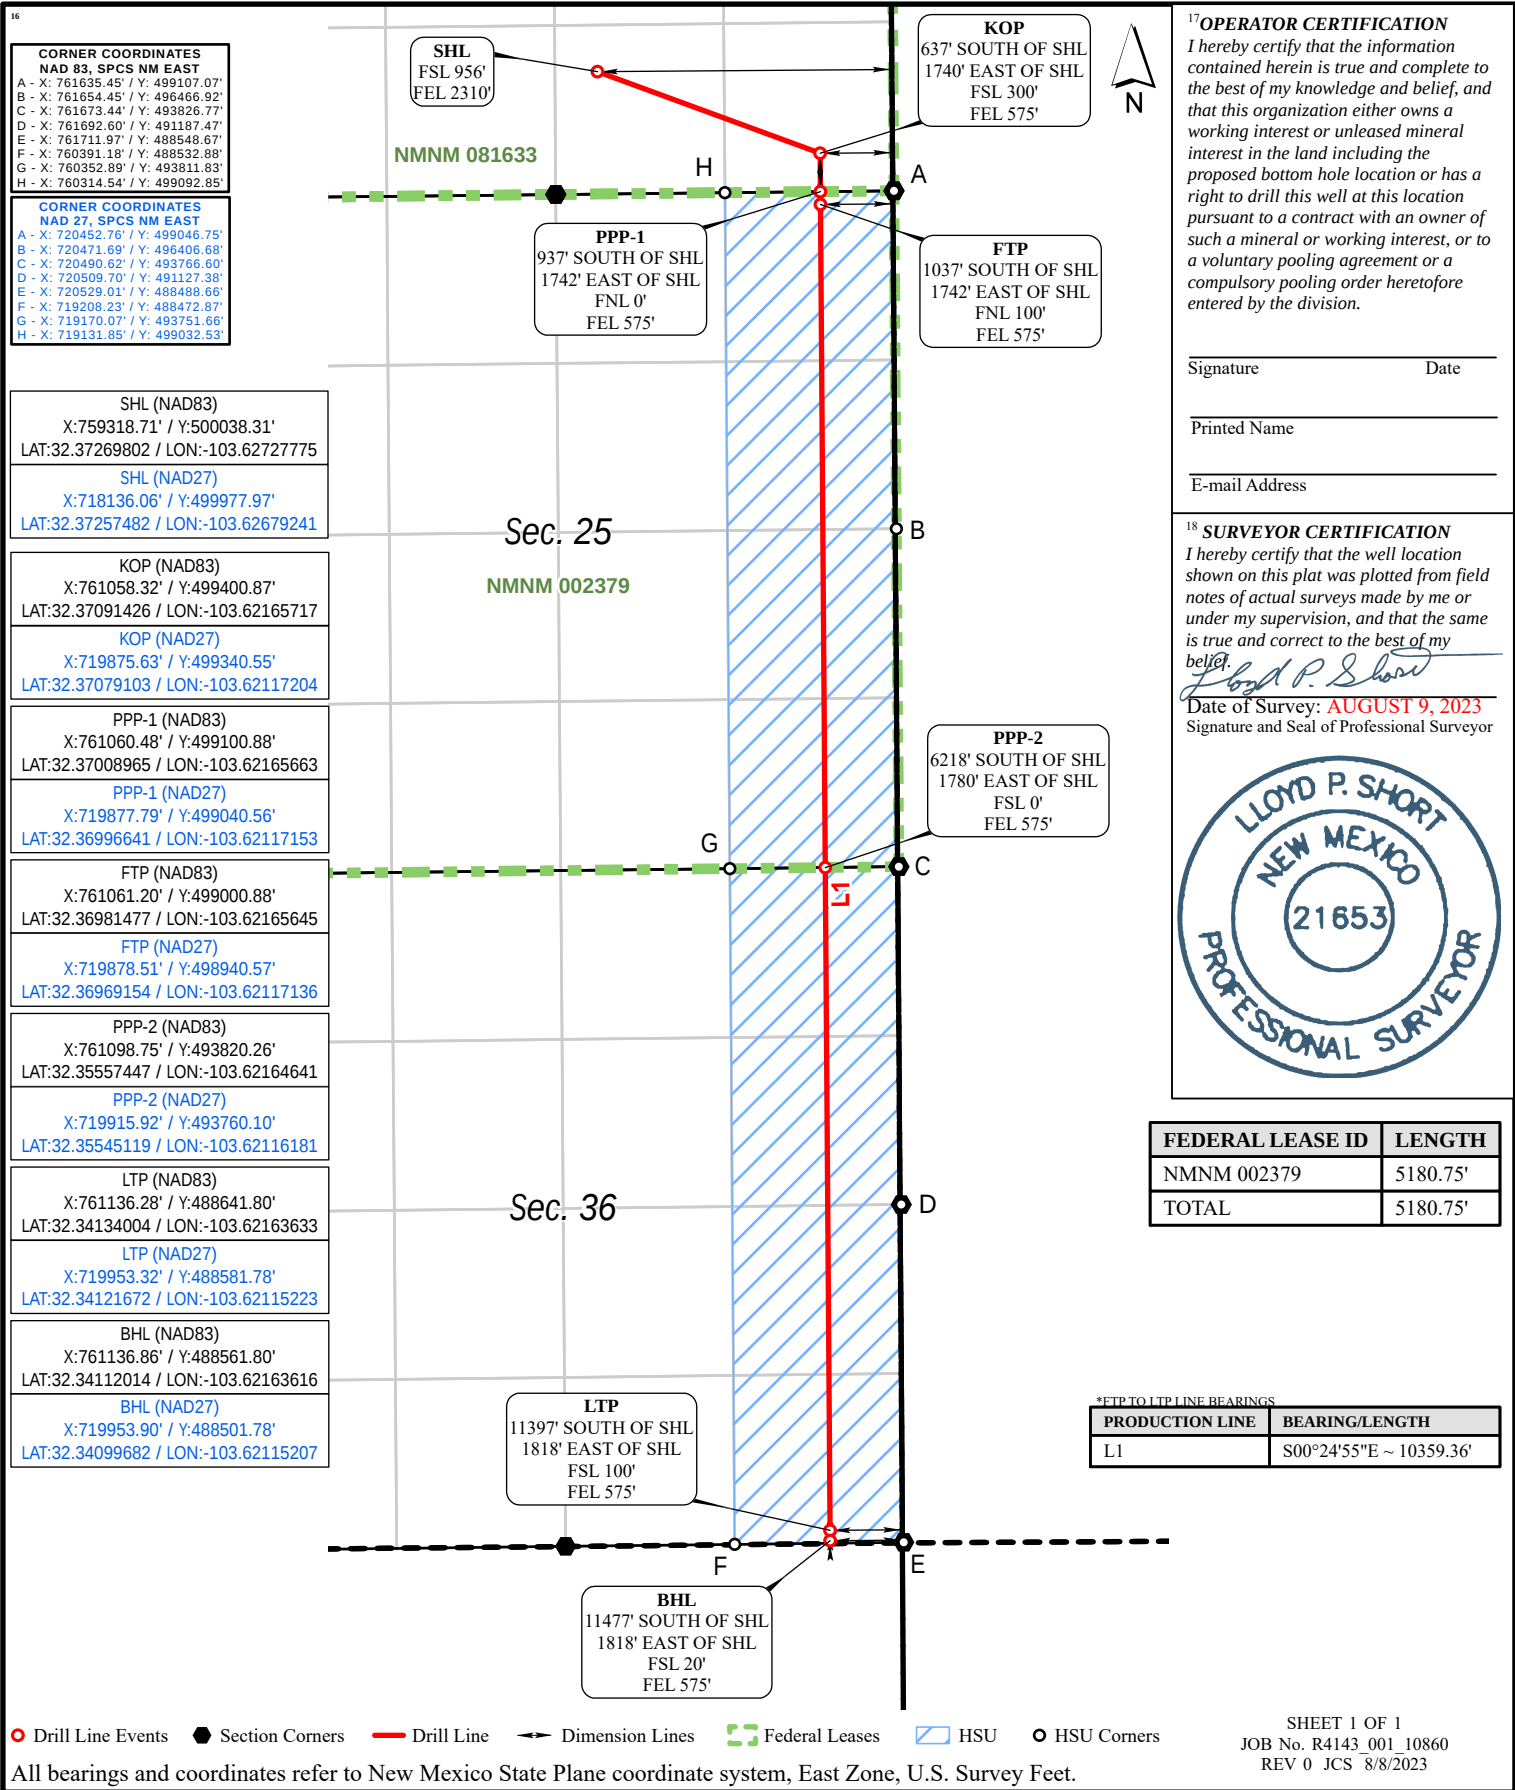

OXY

PRD NM DIRECTIONAL PLANS (NAD 1983)

Stack Cats 25_36

Stack Cats 25_36 Fed Com 26H

Wellbore #1

Plan: Permitting Plan

Standard Planning Report

26 September, 2023

OXY
Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Stack Cats 25_36 Fed Com 26H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB=25' @ 3780.00ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=25' @ 3780.00ft
Site:	Stack Cats 25_36	North Reference:	Grid
Well:	Stack Cats 25_36 Fed Com 26H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Project	PRD NM DIRECTIONAL PLANS (NAD 1983)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		Using geodetic scale factor

Site	Stack Cats 25_36		
Site Position:		Northing:	499,452.71 usft
From:	Map	Easting:	757,564.76 usft
Position Uncertainty:	1.00 ft	Slot Radius:	13.200 in
		Latitude:	32.371120
		Longitude:	-103.632971

Well	Stack Cats 25_36 Fed Com 26H		
Well Position	+N/-S	0.00 ft	Northing:
	+E/-W	0.00 ft	Easting:
Position Uncertainty		2.00 ft	Wellhead Elevation:
Grid Convergence:		0.38 °	
			Latitude:
			Longitude:
			Ground Level:

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM_FILE	12/16/2021	6.38	60.02	47,781.90000000

Design	Permitting Plan			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	171.00

Plan Survey Tool Program	Date	9/26/2023		
Depth From (ft)	Depth To (ft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	21,744.81	Permitting Plan (Wellbore #1)	B001Mb_MWD+HRGM
				OWSG MWD + HRGM

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
4,220.00	0.00	0.00	4,220.00	0.00	0.00	0.00	0.00	0.00	0.00	
6,019.86	18.00	106.46	5,990.40	-79.46	268.89	1.00	1.00	0.00	106.46	
10,456.53	18.00	106.46	10,209.96	-467.96	1,583.59	0.00	0.00	0.00	0.00	
11,305.06	90.00	179.58	10,708.00	-1,037.47	1,742.56	10.00	8.49	8.62	73.90	FTP (Stack Cats
21,744.81	90.00	179.58	10,708.00	-11,476.95	1,818.22	0.00	0.00	0.00	0.00	PBHL (Stack Cats

OXY
Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Stack Cats 25_36 Fed Com 26H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB=25' @ 3780.00ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=25' @ 3780.00ft
Site:	Stack Cats 25_36	North Reference:	Grid
Well:	Stack Cats 25_36 Fed Com 26H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00
4,220.00	0.00	0.00	4,220.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.80	106.46	4,300.00	-0.16	0.54	0.24	1.00	1.00	0.00
4,400.00	1.80	106.46	4,399.97	-0.80	2.71	1.22	1.00	1.00	0.00
4,500.00	2.80	106.46	4,499.89	-1.94	6.56	2.94	1.00	1.00	0.00
4,600.00	3.80	106.46	4,599.72	-3.57	12.08	5.42	1.00	1.00	0.00
4,700.00	4.80	106.46	4,699.44	-5.69	19.27	8.64	1.00	1.00	0.00
4,800.00	5.80	106.46	4,799.01	-8.31	28.13	12.61	1.00	1.00	0.00
4,900.00	6.80	106.46	4,898.40	-11.42	38.65	17.33	1.00	1.00	0.00
5,000.00	7.80	106.46	4,997.59	-15.02	50.84	22.79	1.00	1.00	0.00
5,100.00	8.80	106.46	5,096.54	-19.11	64.68	29.00	1.00	1.00	0.00
5,200.00	9.80	106.46	5,195.23	-23.69	80.18	35.95	1.00	1.00	0.00
5,300.00	10.80	106.46	5,293.62	-28.76	97.33	43.64	1.00	1.00	0.00

OXY

Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Stack Cats 25_36 Fed Com 26H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB=25' @ 3780.00ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=25' @ 3780.00ft
Site:	Stack Cats 25_36	North Reference:	Grid
Well:	Stack Cats 25_36 Fed Com 26H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,400.00	11.80	106.46	5,391.68	-34.31	116.12	52.06	1.00	1.00	0.00
5,500.00	12.80	106.46	5,489.38	-40.35	136.55	61.22	1.00	1.00	0.00
5,600.00	13.80	106.46	5,586.70	-46.87	158.61	71.11	1.00	1.00	0.00
5,700.00	14.80	106.46	5,683.60	-53.87	182.30	81.73	1.00	1.00	0.00
5,800.00	15.80	106.46	5,780.05	-61.35	207.60	93.08	1.00	1.00	0.00
5,900.00	16.80	106.46	5,876.03	-69.30	234.52	105.14	1.00	1.00	0.00
6,000.00	17.80	106.46	5,971.51	-77.73	263.03	117.93	1.00	1.00	0.00
6,019.86	18.00	106.46	5,990.40	-79.46	268.89	120.55	1.00	1.00	0.00
6,100.00	18.00	106.46	6,066.62	-86.48	292.64	131.20	0.00	0.00	0.00
6,200.00	18.00	106.46	6,161.73	-95.23	322.27	144.49	0.00	0.00	0.00
6,300.00	18.00	106.46	6,256.84	-103.99	351.90	157.77	0.00	0.00	0.00
6,400.00	18.00	106.46	6,351.94	-112.75	381.53	171.06	0.00	0.00	0.00
6,500.00	18.00	106.46	6,447.05	-121.50	411.17	184.34	0.00	0.00	0.00
6,600.00	18.00	106.46	6,542.15	-130.26	440.80	197.63	0.00	0.00	0.00
6,700.00	18.00	106.46	6,637.26	-139.02	470.43	210.91	0.00	0.00	0.00
6,800.00	18.00	106.46	6,732.37	-147.77	500.06	224.20	0.00	0.00	0.00
6,900.00	18.00	106.46	6,827.47	-156.53	529.70	237.48	0.00	0.00	0.00
7,000.00	18.00	106.46	6,922.58	-165.29	559.33	250.77	0.00	0.00	0.00
7,100.00	18.00	106.46	7,017.69	-174.04	588.96	264.05	0.00	0.00	0.00
7,200.00	18.00	106.46	7,112.79	-182.80	618.59	277.34	0.00	0.00	0.00
7,300.00	18.00	106.46	7,207.90	-191.55	648.23	290.62	0.00	0.00	0.00
7,400.00	18.00	106.46	7,303.01	-200.31	677.86	303.91	0.00	0.00	0.00
7,500.00	18.00	106.46	7,398.11	-209.07	707.49	317.20	0.00	0.00	0.00
7,600.00	18.00	106.46	7,493.22	-217.82	737.12	330.48	0.00	0.00	0.00
7,700.00	18.00	106.46	7,588.33	-226.58	766.76	343.77	0.00	0.00	0.00
7,800.00	18.00	106.46	7,683.43	-235.34	796.39	357.05	0.00	0.00	0.00
7,900.00	18.00	106.46	7,778.54	-244.09	826.02	370.34	0.00	0.00	0.00
8,000.00	18.00	106.46	7,873.64	-252.85	855.65	383.62	0.00	0.00	0.00
8,100.00	18.00	106.46	7,968.75	-261.61	885.29	396.91	0.00	0.00	0.00
8,200.00	18.00	106.46	8,063.86	-270.36	914.92	410.19	0.00	0.00	0.00
8,300.00	18.00	106.46	8,158.96	-279.12	944.55	423.48	0.00	0.00	0.00
8,400.00	18.00	106.46	8,254.07	-287.88	974.18	436.76	0.00	0.00	0.00
8,500.00	18.00	106.46	8,349.18	-296.63	1,003.82	450.05	0.00	0.00	0.00
8,600.00	18.00	106.46	8,444.28	-305.39	1,033.45	463.34	0.00	0.00	0.00
8,700.00	18.00	106.46	8,539.39	-314.15	1,063.08	476.62	0.00	0.00	0.00
8,800.00	18.00	106.46	8,634.50	-322.90	1,092.71	489.91	0.00	0.00	0.00
8,900.00	18.00	106.46	8,729.60	-331.66	1,122.35	503.19	0.00	0.00	0.00
9,000.00	18.00	106.46	8,824.71	-340.42	1,151.98	516.48	0.00	0.00	0.00
9,100.00	18.00	106.46	8,919.82	-349.17	1,181.61	529.76	0.00	0.00	0.00
9,200.00	18.00	106.46	9,014.92	-357.93	1,211.24	543.05	0.00	0.00	0.00
9,300.00	18.00	106.46	9,110.03	-366.69	1,240.88	556.33	0.00	0.00	0.00
9,400.00	18.00	106.46	9,205.13	-375.44	1,270.51	569.62	0.00	0.00	0.00
9,500.00	18.00	106.46	9,300.24	-384.20	1,300.14	582.90	0.00	0.00	0.00
9,600.00	18.00	106.46	9,395.35	-392.96	1,329.78	596.19	0.00	0.00	0.00
9,700.00	18.00	106.46	9,490.45	-401.71	1,359.41	609.47	0.00	0.00	0.00
9,800.00	18.00	106.46	9,585.56	-410.47	1,389.04	622.76	0.00	0.00	0.00
9,900.00	18.00	106.46	9,680.67	-419.23	1,418.67	636.05	0.00	0.00	0.00
10,000.00	18.00	106.46	9,775.77	-427.98	1,448.31	649.33	0.00	0.00	0.00
10,100.00	18.00	106.46	9,870.88	-436.74	1,477.94	662.62	0.00	0.00	0.00
10,200.00	18.00	106.46	9,965.99	-445.50	1,507.57	675.90	0.00	0.00	0.00
10,300.00	18.00	106.46	10,061.09	-454.25	1,537.20	689.19	0.00	0.00	0.00
10,400.00	18.00	106.46	10,156.20	-463.01	1,566.84	702.47	0.00	0.00	0.00
10,456.53	18.00	106.46	10,209.96	-467.96	1,583.59	709.98	0.00	0.00	0.00
10,500.00	19.64	118.98	10,251.12	-473.41	1,596.42	717.37	10.00	3.77	28.79
10,600.00	25.82	139.60	10,343.46	-498.19	1,625.31	746.37	10.00	6.18	20.62

OXY

Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Stack Cats 25_36 Fed Com 26H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB=25' @ 3780.00ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=25' @ 3780.00ft
Site:	Stack Cats 25_36	North Reference:	Grid
Well:	Stack Cats 25_36 Fed Com 26H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
10,700.00	33.78	151.89	10,430.25	-539.40	1,652.59	791.35	10.00	7.96	12.29
10,800.00	42.53	159.77	10,508.85	-595.79	1,677.44	850.92	10.00	8.75	7.88
10,900.00	51.67	165.35	10,576.88	-665.63	1,699.10	923.29	10.00	9.13	5.58
11,000.00	61.00	169.66	10,632.27	-746.80	1,716.90	1,006.25	10.00	9.34	4.31
11,100.00	70.46	173.25	10,673.33	-836.85	1,730.32	1,097.29	10.00	9.45	3.59
11,200.00	79.97	176.43	10,698.83	-933.03	1,738.95	1,193.63	10.00	9.52	3.18
11,300.00	89.52	179.43	10,707.98	-1,032.42	1,742.51	1,292.35	10.00	9.54	3.00
11,305.06	90.00	179.58	10,708.00	-1,037.47	1,742.56	1,297.35	10.00	9.55	2.97
11,400.00	90.00	179.58	10,708.00	-1,132.41	1,743.25	1,391.23	0.00	0.00	0.00
11,500.00	90.00	179.58	10,708.00	-1,232.41	1,743.97	1,490.11	0.00	0.00	0.00
11,600.00	90.00	179.58	10,708.00	-1,332.41	1,744.69	1,588.99	0.00	0.00	0.00
11,700.00	90.00	179.58	10,708.00	-1,432.40	1,745.42	1,687.87	0.00	0.00	0.00
11,800.00	90.00	179.58	10,708.00	-1,532.40	1,746.14	1,786.75	0.00	0.00	0.00
11,900.00	90.00	179.58	10,708.00	-1,632.40	1,746.87	1,885.63	0.00	0.00	0.00
12,000.00	90.00	179.58	10,708.00	-1,732.40	1,747.59	1,984.51	0.00	0.00	0.00
12,100.00	90.00	179.58	10,708.00	-1,832.39	1,748.32	2,083.39	0.00	0.00	0.00
12,200.00	90.00	179.58	10,708.00	-1,932.39	1,749.04	2,182.27	0.00	0.00	0.00
12,300.00	90.00	179.58	10,708.00	-2,032.39	1,749.77	2,281.14	0.00	0.00	0.00
12,400.00	90.00	179.58	10,708.00	-2,132.39	1,750.49	2,380.02	0.00	0.00	0.00
12,500.00	90.00	179.58	10,708.00	-2,232.38	1,751.22	2,478.90	0.00	0.00	0.00
12,600.00	90.00	179.58	10,708.00	-2,332.38	1,751.94	2,577.78	0.00	0.00	0.00
12,700.00	90.00	179.58	10,708.00	-2,432.38	1,752.67	2,676.66	0.00	0.00	0.00
12,800.00	90.00	179.58	10,708.00	-2,532.38	1,753.39	2,775.54	0.00	0.00	0.00
12,900.00	90.00	179.58	10,708.00	-2,632.37	1,754.12	2,874.42	0.00	0.00	0.00
13,000.00	90.00	179.58	10,708.00	-2,732.37	1,754.84	2,973.30	0.00	0.00	0.00
13,100.00	90.00	179.58	10,708.00	-2,832.37	1,755.57	3,072.18	0.00	0.00	0.00
13,200.00	90.00	179.58	10,708.00	-2,932.37	1,756.29	3,171.06	0.00	0.00	0.00
13,300.00	90.00	179.58	10,708.00	-3,032.36	1,757.02	3,269.94	0.00	0.00	0.00
13,400.00	90.00	179.58	10,708.00	-3,132.36	1,757.74	3,368.81	0.00	0.00	0.00
13,500.00	90.00	179.58	10,708.00	-3,232.36	1,758.47	3,467.69	0.00	0.00	0.00
13,600.00	90.00	179.58	10,708.00	-3,332.35	1,759.19	3,566.57	0.00	0.00	0.00
13,700.00	90.00	179.58	10,708.00	-3,432.35	1,759.91	3,665.45	0.00	0.00	0.00
13,800.00	90.00	179.58	10,708.00	-3,532.35	1,760.64	3,764.33	0.00	0.00	0.00
13,900.00	90.00	179.58	10,708.00	-3,632.35	1,761.36	3,863.21	0.00	0.00	0.00
14,000.00	90.00	179.58	10,708.00	-3,732.34	1,762.09	3,962.09	0.00	0.00	0.00
14,100.00	90.00	179.58	10,708.00	-3,832.34	1,762.81	4,060.97	0.00	0.00	0.00
14,200.00	90.00	179.58	10,708.00	-3,932.34	1,763.54	4,159.85	0.00	0.00	0.00
14,300.00	90.00	179.58	10,708.00	-4,032.34	1,764.26	4,258.73	0.00	0.00	0.00
14,400.00	90.00	179.58	10,708.00	-4,132.33	1,764.99	4,357.60	0.00	0.00	0.00
14,500.00	90.00	179.58	10,708.00	-4,232.33	1,765.71	4,456.48	0.00	0.00	0.00
14,600.00	90.00	179.58	10,708.00	-4,332.33	1,766.44	4,555.36	0.00	0.00	0.00
14,700.00	90.00	179.58	10,708.00	-4,432.33	1,767.16	4,654.24	0.00	0.00	0.00
14,800.00	90.00	179.58	10,708.00	-4,532.32	1,767.89	4,753.12	0.00	0.00	0.00
14,900.00	90.00	179.58	10,708.00	-4,632.32	1,768.61	4,852.00	0.00	0.00	0.00
15,000.00	90.00	179.58	10,708.00	-4,732.32	1,769.34	4,950.88	0.00	0.00	0.00
15,100.00	90.00	179.58	10,708.00	-4,832.32	1,770.06	5,049.76	0.00	0.00	0.00
15,200.00	90.00	179.58	10,708.00	-4,932.31	1,770.79	5,148.64	0.00	0.00	0.00
15,300.00	90.00	179.58	10,708.00	-5,032.31	1,771.51	5,247.52	0.00	0.00	0.00
15,400.00	90.00	179.58	10,708.00	-5,132.31	1,772.24	5,346.40	0.00	0.00	0.00
15,500.00	90.00	179.58	10,708.00	-5,232.30	1,772.96	5,445.27	0.00	0.00	0.00
15,600.00	90.00	179.58	10,708.00	-5,332.30	1,773.69	5,544.15	0.00	0.00	0.00
15,700.00	90.00	179.58	10,708.00	-5,432.30	1,774.41	5,643.03	0.00	0.00	0.00
15,800.00	90.00	179.58	10,708.00	-5,532.30	1,775.13	5,741.91	0.00	0.00	0.00
15,900.00	90.00	179.58	10,708.00	-5,632.29	1,775.86	5,840.79	0.00	0.00	0.00
16,000.00	90.00	179.58	10,708.00	-5,732.29	1,776.58	5,939.67	0.00	0.00	0.00

OXY
Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Stack Cats 25_36 Fed Com 26H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB=25' @ 3780.00ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=25' @ 3780.00ft
Site:	Stack Cats 25_36	North Reference:	Grid
Well:	Stack Cats 25_36 Fed Com 26H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
16,100.00	90.00	179.58	10,708.00	-5,832.29	1,777.31	6,038.55	0.00	0.00	0.00
16,200.00	90.00	179.58	10,708.00	-5,932.29	1,778.03	6,137.43	0.00	0.00	0.00
16,300.00	90.00	179.58	10,708.00	-6,032.28	1,778.76	6,236.31	0.00	0.00	0.00
16,400.00	90.00	179.58	10,708.00	-6,132.28	1,779.48	6,335.19	0.00	0.00	0.00
16,500.00	90.00	179.58	10,708.00	-6,232.28	1,780.21	6,434.06	0.00	0.00	0.00
16,600.00	90.00	179.58	10,708.00	-6,332.28	1,780.93	6,532.94	0.00	0.00	0.00
16,700.00	90.00	179.58	10,708.00	-6,432.27	1,781.66	6,631.82	0.00	0.00	0.00
16,800.00	90.00	179.58	10,708.00	-6,532.27	1,782.38	6,730.70	0.00	0.00	0.00
16,900.00	90.00	179.58	10,708.00	-6,632.27	1,783.11	6,829.58	0.00	0.00	0.00
17,000.00	90.00	179.58	10,708.00	-6,732.27	1,783.83	6,928.46	0.00	0.00	0.00
17,100.00	90.00	179.58	10,708.00	-6,832.26	1,784.56	7,027.34	0.00	0.00	0.00
17,200.00	90.00	179.58	10,708.00	-6,932.26	1,785.28	7,126.22	0.00	0.00	0.00
17,300.00	90.00	179.58	10,708.00	-7,032.26	1,786.01	7,225.10	0.00	0.00	0.00
17,400.00	90.00	179.58	10,708.00	-7,132.25	1,786.73	7,323.98	0.00	0.00	0.00
17,500.00	90.00	179.58	10,708.00	-7,232.25	1,787.46	7,422.86	0.00	0.00	0.00
17,600.00	90.00	179.58	10,708.00	-7,332.25	1,788.18	7,521.73	0.00	0.00	0.00
17,700.00	90.00	179.58	10,708.00	-7,432.25	1,788.90	7,620.61	0.00	0.00	0.00
17,800.00	90.00	179.58	10,708.00	-7,532.24	1,789.63	7,719.49	0.00	0.00	0.00
17,900.00	90.00	179.58	10,708.00	-7,632.24	1,790.35	7,818.37	0.00	0.00	0.00
18,000.00	90.00	179.58	10,708.00	-7,732.24	1,791.08	7,917.25	0.00	0.00	0.00
18,100.00	90.00	179.58	10,708.00	-7,832.24	1,791.80	8,016.13	0.00	0.00	0.00
18,200.00	90.00	179.58	10,708.00	-7,932.23	1,792.53	8,115.01	0.00	0.00	0.00
18,300.00	90.00	179.58	10,708.00	-8,032.23	1,793.25	8,213.89	0.00	0.00	0.00
18,400.00	90.00	179.58	10,708.00	-8,132.23	1,793.98	8,312.77	0.00	0.00	0.00
18,500.00	90.00	179.58	10,708.00	-8,232.23	1,794.70	8,411.65	0.00	0.00	0.00
18,600.00	90.00	179.58	10,708.00	-8,332.22	1,795.43	8,510.52	0.00	0.00	0.00
18,700.00	90.00	179.58	10,708.00	-8,432.22	1,796.15	8,609.40	0.00	0.00	0.00
18,800.00	90.00	179.58	10,708.00	-8,532.22	1,796.88	8,708.28	0.00	0.00	0.00
18,900.00	90.00	179.58	10,708.00	-8,632.22	1,797.60	8,807.16	0.00	0.00	0.00
19,000.00	90.00	179.58	10,708.00	-8,732.21	1,798.33	8,906.04	0.00	0.00	0.00
19,100.00	90.00	179.58	10,708.00	-8,832.21	1,799.05	9,004.92	0.00	0.00	0.00
19,200.00	90.00	179.58	10,708.00	-8,932.21	1,799.78	9,103.80	0.00	0.00	0.00
19,300.00	90.00	179.58	10,708.00	-9,032.21	1,800.50	9,202.68	0.00	0.00	0.00
19,400.00	90.00	179.58	10,708.00	-9,132.20	1,801.23	9,301.56	0.00	0.00	0.00
19,500.00	90.00	179.58	10,708.00	-9,232.20	1,801.95	9,400.44	0.00	0.00	0.00
19,600.00	90.00	179.58	10,708.00	-9,332.20	1,802.68	9,499.32	0.00	0.00	0.00
19,700.00	90.00	179.58	10,708.00	-9,432.19	1,803.40	9,598.19	0.00	0.00	0.00
19,800.00	90.00	179.58	10,708.00	-9,532.19	1,804.12	9,697.07	0.00	0.00	0.00
19,900.00	90.00	179.58	10,708.00	-9,632.19	1,804.85	9,795.95	0.00	0.00	0.00
20,000.00	90.00	179.58	10,708.00	-9,732.19	1,805.57	9,894.83	0.00	0.00	0.00
20,100.00	90.00	179.58	10,708.00	-9,832.18	1,806.30	9,993.71	0.00	0.00	0.00
20,200.00	90.00	179.58	10,708.00	-9,932.18	1,807.02	10,092.59	0.00	0.00	0.00
20,300.00	90.00	179.58	10,708.00	-10,032.18	1,807.75	10,191.47	0.00	0.00	0.00
20,400.00	90.00	179.58	10,708.00	-10,132.18	1,808.47	10,290.35	0.00	0.00	0.00
20,500.00	90.00	179.58	10,708.00	-10,232.17	1,809.20	10,389.23	0.00	0.00	0.00
20,600.00	90.00	179.58	10,708.00	-10,332.17	1,809.92	10,488.11	0.00	0.00	0.00
20,700.00	90.00	179.58	10,708.00	-10,432.17	1,810.65	10,586.98	0.00	0.00	0.00
20,800.00	90.00	179.58	10,708.00	-10,532.17	1,811.37	10,685.86	0.00	0.00	0.00
20,900.00	90.00	179.58	10,708.00	-10,632.16	1,812.10	10,784.74	0.00	0.00	0.00
21,000.00	90.00	179.58	10,708.00	-10,732.16	1,812.82	10,883.62	0.00	0.00	0.00
21,100.00	90.00	179.58	10,708.00	-10,832.16	1,813.55	10,982.50	0.00	0.00	0.00
21,200.00	90.00	179.58	10,708.00	-10,932.16	1,814.27	11,081.38	0.00	0.00	0.00
21,300.00	90.00	179.58	10,708.00	-11,032.15	1,815.00	11,180.26	0.00	0.00	0.00
21,400.00	90.00	179.58	10,708.00	-11,132.15	1,815.72	11,279.14	0.00	0.00	0.00
21,500.00	90.00	179.58	10,708.00	-11,232.15	1,816.45	11,378.02	0.00	0.00	0.00

OXY

Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Stack Cats 25_36 Fed Com 26H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB=25' @ 3780.00ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=25' @ 3780.00ft
Site:	Stack Cats 25_36	North Reference:	Grid
Well:	Stack Cats 25_36 Fed Com 26H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
21,600.00	90.00	179.58	10,708.00	-11,332.14	1,817.17	11,476.90	0.00	0.00	0.00
21,700.00	90.00	179.58	10,708.00	-11,432.14	1,817.90	11,575.78	0.00	0.00	0.00
21,744.81	90.00	179.58	10,708.00	-11,476.95	1,818.22	11,620.08	0.00	0.00	0.00

Design Targets									
Target Name									
- hi/miss target	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- Shape									
KOP (Stack Cats	0.00	0.00	10,209.96	-637.46	1,739.68	499,400.87	761,058.32	32.370914	-103.621657
- plan misses target center by 218.81ft at 10544.15ft MD (10292.40 TVD, -482.26 N, 1609.32 E)									
- Point									
FTP (Stack Cats	0.00	0.00	10,708.00	-1,037.47	1,742.56	499,000.88	761,061.20	32.369815	-103.621657
- plan hits target center									
- Point									
PBHL (Stack Cats	0.00	0.00	10,708.00	-11,476.95	1,818.22	488,561.80	761,136.86	32.341120	-103.621636
- plan hits target center									
- Point									

Formations						
Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)	
1,029.00	1,029.00	RUSTLER				
1,720.00	1,720.00	SALADO				
3,289.00	3,289.00	CASTILE				
4,970.14	4,968.00	DELAWARE				
5,024.64	5,022.00	BELL CANYON				
5,865.53	5,843.00	CHERRY CANYON				
7,245.43	7,156.00	BRUSHY CANYON				
8,952.99	8,780.00	BONE SPRING				
10,112.74	9,883.00	BONE SPRING 1ST				
10,885.89	10,568.00	BONE SPRING 2ND				

Plan Annotations				
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
4,220.00	4,220.00	0.00	0.00	Build 1°/100'
6,019.86	5,990.40	-79.46	268.89	Hold 18° Tangent
10,456.53	10,209.96	-467.96	1,583.59	KOP, Build 10°/100'
11,305.06	10,708.00	-1,037.47	1,742.56	Landing Point
21,744.81	10,708.00	-11,476.95	1,818.22	TD at 21744.81' MD

Oxy USA Inc. - Stack Cats 25_36 Fed Com 26H

Drill Plan

1. Geologic Formations

TVD of Target (ft):	10708	Pilot Hole Depth (ft):	
Total Measured Depth (ft):	21745	Deepest Expected Fresh Water (ft):	1029

Delaware Basin

Formation	MD-RKB (ft)	TVD-RKB (ft)	Expected Fluids
Rustler	1029	1029	
Salado	1720	1720	Salt
Castile	3289	3289	Salt
Delaware	4970	4968	Oil/Gas/Brine
Bell Canyon	5025	5022	Oil/Gas/Brine
Cherry Canyon	5866	5843	Oil/Gas/Brine
Brushy Canyon	7245	7156	Losses
Bone Spring	8953	8780	Oil/Gas
Bone Spring 1st	10113	9883	Oil/Gas
Bone Spring 2nd	10886	10568	Oil/Gas
Bone Spring 3rd			Oil/Gas
Wolfcamp			Oil/Gas
Penn			Oil/Gas
Strawn			Oil/Gas

*H2S, water flows, loss of circulation, abnormal pressures, etc.

2. Casing Program

Section	Hole Size (in)	MD		TVD		Csg. OD (in)	Csg Wt. (ppf)	Grade	Conn.
		From (ft)	To (ft)	From (ft)	To (ft)				
Surface	17.5	0	1089	0	1089	13.375	54.5	J-55	BTC
Salt	12.25	0	6656	0	6596	9.625	40	L-80 HC	BTC
Production	8.5	0	10907	0	10459	7	32	P-110	Wedge 461
Production	8.5	10907	21745	10459	10708	5.5	20	P-110	Wedge 461

All casing strings will be tested in accordance with 43 CFR part 3170 Subpart 3172

All Casing SF Values will meet or exceed those below			
SF Collapse	SF Burst	Body SF Tension	Joint SF Tension
1.00	1.100	1.4	1.4

Annular Clearance Variance Request

As per the agreement reached in the Oxy/BLM face-to-face meeting on Feb 22, 2018, Oxy requests permission to allow deviation from the 0.422" annular clearance requirement. Please see Annular Clearance Variance attachment for further details.

	Y or N
Is casing new? If used, attach certification as required in 43 CFR 3160	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	Y
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

3. Cementing Program

Section	Stage	Slurry:	Sacks	Yield (ft ³ /ft)	Density (lb/gal)	Excess:	TOC	Placement	Description
Surface	1	Surface - Tail	1138	1.33	14.8	100%	-	Circulate	Class C+Accel.
Int.	1	Intermediate - Tail	141	1.33	14.8	20%	6,156	Circulate	Class C+Accel.
Int.	1	Intermediate - Lead	1604	1.73	12.9	50%	-	Circulate	Class Pozz+Ret.
Prod.	1	Production - Tail	2430	1.38	13.2	15%	7,495	Circulate	Class H+Ret., Disper., Salt
Prod.	2	Production 2S - Tail BH	710	1.71	13.3	50%	-	Bradenhead	Class C+Accel.

Offline Cementing Request

Oxy requests a variance to cement the 9.625" and/or 7.625" intermediate casing strings offline in accordance to the approved variance, EC Tran 461365. Please see Offline Cementing Variance attachment for further details.

4. Pressure Control Equipment

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type		✓	Tested to:	TVD Depth (ft) per Section:
12.25" Hole	13-5/8"	5M	Annular		✓	70% of working pressure	6596
		5M	Blind Ram		✓	250 psi / 5000 psi	
			Pipe Ram				
			Double Ram		✓		
			Other*				
8.5" Hole	13-5/8"	5M	Annular		✓	70% of working pressure	10708
		5M	Blind Ram		✓	250 psi / 5000 psi	
			Pipe Ram				
			Double Ram		✓		
			Other*				

*Specify if additional ram is utilized

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per 43 CFR part 3170 Subpart 3172 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold.

	Formation integrity test will be performed per 43 CFR part 3170 Subpart 3172. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with 43 CFR part 3170 Subpart 3172.
	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
Y	Are anchors required by manufacturer?
	A multibowl or a unionized multibowl wellhead system will be employed. The wellhead and connection to the BOPE will meet all API 6A requirements. The BOP will be tested per 43 CFR part 3170 Subpart 3172 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. We will test the flange connection of the wellhead with a test port that is directly in the flange. We are proposing that we will run the wellhead through the rotary prior to cementing surface casing as discussed with the BLM on October 8, 2015. See attached schematics.

BOP Break Testing Request

Oxy requests permission to adjust the BOP break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019. Please see BOP Break Testing Variance attachment for further details.

Oxy will use Cameron ADAPT wellhead system that uses an OEC top flange connection. This connection has been fully vetted and verified by API to Spec 6A and carries an API monogram.

5. Mud Program

Section	Depth		Depth - TVD		Type	Weight (ppg)	Viscosity	Water Loss
	From (ft)	To (ft)	From (ft)	To (ft)				
Surface	0	1089	0	1089	Water-Based Mud	8.6 - 8.8	40-60	N/C
Intermediate	1089	6656	1089	6596	Saturated Brine-Based or Oil-Based Mud	8.0 - 10.0	35-45	N/C
Production	6656	21745	6596	10708	Water-Based or Oil-Based Mud	8.0 - 9.6	38-50	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CACL2. Oxy will use a closed mud system.

What will be used to monitor the loss or gain of fluid?	PVT/MD Totco/Visual Monitoring
---	--------------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing.		
Yes	Will run GR from TD to surface (horizontal well – vertical portion of hole).	
	Stated logs run will be in the Completion Report and submitted to the BLM.	
No	Logs are planned based on well control or offset log information.	
No	Drill stem test? If yes, explain	
No	Coring? If yes, explain	
Additional logs planned		Interval
No	Resistivity	
No	Density	
Yes	CBL	Production string
Yes	Mud log	Bone Spring – TD
No	PEX	

7. Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	5346 psi
Abnormal Temperature	No
BH Temperature at deepest TVD	166°F

Pump high viscosity sweeps as needed for hole cleaning. The mud system will be monitored visually/manually as well as with an electronic PVT. The necessary mud products for additional weight and fluid loss control will be on location at all times. Appropriately weighted mud will be used to isolate potential gas, oil, and water zones until such time as casing can be cemented into place for zonal

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of 43 CFR part 3170 Subpart 3172. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

N	H2S is present
Y	H2S Plan attached

8. Other facets of operation

	Yes/No
Will the well be drilled with a walking/skidding operation? If yes, describe. We plan to drill the 3 well pad in batch by section: all surface sections, intermediate sections and production sections. The wellhead will be secured with a night cap whenever the rig is not over the well.	Yes
Will more than one drilling rig be used for drilling operations? If yes, describe. Oxy requests the option to contract a Surface Rig to drill, set surface casing, and cement for this well. If the timing between rigs is such that Oxy would not be able to preset surface, the Primary Rig will MIRU and drill the well in its entirety per the APD. Please see the attached document for information on the spudder rig.	Yes
Total Estimated Cuttings Volume: 2195 bbls	



5.500" 20.00 lb/ft P110-CY

TenarisHydril Wedge 461™ Matched Strength



Special Data Sheet

TH DS-20.0359

12 August 2020

Rev 00

Nominal OD	5.500 in.	Wall Thickness	0.361 in.	Grade	P110-CY
Min Wall Thickness	87.5%	Type	CASING	Connection OD Option	MATCHED STRENGTH

Pipe Body Data

Geometry			Performance		
Nominal OD	5.500 in.	Nominal ID	4.778 in.	Body Yield Strength	641 x 1000 lbs
Nominal Weight	20.00 lbs/ft	Wall Thickness	0.361 in.	Internal Yield	12640 psi
Standard Drift Diameter	4.653 in.	Plain End Weight	19.83 lbs/ft	SMYS	110000 psi
Special Drift Diameter	N/A	OD Tolerance	API	Collapse Pressure	11110 psi

Connection Data

Geometry		Performance		Make-up Torques	
Matched Strength OD	6.050 in.	Tension Efficiency	100%	Minimum	17000 ft-lbs
Make-up Loss	3.775 in.	Joint Yield Strength	641 x 1000 lbs	Optimum	18000 ft-lbs
Threads per in.	3.40	Internal Yield	12640 psi	Maximum	21600 ft-lbs
Connection OD Option	MATCHED STRENGTH	Compression Efficiency	100%	Operational Limit Torques	
Coupling Length	7.714 in.	Compression Strength	641 x 1000 lbs	Operating Torque	32000 ft-lbs
		Bending	92 °/100 ft	Yield Torque	38000 ft-lbs
		Collapse	11110 psi	Buck-On Torques	
				Minimum	21600 ft-lbs
				Maximum	23100 ft-lbs

Notes

*If you need to use torque values that are higher than the maximum indicated, please contact a local Tenaris technical sales representative



TenarisHydril Wedge 461®



Coupling	Pipe Body
Grade: P110-CY	Grade: P110-CY
Body: White	1st Band: White
1st Band: Grey	2nd Band: Grey
2nd Band: -	3rd Band: -
3rd Band: -	4th Band: -
	5th Band: -
	6th Band: -

Outside Diameter	7.000 in.	Wall Thickness	0.453 in.	Grade	P110-CY
Min. Wall Thickness	87.50 %	Pipe Body Drift	API Standard	Type	Casing
Connection OD Option	REGULAR				

Pipe Body Data

Geometry				Performance	
Nominal OD	7.000 in.	Wall Thickness	0.453 in.	Body Yield Strength	1025 x1000 lb
Nominal Weight	32 lb/ft	Plain End Weight	31.70 lb/ft	Min. Internal Yield Pressure	12,460 psi
Drift	5.969 in.	OD Tolerance	API	SMYS	110,000 psi
Nominal ID	6.094 in.			Collapse Pressure	10,780 psi

Connection Data

Geometry		Performance		Make-Up Torques	
Connection OD	7.750 in.	Tension Efficiency	100 %	Minimum	20,000 ft-lb
Coupling Length	8.914 in.	Joint Yield Strength	1025 x1000 lb	Optimum	21,000 ft-lb
Connection ID	6.094 in.	Internal Pressure Capacity	12,460 psi	Maximum	25,200 ft-lb
Make-up Loss	4.375 in.	Compression Efficiency	100 %	Operation Limit Torques	
Threads per inch	3.40	Compression Strength	1025 x1000 lb	Operating Torque	61,000 ft-lb
Connection OD Option	Regular	Max. Allowable Bending	72 °/100 ft	Yield Torque	72,000 ft-lb
		External Pressure Capacity	10,780 psi	Buck-On	
		Coupling Face Load	269,000 lb	Minimum	25,200 ft-lb
				Maximum	26,700 ft-lb

Notes

This connection is fully interchangeable with:
Wedge 461® - 7 in. - 0.317 / 0.362 / 0.408 in.
Connections with Dopeless® Technology are fully compatible with the same connection in its Standard version
In October 2019, TenarisHydril Wedge XP® 2.0 was renamed TenarisHydril Wedge 461™. Product dimensions and properties remain identical and both connections are fully interchangeable

For the latest performance data, always visit our website: www.tenaris.com

Tenaris has issued this document for general information only, and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information –if any- provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com . ©Tenaris 2021. All rights reserved.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 311396

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 311396
	Action Type: [C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
pkautz	None	2/12/2024