SUBMIT IN TRIPLICATE.

(Other instructions on reverse side)

•	Form approved. Budget Bureau No. 42-R142
	30-095-23800
Ī	5. LEARE DESIGNATION AND SERIAL NO.
- 1	

UNITED STATES
DEPARTMENT OF THE INTERIOR

GEOLOGICAL SURVEY					SF-079679					
A DRI ICA TIONI	FOR PERMIT TO	O DRILL. D	EEPE	N, OR PLUG B	ACK	6. IF INDIA	N. ALLUTTEE	OR TRIBE!	NAME	
- TYPE OF WORK	APPLICATION FOR PERMIT TO DRILL, DE							7. UNIT AGREEMENT NAME		
b. TIPE OF WELL			BIN ZON	GLE MULTIPL ZONE	· .	S. FARM O	i-Tayloi			
2. NAME OF GPERATOR					9. WELL N		 .			
Tenneco Oil	Company					: :5-E	<u>-</u> : —;	ž 1		
ADDRESS OF OPERATOR		- 1	- O	0222	1.	10. FIELD	AND POOL, O	B MILDCY.	T	
720 So. Cold	orado Blvd., Dei	nver, Color	hany St	ate requirements.*)	-	Basi	n Dakot	a	_	
At surface	•			-	_ :	AND B	., R., M., OR E	ILE.		
At proposed prod. zone							17, T2			
14. DISTANCE IN MILES A	NO DIRECTION FROM NEAD	EST TOWN OR POS	T OFFICE	•	-,			New M		
See Point 1	B, Surface Use	Plan			1.77. 200	San Ju		Inc.		
10. DISTANCE FROM PROPU- LOCATION TO NEAREST	SED*		16. NO	16. NO. OF ACRES IN LEASE		THIS WELL	: :	E/	320	
(Also to nearest drig	OSED LOCATIONS		19. PR	OPOSED DEPTH	1 .	ARY OR CABL				
18. DISTANCE FROM PROTO TO NEAREST WELL, DE OR APPLIED FOR, ON THE				6,243		RO Eary			K WILL STAPT	
21. ELEVATIONS (Show whe	ether DF, RT, GR, etc.)				ا ان ان ا		tober 1			
6,202 G.L.		CACI	NC AND	CEMENTING PROGR.	AM . O		2 3 %			
23.]			SETTING DEPTH	1 .	OUAN	TITY OF CEME	NT		
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER I	FOOT	500-	Suff:			to circ. to s	suri	
12-1/4"	8-5/8"	24#		6,243		below	-		-	
7-7/8"	5-1/2"	15.5#, 17	<u>.U#</u>	0,243			:		-	
								_		
	SEE ATTACHED				-			i -		
		1 1 . 1-1	Ş.		6 . 2					
	an in	educiled	ſ				-			
•	. gari d				, ages at	3				
	The best of the second of the					1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	* * * * * * * * * * * * * * * * * * *	* <u>*</u>		
				e street				: - S		
	•			ſ						
				Į.						
				\$ (?)		٠		ξ. Ε.		
				a vo			1 2 2	製質		
				I I	a					
				Y	Carrier.					
				-1 - back class data on	present D	roductive zor	e and propo	sed new [produc	
zone. If proposal is to	BE PROPOSED PROGRAM: I o drill or deepen direction	f proposal is to d nally, give pertin	eepen or ent data	ou subsurface locations	und meas	ured and true	vertical der			
preventer program, if a	iny.							 o 14,		
24.	A /			sion Production	Manag	er	ATE			
SICNED	<u> </u>		TITLE							
(This space for Fe	deral or State office use)									
PERMIT NO.	PERMIT NO.			APPROVAL DATE						
							ATE	<u></u>		
APPROVED BY CONDITIONS OF APPR	POVAL IN ANT		TITLE						•	
CONDITIONS OF APPR	WIND, 11 APL .			2.6.6.4		-		•		
211/2	· · · · · · · · · · · · · · · · · · ·	Cj	7m	000			•	• • •		

ok Frah

*See Instructions On Reverse Side

OIL CONSERVATION DIVISION

STATE OF NEW MEXICO EMERGY AND MINERALS DEPARTMENT

P. O. BOX 2088 SANTA FE, NEW MEXICO 87501

form C-107 Revised 10-1-18

All distances must be from the outer houndaries of the Section Well No. Lease 5-5 TENNECO OIL COMPANY DELHI-TAYLOR Township Range County Unit Letter Section 26N llW San Juan Actual Footage Location of Well: South East feet from the feet from the line and Dedicated Acreage: Ground Level Elev. Producing Formation 320 Acres 6202 Dakota Basin Dakota 1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below. 2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty). 3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling. etc? If answer is "yes," type of consolidation ___ Yes If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.). No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commis-<u> Managaman managama</u> CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief. Environmental Coordinat Tenneco Oil Company TENNECO OIL CO. September 14, 1979 CONÓCO Sec. ODESSA NATURAL CORP. 9901 17 I hereby certify that the well location This well staked shown on this plat was plotted from field SF-079679 non regulation to avoid notes of actual surveys made by me or NIIP farmland under my supervision, and that the same is true and correct to the best of my knowledge and belief. Date Surveyed July 24, 1979 1 Registered Protessional Fi Fred B Certificate No 3950 660 1320 1650 1980 2310 2000

The geological name of the surface formation is Tertiary San Jose 2&3. Estimated Formation Tops:

Ojo Alamo Kirkland Pictured Cliffs	429 579 1487 2371 2462	Point Lookout Mancos Gallup Greenhorn	3989 4220 5044 5897
Cliffhouse Menefee		Greennorn Dakota Total Depth	6041 6243

- 4. Drill a 12-1/4" hole to 500^{+} . Run 8-5/8", 24#, K-55 ST&C casing to 500^{+} and cement to surface. Use 2% CaCl₂ in cement. Drill out shoe and reduce hole to 7-7/8" and drill to total depth. If productive, run 5-1/2" casing to total depth. Cement in two stages: (1) top of cement above Gallup and (2) top of cement above Kirland. If nonproductive, P&A per U.S.G.S. requirements.
- Blowout Preventors: Hydraulic double ram, 10". One set of rams will be provided each size drill pipe in the hole. One set of blind rams at all times. Fill line will be 2", kill line will be 2", choke relief line will be 2". BOP's, drills, and tests will be recorded in the driller's log. BOP will be tested every 24 hours and recorded in IADC log.
- Mud Program: (Sufficient quantity of mud and weight material will be available on 6. location.)

0-500spud mud low solids fresh water mud. No WL control. 500-5500 WI-8 cc or less. Viscosity - 70+ required to log. 5500-T.D.

Auxiliary Equipment: 7.

Kelly cock will be in use at all times.

- Stabling valve to fit drill pipe will be present on floor at all times.
- Mud monitoring will be visual. No abnormal pressures are anticipated. С.

Floats at bits. d.

- Drill string safety valve(s) to fit all pipe in drill string will be maintained on the rig floor while drilling operations are in progress.
- Coring, Logging, and Testing Program: · 8.

No cores will be taken. Samples will be taken as directed by wellsite geological engineer. GR/FDC/CNL caliper from T.D. to base of Mesaverde. GR/SP/SN induction from T.D. to surface casing.

- No abnormal pressures or temperatures are anticipated.
- The drilling of this well will take approximately 10 days. 10.

The gas is contracted to El Paso Natural Gas Company.

) will be notified of spudding in Your office (telephone 11. sufficient time to witness cementing operations. Immediate notice will be given on blowouts, fires, spills, and accidents involving life threatening injuries or loss of life. Prior approval will be obtained before appreciably changing drilling program or commencing plugging operations, plug back work, casing repair work or corrective cementing operations.

DELHI TAYLOR #5-E

Existing Roads

- A. Proposed Well Site Location: The proposed wellsite location was surveyed and staked by a registered land surveyor and is located 2350' FSL and 990' FEL, Sec.17 T26N-R1LW, San Juan County, New Mexico. (See Exhibit I acreage dedication plan).
- B. Planned Access Route: Planned access route begins at Carson Trading Post and proceeds north for approximately 1/2 mile to fork in road and continues northwesterly on blacktop for approximately 2 miles. Turn northwest into wellsite location on 1800' of newly constructed road. (See Exhibit II).
- C. Access Road Labelled:

Color Code: Red - Improved Surface Blue - New Access Road

- D. Not applicable the proposed well is a development well.
- E. The proposed well is a development well. See Exhibit II for existing roads within a one mile radius.
- F. Existing Road Maintenance or Improvement Plan: The existing roads will require minimal maintenance.

2. Planned Access Roads

(All roads are existing roads.)

- A. Width:
 The average width of the road is twenty feet.
 - B. Maximum Grades: Maximum grades will be 6%.
 - C. Turnouts:
 There are no turnouts planned as sight distance is sufficient.
 - D. Drainage Design:
 The road is center crowned to allow drainage. The road is flat primarily.
 - E. Culverts Use Major Cuts and Fills:

 No culverts or major cuts and fills will be required.
 - F. Surfacing Material:
 Native soil has been wetted, bladed and compacted to make the road surface, which is existing.

Planned Access Roads (Cont'd)

- G. Gates, Cattleguards, Fence Cuts: No gates, cattleguards or fences will be needed.
- H. New Roads Centerlined Flagged: Existing Roads.

Location of Existing Wells

The proposed well is a development well. ExhibitIII shows existing wells within a one mile radius.

- A. Water Wells: None
- B. Abandoned Wells: None.
- C. Temporarily Abandoned Wells: None
- D. Disposal Wells: None
- E. Drilling Wells: See Exhibit III
- F. Producing Wells: See Exhibit III
- G. Shut-In Wells: None.
- H. Injection Wells: NoneI. Monitoring or Observation Wells: None.

4. Location of Existing and/or Proposed Facilities

A. Existing facilities within one mile owned or controlled by Lessee/Operator:

- (1) Tank batteries None
- (2) Production facilities See Exhibit III
- (3) Oil Gathering Lines None
- (4) Gas Gathering Lines None
- (5) Injection Lines None
- (6) Disposal Lines None
- B. New facilities in the event of production:
 - (1) New facilities will be within the dimensions of the drill pad.
 - (2) Dimensions are shown on Exhibit IV.
 - (3) Construction Materials/Methods:
 Construction materials will be native to the site.
 Facilities will consist of a well pad.
 - (4) Protection of Wildlife/Livestock:

 Facilities will be fenced as needed to protect wildlife and livestock.

4. Location of Existing and/or Proposed Facilities (Cont'd)

- B. New facilities in the event of production: (cont'd)
 - (5) New facilities will consist of a wellhead, tank and production unit.
- Rehabilitation of Disturbed Areas:
 Following the completion of construction, those areas required for continued production will be graded to provide drainage and minimize erosion. Those areas unnecessary for use will be graded to blend with surrounding topography per BLM recommendations.

Location and Type of Water Supply

- A. Location and type of water supply:
 Water will be hauled from a private source
- B. Water Transportation System: Water trucks will be used.
- C. Water wells: N/A.

6. Source of Construction Materials

- A. Materials:
 Construction materials will consist of soil native to the site. Any topsoil, if present, will be stripped and stockpiled as needed.
- B. Land Ownership; The planned site and access road is on federal land administered by the Bureau of Land Management.
- C. . Materials Foreign to the Site: N/A.
- D. Access Roads: No additional roads will be required.

7. Methods for Handling Waste Disposal

- A. Cuttings: Cuttings will be contained in the reserve pit.
- B. Drilling Fluids: Drilling fluids will be retained in the reserve pit.
- C. Produced Fluids:
 Produced fluids, including produced water will be collected in the reserve pit. Any small amount of hydrocarbon that may be produced during testing will be retained in the reserve pit. Prior to clean up operations, the hydrocarbon material will be skimmed.

7. Methods for Handling Waste Disposal (Cont'd)

- D. Sewage:
 Sanitary facilities for sewage disposal will consist of at least one pit toilet, during the driller operations.
 The pit will be backfilled immediately following completion of the drilling operation.
- E. Garbage:

 There probably will not be much putriscible garbage to dispose of. However, it will be disposed of along with the refuse in a constructed burn pit, which will be fenced. The small amount of refuse will be burned and the pit will be covered with a minimum 36 inch cover upon completion.
- F. Clean-Up of Well Site:
 Upon the release of the drilling rig, the surface of the drilling pad will be prepared to accommodate a completion rig, if testing indicates potential productive zones. In either case, the "mouse hole" and "rat hole" will be covered to eliminate a potential hazard to livestock. The reserve pit will be fenced to prevent entry of livestock until the pit is backfilled. Reasonable clean up will be performed prior to final restoration of the site.

8. Ancillary Facilities

None required.

9. Well Site Layout

- A. See Exhibit IV.
- B. Location of pits, etc. See Exhibit IV
 - C. Rig orientation etc. See Exhibit IV
 - D. Lining of pits:
 Pits will not be lined. They will be covered with a fine
 mesh netting, if necessary, for the protection of wildlife
 if fluids are found to be toxic.

10. Plans for Restoration of Surface

A. Reserve pit clean up:
The pit will be fenced prior to rig release and shall be maintained until clean up. Prior to backfilling any hydrocarbon material on the pit surface will be removed. The fluids and solids contained in the pit shall be backfilled with soil excavated from the site and with soil adjacent to the reserve pit. The restored surface of the reserve pit will be contoured as needed to minimize erosion. The reserve pit area will be seeded per BLM recommendations during the appropriate season following final restoration of the site.

10. Plans for Restoration of Surface (Cont'd)

- B. Restoration Plans Production Developed:
 The reserve pit will be backfilled and restored as described under Item A. In addition, those disturbed areas not required for production will be graded to blend with the surrounding topography, and seeded, per BLM recommendations. The portion of the drill pad required for production and turning areas will be graded to minimize erosion and provide access to production facilities under inclement conditions. Following depletion and abandonment of the site, restoration procedures will be those under Item C. below.
- C. Restoration Plan No Production Developed:
 The reserve pit will be restored as described above. With no production developed, the entire surface disturbed by construction of the drilling pad will be restored. The site will be contoured to blend with the surrounding topography. The site will be seeded according to BLM recommendations. If the new access road is not required for other development plans, it will be obliterated and restored and seeded per BLM recommendations.
- D. Rehabilitation Time Table:
 Upon completion of operations the intial clean up of the well site will be performed. Final restoration of the site will be performed as soon as possible according to procedural guide-lines published by the USGS and BLM. Seeding of the disturbed areas which are no longer required will be performed during the appropriate season, following final restoration.

11. Other Information

- A. Surface Description: Surface description of the proposed wellsite location is located approximately 1-1/2 miles north of Gallegos Canyon. Terrain consists of sandy soil, sagebrush and no trees.
 - B. Surface Use Activities: The surface is federally owned and managed by the BLM. The predominant surface use is mineral exploration and production.
 - C. Proximity of Water, Dwellings and Historical Sites:
 - Water: There are no reservoirs or streams in the immediate area.
 - Occupied Dwellings: There are no occupied dwellings or buildings in the area.
 - 3. Sites: An archeological reconnissance has been performed for this location and clearance has been granted.

12. Operator's Field Representative


Donald S. Barnes
Division Drilling Engineer
Tenneco Oil Company
720 South Colorado Blvd.
Penthouse
Denver, CO 80222
(303) 758-7130 Ext. 212


13. Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions as they actually exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the proposed work performed by Tenneco Oil Company and its contractors and subcontractos will conform to this plan.

Date: 9-19-79

J. M. Lacey Division Production Manager

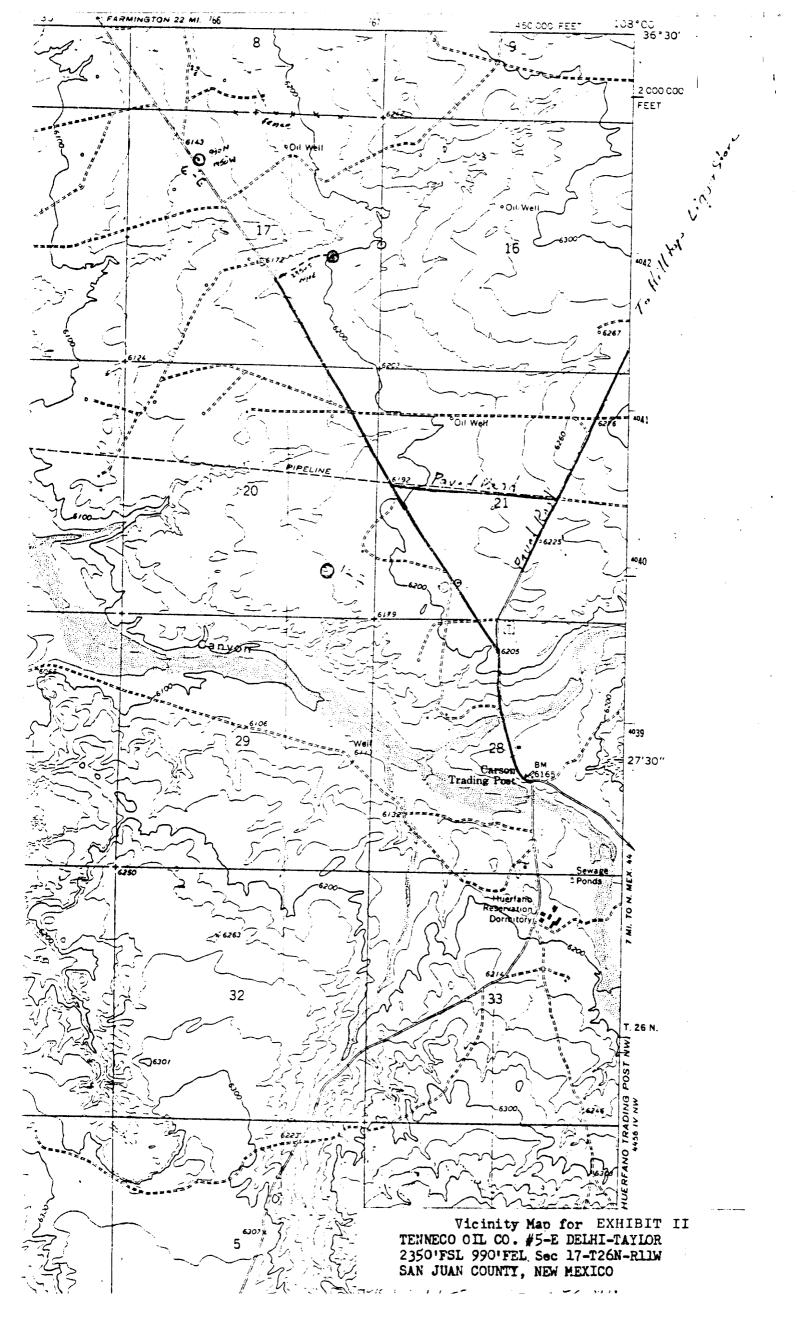

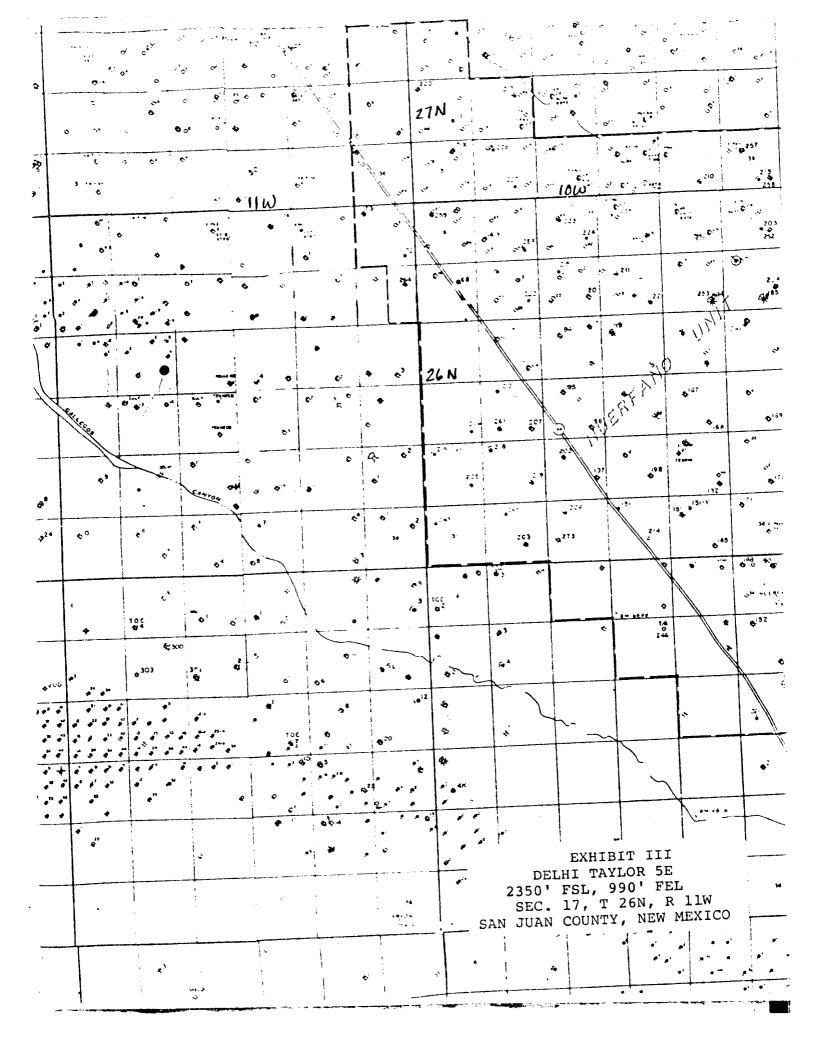

TENNECO OIL COMPANY

CALCULATION SHEET

