

5-USGS (Farmington) 1-Wexpro (Fmgtn) 1-Wexpro (Salt Lake) 1-File

Form 9-331
Dec. 1973

Form Approved.
Budget Bureau No. 42-R1424

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other ☐

2. NAME OF OPERATOR
Dugan Production Corp.

3. ADDRESS OF OPERATOR
Box 208, Farmington, NM 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
1120' FNL - 1520' FEL

AT SURFACE:

AT TOP PROD. INTERVAL:


AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) CSG ☐

SUBSEQUENT REPORT OF:

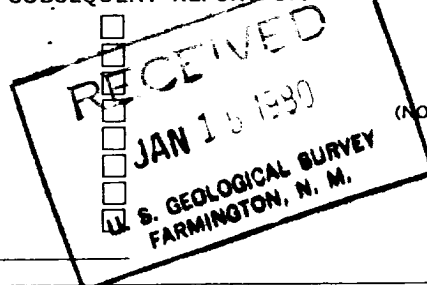

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

5. LEASE
NM 17781

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Paul Revere

9. WELL NO.
#205

10. FIELD OR WILDCAT NAME
WAW Fruitland PC

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec 15 T26N R13W

12. COUNTY OR PARISH
San Juan

13. STATE
NM

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
6143'

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

1-9-80

Trip in hole w/drill pipe. Conditioned hole. POH. Ran log by Southwest Surveys. Rigged up and ran 47 jts 2-7/8" OD 6.4# 10R NEUE new tbg for csg. TE 1376.61' set @ 1375' GL. Cemented by Cementers Inc. w/75 sx 2% Lodense w/1/4# cello flake per sx followed by 50 sx neat w/1/4# cello flake per sx. Reciprocated pipe while cementing. Good returns throughout job. Trace of cement circulated. POB 3:00 p.m. 1-9-80. WOC

Subsurface Safety Valve: Manu. and Type

Set @

18. I hereby certify that the foregoing is true and correct

SIGNED Thomas A. Dugan TITLE Petroleum Engineer DATE 1-11-80

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

ACCEPTED FOR RECORD

JAN 17 '80

NMOCC