eceived by OCD: 9/3/2024 6:3	37:45 AM			Page 1 of 4		
Form 3160-5 (June 2019) DE	UNITED STATES PARTMENT OF THE INTERIOR		FORM APPROVED OMB No. 1004-0137 Expires: October 31, 2021			
BUR	REAU OF LAND MANAGEMENT		5. Lease Serial No. NMNM078968A			
Do not use this	NOTICES AND REPORTS ON W form for proposals to drill or to Use Form 3160-3 (APD) for suc	6. If Indian, Allottee or Tribe Name	6. If Indian, Allottee or Tribe Name			
SUBMIT IN	ITRIPLICATE - Other instructions on page	e 2	7. If Unit of CA/Agreement, Name and/or No.			
1. Type of Well Oil Well Gas	Well Other		8. Well Name and No. PRETTY GOOD 20 FED	COM/708H		
2. Name of Operator EOG RESOUR	CES INCORPORATED		9. API Well No. 3002551795			
	BBY 2, HOUSTON, TX 77(3b. Phone No.	(include area code)	10. Field and Pool or Exploratory Area			
	(713) 651-700		WC-025 G-09 S233216K; UPPER WOLFCA	MP		
4. Location of Well (Footage, Sec., T.,	R.,M., or Survey Description)		11. Country or Parish, State			
SEC 20/T22S/R32E/NMP			LEA/NM			
12. CHI	ECK THE APPROPRIATE BOX(ES) TO INI	DICATE NATURE O	F NOTICE, REPORT OR OTHER DATA			
TYPE OF SUBMISSION		ТҮРЕ	OF ACTION			
✓ Notice of Intent	Acidize Deep		Production (Start/Resume) Water Shut-Off			
_		aulic Fracturing	Reclamation Well Integrity			
Subsequent Report		Construction	Recomplete Other			
Final Abandonment Notice		and Abandon	Temporarily Abandon Water Disposal			
	Convert to Injection Plug		arting date of any proposed work and approximate duration			
the proposal is to deepen direction the Bond under which the work wi completion of the involved operati	ally or recomplete horizontally, give subsurfa ill be perfonned or provide the Bond No. on fi ions. If the operation results in a multiple com	ace locations and mea file with BLM/BIA. R apletion or recomplet	sured and true vertical depths of all performance approximate a generation and z equired subsequent reports must be filed within 30 days fol ion in a new interval, a Form 3160-4 must be filed once test ion, have been completed and the operator has detennined the second secon	ones. Attach lowing ing has been		
EOG respectfully requests an	n amendment to our approved APD for this	is well to reflect the	following changes:			
Pretty Good 20 Fed Com 744	1H (FKA 708H) API #: 30-025-51795					
Change name from Pretty Go	ood 20 Fed Com 708H to Pretty Good 20	Fed Com 744H.				
-	-32-E, Sec 32, 100' FSL, 1334' FWL, LEA 00' FSL, 670' FWL, LEA Co., N.M.	Co., NM,				
Change target formation to W	/olfcamp U4.					
Update casing and cement pr Continued on page 3 additiona						
	is true and correct. Name (<i>Printed/Typed</i>)					
STAR HARRELL / Ph: (432) 848-9		Regulatory S	Specialist			

(Electronic Submission) Signature

Date

04/30/2024

THE SPACE FOR FEDERAL OR STATE OFICE USE

Approved by		
KEITH P IMMATTY / Ph: (575) 988-4722 / Approved	ENGINEER Title	05/05/2024 Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office CARLSBAD	

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Additional Remarks

Update HSU to 1920 acers.

Allow for full string of either 5.5" 20# P110-EC DWC/C IS MS or 6" 22.3# DWC/C IS depending on availability of casing.

Location of Well

0. SHL: NENW / 200 FNL / 1684 FWL / TWSP: 22S / RANGE: 32E / SECTION: 20 / LAT: 32.383794 / LONG: -103.699883 (TVD: 0 feet, MD: 0 feet) PPP: NENW / 100 FNL / 1334 FWL / TWSP: 22S / RANGE: 32E / SECTION: 20 / LAT: 32.384065 / LONG: -103.701018 (TVD: 11657 feet, MD: 11672 feet) PPP: NENW / 0 FNL / 1334 FWL / TWSP: 22S / RANGE: 32E / SECTION: 29 / LAT: 32.369822 / LONG: -103.701003 (TVD: 11922 feet, MD: 16956 feet) BHL: SESW / 100 FSL / 1334 FWL / TWSP: 22S / RANGE: 32E / SECTION: 29 / LAT: 32.355573 / LONG: -103.70099 (TVD: 11922 feet, MD: 22139 feet)

DISTRICT I 1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720 DISTRICT II 811 S. Frat St., Artesia, NM 88210 Phone: (575) 748-720 DISTRICT III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170 DISTRICT IV 1220 S. St. Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3460 Fax: (505) 476-3462


State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, New Mexico 87505

□ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

	PI Number)25-5179	5		Pool Code 98166	Pool Name WC-025 G-09 S233216K; Upper Wolfcamp				mp	
Property Co 33455			1		Well Number 744H					
OGRID N 7377	-		Operator Name EOG RESOURCES, INC.						Elevation 3668'	
L	Surface Location									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County	
С	20	22 S	32 E		200	NORTH	1684	WEST	LEA	
			Bott	om Hole	Location If Di	fferent From Surfac	ce		-	
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County	
М	32	22 S	32 E	100 SOUTH 670 WEST				WEST	LEA	
Dedicated Acres	Joint or	Infill	Consolidated Co	de Orc	ler No.	Ī		-		
1920			PENDING COM AGREEMENT AND NSP							

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

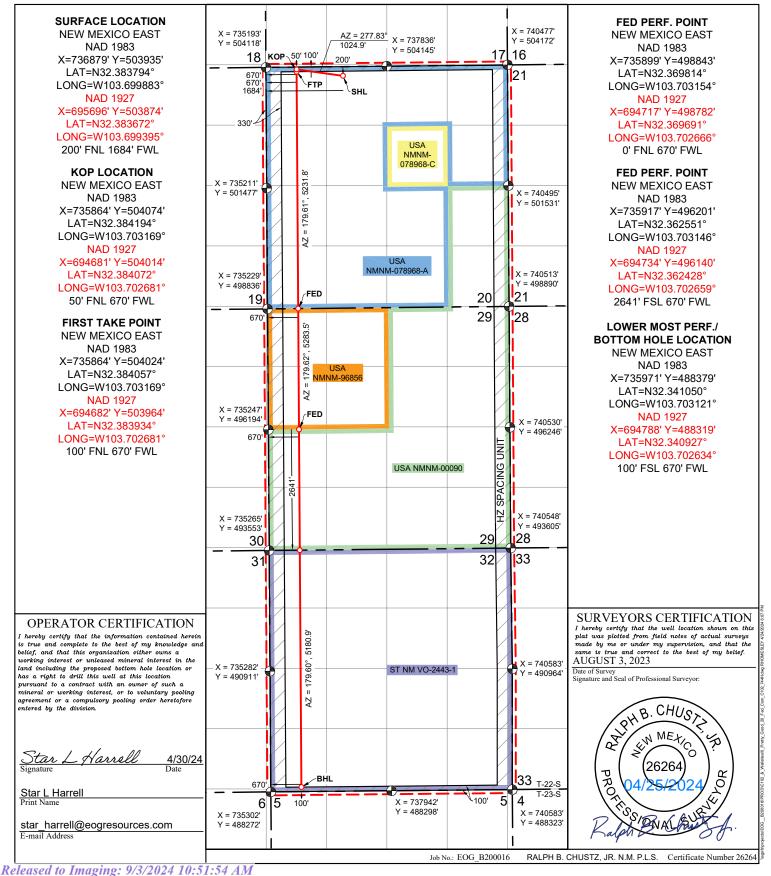

Seog resources

Pretty Good 20 Fed Com 744H

Revised Permit Information 04/17/2024:

Well Name: Pretty Good 20 Fed Com 744H

Location: SHL: 200' FNL & 1684' FWL, Section 20, T-22-S, R-32-E, LEA Co., N.M. BHL: 100' FSL & 670' FWL, Section 32, T-22-S, R-32-E, LEA Co., N.M.

CASING PROGRAM:

Hole	Interv	al MD	Interval TVD		Csg			
Size	From (ft)	To (ft)	From (ft)	To (ft)	OD	Weight	Grade	Conn
12-1/4"	0	1,290	0	1,290	9-5/8"	36#	J-55	LTC
8-3/4"	0	11,485	0	11,400	7-5/8"	29.7#	ICYP-110	MO FXL
6-3/4"	0	10,985	0	10,900	5-1/2"	20#	P110-EC	DWC/C IS MS
6-3/4"	10,985	11,485	10,900	11,400	5-1/2"	20#	P110-EC	VAM Sprint SF
6-3/4"	11,485	28,301	11,400	12,728	5-1/2"	20#	P110-EC	DWC/C IS MS

Variance is requested to waive the centralizer requirements for the 7-5/8" casing in the 8-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 8-3/4" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 5-1/2" casing in the 6-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 6-3/4" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive the annular clearance requirements for the 5-1/2" casing by 7-5/8" casing annulus to the proposed top of cement.

EOG requests permission to allow deviation from the 0.422" annulus clearance requirement from Onshore Order #2 under the following conditions:

- Annular clearance to meet or exceed 0.422'' between intermediate casing ID and production casing coupling only on the first 500' overlap between both casing strings.
- Annular clearance less than 0.422" is acceptable for the production open hole section.

		Wt.	Yld	Shumu Description
Depth	No. Sacks	ppg	Ft3/sk	Slurry Description
1,290'	350	13.5	1.73	Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl2 + 0.25 lb/sk Cello-
9-5/8''				Flake (TOC @ Surface)
	80	14.8	1.34	Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium
				Metasilicate (TOC @ 1,090')
11,400'	450	14.2	1.11	1st Stage (Tail): Class C + 0.6% Halad-9 + 0.45% HR-601 + 3%
7-5/8''				Microbond (TOC @ 7,630')
	1300	14.8	1.5	2nd Stage (Bradenhead squeeze): Class C + 3% Salt + 1% PreMag-M +
				6% Bentonite Gel (TOC @ surface)
28,301'	1900	13.2	1.41	Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond
5-1/2''				(TOC @ 10,899')

CEMENTING PROGRAM:

Additive	Purpose		
Bentonite Gel	Lightweight/Lost circulation prevention		
Calcium Chloride	Accelerator		
Cello-flake	Lost circulation prevention		
Sodium Metasilicate	Accelerator		
MagOx	Expansive agent		
Pre-Mag-M	Expansive agent		
Sodium Chloride	Accelerator		
FL-62	Fluid loss control		
Halad-344	Fluid loss control		
Halad-9	Fluid loss control		
HR-601	Retarder		
Microbond	Expansive Agent		

EOG requests variance from minimum standards to pump a two stage cement job on the 7-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon (7,825') and the second stage performed as a 1000 sack bradenhead squeeze with planned cement from the Brushy Canyon to surface. If necessary, a top out consisting of 300 sacks of Class C cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (2.30 yld, 12.91 ppg) will be executed as a contingency. Top will be verified by Echo-meter.

EOG will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program.

EOG will report to the BLM the volume of fluid (limited to 5 bbls) used to flush intermediate casing valves following backside cementing procedures.

Measured Depth	Туре	Weight (ppg)	Viscosity	Water Loss
0 – 1,290'	Fresh - Gel	8.6-8.8	28-34	N/c
1,290' - 11,400'	Brine	9.0-10.5	28-34	N/c
11,400' - 12,333'	Oil Base	8.7-9.4	58-68	N/c - 6
12,333' – 28,301' Lateral	Oil Base	10.0-14.0	58-68	4 - 6

MUD PROGRAM:




TUBING REQUIREMENTS

EOG respectively requests an exception to the following NMOCD rule:

 19.15.16.10 Casing AND TUBING RQUIREMENTS: J (3): "The operator shall set tubing as near the bottom as practical and tubing perforations shall not be more than 250 feet above top of pay zone."

With horizontal flowing and gas lifted wells an end of tubing depth placed at or slightly above KOP is a conservative way to ensure the tubing stays clean from debris, plugging, and allows for fewer well interventions post offset completion. The deeper the tubulars are run into the curve, the higher the probability is that the tubing will become stuck in sand and or well debris as the well produces over time. An additional consideration for EOT placement during artificial lift installations is avoiding the high dog leg severity and inclinations found in the curve section of the wellbore to help improve reliability and performance. Dog leg severity and inclinations tend not to hamper gas lifted or flowing wells, but they do effect other forms of artificial lift like rod pump or ESP (electric submersible pump). Keeping the EOT above KOP is an industry best practice for those respective forms of artificial lift.

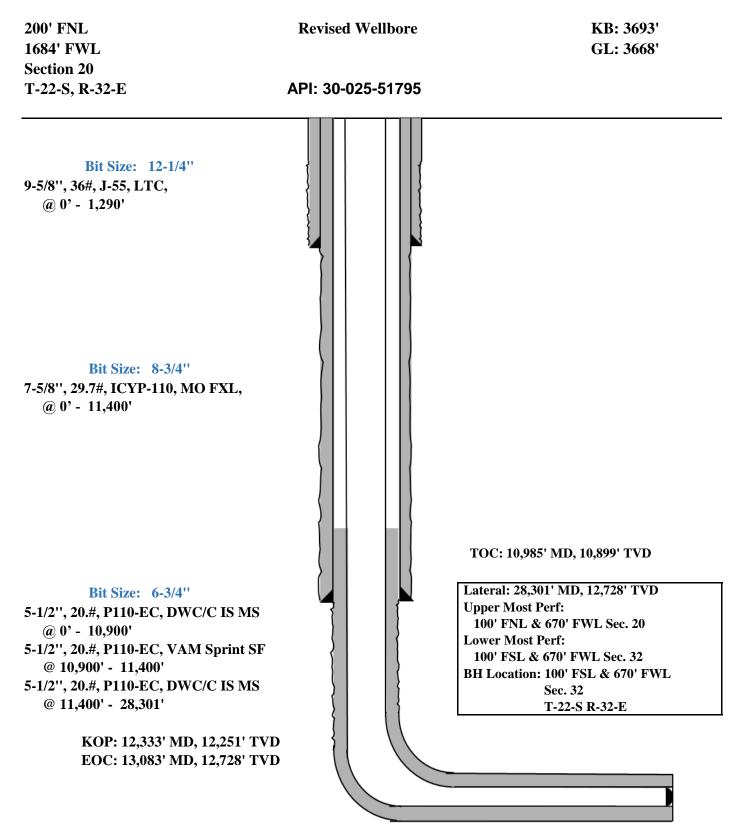



Design B CASING PROGRAM:

Hole	Interv	al MD	Interval TVD		Csg			
Size	From (ft)	To (ft)	From (ft)	To (ft)	OD	Weight	Grade	Conn
13"	0	1,290	0	1,290	10-3/4"	40.5#	J-55	STC
9-7/8"	0	11,485	0	11,399	8-3/4"	38.5#	P110-EC	VAM Sprint-SF
7-7/8"	0	12,333	0	12,728	6"	22.3#	P110-EC	DWC/C IS
6.75"	12,333	28,301	12,251	12,728	5-1/2"	20#	P110-EC	DWC/C IS MS

**For highlighted rows above, variance is requested to run entire string of either 6" or 5-1/2" casing string above due to availablility.

Variance is requested to waive the centralizer requirements for the 8-3/4" casing in the 9-7/8" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 9-7/8" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 6" and 5-1/2" casings in the 7-7/8" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 7-7/8" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive the annular clearance requirements for the 6" and 5-1/2" casings by 8-3/4" casing annulus to the proposed top of cement.

EOG requests permission to allow deviation from the 0.422" annulus clearance requirement from Onshore Order #2 under the following conditions:

- Annular clearance to meet or exceed 0.422" between intermediate casing ID and production casing coupling only on the first 500' overlap between both casing strings.
- Annular clearance less than 0.422" is acceptable for the production open hole section.

	Wt. Yld		Yld	Shume Description
Depth	No. Sacks	ppg	Ft3/sk	Slurry Description
1,290'	330	13.5	1.73	Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl2 + 0.25 lb/sk Cello-
10-3/4"				Flake (TOC @ Surface)
	70	14.8	1.34	Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium
				Metasilicate (TOC @ 1,090')
11,399'	510	14.2	1.11	1st Stage (Tail): Class C + 0.6% Halad-9 + 0.45% HR-601 + 3%
8-3/4"				Microbond (TOC @ 7,630')
	1480	14.8	1.5	2nd Stage (Bradenhead squeeze): Class C + 3% Salt + 1% PreMag-M +
				6% Bentonite Gel (TOC @ surface)
28,301'	2410	13.2	1.31	Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond
6"				(TOC @ 10,899')

CEMENTING PROGRAM:

Seog resources

Pretty Good 20 Fed Com 744H

EOG requests variance from minimum standards to pump a two stage cement job on the 8-3/4" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon (7,825') and the second stage performed as a 1000 sack bradenhead squeeze with planned cement from the Brushy Canyon to surface. If necessary, a top out consisting of 479 sacks of Class C cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (2.30 yld, 12.91 ppg) will be executed as a contingency. Top will be verified by Echo-meter.

EOG will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program.


EOG will report to the BLM the volume of fluid (limited to 5 bbls) used to flush intermediate casing valves following backside cementing procedures.

VARIANCE REQUESTS:

EOG requests the additional variance(s) in the attached document(s):

Variances requested include (supporting documents attached):

- BOP Break Testing for 5M Intermediate Intervals (EOG BLM Variance 3a_b)
- Offline Cementing for Surface and Intermediate Intervals (EOG BLM Variance 3a_b)
- Intermediate Bradenhead Cement (EOG BLM Variance 2a)

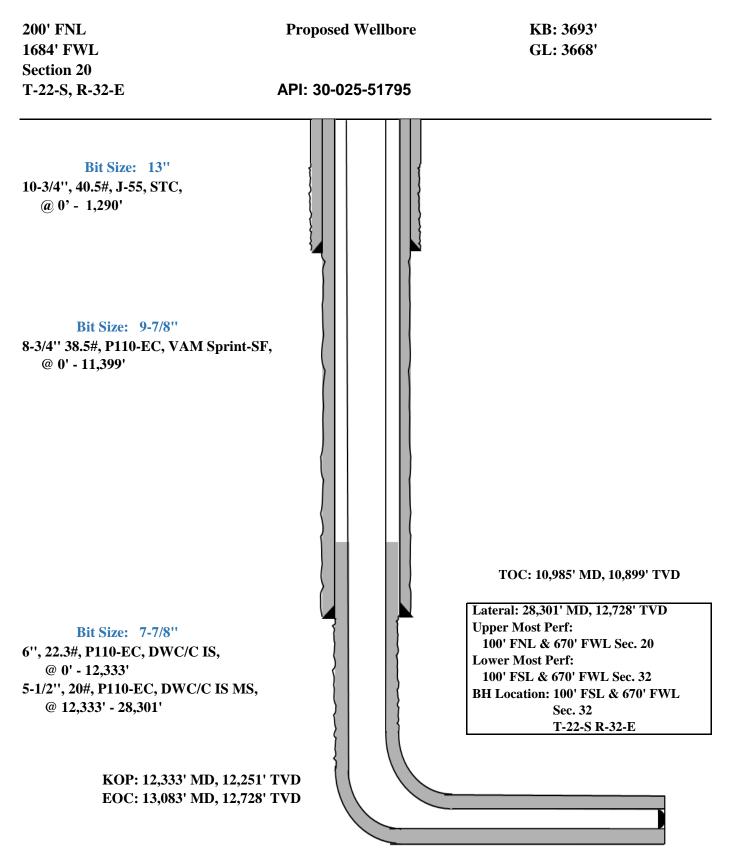

Seog resources

Pretty Good 20 Fed Com 744H

GEOLOGIC NAME OF SURFACE FORMATION:

Permian

ESTIMATED TOPS OF IMPORTANT GEOLOGICAL MARKERS:

Rustler	1,153'
Tamarisk Anhydrite	1,264'
Top of Salt	1,700'
Base of Salt	4,700'
Lamar	4,750'
Bell Canyon	5,432'
Cherry Canyon	6,276'
Brushy Canyon	7,825'
Bone Spring Lime	9,171'
Leonard (Avalon) Shale	9,242'
1st Bone Spring Sand	10,278'
2nd Bone Spring Shale	10,497'
2nd Bone Spring Sand	10,818'
3rd Bone Spring Carb	11,299'
3rd Bone Spring Sand	11,856'
Wolfcamp	12,175'
TD	12,728'

ESTIMATED DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS:

Upper Permian Sands	0-400'	Fresh Water
Bell Canyon	5,432'	Oil
Cherry Canyon	6,276'	Oil
Brushy Canyon	7,825'	Oil
Leonard (Avalon) Shale	9,242'	Oil
1st Bone Spring Sand	10,278'	Oil
2nd Bone Spring Shale	10,497'	Oil
2nd Bone Spring Sand	10,818'	Oil

Midland

Lea County, NM (NAD 83 NME) Pretty Good 20 Fed Com #744H

ОН

Plan: Plan #0.2

Standard Planning Report

25 April, 2024

Planning Report

Database: Company: Project: Site: Well: Wellbore: Design:	PEDMB Midland Lea County, NM (NAD 8 Pretty Good 20 Fed Con #744H OH Plan #0.2		Local Co-ordina TVD Reference MD Reference: North Referenc Survey Calcula	e:	Well #744H kb = 25' @ 3693.0u kb = 25' @ 3693.0u Grid Minimum Curvature	sft
Project	Lea County, NM (NAD 83	NME)				
Geo Datum:	US State Plane 1983 North American Datum 198 New Mexico Eastern Zone	3	System Datum:		Mean Sea Level	
Site	Pretty Good 20 Fed Com					
Site Position: From: Position Uncertainty:	Map 0.0 usft	Northing: Easting: Slot Radius:	503,120.0 738,938.0 13-3/1) usft Longitud		32° 22' 53.475 N 103° 41' 35.624 W
Well	#744H					
Well Position Position Uncertainty	+N/-S 0.0 u +E/-W 0.0 u 0.0 u	isft Easting:	73	3,935.00 usft 6,879.00 usft usft	Latitude: Longitude: Ground Level:	32° 23' 1.661 N 103° 41' 59.578 W 3,668.0 usft
Grid Convergence:	0.34 °					-,
Wellbore	ОН					
Magnetics	Model Name	Sample Date	Declination (°)		Dip Angle (°)	Field Strength (nT)
	IGRF2020	8/20/2020		6.71	60.05	47,658.85977811
Design	Plan #0.2					
Audit Notes:						
Version:		Phase:	PLAN	Tie On Dept	h: 0.0	
Vertical Section:	Dept	h From (TVD) (usft) 0.0	+N/-S (usft) 0.0	+E/-W (usft) 0.0	Directio (°) 183.3-	
Plan Survey Tool Pro Depth From (usft)	gram Date 4/ Depth To (usft) Survey (W		Tool Name	Remar	rks	
1 0.0	28,301.0 Plan #0.2 (OH)	EOG MWD+IFR1 MWD + IFR1			

.

Planning Report

Database:	PEDMB	Local Co-ordinate Reference:	Well #744H
Company:	Midland	TVD Reference:	kb = 25' @ 3693.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3693.0usft
Site:	Pretty Good 20 Fed Com	North Reference:	Grid
Well:	#744H	Survey Calculation Method:	Minimum Curvature
Wellbore:	ОН		
Design:	Plan #0.2		

Plan Sections

Measured Depth	Inclination	Azimuth	Vertical Depth	+N/-S	+E/-W	Dogleg Rate	Build Rate	Turn Rate	TFO	
(usft)	(°)	(°)	(usft)	(usft)	(usft)	(°/100usft)	(°/100usft)	(°/100usft)	(°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,672.8	9.46	277.80	1,670.6	5.3	-38.6	2.00	2.00	0.00	277.80	
7,434.8	9.46	277.80	7,354.4	133.7	-976.4	0.00	0.00	0.00	0.00	
7,907.6	0.00	0.00	7,825.0	139.0	-1,015.0	2.00	-2.00	0.00	180.00	
12,333.1	0.00	0.00	12,250.5	139.0	-1,015.0	0.00	0.00	0.00	0.00	KOP(Pretty Good 20
12,553.5	26.46	180.00	12,463.2	89.0	-1,015.0	12.00	12.00	81.65	180.00	FTP(Pretty Good 20
13,083.1	90.00	179.60	12,727.9	-338.5	-1,013.0	12.00	12.00	-0.08	-0.44	
17,836.7	90.00	179.60	12,728.0	-5,092.0	-980.0	0.00	0.00	0.00	0.00	Fed Perf 1(Pretty G
20,478.8	90.00	179.62	12,728.0	-7,734.0	-962.0	0.00	0.00	0.00	84.45	Fed Perf 2(Pretty G
28,301.0	90.00	179.59	12,728.0	-15,556.0	-908.0	0.00	0.00	0.00	-93.15	PBHL(Pretty Good

Planning Report

Database:	PEDMB	Local Co-ordinate Reference:	Well #744H
Company:	Midland	TVD Reference:	kb = 25' @ 3693.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3693.0usft
Site:	Pretty Good 20 Fed Com	North Reference:	Grid
Well:	#744H	Survey Calculation Method:	Minimum Curvature
Wellbore:	ОН		
Design:	Plan #0.2		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
	0.00		700.0	0.0	0.0	0.0	0.00	0.00	
700.0		0.00							0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	2.00	277.80	1,300.0	0.2	-1.7	-0.1	2.00	2.00	0.00
1,400.0	4.00	277.80	1,399.8	0.9	-6.9	-0.5	2.00	2.00	0.00
1,500.0	6.00	277.80	1,499.5	2.1	-15.5	-1.2	2.00	2.00	0.00
1,600.0	8.00	277.80	1,598.7	3.8	-27.6	-2.2	2.00	2.00	0.00
1,672.8	9.46	277.80	1,670.6	5.3	-38.6	-3.0	2.00	2.00	0.00
1,700.0	9.46	277.80	1,697.5	5.9	-43.0	-3.4	0.00	0.00	0.00
1,800.0	9.46	277.80	1,796.1	8.1	-59.3	-4.6	0.00	0.00	0.00
1,900.0	9.46	277.80	1,894.8	10.3	-75.5	-5.9	0.00	0.00	0.00
2,000.0	9.46	277.80	1,993.4	12.6	-91.8	-7.2	0.00	0.00	0.00
2,100.0	9.46	277.80	2,092.1	14.8	-108.1	-8.5	0.00	0.00	0.00
2,200.0	9.46	277.80	2,190.7	17.0	-124.4	-9.8	0.00	0.00	0.00
2,300.0	9.46	277.80	2,289.3	19.3	-140.7	-11.0	0.00	0.00	0.00
2,400.0	9.46	277.80	2,388.0	21.5	-156.9	-12.3	0.00	0.00	0.00
2,500.0	9.46	277.80	2,486.6	23.7	-173.2	-13.6	0.00	0.00	0.00
2,600.0	9.46	277.80	2,585.3	25.9	-189.5	-14.9	0.00	0.00	0.00
2,700.0	9.46	277.80	2,683.9	28.2	-205.8	-16.1	0.00	0.00	0.00
2,800.0	9.46	277.80	2,782.5	30.4	-222.0	-17.4	0.00	0.00	0.00
2,900.0	9.46	277.80	2,881.2	32.6	-238.3	-18.7	0.00	0.00	0.00
3,000.0	9.46	277.80	2,979.8	34.9	-254.6	-20.0	0.00	0.00	0.00
3,100.0	9.46	277.80	3,078.5	34.9	-254.0	-20.0	0.00	0.00	0.00
3,200.0	9.46	277.80	3,177.1	39.3	-270.9	-21.2	0.00	0.00	0.00
3,200.0	9.46	277.80	3,177.1	39.3 41.6	-207.1	-22.5 -23.8	0.00	0.00	0.00
-									
3,400.0	9.46	277.80	3,374.4	43.8	-319.7	-25.1	0.00	0.00	0.00
3,500.0	9.46	277.80	3,473.0	46.0	-336.0	-26.4	0.00	0.00	0.00
3,600.0	9.46	277.80	3,571.7	48.2	-352.3	-27.6	0.00	0.00	0.00
3,700.0	9.46	277.80	3,670.3	50.5	-368.5	-28.9	0.00	0.00	0.00
3,800.0	9.46	277.80	3,769.0	52.7	-384.8	-30.2	0.00	0.00	0.00
3,900.0	9.46	277.80	3,867.6	54.9	-401.1	-31.5	0.00	0.00	0.00
4,000.0	9.46	277.80	3,966.2	57.2	-417.4	-32.7	0.00	0.00	0.00
4,100.0	9.46	277.80	4,064.9	59.4	-433.6	-34.0	0.00	0.00	0.00
4,200.0	9.46	277.80	4,163.5	61.6	-449.9	-35.3	0.00	0.00	0.00
4,300.0	9.46	277.80	4,262.2	63.8	-466.2	-36.6	0.00	0.00	0.00
4,400.0	9.46	277.80	4,360.8	66.1	-482.5	-37.8	0.00	0.00	0.00
4,500.0	9.46	277.80	4,459.4	68.3	-498.7	-39.1	0.00	0.00	0.00
4,600.0	9.46	277.80	4,558.1	70.5	-515.0	-40.4	0.00	0.00	0.00
4,700.0	9.46	277.80	4,656.7	72.8	-531.3	-41.7	0.00	0.00	0.00
4,800.0	9.46	277.80	4,755.4	75.0	-547.6	-43.0	0.00	0.00	0.00
4,900.0	9.46	277.80	4,854.0	77.2	-563.9	-44.2	0.00	0.00	0.00
5,000.0	9.46	277.80	4,952.6	79.4	-580.1	-45.5	0.00	0.00	0.00
5,100.0	9.46	277.80	5,051.3	81.7	-596.4	-46.8	0.00	0.00	0.00
5,200.0	9.46	277.80	5,149.9	83.9	-612.7	-48.1	0.00	0.00	0.00
	00		-,	00.0	÷.=		0.00	0.00	2.00

4/25/2024 4:02:08PM

Planning Report

Database:	PEDMB	Local Co-ordinate Reference:	Well #744H
Company:	Midland	TVD Reference:	kb = 25' @ 3693.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3693.0usft
Site:	Pretty Good 20 Fed Com	North Reference:	Grid
Well:	#744H	Survey Calculation Method:	Minimum Curvature
Wellbore:	ОН		
Design:	Plan #0.2		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,300.0	9.46	277.80	5,248.6	86.1	-629.0	-49.3	0.00	0.00	0.00
5,400.0	9.46	277.80	5,347.2	88.4	-645.2	-50.6	0.00	0.00	0.00
5,500.0	9.46	277.80	5,445.9	90.6	-661.5	-51.9	0.00	0.00	0.00
5,600.0	9.46	277.80	5,544.5	92.8	-677.8	-53.2	0.00	0.00	0.00
5,700.0	9.46	277.80	5,643.1	95.0	-694.1	-54.4	0.00	0.00	0.00
5,800.0	9.46	277.80	5,741.8	97.3	-710.3	-55.7	0.00	0.00	0.00
5,900.0	9.46	277.80	5,840.4	99.5	-726.6	-57.0	0.00	0.00	0.00
6,000.0	9.46	277.80	5,939.1	101.7	-742.9	-58.3	0.00	0.00	0.00
6,100.0	9.46	277.80	6,037.7	104.0	-759.2	-59.6	0.00	0.00	0.00
6,200.0	9.46	277.80	6,136.3	106.2	-775.5	-60.8	0.00	0.00	0.00
6,300.0	9.46	277.80	6,235.0	108.4	-791.7	-62.1	0.00	0.00	0.00
6,400.0	9.46	277.80	6,333.6	110.7	-808.0	-63.4	0.00	0.00	0.00
6,500.0	9.46	277.80	6,432.3	112.9	-824.3	-64.7	0.00	0.00	0.00
6,600.0	9.46	277.80	6,530.9	115.1	-840.6	-65.9	0.00	0.00	0.00
6,700.0	9.46	277.80	6,629.5	117.3	-856.8	-67.2	0.00	0.00	0.00
6,800.0	9.46	277.80	6,728.2	119.6	-873.1	-68.5	0.00	0.00	0.00
6,900.0	9.46	277.80	6,826.8	121.8	-889.4	-69.8	0.00	0.00	0.00
7,000.0	9.46	277.80	6,925.5	124.0	-905.7	-71.0	0.00	0.00	0.00
7,100.0	9.46	277.80	7,024.1	126.3	-921.9	-72.3	0.00	0.00	0.00
7,200.0	9.46	277.80	7,122.8	128.5	-938.2	-73.6	0.00	0.00	0.00
7,300.0	9.46	277.80	7,221.4	130.7	-954.5	-74.9	0.00	0.00	0.00
7,400.0	9.46	277.80	7,320.0	132.9	-970.8	-76.1	0.00	0.00	0.00
7,434.8	9.46	277.80	7,354.4	133.7	-976.4	-76.6	0.00	0.00	0.00
7,500.0	8.15	277.80	7,418.8	135.1	-986.3	-77.4	2.00	-2.00	0.00
7,600.0	6.15	277.80	7,518.0	136.8	-998.7	-78.3	2.00	-2.00	0.00
7,700.0	4.15	277.80	7,617.6	138.0	-1,007.6	-79.0	2.00	-2.00	0.00
7,700.0						-79.0			
7,800.0	2.15	277.80	7,717.4	138.7	-1,013.0	-79.5	2.00	-2.00	0.00
7,907.6	0.00	0.00	7,825.0	139.0	-1,015.0	-79.6	2.00	-2.00	0.00
8,000.0	0.00	0.00	7,917.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
8,100.0	0.00	0.00	8,017.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
8,200.0	0.00	0.00	8,117.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
8,300.0	0.00	0.00	8,217.4	139.0	1 015 0	-79.6	0.00	0.00	0.00
8,300.0	0.00	0.00	8,217.4 8,317.4	139.0	-1,015.0 -1,015.0	-79.6	0.00	0.00	0.00
8,500.0	0.00	0.00	8,417.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
8,600.0	0.00	0.00	8,517.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
8,700.0	0.00	0.00	8,617.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
8,800.0	0.00	0.00	8,717.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
8,900.0	0.00	0.00	8,817.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
9,000.0	0.00	0.00	8,917.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
9,100.0	0.00	0.00	9,017.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
9,200.0	0.00	0.00	9,117.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
9,300.0	0.00	0.00	9,217.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
9,400.0	0.00	0.00	9,317.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
9,500.0	0.00	0.00	9,417.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
9,600.0	0.00	0.00	9,517.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
9,700.0	0.00	0.00	9,617.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
9,800.0	0.00	0.00	9,717.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
9,800.0 9.900.0									
- ,	0.00	0.00	9,817.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
10,000.0	0.00	0.00	9,917.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
10,100.0	0.00	0.00	10,017.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
10,200.0	0.00	0.00	10,117.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
10,300.0	0.00	0.00	10,217.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
10,400.0	0.00	0.00	10,317.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
10,500.0	0.00	0.00	10,417.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00

4/25/2024 4:02:08PM

Planning Report

Database:	PEDMB	Local Co-ordinate Reference:	Well #744H
Company:	Midland	TVD Reference:	kb = 25' @ 3693.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3693.0usft
Site:	Pretty Good 20 Fed Com	North Reference:	Grid
Well:	#744H	Survey Calculation Method:	Minimum Curvature
Wellbore:	ОН		
Design:	Plan #0.2		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
10,600.0	0.00	0.00	10,517.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
10,700.0	0.00	0.00	10,617.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
10,800.0	0.00	0.00	10,717.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
10,900.0	0.00	0.00	10,817.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
11,000.0	0.00	0.00	10,917.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
11,100.0	0.00	0.00	11,017.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
11,200.0	0.00	0.00	11,117.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
11,300.0	0.00	0.00	11,217.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
11,400.0	0.00	0.00	11,317.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
11,500.0	0.00	0.00	11,417.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
11,600.0	0.00	0.00	11,517.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
11,700.0	0.00	0.00	11,617.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
11 900 0	0.00	0.00	11 717 4	120.0	1 015 0	70.6	0.00	0.00	0.00
11,800.0 11,900.0	0.00	0.00	11,717.4 11,817.4	139.0 130.0	-1,015.0	-79.6	0.00	0.00 0.00	0.00
	0.00	0.00		139.0 139.0	-1,015.0 -1,015.0	-79.6 -79.6	0.00	0.00	0.00
12,000.0	0.00	0.00	11,917.4 12,017.4				0.00	0.00	0.00
12,100.0 12,200.0	0.00	0.00 0.00	12,017.4 12,117.4	139.0 139.0	-1,015.0 -1,015.0	-79.6 -79.6	0.00	0.00	0.00
			,						
12,300.0	0.00	0.00	12,217.4	139.0	-1,015.0	-79.6	0.00	0.00	0.00
12,333.1	0.00	0.00	12,250.5	139.0	-1,015.0	-79.6	0.00	0.00	0.00
12,350.0	2.03	180.00	12,267.4	138.7	-1,015.0	-79.3	12.00	12.00	0.00
12,375.0	5.03	180.00	12,292.4	137.2	-1,015.0	-77.8	12.00	12.00	0.00
12,400.0	8.03	180.00	12,317.2	134.3	-1,015.0	-74.9	12.00	12.00	0.00
12,425.0	11.03	180.00	12,341.9	130.2	-1,015.0	-70.8	12.00	12.00	0.00
12,450.0	14.03	180.00	12,366.3	124.8	-1,015.0	-65.4	12.00	12.00	0.00
12,475.0	17.03	180.00	12,390.3	118.1	-1,015.0	-58.7	12.00	12.00	0.00
12,500.0	20.03	180.00	12,414.0	110.1	-1,015.0	-50.8	12.00	12.00	0.00
12,525.0	23.03	180.00	12,437.3	100.9	-1,015.0	-41.6	12.00	12.00	0.00
12,550.0	26.03	180.00	12,460.0	90.6	-1,015.0	-31.3	12.00	12.00	0.00
12,553.5	26.46	180.00	12,463.2	89.0	-1,015.0	-29.7	12.00	12.00	0.00
12,575.0	29.03	179.96	12,482.2	79.0	-1,015.0	-19.7	12.00	12.00	-0.19
12,600.0	32.03	179.92	12,503.7	66.3	-1,015.0	-7.0	12.00	12.00	-0.16
12,625.0	35.03	179.88	12,524.6	52.5	-1,015.0	6.7	12.00	12.00	-0.14
12 650 0	38.03	170.96	12,544.7	37.6	1 014 0	21.6	12.00	12.00	-0.12
12,650.0 12,675.0	41.03	179.86 179.83	12,544.7	21.7	-1,014.9	37.5	12.00	12.00	-0.12
	44.03	179.83	12,563.9	4.8	-1,014.9	54.3	12.00	12.00	
12,700.0 12,725.0	44.03	179.79	12,599.9	-13.0	-1,014.8 -1,014.8	72.1	12.00	12.00	-0.09 -0.08
12,725.0	50.03	179.77	12,616.4	-13.0	-1,014.8	90.8	12.00	12.00	-0.08
12,775.0	53.03	179.75	12,632.0	-51.3	-1,014.6	110.4	12.00	12.00	-0.07
12,800.0	56.03	179.74	12,646.5	-71.7	-1,014.5	130.7	12.00	12.00	-0.06
12,825.0	59.03	179.72	12,659.9	-92.8	-1,014.4	151.7	12.00	12.00	-0.06
12,850.0	62.03	179.71	12,672.2	-114.5	-1,014.3	173.5	12.00	12.00	-0.05
12,875.0	65.03	179.69	12,683.3	-136.9	-1,014.2	195.8	12.00	12.00	-0.05
12,900.0	68.03	179.68	12,693.3	-159.9	-1,014.1	218.7	12.00	12.00	-0.05
12,925.0	71.03	179.67	12,702.0	-183.3	-1,013.9	242.0	12.00	12.00	-0.05
12,950.0	74.03	179.66	12,709.5	-207.1	-1,013.8	265.8	12.00	12.00	-0.05
12,975.0	77.03	179.65	12,715.8	-231.3	-1,013.7	290.0	12.00	12.00	-0.04
13,000.0	80.03	179.64	12,720.7	-255.8	-1,013.5	314.4	12.00	12.00	-0.04
13,025.0	83.03	179.63	12,724.4	-280.5	-1,013.3	339.1	12.00	12.00	-0.04
13,050.0	86.03	179.62	12,726.8	-305.4	-1,013.2	363.9	12.00	12.00	-0.04
13,075.0	89.03	179.61	12,727.9	-330.4	-1,013.0	388.9	12.00	12.00	-0.04
13,083.1	90.00	179.60	12,727.9	-338.5	-1,013.0	396.9	12.00	12.00	-0.04
13,100.0	90.00	179.60	12,727.9	-355.4	-1,012.8	413.8	0.00	0.00	0.00
13,200.0 13,300.0	90.00 90.00	179.60 179.60	12,727.9 12,727.9	-455.4 -555.4	-1,012.1 -1,011.4	513.6 613.4	0.00 0.00	0.00 0.00	0.00 0.00
13.300.0	90.00	1/9.00	12,121.9	-000.4	-1,011.4	013.4	0.00	0.00	0.00

4/25/2024 4:02:08PM

COMPASS 5000.16 Build 100

Planning Report

Database:	PEDMB	Local Co-ordinate Reference:	Well #744H
Company:	Midland	TVD Reference:	kb = 25' @ 3693.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3693.0usft
Site:	Pretty Good 20 Fed Com	North Reference:	Grid
Well:	#744H	Survey Calculation Method:	Minimum Curvature
Wellbore:	ОН		
Design:	Plan #0.2		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,400.0	90.00	179.60	12,727.9	-655.4	-1,010.8	713.2	0.00	0.00	0.00
13,500.0	90.00	179.60	12,727.9	-755.4	-1,010.1	813.0	0.00	0.00	0.00
13,600.0	90.00	179.60	12,728.0	-855.4	-1,009.4	912.7	0.00	0.00	0.00
13,700.0	90.00	179.60	12,728.0	-955.4	-1,008.7	1,012.5	0.00	0.00	0.00
13,800.0	90.00	179.60	12,728.0	-1,055.4	-1,008.0	1,112.3	0.00	0.00	0.00
13,900.0	90.00	179.60	12,728.0	-1,155.4	-1,007.3	1,212.1	0.00	0.00	0.00
14,000.0	90.00	179.60	12,728.0	-1,255.4	-1,006.6	1,311.9	0.00	0.00	0.00
14,100.0	90.00	179.60	12,728.0	-1,355.4	-1,005.9	1,411.7	0.00	0.00	0.00
14,200.0	90.00	179.60	12,728.0	-1,455.4	-1,005.2	1,511.5	0.00	0.00	0.00
14,300.0	90.00	179.60	12,728.0	-1,555.4	-1,004.5	1,611.3	0.00	0.00	0.00
14,400.0	90.00	179.60	12,728.0	-1,655.4	-1,003.8	1,711.0	0.00	0.00	0.00
14,500.0	90.00	179.60	12,728.0	-1,755.4	-1,003.1	1,810.8	0.00	0.00	0.00
14,600.0	90.00	179.60	12,728.0	-1,855.4	-1,002.4	1,910.6	0.00	0.00	0.00
14,700.0	90.00	179.60	12,728.0	-1,955.4	-1,001.7	2,010.4	0.00	0.00	0.00
14,800.0	90.00	179.60	12,728.0	-2,055.4	-1,001.0	2,110.2	0.00	0.00	0.00
14,900.0	90.00	179.60	12,728.0	-2,155.4	-1,000.4	2,210.0	0.00	0.00	0.00
15,000.0	90.00	179.60	12,728.0	-2,255.4	-999.7	2,309.8	0.00	0.00	0.00
15,100.0	90.00	179.60	12,728.0	-2,355.4	-999.0	2,409.6	0.00	0.00	0.00
15,200.0	90.00	179.60	12,728.0	-2,455.3	-998.3	2,509.3	0.00	0.00	0.00
15,300.0	90.00	179.60	12,728.0	-2,555.3	-997.6	2,609.1	0.00	0.00	0.00
15,400.0	90.00	179.60	12,728.0	-2,655.3	-996.9	2,708.9	0.00	0.00	0.00
15,500.0	90.00	179.60	12,728.0	-2,755.3	-996.2	2,808.7	0.00	0.00	0.00
15,600.0	90.00	179.60	12,728.0	-2,855.3	-995.5	2,908.5	0.00	0.00	0.00
15,700.0	90.00	179.60	12,728.0	-2,955.3	-994.8	3,008.3	0.00	0.00	0.00
15,800.0	90.00	179.60	12,728.0	-3,055.3	-994.1	3,108.1	0.00	0.00	0.00
15,900.0	90.00	179.60	12,728.0	-3,155.3	-993.4	3,207.9	0.00	0.00	0.00
16,000.0	90.00	179.60	12,728.0	-3,255.3	-992.7	3,307.6	0.00	0.00	0.00
16,100.0	90.00	179.60	12,728.0	-3,355.3	-992.0	3,407.4	0.00	0.00	0.00
16,200.0	90.00	179.60	12,728.0	-3,455.3	-991.3	3,507.2	0.00	0.00	0.00
16,300.0	90.00	179.60	12,728.0	-3,555.3	-990.7	3,607.0	0.00	0.00	0.00
16,400.0	90.00	179.60	12,728.0	-3,655.3	-990.0	3,706.8	0.00	0.00	0.00
16,500.0	90.00	179.60	12,728.0	-3,755.3	-989.3	3,806.6	0.00	0.00	0.00
16,600.0	90.00	179.60	12,728.0	-3,855.3	-988.6	3,906.4	0.00	0.00	0.00
16,700.0	90.00	179.60	12,728.0	-3,955.3	-987.9	4,006.2	0.00	0.00	0.00
16,800.0	90.00	179.60	12,728.0	-4,055.3	-987.2	4,105.9	0.00	0.00	0.00
16,900.0	90.00	179.60	12,728.0	-4,155.3	-986.5	4,205.7	0.00	0.00	0.00
17,000.0	90.00	179.60	12,728.0	-4,255.3	-985.8	4,305.5	0.00	0.00	0.00
17,100.0	90.00	179.60	12,728.0	-4,355.3	-985.1	4,405.3	0.00	0.00	0.00
17,200.0	90.00	179.60	12,728.0	-4,455.3	-984.4	4,505.1	0.00	0.00	0.00
17,300.0	90.00	179.60	12,728.0	-4,555.3	-983.7	4,604.9	0.00	0.00	0.00
17,400.0	90.00	179.60	12,728.0	-4,655.3	-983.0	4,704.7	0.00	0.00	0.00
17,500.0	90.00	179.60	12,728.0	-4,755.3	-982.3	4,804.5	0.00	0.00	0.00
17,600.0	90.00	179.60	12,728.0	-4,855.3	-981.6	4,904.2	0.00	0.00	0.00
17,700.0	90.00	179.60	12,728.0	-4,955.3	-980.9	5,004.0	0.00	0.00	0.00
17,800.0	90.00	179.60	12,728.0	-5,055.3	-980.3	5,103.8	0.00	0.00	0.00
17,836.7	90.00	179.60	12,728.0	-5,092.0	-980.0	5,140.5	0.00	0.00	0.00
17,900.0	90.00	179.60	12,728.0	-5,155.3	-979.6	5,203.6	0.00	0.00	0.00
18,000.0	90.00	179.60	12,728.0	-5,255.3	-978.9	5,303.4	0.00	0.00	0.00
18,100.0	90.00	179.60	12,728.0	-5,355.3	-978.2	5,403.2	0.00	0.00	0.00
18,200.0	90.00	179.60	12,728.0	-5,455.3	-977.5	5,503.0	0.00	0.00	0.00
18,300.0	90.00	179.61	12,728.0	-5,555.3	-976.8	5,602.8	0.00	0.00	0.00
18,400.0	90.00	179.61	12,728.0	-5,655.3	-976.1	5,702.5	0.00	0.00	0.00
18,500.0	90.00	179.61	12,728.0	-5,755.3	-975.4	5,802.3	0.00	0.00	0.00

4/25/2024 4:02:08PM

Planning Report

Database:	PEDMB	Local Co-ordinate Reference:	Well #744H
Company:	Midland	TVD Reference:	kb = 25' @ 3693.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3693.0usft
Site:	Pretty Good 20 Fed Com	North Reference:	Grid
Well:	#744H	Survey Calculation Method:	Minimum Curvature
Wellbore:	ОН		
Design:	Plan #0.2		

Planned Survey

Measu Dep (ust	th	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
18.	700.0	90.00	179.61	12,728.0	-5,955.3	-974.0	6,001.9	0.00	0.00	0.00
	800.0	90.00	179.61	12,728.0	-6,055.3	-973.4	6,101.7	0.00	0.00	0.00
	900.0	90.00	179.61	12,728.0	-6,155.3	-972.7	6,201.5	0.00	0.00	0.00
	0.000	90.00	179.61	12,728.0	-6,255.3	-972.0	6,301.3	0.00	0.00	0.00
	100.0	90.00	179.61	12,728.0	-6,355.3	-971.3	6,401.1	0.00	0.00	0.00
	200.0	90.00	179.61	12,728.0	-6,455.3	-970.6	6,500.8	0.00	0.00	0.00
	300.0	90.00	179.61	12,728.0	-6,555.2	-970.0	6,600.6	0.00	0.00	0.00
	400.0	90.00	179.61	12,728.0	-6,655.2	-969.3	6,700.4	0.00	0.00	0.00
19,	500.0	90.00	179.61	12,728.0	-6,755.2	-968.6	6,800.2	0.00	0.00	0.00
19,	600.0	90.00	179.61	12,728.0	-6,855.2	-967.9	6,900.0	0.00	0.00	0.00
19,	700.0	90.00	179.61	12,728.0	-6,955.2	-967.2	6,999.8	0.00	0.00	0.00
19,	800.0	90.00	179.61	12,728.0	-7,055.2	-966.6	7,099.6	0.00	0.00	0.00
19,	900.0	90.00	179.61	12,728.0	-7,155.2	-965.9	7,199.4	0.00	0.00	0.00
20,	0.000	90.00	179.61	12,728.0	-7,255.2	-965.2	7,299.1	0.00	0.00	0.00
20	100.0	90.00	179.61	12,728.0	-7,355.2	-964.5	7,398.9	0.00	0.00	0.00
	200.0	90.00	179.62	12,728.0	-7,455.2	-963.9	7,498.7	0.00	0.00	0.00
	300.0	90.00	179.62	12,728.0	-7,555.2	-963.2	7,598.5	0.00	0.00	0.00
	400.0	90.00	179.62	12,728.0	-7,655.2	-962.5	7,698.3	0.00	0.00	0.00
	478.8	90.00	179.62	12,728.0	-7,734.0	-962.0	7,776.9	0.00	0.00	0.00
	500.0	90.00	179.62	12,728.0	-7,755.2	-961.9	7,798.1	0.00	0.00	0.00
	600.0	90.00	179.62	12,728.0	-7,855.2	-961.2	7,897.9	0.00	0.00	0.00
	700.0	90.00	179.62	12,728.0	-7,955.2	-960.5	7,997.7	0.00	0.00	0.00
	800.0	90.00	179.62	12,728.0	-8,055.2	-959.8	8,097.5	0.00	0.00	0.00
20,	900.0	90.00	179.62	12,728.0	-8,155.2	-959.2	8,197.2	0.00	0.00	0.00
21,	0.000	90.00	179.61	12,728.0	-8,255.2	-958.5	8,297.0	0.00	0.00	0.00
21,	100.0	90.00	179.61	12,728.0	-8,355.2	-957.8	8,396.8	0.00	0.00	0.00
21,	200.0	90.00	179.61	12,728.0	-8,455.2	-957.2	8,496.6	0.00	0.00	0.00
21,	300.0	90.00	179.61	12,728.0	-8,555.2	-956.5	8,596.4	0.00	0.00	0.00
21,	400.0	90.00	179.61	12,728.0	-8,655.2	-955.8	8,696.2	0.00	0.00	0.00
21	500.0	90.00	179.61	12,728.0	-8,755.2	-955.1	8,796.0	0.00	0.00	0.00
	600.0	90.00	179.61	12,728.0	-8,855.2	-954.5	8,895.8	0.00	0.00	0.00
	700.0	90.00	179.61	12,728.0	-8,955.2	-953.8	8,995.6	0.00	0.00	0.00
	800.0	90.00	179.61	12,728.0	-9,055.2	-953.1	9,095.3	0.00	0.00	0.00
	900.0	90.00	179.61	12,728.0	-9,155.2	-952.4	9,195.1	0.00	0.00	0.00
	000.0	90.00	179.61	12,728.0	-9,255.2	-951.8	9,294.9	0.00	0.00	0.00
	100.0	90.00	179.61	12,728.0	-9,355.2	-951.1	9,394.7	0.00	0.00	0.00
	200.0	90.00	179.61	12,728.0	-9,455.2	-950.4	9,494.5	0.00	0.00	0.00
	300.0 400.0	90.00	179.61	12,728.0 12,728.0	-9,555.2	-949.7	9,594.3	0.00	0.00	0.00 0.00
,		90.00	179.61		-9,655.2	-949.0	9,694.1	0.00	0.00	
	500.0	90.00	179.61	12,728.0	-9,755.2	-948.4	9,793.9	0.00	0.00	0.00
22,	600.0	90.00	179.61	12,728.0	-9,855.2	-947.7	9,893.7	0.00	0.00	0.00
	700.0	90.00	179.61	12,728.0	-9,955.2	-947.0	9,993.4	0.00	0.00	0.00
	800.0	90.00	179.61	12,728.0	-10,055.2	-946.3	10,093.2	0.00	0.00	0.00
22,	900.0	90.00	179.61	12,728.0	-10,155.2	-945.6	10,193.0	0.00	0.00	0.00
23.	0.000	90.00	179.61	12,728.0	-10,255.2	-945.0	10,292.8	0.00	0.00	0.00
	100.0	90.00	179.61	12,728.0	-10,355.2	-944.3	10,392.6	0.00	0.00	0.00
	200.0	90.00	179.61	12,728.0	-10,455.2	-943.6	10,492.4	0.00	0.00	0.00
	300.0	90.00	179.61	12,728.0	-10,555.2	-942.9	10,592.2	0.00	0.00	0.00
	400.0	90.00	179.61	12,728.0	-10,655.2	-942.2	10,692.0	0.00	0.00	0.00
	500.0	90.00	179.61	12,728.0	-10,755.2	-941.5	10,791.7	0.00	0.00	0.00
	500.0 600.0	90.00	179.61	12,728.0	-10,755.2	-941.5 -940.8	10,791.7	0.00	0.00	0.00
	700.0	90.00	179.61	12,728.0	-10,855.2	-940.8	10,891.3	0.00	0.00	0.00
	800.0	90.00	179.61	12,728.0	-11,055.1	-940.2	11,091.1	0.00	0.00	0.00
	900.0	90.00	179.61	12,728.0	-11,155.1	-939.5	11,190.9	0.00	0.00	0.00
23,	000.0	30.00	173.01	12,120.0	-11,100.1	-300.0	11,100.0	0.00	0.00	0.00

4/25/2024 4:02:08PM

COMPASS 5000.16 Build 100

Planning Report

Database:	PEDMB	Local Co-ordinate Reference:	Well #744H
Company:	Midland	TVD Reference:	kb = 25' @ 3693.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3693.0usft
Site:	Pretty Good 20 Fed Com	North Reference:	Grid
Well:	#744H	Survey Calculation Method:	Minimum Curvature
Wellbore:	ОН		
Design:	Plan #0.2		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
24,000.0	90.00	179.61	12,728.0	-11,255.1	-938.1	11,290.7	0.00	0.00	0.00
24,100.0	90.00	179.61	12,728.0	-11,355.1	-937.4	11,390.5	0.00	0.00	0.00
24,200.0	90.00	179.61	12,728.0	-11,455.1	-936.7	11,490.3	0.00	0.00	0.00
24,300.0	90.00	179.60	12,728.0	-11,555.1	-936.0	11,590.0	0.00	0.00	0.00
24,400.0	90.00	179.60	12,728.0	-11,655.1	-935.3	11,689.8	0.00	0.00	0.00
24,500.0	90.00	179.60	12,728.0	-11,755.1	-934.6	11,789.6	0.00	0.00	0.00
24,600.0	90.00	179.60	12,728.0	-11,855.1	-934.0	11,889.4	0.00	0.00	0.00
24,700.0	90.00	179.60	12,728.0	-11,955.1	-933.3	11,989.2	0.00	0.00	0.00
24,800.0	90.00	179.60	12,728.0	-12,055.1	-932.6	12,089.0	0.00	0.00	0.00
24,900.0	90.00	179.60	12,728.0	-12,155.1	-931.9	12,188.8	0.00	0.00	0.00
25,000.0	90.00	179.60	12,728.0	-12,255.1	-931.2	12,288.6	0.00	0.00	0.00
25,100.0	90.00	179.60	12,728.0	-12,355.1	-930.5	12,388.3	0.00	0.00	0.00
25,200.0	90.00	179.60	12,728.0	-12,455.1	-929.8	12,488.1	0.00	0.00	0.00
25,300.0	90.00	179.60	12,728.0	-12,555.1	-929.1	12,587.9	0.00	0.00	0.00
25,400.0	90.00	179.60	12,728.0	-12,655.1	-928.4	12,687.7	0.00	0.00	0.00
25,500.0	90.00	179.60	12,728.0	-12,755.1	-927.7	12,787.5	0.00	0.00	0.00
25,600.0	90.00	179.60	12,728.0	-12,855.1	-927.0	12,887.3	0.00	0.00	0.00
25,700.0	90.00	179.60	12,728.0	-12,955.1	-926.3	12,987.1	0.00	0.00	0.00
25,800.0	90.00	179.60	12,728.0	-13,055.1	-925.6	13,086.9	0.00	0.00	0.00
25,900.0	90.00	179.60	12,728.0	-13,155.1	-924.9	13,186.6	0.00	0.00	0.00
26,000.0	90.00	179.60	12.728.0	-13,255.1	-924.2	13,286.4	0.00	0.00	0.00
26,100.0	90.00	179.60	12,728.0	-13,355.1	-923.5	13,386.2	0.00	0.00	0.00
26,200.0	90.00	179.60	12,728.0	-13,455.1	-922.8	13,486.0	0.00	0.00	0.00
26,300.0	90.00	179.60	12,728.0	-13,555.1	-922.1	13,585.8	0.00	0.00	0.00
26,400.0	90.00	179.60	12,728.0	-13,655.1	-921.4	13,685.6	0.00	0.00	0.00
26,500.0	90.00	179.60	12,728.0	-13,755.1	-920.7	13,785.4	0.00	0.00	0.00
26,600.0	90.00	179.60	12,728.0	-13,855.1	-920.0	13,885.1	0.00	0.00	0.00
26,700.0	90.00	179.60	12,728.0	-13,955.1	-919.3	13,984.9	0.00	0.00	0.00
26,800.0	90.00	179.60	12,728.0	-14,055.1	-918.6	14,084.7	0.00	0.00	0.00
26,900.0	90.00	179.60	12,728.0	-14,155.1	-917.9	14,184.5	0.00	0.00	0.00
27,000.0	90.00	179.60	12,728.0	-14,255.1	-917.2	14,284.3	0.00	0.00	0.00
27,100.0	90.00	179.60	12,728.0	-14,355.1	-916.5	14,384.1	0.00	0.00	0.00
27,200.0	90.00	179.60	12,728.0	-14,455.1	-915.8	14,483.9	0.00	0.00	0.00
27,300.0	90.00	179.60	12,728.0	-14,555.1	-915.1	14,583.7	0.00	0.00	0.00
27,400.0	90.00	179.60	12,728.0	-14,655.1	-914.4	14,683.4	0.00	0.00	0.00
27,500.0	90.00	179.59	12,728.0	-14,755.1	-913.7	14,783.2	0.00	0.00	0.00
27,600.0	90.00	179.59	12,728.0	-14,855.1	-913.0	14,883.0	0.00	0.00	0.00
27,700.0	90.00	179.59	12,728.0	-14,955.1	-912.3	14,003.0	0.00	0.00	0.00
27,800.0	90.00	179.59	12,728.0	-15,055.0	-912.5	15,082.6	0.00	0.00	0.00
27,800.0	90.00	179.59	12,728.0	-15,055.0	-911.0	15,082.0	0.00	0.00	0.00
28,000.0	90.00	179.59	12,728.0	-15,255.0	-910.1	15,282.2	0.00	0.00	0.00
28,000.0	90.00	179.59	12,728.0	-15,255.0	-910.1	15,282.2	0.00	0.00	0.00
					-909.4 -908.7				
28,200.0	90.00	179.59	12,728.0	-15,455.0		15,481.7	0.00	0.00	0.00
28,301.0	90.00	179.59	12,728.0	-15,556.0	-908.0	15,582.5	0.00	0.00	0.00

Planning Report

Database: Company: Project: Site: Well: Wellbore: Design:	PEDMB Midland Lea County, NM (NAD 83 NME) Pretty Good 20 Fed Com #744H OH Plan #0.2			TVD Refere MD Referen North Refer	ce:	kb = 2 kb = 2 Grid	Nell #744H kb = 25' @ 3693.0usft kb = 25' @ 3693.0usft Grid Minimum Curvature		
Design Targets Target Name									
- hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
KOP(Pretty Good 20 Fe - plan hits target ce - Point		0.00	12,250.5	139.0	-1,015.0	504,074.00	735,864.0	0 32° 23' 3.096 N	103° 42' 11.405 W
FTP(Pretty Good 20 Fe - plan hits target ce - Point		0.00	12,463.2	89.0	-1,015.0	504,024.00	735,864.0	0 32° 23' 2.601 N	103° 42' 11.408 W
Fed Perf 2(Pretty Good - plan hits target ce - Point		0.00	12,728.0	-7,734.0	-962.0	496,201.00	735,917.0	0 32° 21' 45.188 N	103° 42' 11.327 W
PBHL(Pretty Good 20 F - plan hits target ce - Point		0.00	12,728.0	-15,556.0	-908.0	488,379.00	735,971.0	0 32° 20' 27.784 N	103° 42' 11.234 W
Fed Perf 1(Pretty Good - plan hits target ce - Point		0.00	12,728.0	-5,092.0	-980.0	498,843.00	735,899.0	0 32° 22' 11.332 N	103° 42' 11.356 W

.

leogresources

400-

800-

1200-

1600-

2000-

2400

- - - -

- - - - - -


Lea County, NM (NAD 83 NME)

Pretty Good 20 Fed Com

Plan #0.2


PROJECT DETAILS: Lea County, NM (NAD 83 NME)

Geodetic System: US State Plane 1983 Datum: North American Datum 1983 Ellipsoid: GRS 1980 Zone: New Mexico Eastern Zone System Datum: Mean Sea Level

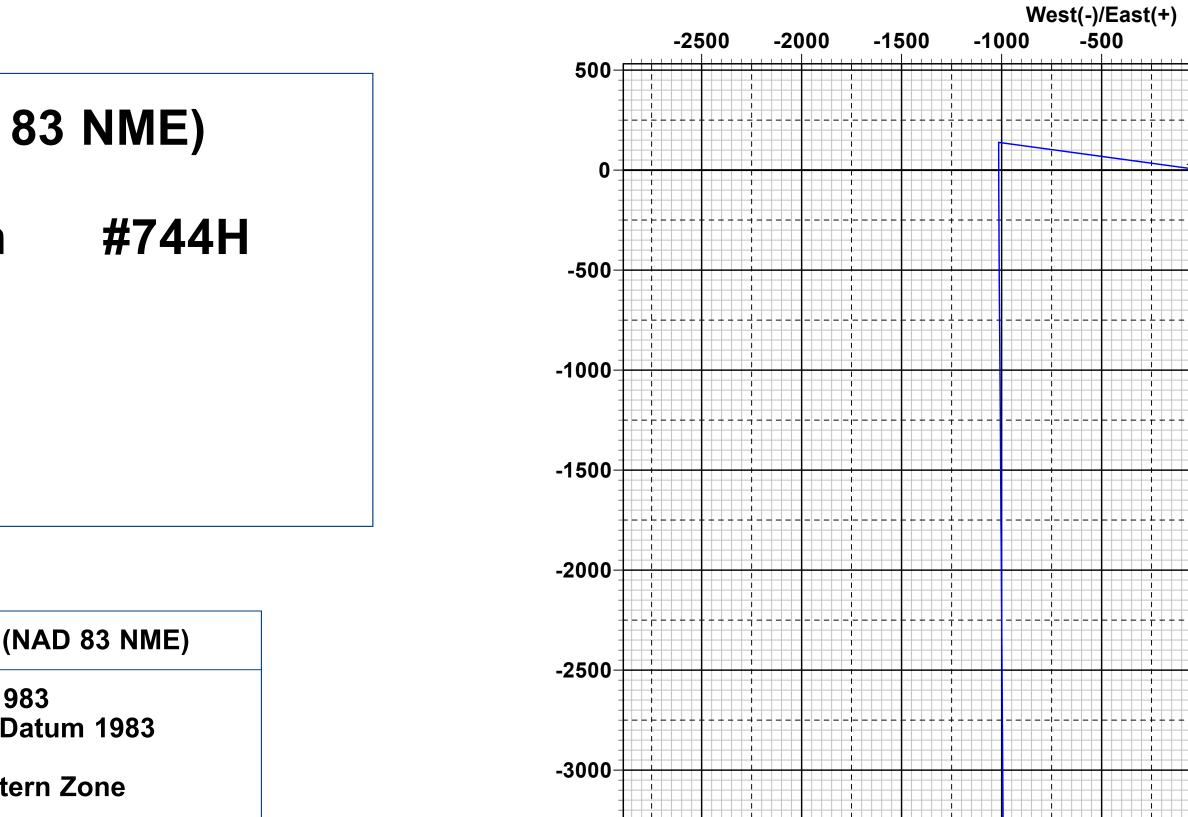

-3500-

-4000-

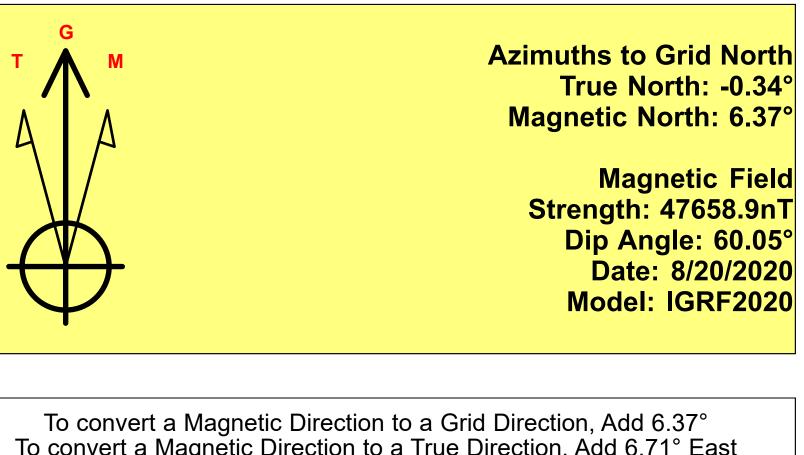


To convert a Magnetic Direction to a Grid Direction, Add 6.37° To convert a Magnetic Direction to a True Direction, Add 6.71° East To convert a True Direction to a Grid Direction, Subtract 0.34°

	WELL DETAILS): #/44H	
		3668.	.0
	kb = 25' (② 3693.0usft	
Northing	Easting	Latittude	Longitude
503935.00	736879.00	32° 23' 1.661 N	103° 41' 59.578 W

	SECTION DETAILS									
Target	VSect	TFace	Dleg	+E/-W	+N/-S	TVD	Azi	Inc	MD	Sec
	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	1
	0.0	0.00	0.00	0.0	0.0	1200.0	0.00	0.00	1200.0	2
	-3.0	277.80	2.00	-38.6	5.3	1670.6	277.80	9.46	1672.8	3
	-76.6	0.00	0.00	-976.4	133.7	7354.4	277.80	9.46	7434.8	4
	-79.6	180.00	2.00	-1015.0	139.0	7825.0	0.00	0.00	7907.6	5
KOP(Pretty Good 20 Fed Com	-79.6	0.00	0.00	-1015.0	139.0	12250.5	0.00	0.00	12333.1	6
FTP(Pretty Good 20 Fed Com	-29.7	180.00	12.00	-1015.0	89.0	12463.2	180.00	26.46	12553.5	7
	396.9	-0.44	12.00	-1013.0	-338.5	12727.9	179.60	90.00	13083.1	8
Fed Perf 1(Pretty Good 20 Fed	5140.5	0.00	0.00	-980.0	-5092.0	12728.0	179.60	90.00	17836.7	9
Fed Perf 2(Pretty Good 20 Fed	7776.9	84.45	0.00	-962.0	-7734.0	12728.0	179.62	90.00	20478.8	10
PBHL(Pretty Good 20 Fed Co	15582.5	-93.15	0.00	-908.0	-15556.0	12728.0	179.59	90.00	28301.0	11

CASING DETAILS	WELLBORE TAR	GET DETAIL	S (MAP CO-OF	RDINATES)		
No casing data is available	Name	TVD	+N/-S	+E/-W	Northing	Easting
	KOP(Pretty Good 20 Fed Com #708H)	12250.5	139.0	-1015.0	504074.00	735864.00
	FTP(Pretty Good 20 Fed Com #708H)	12463.2	89.0	-1015.0	504024.00	735864.00
	Fed Perf 1(Pretty Good 20 Fed Com #708H)	12728.0	-5092.0	-980.0	498843.00	735899.00
	Fed Perf 2(Pretty Good 20 Fed Com #708H)	12728.0	-7734.0	-962.0	496201.00	735917.00
	PBHL(Pretty Good 20 Fed Com #708H)	12728.0	-15556.0	-908.0	488379.00	735971.00

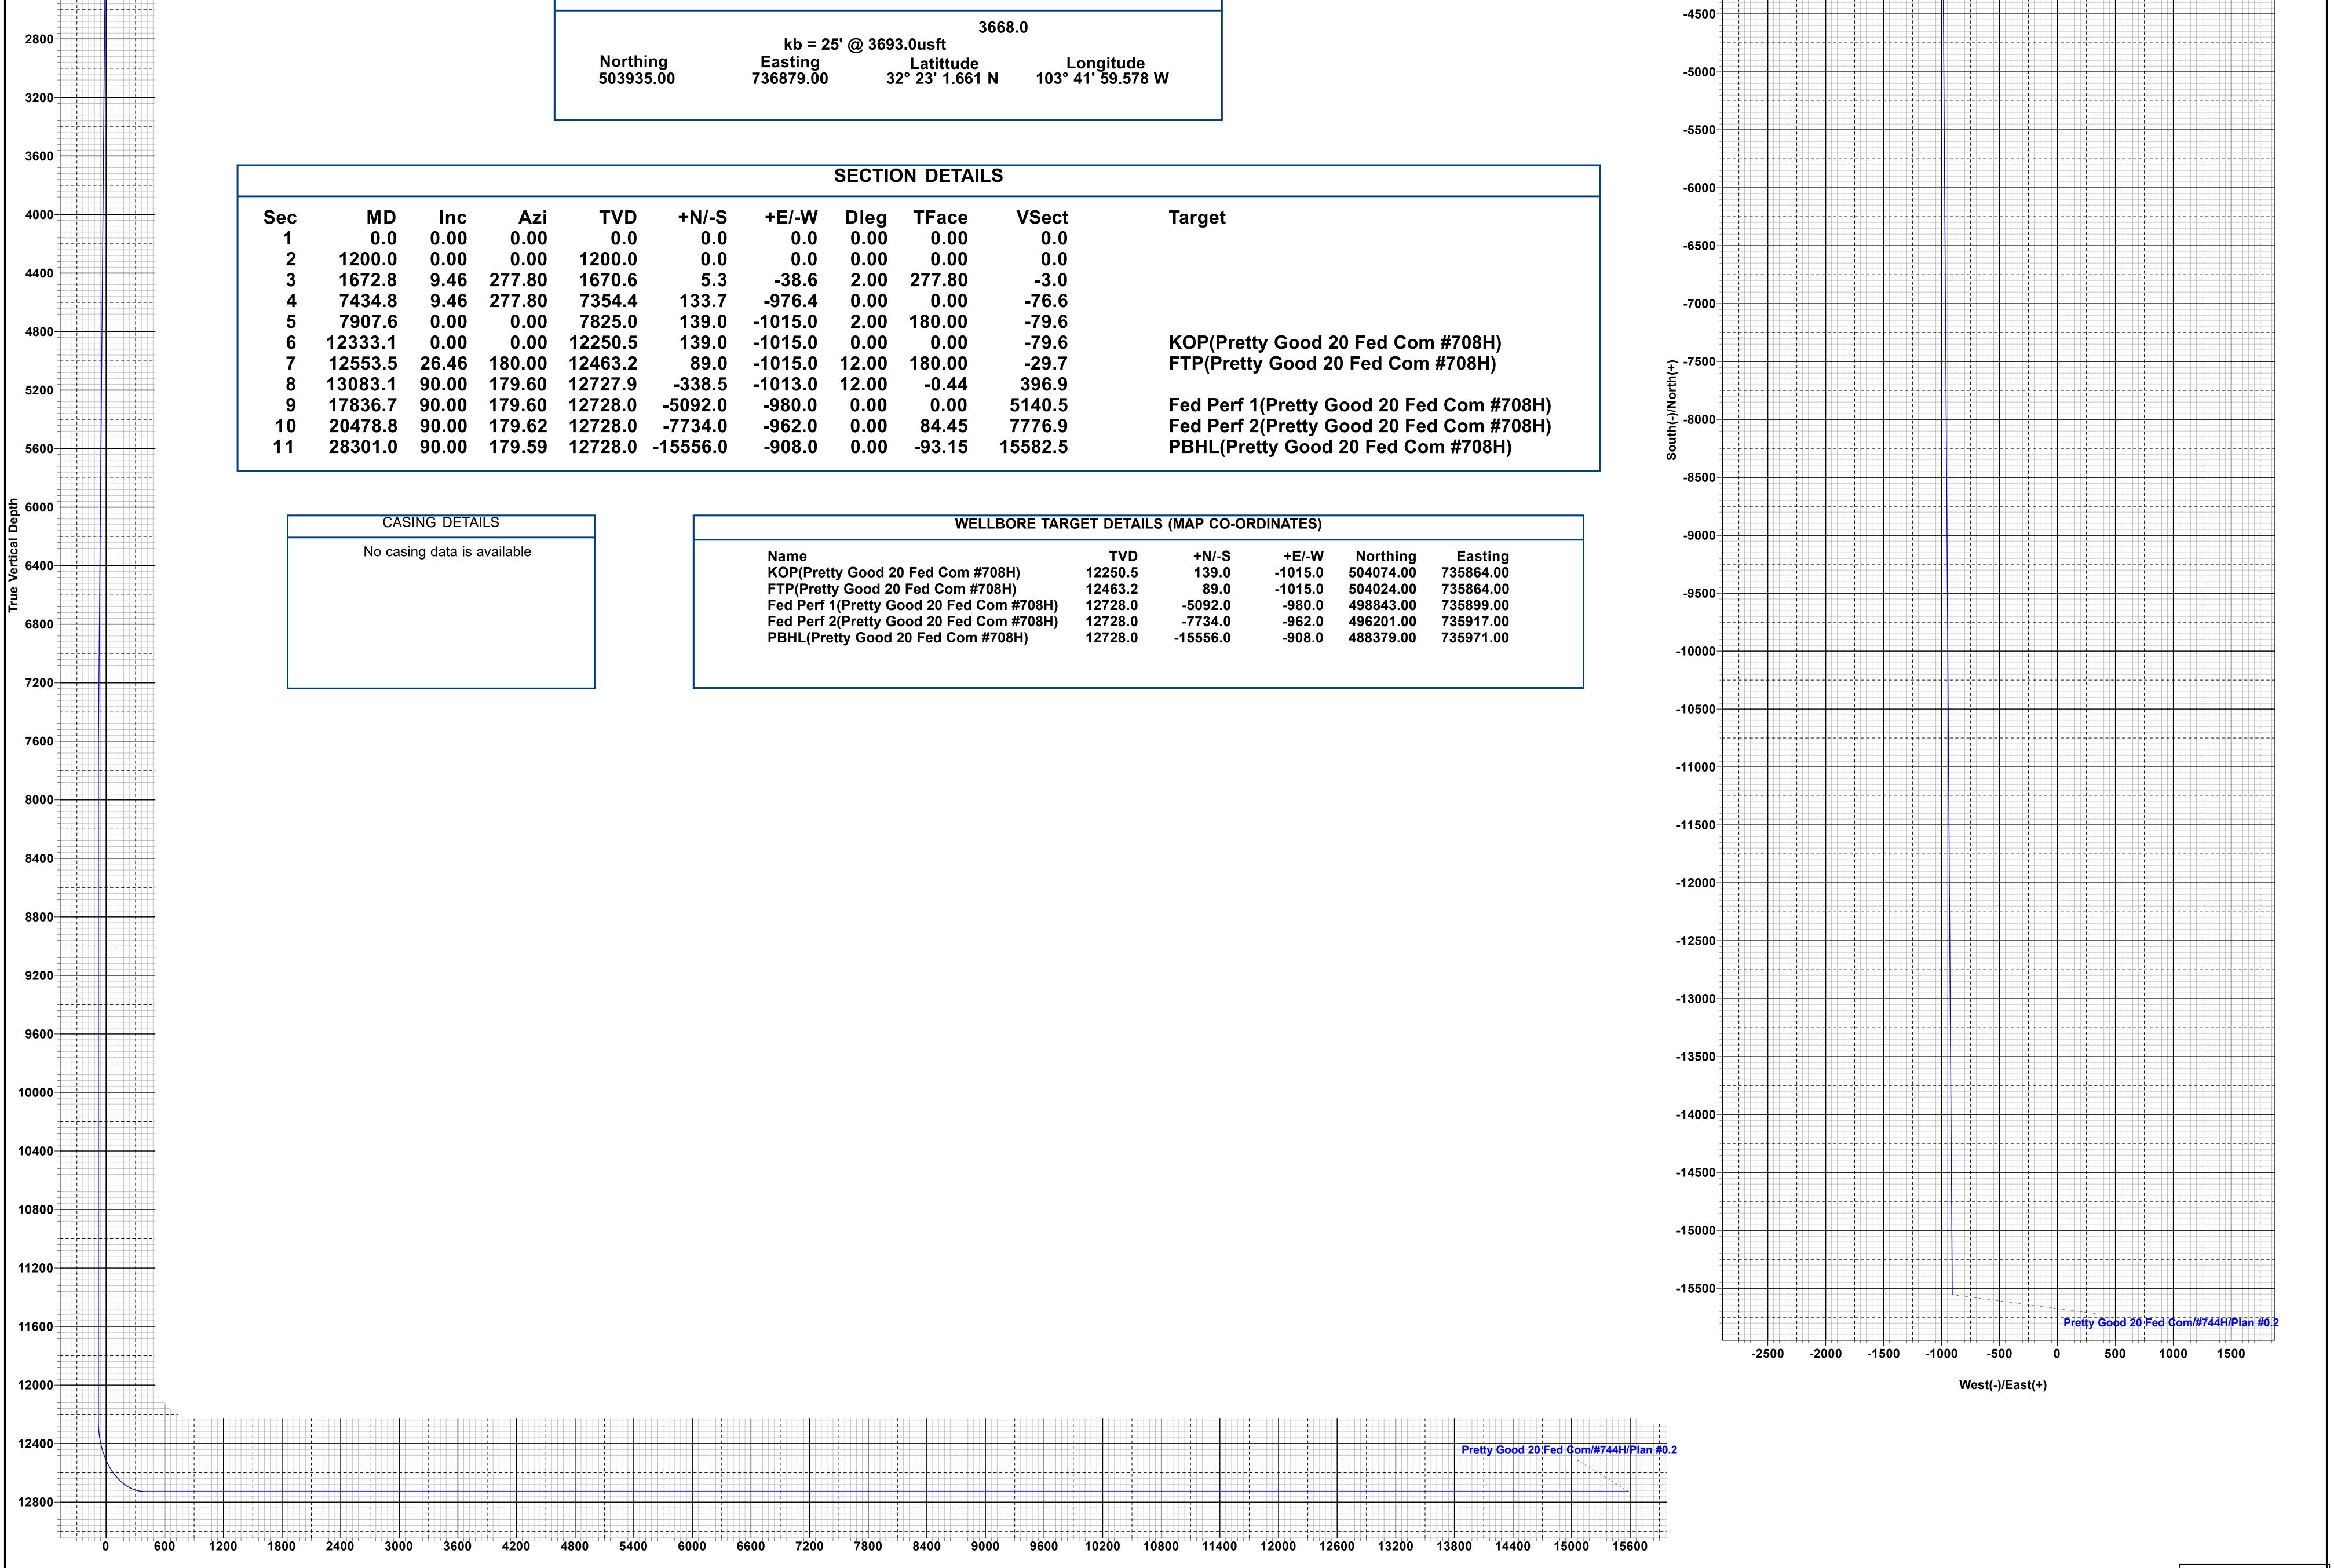

Vertical Section at 183.34°

Lea County, NM (NAD 83 NME) Pretty Good 20 Fed Com #744H OH Plan #0.2 16:01, April 25 2024

1000

500

--++-+-

+++-

- - - - - -

1500

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

COUNT1.	Lea County, New Mexico
COUNTY	Lea County, New Mexico
LOCATION:	Section 32, T.22 S., R.32 E.
BOTTOM HOLE FOOTAGE	
SURFACE HOLE FOOTAGE:	
WELL NAME & NO.:	PRETTY GOOD 20 FED COM 744H
	EOG RESOURCES INCORPORATED

ALL PREVIOUS COAs STILL APPLY

COA

H2S	• Yes	O No	
Potash	• None	© Secretary	© R-111-P
Cave/Karst Potential	• Low	O Medium	O High
Cave/Karst Potential	Critical		
Variance	O None	• Flex Hose	O Other
Wellhead	Conventional	Multibowl	O Both
Wellhead Variance	O Diverter		
Other	□4 String	Capitan Reef	□WIPP
Other	Fluid Filled	🗆 Pilot Hole	🗆 Open Annulus
Cementing	□ Contingency	EchoMeter	Primary Cement
	Cement Squeeze		Squeeze
Special Requirements	Water Disposal	COM	🗆 Unit
Special Requirements	□ Batch Sundry		
Special Requirements	Break Testing	☑ Offline	Casing
Variance		Cementing	Clearance

A. CASING

Primary Casing Design:

- 1. The **9-5/8** inch surface casing shall be set at approximately **1,290** feet (a minimum of 25 feet (Lea County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after

completing the cement job.

- b. Wait on cement (WOC) time for a primary cement job will be a minimum of <u>8</u>
 <u>hours</u> or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.
- 2. The **7-5/8** inch intermediate casing shall be set at approximately **11,400** feet TVD. The minimum required fill of cement behind the **7-5/8** inch intermediate casing is:

Option 1 (Single Stage):

• Cement to surface. If cement does not circulate see B.1.a, c-d above.

Option 2:

Operator has proposed to cement in two stages by conventionally cementing the first stage and performing a bradenhead squeeze on the second stage, contingent upon no returns to surface.

- a. First stage: Operator will cement with intent to reach the top of the **Brushy** Canyon
- b. Second stage:
 - Operator will perform bradenhead squeeze and top-out. Cement to surface. If cement does not reach surface, the appropriate BLM office shall be notified.

Operator has proposed to pump down 9-5/8" X 7-5/8" annulus. <u>Operator must top</u> <u>out cement after the bradenhead squeeze and verify cement to surface. Operator</u> <u>can also check TOC with Echo-meter. CBL must be run from TD of the 7-5/8"</u> <u>casing to surface if confidence is lacking on the quality of the bradenhead squeeze</u> <u>cement job. Submit results to BLM.</u>

<u>If cement does not tie-back into the previous casing shoe, a third stage remediation</u> <u>BH may be performed. The appropriate BLM office shall be notified.</u>

Bradenhead squeeze in the production interval is only as an edge case remediation measure and is NOT approved in this COA. If production cement job experiences losses and a bradenhead squeeze is needed for tie-back, BLM Engineering should be notified prior to job with volumes and planned wellbore schematic. CBL will be needed when this occurs. If cement does not reach surface, the next casing string must come to surface.

Operator must use a limited flush fluid volume of 1 bbl following backside cementing procedures.

3. The **5-1**/2 inch production casing shall be set at approximately **28,301** feet. The minimum required fill of cement behind the **5-1**/2 inch production casing is:

Option 1 (Single Stage):

• Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

Alternate Casing Design:

- 1. The **10-3/4** inch surface casing shall be set at approximately **1,290** feet (a minimum of 25 feet (Lea County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of $\underline{8}$ <u>hours</u> or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
- 2. The **8-3/4** inch intermediate casing shall be set at approximately **11,400** feet. **Keep casing full to stay within collapse SF requirement.** The minimum required fill of cement behind the **8-3/4** inch intermediate casing is:

Option 1 (Single Stage):

• Cement to surface. If cement does not circulate see B.1.a, c-d above.

Option 2:

Operator has proposed to cement in two stages by conventionally cementing the first stage and performing a bradenhead squeeze on the second stage, contingent upon no returns to surface.

- c. First stage: Operator will cement with intent to reach the top of the **Brushy** Canyon
- d. Second stage:
 - Operator will perform bradenhead squeeze and top-out. Cement to surface. If cement does not reach surface, the appropriate BLM office shall be notified.

Operator has proposed to pump down 10-3/4" X 8-3/4" annulus. <u>Operator must top</u> <u>out cement after the bradenhead squeeze and verify cement to surface. Operator</u> <u>can also check TOC with Echo-meter. CBL must be run from TD of the 8-3/4"</u> <u>casing to surface if confidence is lacking on the quality of the bradenhead squeeze</u> <u>cement job. Submit results to BLM.</u>

<u>If cement does not tie-back into the previous casing shoe, a third stage remediation</u> <u>BH may be performed. The appropriate BLM office shall be notified.</u>

Bradenhead squeeze in the production interval is only as an edge case remediation measure and is NOT approved in this COA. If production cement job experiences losses and a bradenhead squeeze is needed for tie-back, BLM Engineering should be notified prior to job with volumes and planned wellbore schematic. CBL will be needed when this occurs.

If cement does not reach surface, the next casing string must come to surface.

Operator must use a limited flush fluid volume of 1 bbl following backside cementing procedures.

3. The 6 inch X 5.5 inch tapered production casing shall be set at approximately 28,301 feet. Operator has requested the optionality to run only the 6 inch or only the 5.5 inch casing from surface to TD. These alternatives have been reviewed and is OK. Keep casing full to stay within collapse SF requirement. The minimum required fill of cement behind the 6 inch x 5.5 inch tapered production casing is:

Option 1 (Single Stage):

• Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

(Note: For a minimum 5M BOPE or less (Utilizing a 10M BOPE system) BOPE Break Testing Variance

- BOPE Break Testing is ONLY permitted for 5M BOPE or less. (Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP)
- BOPE Break Testing is NOT permitted to drilling the production hole section.
- Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer (**575-706-2779**) prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).
- The BLM is to be contacted (575-689-5981 Lea County) 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per 43 CFR part 3170 Subpart 3172.
- If in the event break testing is not utilized, then a full BOPE test would be conducted.

Offline Cementing

OK for surface and intermediate cementing. Notify the BLM prior to the commencement of any offline cementing procedure.

Casing Clearance:

- 500' tie back OK in production interval.
- Operator aware on lack of 1" optionality in surface interval and will do remediation if needed.

Operator shall clean up cycles until wellbore is clear of cuttings and any large debris, ensure cutting sizes are adequate "coffee ground or less" before cementing.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Eddy County

EMAIL or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,

BLM_NM_CFO_DrillingNotifications@BLM.GOV (575) 361-2822

Lea County Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575) 689-5981

- 1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per **43** CFR part **3170** Subpart **3172** as soon as 2nd Rig is rigged up on well.
- 2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
- 3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

- 1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
- 2. <u>Wait on cement (WOC) for Potash Areas:</u> After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the

following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least <u>24</u> <u>hours</u>. WOC time will be recorded in the driller's log. The casing intergrity test can be done (prior to the cement setting up) immediately after bumping the plug.

- 3. <u>Wait on cement (WOC) for Water Basin:</u> After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least <u>8 hours</u>. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- 4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
- 5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
- 6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
- 7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
- 8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

- All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in 43 CFR part 3170 Subpart 3172 and API STD 53 Sec. 5.3.
- 2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's

requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.

- 3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
- 4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in 43
 CFR part 3170 Subpart 3172 must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- 5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)

- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to 43 CFR part 3170 Subpart 3172 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per 43 CFR part 3170 Subpart 3172.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

•

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

KPI 5/4/2024



Intermediate Bradenhead Cement:

EOG requests variance from minimum standards to pump a two stage cement job on the intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon and the second stage performed as 1000 sack bradenhead squeeze with planned cement from the Brushy Canyon to surface. If necessary, a top out consisting of Class C cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (2.30 yld, 12.91 ppg) will be executed as a contingency. Top of cement will be verified by Echo-meter.

EOG will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program.

EOG will report to the BLM the volume of fluid (limited to 5 bbls) used to flush intermediate casing valves following backside cementing procedures.




Break-test BOP & Offline Cementing:


EOG Resources Inc. (EOG) respectfully requests a variance from the minimum standards for well control equipment testing of ECFR Title 43 Part 3172.6(b)(9)(iv) to allow a testing schedule of the blow out preventer (BOP) and blow out prevention equipment (BOPE) along with Batch Drilling & Offline cement operations to include the following:

- Full BOPE test at first installation on the pad.
- Full BOPE test every 21 days.
- This test will be conducted for 5M rated hole intervals only.
- Each rig requesting the break-test variance is capable of picking up the BOP without damaging components using winches, following API Standard 53, Well Control Equipment Systems for Drilling Wells (Fifth edition, December 2018, Annex C. Table C.4) which recognizes break testing as an acceptable practice.
- Function tests will be performed on the following BOP elements:
 - Annular **à** during each full BOPE test
 - Upper Pipe Rams **à** On trip ins where FIT required
 - Blind Rams **à** Every trip
 - Lower Pipe Rams à during each full BOPE test
- Break testing BOP and BOPE coupled with batch drilling operations and option to offline cement and/or remediate (if needed) any surface or intermediate sections, according to attached offline cementing support documentation.
- After the well section is secured, the BOP will be disconnected from the wellhead and walked with the rig to another well on the pad.
- TA cap will also be installed per Wellhead vendor procedure and pressure inside the casing will be monitored via the valve on the TA cap as per standard batch drilling ops.

Break Test Diagram (HCR valve)

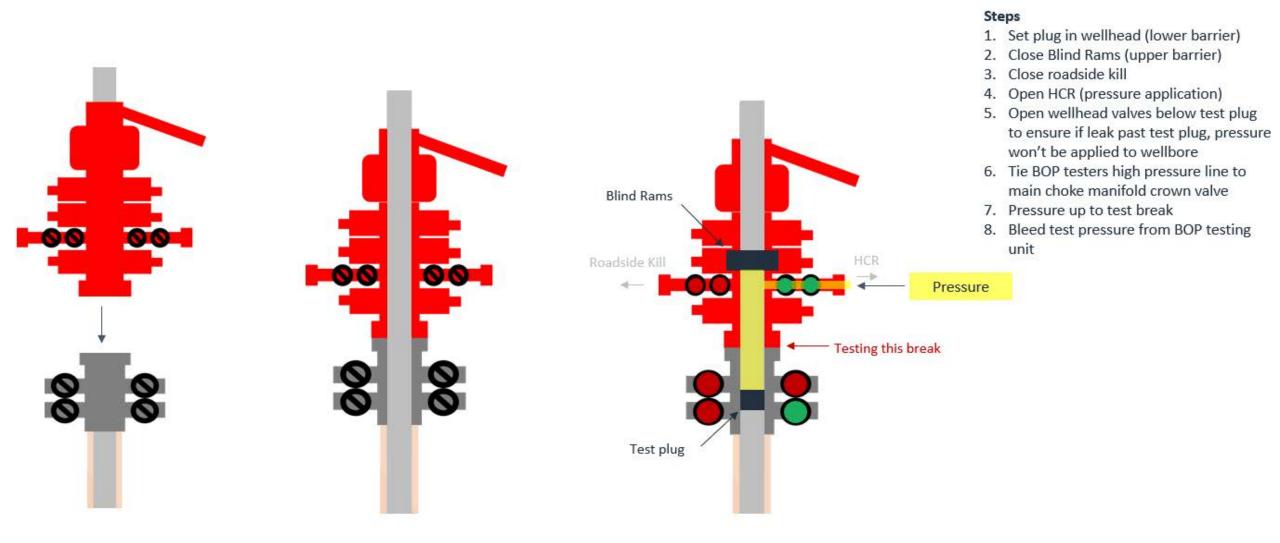

Break Test Diagram (Test Joint)

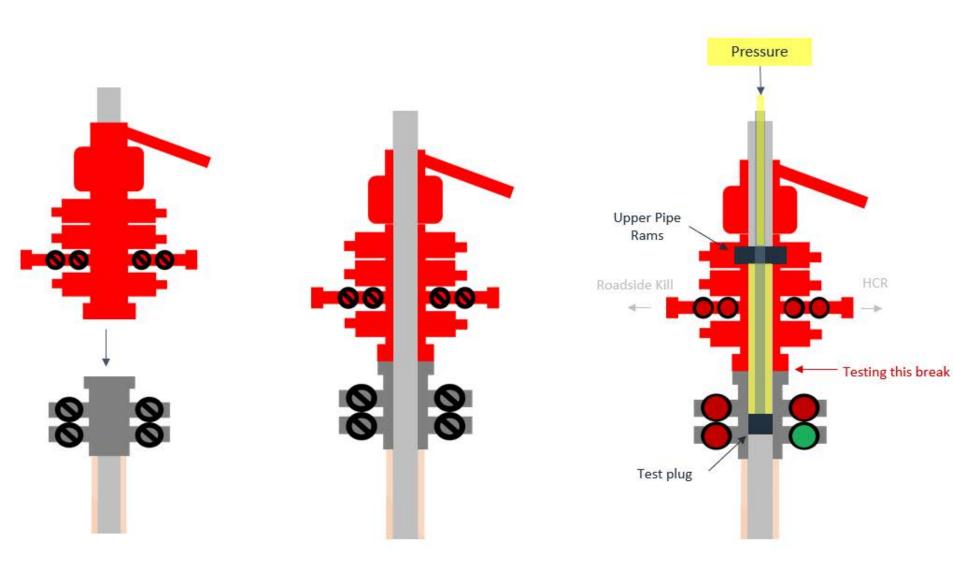

Steps

- 1. Set plug in with test joint wellhead (lower barrier)
- 2. Close Upper Pipe Rams (upper barrier)
- 3. Close roadside kill
- 4. Close HCR
- Open wellhead valves below test plug to ensure if leak past test plug, pressure won't be applied to wellbore
- 6. Tie BOP testers high pressure line to top of test joint
- 7. Pressure up to test break
- 8. Bleed test pressure from BOP testing unit

Seog resources Offline Intermediate Cementing Procedure

Cement Program

1. No changes to the cement program will take place for offline cementing.

Summarized Operational Procedure for Intermediate Casing

- 1. Run casing as per normal operations. While running casing, conduct negative pressure test and confirm integrity of the float equipment back pressure valves.
 - a. Float equipment is equipped with two back pressure valves rated to a minimum of 5,000 psi.
- 2. Land production casing on mandrel hanger through BOP.
 - a. If casing is unable to be landed with a mandrel hanger, then the **casing will be cemented online**.
- 3. Break circulation and confirm no restrictions.
 - a. Ensure no blockage of float equipment and appropriate annular returns.
 - b. Perform flow check to confirm well is static.
- 4. Set pack-off
 - a. If utilizing a fluted/ported mandrel hanger, ensure well is static on the annulus and inside the casing by filling the pipe with kill weight fluid, remove landing joint, and set annular packoff through BOP. Pressure test to 5,000 psi for 10 min.
 - b. If utilizing a solid mandrel hanger, ensure well is static on the annulus and inside the casing by filling the pipe with kill weight fluid. Pressure test seals to 5,000 psi for 10 min. Remove landing joint through BOP.
- 5. After confirmation of both annular barriers and the two casing barriers, install TA plug and pressure test to 5,000 psi for 10 min. Notify the BLM with intent to proceed with nipple down and offline cementing.
 - a. Minimum 4 hrs notice.
- 6. With the well secured and BLM notified, nipple down BOP and secure on hydraulic carrier or cradle.
 - a. Note, if any of the barriers fail to test, the BOP stack will not be nippled down until after the cement job has concluded and both lead and tail slurry have reached 500 psi.
- 7. Skid/Walk rig off current well.
- 8. Confirm well is static before removing TA Plug.
 - a. Cementing operations will not proceed until well is under control. (If well is not static, notify BLM and proceed to kill)
 - b. Casing outlet valves will provide access to both the casing ID and annulus. Rig or third party pump truck will kill well prior to cementing.
 - c. Well control plan can be seen in Section B, Well Control Procedures.
 - d. If need be, rig can be moved back over well and BOP nippled back up for any further remediation.

Page | 1

Page 39 of 47

2/24/2022

Seog resources

Offline Intermediate Cementing Procedure

- e. Diagram for rig positioning relative to offline cementing can be seen in Figure 4.
- 9. Rig up return lines to take returns from wellhead to pits and rig choke.
 - a. Test all connections and lines from wellhead to choke manifold to 5,000 psi high for 10 min.
 - b. If either test fails, perform corrections and retest before proceeding.
 - c. Return line schematics can be seen in Figure 3.
- 10. Remove TA Plug from the casing.
- 11. Install offline cement tool.
 - a. Current offline cement tool schematics can be seen in Figure 1 (Cameron) and Figure 2 (Cactus).
- 12. Rig up cement head and cementing lines.
 - a. Pressure test cement lines against cement head to 80% of casing burst for 10 min.
- 13. Break circulation on well to confirm no restrictions.
 - a. If gas is present on circulation, well will be shut in and returns rerouted through gas buster.
 - b. Max anticipated time before circulating with cement truck is 6 hrs.
- 14. Pump cement job as per plan.
 - a. At plug bump, test casing to 0.22 psi/ft or 1500 psi, whichever is greater.
 - b. If plug does not bump on calculated, shut down and wait 8 hrs or 500 psi compressive strength, whichever is greater before testing casing.
- 15. Confirm well is static and floats are holding after cement job.
 - a. With floats holding and backside static:
 - i. Remove cement head.
 - b. If floats are leaking:
 - i. Shut-in well and WOC (Wait on Cement) until tail slurry reaches 500 psi compressive strength and the casing is static prior to removing cement head.
 - c. If there is flow on the backside:
 - i. Shut in well and WOC until tail slurry reaches 500 psi compressive strength. Ensure that the casing is static prior to removing cement head.
- 16. Remove offline cement tool.
- 17. Install night cap with pressure gauge for monitoring.
- 18. Test night cap to 5,000 psi for 10 min.

Example Well Control Plan Content

A. Well Control Component Table

The table below, which covers the cementing of the <u>5M MASP (Maximum Allowable Surface Pressure) portion of the well</u>, outlines the well control component rating in use. This table, combined with the mud program, documents that two barriers to flow can be maintained at all times, independent of the BOP nippled up to the wellhead.

Intermediate hole section, 5M requirement

Component	RWP
Pack-off	10M
Casing Wellhead Valves	10M
Annular Wellhead Valves	5M
TA Plug	10M
Float Valves	5M
2" 1502 Lo-Torque Valves	15M

B. Well Control Procedures

Well control procedures are specific to the rig equipment and the operation at the time the kick occurs. Below are the minimal high-level tasks prescribed to assure a proper shut-in while circulating and cementing through the Offline Cement Adapter.

General Procedure While Circulating

- 1. Sound alarm (alert crew).
- 2. Shut down pumps.
- 3. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
- 4. Confirm shut-in.
- 5. Notify tool pusher/company representative.

Page | 3

2/24/2022

Seog resources

Offline Intermediate Cementing Procedure

- 6. Read and record the following:
 - a. SICP (Shut in Casing Pressure) and AP (Annular Pressure)
 - b. Pit gain
 - c. Time
 - d. Regroup and identify forward plan to continue circulating out kick via rig choke and mud/gas separator. Circulate and adjust mud density as needed to control well.

General Procedure While Cementing

- 1. Sound alarm (alert crew).
- 2. Shut down pumps.
- 3. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
- 4. Confirm shut-in.
- 5. Notify tool pusher/company representative.
- 6. Open rig choke and begin pumping again taking returns through choke manifold and mud/gas separator.
- 7. Continue to place cement until plug bumps.
- 8. At plug bump close rig choke and cement head.
- 9. Read and record the following
 - a. SICP and AP
 - b. Pit gain
 - c. Time
 - d. Shut-in annulus valves on wellhead


General Procedure After Cementing

- 1. Sound alarm (alert crew).
- 2. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
- 3. Confirm shut-in.
- 4. Notify tool pusher/company representative.
- 5. Read and record the following:
 - a. SICP and AP
 - b. Pit gain
 - c. Time
 - d. Shut-in annulus valves on wellhead

Page | 4

Seog resources Offline Intermediate Cementing Procedure


Figure 1: Cameron TA Plug and Offline Adapter Schematic

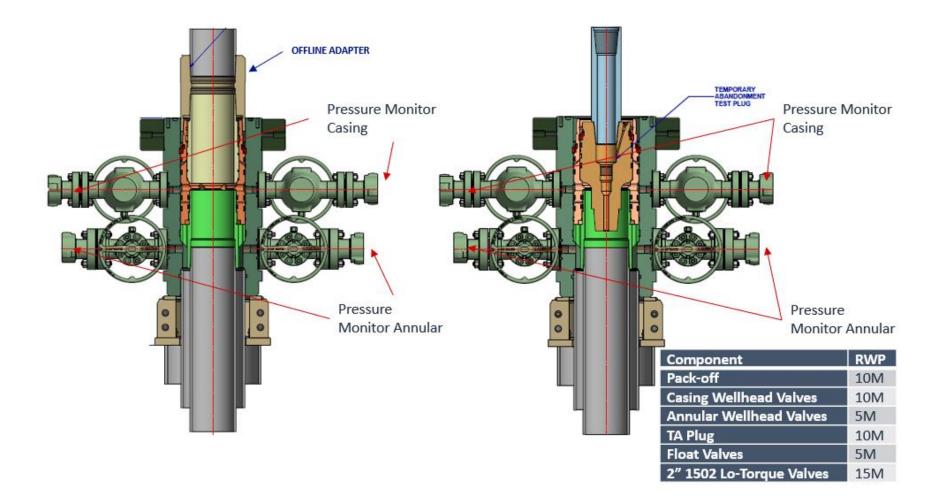

2/24/2022

Offline Intermediate Cementing Procedure



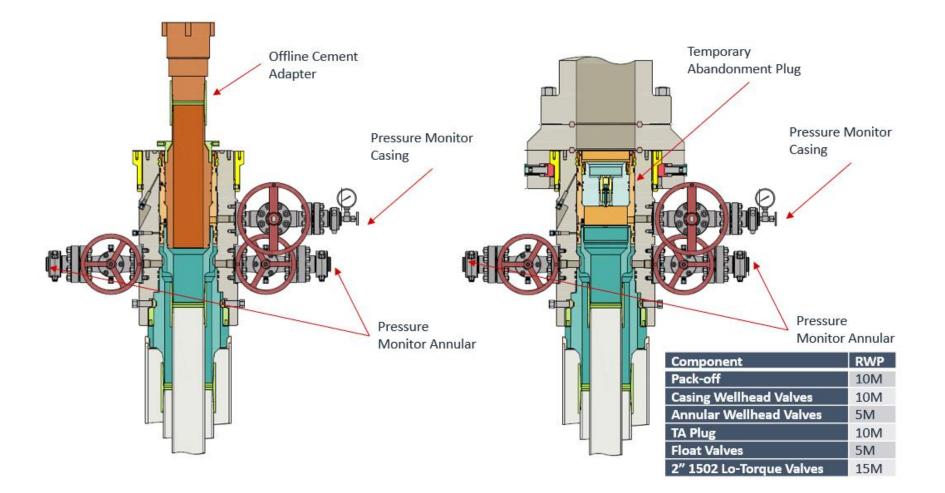


2/24/2022

Page 44 of 47

2/24/2022





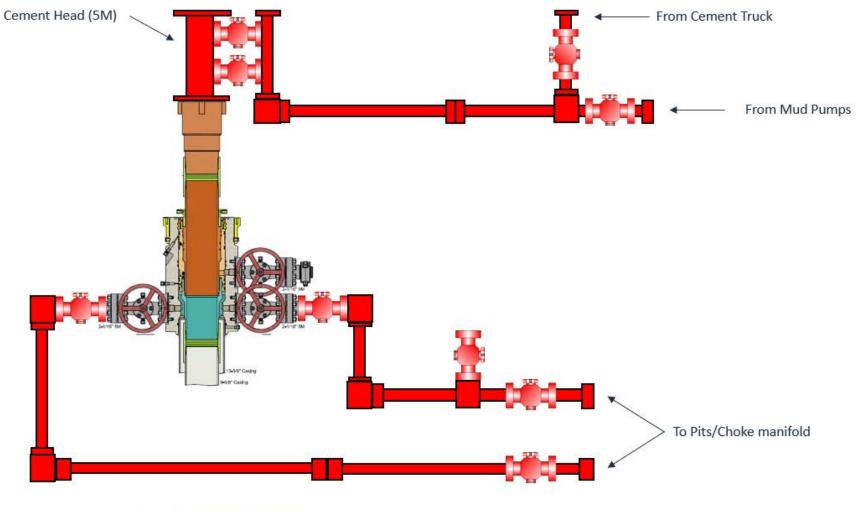

*** All Lines 10M rated working pressure

Page | 7





2/24/2022



Pretty Good 20 Fed Com 744H (FKA 708H) API #: 30-025-51795 Variances

EOG respectfully requests the below variances to be applied to the above well:

- Variance is requested to waive the centralizer requirements for the intermediate casing in the intermediate hole. An expansion additive will be utilized, in the cement slurry, for the entire length of the intermediate interval to maximize cement bond and zonal isolation.

- Variance is also requested to waive the centralizer requirements for the production casing in the production hole. An expansion additive will be utilized, in the cement slurry, for the entire length of the production interval to maximize cement bond and zonal isolation.

- Variance is requested to use a co-flex line between the BOP and choke manifold (instead of using a 4" OD steel line).

- Variance is requested to use a 5,000 psi annular BOP with the 10,000 psi BOP stack.

- EOG Resources requests the option to contract a Surface Rig to drill, set surface casing, and Cement on the subject well. After WOC 8 hours or 500 psi compressive strength (whichever is greater), the Surface Rig will move off so the wellhead can be installed. A welder will cut the casing to the proper height and weld on the wellhead (both "A" and "B" sections). The weld will be tested to 1,500 psi. All valves will be closed and a wellhead cap will be installed (diagram attached). If the timing between rigs is such that EOG Resources would not be able to preset the surface, the Primary Rig will MIRU and drill the well in its entirety per the APD.

EOG requests the additional variance(s) in the attached document(s):

- EOG BLM Variance 3a_b BOP Break-test and Offline Intermediate Cement
- EOG BLM Variance 2a Inermediate Bradenhead Cement

District I 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170 District IV

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3470 Fax: (505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Operator:	OGRID:
EOG RESOURCES INC	7377
5509 Champions Drive	Action Number:
Midland, TX 79706	379842
	Action Type:
	[C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
pkautz	REQUIRES NSP	9/3/2024

Page 47 of 47

.

Action 379842

Released to Imaging: 9/3/2024 10:51:54 AM