

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)


1. oil ☐ well gas ☒ well other ☐
2. NAME OF OPERATOR
Supron Energy Corp. % John H. Hill, et al
3. ADDRESS OF OPERATOR Suite 020, Kysar Building
300 W. Arrington, Farmington, New Mexico 87401
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1850' FSL & 1850' FEL (NW SE)
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:


SUBSEQUENT REPORT OF:

- TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

- ☐
☒
☐
☐
☐
☐
☐
☐

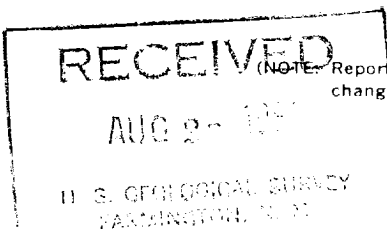

5. LEASE
SF - 078384
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
N/A
7. UNIT AGREEMENT NAME
N/A
8. FARM OR LEASE NAME
Newsom "B"
9. WELL NO.
1R
10. FIELD OR WILDCAT NAME
Ballard Pictured Cliffs
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 9 T26N R8W
12. COUNTY OR PARISH
San Juan
13. STATE
New Mexico
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
6445' GL



17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS* (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

1. Logged well, ran Gamma Ray Correlation and CCL logs.
2. Perforated the Pictured Cliffs formation as follows: 2290, 93, 96, 2302, 05, 08, 14, 18, 20, 22, 26, 34, 36, 38 & 39. Total 15 holes with Ceramic Strip.
3. Acidized with 1500 gallons 15% HCL acid and 2% KCL water.
4. Maximum Treating Pressure 2800 PSI, Minimum Treating Pressure 1000 PSI, Average Treating Pressure 1000 PSI, ISDP 700 PSI, Final Shut-In Pressure 800 PSI in 15 minutes. Job completed at 4:13 A.M., 8/24/81.

Subsurface Safety Valve: Manu. and Type

Set @ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Norman V. Wallis TITLE Exploration/Development Superintendent DATE August 27, 1981

(This space for Federal or State office use)

APPROVED BY
CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

*See Instructions on Reverse Side

NMOCC

BY