Form 3160-3 FORM APPROVED OMB No. 1004-0137 (June 2015) Expires: January 31, 2018 **UNITED STATES** DEPARTMENT OF THE INTERIOR 5. Lease Serial No. BUREAU OF LAND MANAGEMENT NMNM118722 APPLICATION FOR PERMIT TO DRILL OR REENTER 6. If Indian, Allotee or Tribe Name 7. If Unit or CA Agreement, Name and No. **✓** DRILL REENTER 1a. Type of work: 1b. Type of Well: Oil Well Gas Well Other 8. Lease Name and Well No. 1c. Type of Completion: Hydraulic Fracturing ✓ Single Zone Multiple Zone SD 14 23 FED P305 307H 2. Name of Operator 9. API Well No. CHEVRON USA INCORPORATED 3a. Address 3b. Phone No. (include area code) 10. Field and Pool, or Exploratory PO BOX 1392, BAKERSFIELD, CA 93302 (661) 633-4000 Jennings/UPPER BONE SPRING SHALE 4. Location of Well (Report location clearly and in accordance with any State requirements.*) 11. Sec., T. R. M. or Blk. and Survey or Area SEC 14/T26S/R32E/NMP At surface NWNE / 312 FNL / 2346 FEL / LAT 32.049447 / LONG -103.644573 At proposed prod. zone SWSE / 25 FSL / 1635 FEL / LAT 32.020964 / LONG -103.642323 14. Distance in miles and direction from nearest town or post office* 12. County or Parish 13. State LEA NM 39 miles 15. Distance from proposed* 16. No of acres in lease 17. Spacing Unit dedicated to this well 312 feet location to nearest property or lease line, ft. 640.0 (Also to nearest drig. unit line, if any) 18. Distance from proposed location* 19. Proposed Depth 20. BLM/BIA Bond No. in file to nearest well, drilling, completed, 250 feet 9900 feet / 20410 feet FED: applied for, on this lease, ft. 21. Elevations (Show whether DF, KDB, RT, GL, etc.) 22. Approximate date work will start* 23. Estimated duration 3207 feet 01/05/2024 130 days 24. Attachments The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable) 1. Well plat certified by a registered surveyor. 4. Bond to cover the operations unless covered by an existing bond on file (see 2. A Drilling Plan. Item 20 above). 3. A Surface Use Plan (if the location is on National Forest System Lands, the 5. Operator certification. 6. Such other site specific information and/or plans as may be requested by the SUPO must be filed with the appropriate Forest Service Office). 25. Signature Name (Printed/Typed) Date (Electronic Submission) CAROL ADLER / Ph: (432) 687-7866 09/30/2022 Sr Regulatory Affairs Coordinator Approved by (Signature) Name (Printed/Typed) Date (Electronic Submission) 09/23/2024 CODY LAYTON / Ph: (575) 234-5959 Title Office Assistant Field Manager Lands & Minerals Carlsbad Field Office Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



*(Instructions on page 2)

applicant to conduct operations thereon. Conditions of approval, if any, are attached.


| 102324 dwg |
|------------|
| C-102 |
| 307H |
| P305 No. |
| 23 FED |
| G\SD 14 |
| 4500\DW |
| :\2022\222 |
| - |

| Phone: (General Phone: (Online F | Information (505) 629-61 Phone Direct | 141 Fax: (55) 4 16 | | | Energy, Mi | te of New Mexico nerals & Natural Res Department SERVATION DIV | | Subi | | d Report | | | |
|----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------|-------------------|----------------------|--|--|--|
| | | | | • | WELL LOCA | TION INFORMATION | J | • | | | | | |
| API Nu | | | Pool Code | 97903 | | Pool Name | 18 52532350 | 3. I OWED | BONE SPRING | તુ | | | |
| Propert | N/A ty Code | | Property Na | | | WC-023 G-0 | 76 32332330 | J, LOWER | Well Numb | | | | |
| | N/A | | | | SD | 14 23 FED P305 | | | | 307H | | | |
| OGRIE | 9 No. 4323 | | Operator N | ame | CHEV | VRON U.S.A. INC. | | | Ground Lev | vel Elevation 3,207' | | | |
| Surface | Owner: 🗆 | State ☐ Fee ☐ |] Tribal ⊠ Fo | ederal | | Mineral Owner: | State □ Fe | e 🗆 Tribal | X Federal | | | | |
| | | | | | Surt | face Location | | | | | | | |
| UL | Section | Township | Range | Lot | Ft. from N/S | Ft. from E/W | Latitude | | Longitude | County | | | |
| В | 14 | 26 SOUTH | 32 EAST, N.M.P.M. | N/A | 312' NORTH | 2,346' EAST | 32.04944 | 17° N 1 | 103.644573° W | LEA | | | |
| | | | | | | n Hole Location | | | | | | | |
| UL | Section | Township | Range 32 EAST, | Lot | Ft. from N/S | Ft. from E/W | Latitude | | Longitude | County | | | |
| О | 23 | 26 SOUTH | N.M.P.M. | N/A | 25' SOUTH | 1,635' EAST | 32.02096 | 54° N 1 | 103.642323° W | LEA | | | |
| | | T | | | | | | | | | | | |
| | ted Acres | Infill or Defi | _ | 1 | g Well API | Overlapping Spacing Unit (Y/N) Consolidation Code N N/A | | | | | | | |
| | Vumbers. | N/A | LL | 30- | -025-49786 | Well setbacks are un | ider Commo | n Ownersh | | | | | |
| Order | varioers. | IN/A | | | | Well setodeks are un | ider Comme | on Ownersii | ip. 🗆 res 🖼 10 | | | | |
| | | | Г | | | Off Point (KOP) | | | | | | | |
| UL | Section | Township | Range 32 EAST, | Lot | Ft. from N/S | Ft. from E/W | Latitude | | Longitude | County | | | |
| В | 14 | 26 SOUTH | N.M.P.M. | N/A | 100' NORTH | 1,635' EAST | 32.05003 | 30° N 1 | 103.642276° W | LEA | | | |
| UL | Section | Township | Range | Lot | Ft. from N/S | Ft. from E/W | Latitude | | Longitude | County | | | |
| | | · | 32 EAST, | | 100' NORTH | | 32.050030° N | | 103.642276° W | , | | | |
| В | 14 | 26 SOUTH | N.M.P.M. | N/A | | 1,635' EAST ake Point (LTP) | 32.03003 | 50 IN [1 | 103.042270 W | LEA | | | |
| UL | Section | Township | Range | Lot | Ft. from N/S | Ft. from E/W | Latitude | | Longitude | County | | | |
| О | 23 | 26 SOUTH | 32 EAST, N.M.P.M. | N/A | 100' SOUTH | 1,635' EAST | 32.02117 | 71° N 1 | 103.642322° W | LEA | | | |
| | | | | | | | | Į. | | | | | |
| Unitize | | rea of Uniform N/A | Interest | Spacing | Unit Type 🗵 Ho | rizontal Vertical | Gro | und Floor E | levation: 3,207' | | | | |
| <u> </u> | 1 | N/A | | | | | | | 3,207 | | | | |
| OPER. | ATOR CER | ΓΙΓΙCATIONS | | | | SURVEYOR CERTIFI | ICATIONS | | | | | | |
| best of n that this the land at this la unleased pooling If this we the cons mineral the well order fre | my knowledge organization including the cocation pursue of mineral inte-order heretofe ell is a horizo tent of at least interest in each is completed if the division the division of the completed if the completed if the division of the division of the division the | proposed bottom unt to a contract rest, or to a volu ore entered by the untal well, I furthe one lessee or ow the tract (in the ta unterval will be lo untary | if the well is a vorking interest on the location with an owner of the analyst pooling age division. The certify that the analyst pool or for for for the analyst pool or for for the analyst pool or | pertical or de or unleased or has a rig of a working greement or tis organiza is interest or mation) in | irectional well, mineral interest in ht to drill this well g interest or a compulsory tion has received r unleased which any part of | I hereby certify that the we actual surveys made by me to the best of my belief. See Sheet 2 of 2 for plat. Signature and Seal of Prof | e or under my | 23006 10/23/20 | and that the same | | | | |
| Nico Printed | ole Taylo Name | | | | | Certificate Number | 02/04/20 Date of Sur |)22 | . U | | | | |
| nicol Email A | | @chevro | n.com | | | | | | | | | | |

ACREAGE DEDICATION PLATS

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

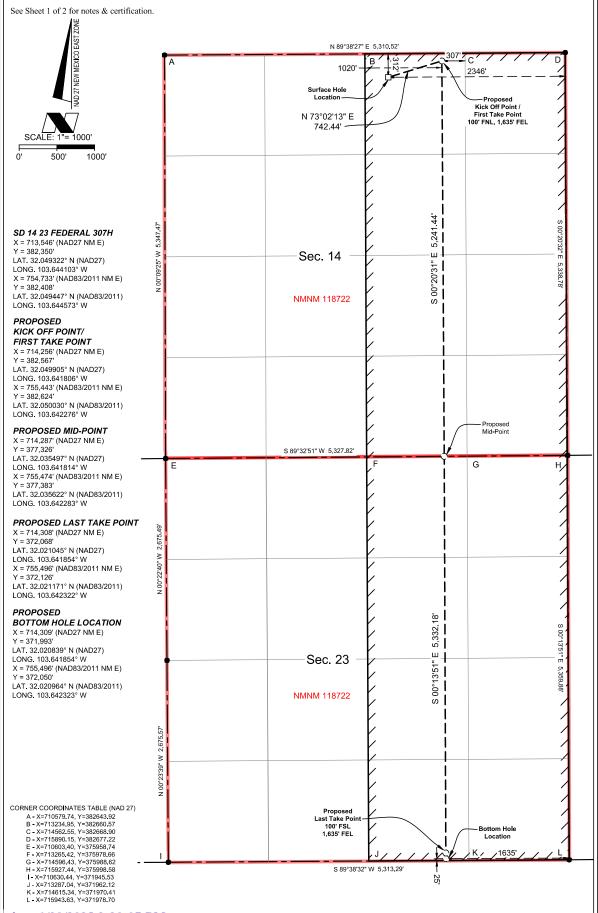

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Electronically Via E-permitting

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description Effective May 25, 2021

| I. Operator:Chevr | on USA Inc | | _ OGRID: _ | 4323 | Date | : 09/2//2022 |
|---------------------------------------------------|--------------|----------------------------|-----------------------|--------------------------|--------------------------|----------------------------------------|
| II. Type: ⊠ Origina If Other, please describe | | ent due to □ 19.15.27. | | AC □ 19.15.27.9 | 9.D(6)(b) NMAC | □ Other. |
| III. Well(s): Provide the be recompleted from a s | | | | | wells proposed to | be drilled or proposed to |
| Well Name | API | ULSTR | Footages | Anticipated Oil BBL/D | Anticipated Gas MCF/D | Anticipated Produced Water BBL/D |
| SD 14 23 Fed Pad 305 #204H | Pending | UL: B Sect 14 T26S R32E | 312" FNL 2406' FEL | 1440 BBL/D | 3815 MCF/D | 2890 BBL/D |
| SD 14 23 Fed Pad 305 #205H | Pending | UL: B Sect 14 T26S R32E | 312" FNL 2366' FEL | 1440 BBL/D | 3815 MCF/D | 2890 BBL/D |
| SD 14 23 Fed Pad 305 #206H | Pending | UL: B Sect 14 T26S R32E | 312" FNL 2326' FEL | 1440 BBL/D | 3815 MCF/D | 2890 BBL/D |
| SD 14 23 Fed Pad 305 #305H | Pending | UL: B Sect 14 T26S R32E | 312" FNL 2426' FEL | 1440 BBL/D | 3815 MCF/D | 2890 BBL/D |
| SD 14 23 Fed Pad 305 #306H | Pending | UL: B Sect 14 T26S R32E | 312" FNL 2386' FEL | 1440 BBL/D | 3815 MCF/D | 2890 BBL/D |
| SD 14 23 Fed Pad 305 #307H | Pending | UL: B Sect 14 T26S R32E | 312" FNL 2346' FEL | 1440 BBL/D | 3815 MCF/D | 2890 BBL/D |
| SD 14 23 Fed Pad 305 #308H | Pending | UL: B Sect 14 T26S R32E | 312" FNL 2306' FEL | 1440 BBL/D | 3815 MCF/D | 2890 BBL/D |
| IV. Central Delivery P | oint Name: _ | Salado Draw S | atellite 14 | | _[See 19.15.27.9 | O(D)(1) NMAC] |

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name | API | Spud Date | TD Reached | Completion | Initial Flow | First Production |
|-------------------------------|-----|-----------|------------|-------------------|--------------|------------------|
| | | | Date | Commencement Date | Back Date | Date |
| SD 14 23 Fed Pad 305 #204H | TBD | 4/1/2026 | N/A | N/A | N/A | N/A |
| SD 14 23 Fed Pad 305 #205H | TBD | 4/21/2026 | N/A | N/A | N/A | N/A |
| SD 14 23 Fed Pad 305 #206H | TBD | 5/11/2026 | N/A | N/A | N/A | N.A |

| SD 14 23 Fed Pad 305 #305H | TBD | 5/31/2026 | N/A | N/A | N/A | N/A |
|-------------------------------|-----|-----------|-----|-----|-----|-----|
| SD 14 23 Fed Pad 305 #306H | TBD | 6/20/2026 | N/A | N/A | N/A | N/A |
| SD 14 23 Fed Pad 305 #307H | TBD | 7/10/2026 | N/A | N/A | N/A | N/A |
| SD 14 23 Fed Pad 305 #308H | TBD | 7/30/2026 | N/A | N/A | N/A | N/A |

VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ⊠ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices:

☐ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☑ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

| | Natural Gas Rate MCF/D | Gas for the First Year MCF |
|--|------------------------|----------------------------|
| | | |

X. Natural Gas Gathering System (NGGS):

| Operator | System | ULSTR of Tie-in | Anticipated Gathering | Available Maximum Daily Capacity |
|----------|--------|-----------------|-----------------------|----------------------------------|
| | | | Start Date | of System Segment Tie-in |
| | | | | |
| | | | | |

XI. Map. \square Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system \square will \square will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator \square does \square does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: □ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Page 2 of 5

(i)

Section 3 - Certifications <u>Effective May 25, 2021</u>

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal: 🗵 Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system: or ☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. If Operator checks this box, Operator will select one of the following: Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or Venting and Flaring Plan.

Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including: power generation on lease: (a) **(b)** power generation for grid; compression on lease; (c) (d) liquids removal on lease; reinjection for underground storage; (e) **(f)** reinjection for temporary storage; **(g)** reinjection for enhanced oil recovery; fuel cell production; and (h)

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

other alternative beneficial uses approved by the division.

- (a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or
- (b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.
- 2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

| Signature: Cindy Herrera-Murillo Printed Name: Cindy Herrera-Murillo |
|-----------------------------------------------------------------------|
| Printed Name: Cindy Herrera-Murillo |
| Title: Sr HSE Regulatory affairs Coordinator |
| E-mail Address eeof@chevron.com |
| Date: 09/27/2022 |
| Phone: 575-263-0431 |
| OIL CONSERVATION DIVISION |
| (Only applicable when submitted as a standalone form) |
| Approved By: |
| Title: |
| Approval Date: |
| Conditions of Approval: |
| |
| |
| |
| |

VI. Separation Equipment:

Separation equipment installed at each Chevron facility is designed for maximum anticipated throughput and pressure to minimize waste. Separation equipment is designed and built according to ASME Sec VIII Div I to ensure gas is separated from liquid streams according to projected production.

VII./VIII. Operational & Best Management Practices:

- 1. General Requirements for Venting and Flaring of Natural Gas:
 - In all circumstances, Chevron will flare rather than vent unless flaring is technically infeasible and venting of natural gas will avoid a risk of an immediate and substantial adverse impact on safety, public health, or the environment.
 - Chevron installs and operates vapor recovery units (VRUs) in new facilities to minimize venting and flaring.
 If a VRU experiences operating issues, it is quickly assessed so that action can be taken to return the VRU to operation or, if necessary, facilities are shut-in to reduce the venting or flaring of natural gas.

2. During Drilling Operations:

- Flare stacks will be located a minimum of 110 feet from the nearest surface hole location.
- If an emergency or malfunction occurs, gas will be flared or vented to avoid a risk of an immediate and substantial adverse impact on public health, safety or the environment and be properly reported to the NMOCD pursuant to 19.15.27.8.G.
- Natural gas is captured or combusted if technically feasible using best industry practices and control technologies, such as the use of separators (e.g., Sand Commanders) during normal drilling and completions operations.

3. During Completions:

- Chevron typically does not complete traditional flowback, instead Chevron will flow produced oil, water, and gas to a centralized tank battery and continuously recover salable quality gas. If Chevron completes traditional flowback, Chevron conducts reduced emission completions as required by 40 CFR 60.5375a by routing gas to a gas flow line as soon as practicable once there is enough gas to operate a separator.
 Venting does not occur once there is enough gas to operate a separator
- Normally, during completions a flare is not on-site. A Snubbing Unit will have a flare on-site, and the flare volume will be estimated.
- If natural gas does not meet pipeline quality specification, the gas is sampled twice per week until the gas meets the specifications.

4. During Production:

- An audio, visual and olfactory (AVO) inspection will be performed daily (at minimum) for active wells and
 facilities to confirm that all production equipment is operating properly and there are no leaks or releases
 except as allowed in Subsection D of 19.15.27.8 NMAC. Inactive, temporarily abandoned, or shut-in wells
 and facilities will be inspected weekly. Inspection records will be kept for a minimum of five years and will
 be available upon request by the division.
- Monitor manual liquid unloading for wells on-site, takes all reasonable actions to achieve a stabilized rate
 and pressure at the earliest practical time and takes reasonable actions to minimize venting to the
 maximum extent practicable.
- In all circumstances, Chevron will flare rather than vent unless flaring is technically infeasible and venting of natural gas will avoid a risk of an immediate and substantial adverse impact on safety, public health, or the environment.
- Chevron's design for new facilities utilizes air-activated pneumatic controllers and pumps.
- If natural gas does not meet pipeline quality specification, the gas is sampled twice per week until the gas meets the specifications.
- Chevron does not produce oil or gas until all flowlines, tank batteries, and oil/gas takeaway are installed, tested, and determined operational.

5. Performance Standards

- Equipment installed at each facility is designed for maximum anticipated throughput and pressure to minimize waste. Tank pressure relief systems utilize a soft seated or metal seated PSVs, as appropriate, which are both designed to not leak.
- Flare stack has been designed for proper size and combustion efficiency. New flares will have a
 continuous pilot and will be located at least 100 feet from the well and storage tanks and will be securely
 anchored.
- New tanks will be equipped with an automatic gauging system.
- An audio, visual and olfactory (AVO) inspection will be performed daily (at minimum) for active wells and
 facilities to confirm that all production equipment is operating properly and there are no leaks or releases
 except as allowed in Subsection D of 19.15.27.8 NMAC. Inactive, temporarily abandoned, or shut-in wells
 and facilities will be inspected weekly. Inspection records will be kept for a minimum of five years and will
 be available upon request by the division.

6. Measurement or Estimation of Vented and Flared Natural Gas

- Chevron estimates or measures the volume of natural gas that is vented, flared, or beneficially used during drilling, operations, regardless of the reason or authorization for such venting or flaring.
- Where technically practicable, Chevron will install meters on flares installed after May 25, 2021. Meters
 will conform to industry standards. Bypassing the meter will only occur for inspecting and servicing of the
 meter.

Well Name: SD 14 23 FED P305 Well Number: 307H

utilized.

Testing Procedure: The stack will be tested as specified in the attached testing requirements. Batch drilling of the surface, production, and production liner will take place. A full BOP test will be performed per hole section, unless approval from BLM is received otherwise (see variance request). Flex choke hose will be used for all wells on the pad (see attached specs and variance). BOP test pressures and other documented tests may be recorded and documented via utilization of the IPT 'Suretec' Digital BOP Test Method in lieu of the standard test chart. In the event the IPT system is unavailable, the standard test chart will be used.

Choke Diagram Attachment:

BLM_5M_Choke_Manifold_Diagram_20220928073227.pdf

BOP Diagram Attachment:

BLM_5M_Annular_10M_Rams_Stackup_and_Test_Plan_20220928073255.pdf

NM Slim Hole Wellhead 6650 psi UH S 20220928073336.pdf

BLM_Choke_Hose_Test_Specs_and_Pressure_Test_Continental_20220928073403.pdf

Sundry_Break_Testing_and_WOC_500_psi_SD_P305_20220928073443.pdf

Section 3 - Casing

| Casing ID | String Type | Hole Size | Csg Size | Condition | Standard | Tapered String | Top Set MD | Bottom Set MD | Top Set TVD | Bottom Set TVD | Top Set MSL | Bottom Set MSL | Calculated casing length MD | Grade | Weight | Joint Type | Collapse SF | Burst SF | Joint SF Type | Joint SF | Body SF Type | Body SF |
|-----------|------------------|-----------|----------|-----------|----------|----------------|------------|---------------|-------------|----------------|-------------|----------------|--------------------------------|-----------|--------|-------------------|-------------|----------|---------------|-----------|--------------|-----------|
| 1 | SURFACE | 17.5 | 13.375 | NEW | API | N | 0 | 995 | 0 | 995 | 3207 | 2212 | 995 | J-55 | | OTHER - BTC | 3.72 | 1.98 | BUOY | 15.7 3 | BUOY | 15.7 3 |
| 2 | INTERMED IATE | 12.2 5 | 9.625 | NEW | API | N | 0 | 4633 | 0 | 4593 | 3159 | -1386 | 4633 | L-80 | 40 | BUTT | 2.24 | 2.46 | BUOY | 4.99 | BUOY | 4.99 |
| | INTERMED IATE | 8.75 | 7.0 | NEW | API | N | 0 | 9457 | 0 | 9407 | 3159 | -6200 | | OTH ER | - | OTHER - BLUE | 2.94 | 4.18 | BUOY | 3.41 | BUOY | 3.41 |
| 4 | PRODUCTI ON | 6.12 5 | 5.0 | NEW | API | N | 9157 | 9907 | 8907 | 9807 | -5700 | -6600 | 750 | P- 110 | | OTHER - W- 513 | 2.35 | 3.94 | BUOY | 2.08 | BUOY | 2.08 |
| 5 | PRODUCTI ON | 6.12 5 | 4.5 | NEW | API | N | 9907 | 20410 | 9807 | 9900 | -6600 | -6693 | 10503 | P- 110 | | OTHER - W- 521 | 2.35 | 3.94 | BUOY | 2.08 | BUOY | 2.08 |

Casing Attachments

Well Name: SD 14 23 FED P305 Well Number: 307H

| ^ · · · · | A 44 I 4 - |
|-----------|--------------------|
| เ:ลยเทศ | Attachments |
| Casiliq | Allacillicits |
| | |

Casing ID: 1

String

SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

 $13.375_54.5ppf_J55_BTC_20190802115131.pdf$

Casing ID: 2

String

INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

9.625_L80IC_20190802115220.pdf

Casing ID: 3

•

String

INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

7_29ppf_TN110SS_TSH_Blue_20220928074833.pdf

Well Name: SD 14 23 FED P305 Well Number: 307H

Casing Attachments

Casing ID: 4

String

PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

 $5_18ppf_P110_Flush_W513_20220928075129.pdf$

Casing ID: 5

String

PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

4.5_11.6ppf_P110_TSH_W521_20220928075110.pdf

Section 4 - Cement

| String Type | Lead/Tail | Stage Tool Depth | Тор МБ | Bottom MD | Quantity(sx) | Yield | Density | Cu Ft | Excess% | Cement type | Additives |
|-------------|-----------|---------------------|--------|-----------|--------------|-------|---------|-------|---------|-------------|----------------------------------------------|
| SURFACE | Lead | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | N/A | N/A |
| SURFACE | Tail | | 0 | 995 | 650 | 1.33 | 14.8 | 864 | 25 | CLASS C | Extender, Antifoam, Retarder, Viscosifier |
| PRODUCTION | Lead | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | N/A | NA |

| INTERMEDIATE | Lead | 0 | 3633 | 571 | 2.49 | 11.9 | 1422 | 25 | Class C | Extender, Antifoam, |
|--------------|------|---|------|-----|------|------|------|----|---------|-----------------------|
| | | | | | | | | | | Retarder, Viscosifier |

Well Name: SD 14 23 FED P305 Well Number: 307H

| String Type | Lead/Tail | Stage Tool Depth | Top MD | Bottom MD | Quantity(sx) | Yield | Density | Cu Ft | Excess% | Cement type | Additives |
|--------------|-----------|---------------------|--------|-----------|--------------|-------|---------|-------|---------|-------------|----------------------------------------------|
| INTERMEDIATE | Tail | | 3633 | 4633 | 323 | 1.33 | 14.8 | 429 | 25 | Class C | Extender, Antifoam, Retarder, Viscosifier |
| INTERMEDIATE | Lead | | 0 | 8457 | 583 | 2.49 | 11.9 | 1453 | 25 | Class C | Extender, Antifoam, Retarder, Viscosifier |
| INTERMEDIATE | Tail | | 8457 | 9457 | 141 | 1.33 | 14.8 | 188 | 25 | Class C | Extender, Antifoam, Retarder, Viscosifier |
| PRODUCTION | Lead | | 9157 | 2041 0 | 996 | 1.33 | 14.8 | 1325 | 25 | Class C | Extender, Antifoam, Retarder, Viscosifier |

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: If an open reserve pit is not approved by OCD, a closed system will be used consisting of above ground steel tanks and all wastes accumulated during drilling operations will be contained in a portable trash cage and removed from location and deposited in an approved sanitary landfill. If an open reserve pit is in place, pit construction, operation, and closure will follow all applicable rules and regulation. Sanitary wastes will be contained in a chemical porta-toilet and then hauled to an approved sanitary landfill.

Describe the mud monitoring system utilized: All fluids and cuttings will be disposed of in accordance with New Mexico Oil Conservation Division rules and regulations. And transportating of E&P waste will follow EPA regulations and accompanying manifests. A mud test shall be performed every 24 hours after mudding up to determine, as applicable: density, viscosity, gel strength, filtration, and pH. Visual mud monitoring equipment shall be in place to detect volume changes indicating loss or gain of circulating fluid volume. When abnormal pressures are anticipated -- a pit volume totalizer (PVT), stroke counter, and flow sensor will be used to detect volume changes indicating loss or gain of circulating fluid volume.

Circulating Medium Table

| Top Depth | Bottom Depth | Mud Type | Min Weight (lbs/gal) | Max Weight (lbs/gal) | Density (lbs/cu ft) | Gel Strength (lbs/100 sqft) | ЬН | Viscosity (CP) | Salinity (ppm) | Filtration (cc) | Additional Characteristics |
|-----------|--------------|--------------------|----------------------|----------------------|---------------------|-----------------------------|----|----------------|----------------|-----------------|----------------------------------|
| 4633 | 9457 | WATER-BASED MUD | 8.7 | 9 | | | | | | | F. Vis 70 - 75, Filtrate 25 - 30 |

Well Name: SD 14 23 FED P305 Well Number: 307H

| Top Depth | Bottom Depth | Mud Type | Min Weight (lbs/gal) | Max Weight (lbs/gal) | Density (lbs/cu ft) | Gel Strength (lbs/100 sqft) | Hd | Viscosity (CP) | Salinity (ppm) | Filtration (cc) | Additional Characteristics |
|-----------|--------------|------------------|----------------------|----------------------|---------------------|-----------------------------|----|----------------|----------------|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| 9457 | 2041 | OIL-BASED MUD | 9.2 | 9.5 | | 0 | | | 03 | <u> </u> | F. Vis 70 - 75, Filtrate 25 - 30 -Due to wellbore instability in the lateral, may exceed the MW weight window needed to maintain overburden stresses |
| 0 | 995 | SPUD MUD | 8.3 | 8.9 | | | | | | | F. Vis 32-34, Filtrate NC - NC |
| 995 | 4633 | OTHER : BRINE | 8.9 | 10 | | | | | | | F. Vis 28 - 30, Filtrate 25 - 30 -Saturated brine would be used through salt sections. |

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Production tests are not planned.

Logs run include: Gamma Ray Log, Directional Survey

Coring Operations are not planned.

List of open and cased hole logs run in the well:

GAMMA RAY LOG, DIRECTIONAL SURVEY,

Coring operation description for the well:

Conventional whole core samples are not planned. A Directional Survey will be run.

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 4891 Anticipated Surface Pressure: 2712

Anticipated Bottom Hole Temperature(F): 165

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geoharzards description:

Contingency Plans geohazards

Well Name: SD 14 23 FED P305 Well Number: 307H

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations

Chevron_Standard_H2S_Contingency_Plan_2022_20220928080336.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

DefPlan100ft_SD1423FEDP305No.307H_R0_20220929144111.pdf SD_P305_307H_9P_20220930133159.pdf

Other proposed operations facets description:

Chevron requests authorization to use the spudder rig to spud the well and set surface casing. The drilling rig will move in less than 90 days to continue drilling operations. Rig layouts attached.

Other proposed operations facets attachment:

7_well_rig_layout_patterson_20220928080517.pdf
CUSA_Spudder_Rig_Data_20220928080541.pdf
Gas_Management_Plan__SD_Pad_305_20220928083019.pdf
Operational_Best_Management_Practices_V2_20220928083027.pdf

Other Variance attachment:

Longitude

Schlumberger

SD 14 23 FED P305 No. 307H R0 mdv 24May22 Proposal Geodetic Report



(Def Plan)

VSEC

 Report Date:
 May 26, 2022 - 12:06 PM

 Client:
 Chevron

 Field:
 NM Lea County (NAD 27)

 Structure / Slot:
 Chevron Salado Draw Pad 305 / 307H

 Well:
 SD 14 23 FED P305 No. 307H

 Borehole:
 SD 14 23 FED P305 No. 307H

 UWI / API#:
 Unknown / Unknown

 UWI / AP#:
 Unknown / Unknown

 Survey Name:
 SD 14 23 FED P305 No. 307H R0 mdv 24May22

 Survey Date:
 May 26, 2022

 Tort / AHD / DDI / ERD Ratio:
 107.014 * / 11382.929 ft / 6.396 / 1.138

 Coordinate Reference System:
 NAD27 New Mexico State Plane, Eastern Zone, US Feet

 Location Lat / Long:
 N 32' 2'57.55702", W 103' 38' 38.76566"

 Location Grid MKE YIX:
 N 382350.000 ftUS, E 713346.000 ftUS

CRS Grid Convergence Angle: 0.3658 ° Grid Scale Factor: 0.99996132

Version / Patch: 2.10.829.1

 Survey / DLS Computation:
 Minimum Curvature / Lubinski

 Vertical Section Azimuth:
 179.730 ° (Grid North)

 Vertical Section Origin:
 0.000 ft, 0.000 ft

 TVD Reference Datum:
 RKB = 28ft

 TVD Reference Elevation:
 3235.000 ft above MSL

 Seabed / Ground Elevation:
 3207.000 ft above MSL

 Magnetic Declination:
 6.387 °

 Total Gravity Field Strength:
 998.4329mgn (9.80665 Based)

 Gravity Model:
 GARM

| Comments | (ft) | (°) | Azım Grid (°) | (ft) | VSEC (ft) | (ft) | (ft) | (°/100ft) | (ftUS) | (ftUS) (N/S ° ' ") (E/W ° | |
|----------------------|--------------------|--------------|------------------|--------------------|--------------------|------------------|------------------|--------------|------------------------|---------------------------------------------------------------------------|-------|
| Surface | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | N/A | 382350.00 | 713546.00 N 32 2 57.56 W 103 38 38 | |
| Dockum (DCKM) | 50.00 | 0.00 | 69.38 | 50.00 | 0.00 | 0.00 | 0.00 | 0.00 | 382350.00 | 713546.00 N 32 2 57.56 W 103 38 38. | 3.77 |
| | 100.00 | 0.00 | 69.38 | 100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 382350.00 | 713546.00 N 32 257.56 W 103 38 38 | 3.77 |
| | 200.00 | 0.00 | 69.38 | 200.00 | 0.00 | 0.00 | 0.00 | 0.00 | 382350.00 | 713546.00 N 32 257.56 W 103 38 38 | |
| | 300.00 | 0.00 | 69.38 | 300.00 | 0.00 | 0.00 | 0.00 | 0.00 | 382350.00 | 713546.00 N 32 257.56 W 103 38 38 | |
| | 400.00 | 0.00 | 69.38 | 400.00 | 0.00 | 0.00 | 0.00 | 0.00 | 382350.00 | 713546.00 N 32 2 57.56 W 103 38 38 | |
| Dewey Lake (DWLK) | 500.00 600.00 | 0.00 0.00 | 69.38 69.38 | 500.00 600.00 | 0.00 0.00 | 0.00 0.00 | 0.00 0.00 | 0.00 0.00 | 382350.00 382350.00 | 713546.00 N 32 2 57.56 W 103 38 38 713546.00 N 32 2 57.56 W 103 38 38 | |
| Rustler (RSLR) | 685.08 | 0.00 | 69.38 | 685.08 | 0.00 | 0.00 | 0.00 | 0.00 | 382350.00 | 713546.00 N 32 2 57.56 W 103 38 38 713546.00 N 32 2 57.56 W 103 38 38. | |
| Nusuer (NSLN) | 700.00 | 0.00 | 69.38 | 700.00 | 0.00 | 0.00 | 0.00 | 0.00 | 382350.00 | 713546.00 N 32 2 57.56 W 103 38 38 | |
| Build 1.5°/100ft | 800.00 | 0.00 | 69.38 | 800.00 | 0.00 | 0.00 | 0.00 | 0.00 | 382350.00 | 713546.00 N 32 257.56 W 103 38 38 | |
| | 900.00 | 1.50 | 69.38 | 899.99 | -0.46 | 0.46 | 1.23 | 1.50 | 382350.46 | 713547.23 N 32 2 57.56 W 103 38 38 | |
| Los Medanos | 970.06 | 2.55 | 69.38 | 970.00 | -1.32 | 1.33 | 3.54 | 1.50 | 382351.33 | 713549.54 N 32 2 57.57 W 103 38 38. | |
| | 1000.00 | 3.00 | 69.38 | 999.91 | -1.82 | 1.84 | 4.90 | 1.50 | 382351.84 | 713550.90 N 32 257.57 W 103 38 38 | |
| Salado (SLDO) | 1080.58 | 4.21 | 69.38 | 1080.33 | -3.58 | 3.63 | 9.64 | 1.50 | 382353.63 | 713555.64 N 32 2 57.59 W 103 38 38. | |
| | 1100.00 | 4.50 | 69.38 | 1099.69 | -4.09 | 4.15 | 11.02 | 1.50 | 382354.15 | 713557.02 N 32 2 57.60 W 103 38 38 | |
| | 1200.00 | 6.00 7.50 | 69.38 | 1199.27 | -7.28 | 7.37 | 19.58 30.59 | 1.50 | 382357.37 | 713565.58 N 32 2 57.63 W 103 38 38 | |
| Hold | 1300.00 1333.32 | 7.50 8.00 | 69.38 69.38 | 1298.57 1331.59 | -11.36 -12.92 | 11.51 13.09 | 30.59 | 1.50 1.50 | 382361.51 382363.09 | 713576.58 N 32 2 57.67 W 103 38 38 713580.79 N 32 2 57.68 W 103 38 38 | |
| Told | 1400.00 | 8.00 | 69.38 | 1397.62 | -16.15 | 16.35 | 43.48 | 0.00 | 382366.35 | 713589.47 N 32 257.72 W 103 38 38 | |
| | 1500.00 | 8.00 | 69.38 | 1496.65 | -20.99 | 21.25 | 56.50 | 0.00 | 382371.25 | 713602.50 N 32 2 57.76 W 103 38 38 | |
| | 1600.00 | 8.00 | 69.38 | 1595.67 | -25.83 | 26.15 | 69.53 | 0.00 | 382376.15 | 713615.53 N 32 2 57.81 W 103 38 37 | |
| | 1700.00 | 8.00 | 69.38 | 1694.70 | -30.67 | 31.05 | 82.55 | 0.00 | 382381.05 | 713628.55 N 32 2 57.86 W 103 38 37 | 7.80 |
| | 1800.00 | 8.00 | 69.38 | 1793.73 | -35.50 | 35.95 | 95.58 | 0.00 | 382385.95 | 713641.58 N 32 257.91 W 103 38 37 | |
| | 1900.00 | 8.00 | 69.38 | 1892.75 | -40.34 | 40.85 | 108.61 | 0.00 | 382390.85 | 713654.60 N 32 2 57.95 W 103 38 37 | |
| | 2000.00 | 8.00 | 69.38 | 1991.78 | -45.18 | 45.75 | 121.63 | 0.00 | 382395.75 | 713667.63 N 32 2 58.00 W 103 38 37 | |
| | 2100.00 | 8.00 | 69.38 | 2090.81 | -50.02 | 50.65 | 134.66 | 0.00 | 382400.65 | 713680.65 N 32 2 58.05 W 103 38 37 | |
| | 2200.00 2300.00 | 8.00 8.00 | 69.38 69.38 | 2189.83 2288.86 | -54.86 -59.70 | 55.55 60.45 | 147.68 160.71 | 0.00 0.00 | 382405.55 382410.45 | 713693.68 N 32 2 58.10 W 103 38 37 713706.70 N 32 2 58.15 W 103 38 36 | |
| | 2400.00 | 8.00 | 69.38 | 2387.89 | -64.54 | 65.35 | 173.73 | 0.00 | 382415.35 | 713719.73 N 32 2 58.19 W 103 38 36 | |
| | 2500.00 | 8.00 | 69.38 | 2486.92 | -69.37 | 70.25 | 186.76 | 0.00 | 382420.25 | 713732.75 N 32 2 58.24 W 103 38 36 | |
| | 2600.00 | 8.00 | 69.38 | 2585.94 | -74.21 | 75.15 | 199.79 | 0.00 | 382425.15 | 713745.78 N 32 2 58.29 W 103 38 36 | |
| | 2700.00 | 8.00 | 69.38 | 2684.97 | -79.05 | 80.05 | 212.81 | 0.00 | 382430.05 | 713758.80 N 32 258.34 W 103 38 36 | 3.29 |
| | 2800.00 | 8.00 | 69.38 | 2784.00 | -83.89 | 84.95 | 225.84 | 0.00 | 382434.95 | 713771.83 N 32 258.38 W 103 38 36 | |
| Castile (CSTL) | 2814.93 | 8.00 | 69.38 | 2798.78 | -84.61 | 85.69 | 227.78 | 0.00 | 382435.68 | 713773.77 N 32 2 58.39 W 103 38 36. | |
| | 2900.00 | 8.00 | 69.38 | 2883.02 | -88.73 | 89.85 | 238.86 | 0.00 | 382439.85 | 713784.85 N 32 2 58.43 W 103 38 35 | |
| | 3000.00 3100.00 | 8.00 8.00 | 69.38 69.38 | 2982.05 3081.08 | -93.57 -98.41 | 94.75 99.65 | 251.89 264.91 | 0.00 0.00 | 382444.75 382449.65 | 713797.88 N 32 2 58.48 W 103 38 35 713810.90 N 32 2 58.53 W 103 38 35 | |
| | 3200.00 | 8.00 | 69.38 | 3180.10 | -103.24 | 104.55 | 277.94 | 0.00 | 382454.55 | 713823.93 N 32 2 58.57 W 103 38 35 | |
| | 3300.00 | 8.00 | 69.38 | 3279.13 | -108.08 | 109.45 | 290.97 | 0.00 | 382459.45 | 713836.95 N 32 2 58.62 W 103 38 35 | |
| | 3400.00 | 8.00 | 69.38 | 3378.16 | -112.92 | 114.35 | 303.99 | 0.00 | 382464.35 | 713849.98 N 32 2 58.67 W 103 38 35 | |
| | 3500.00 | 8.00 | 69.38 | 3477.18 | -117.76 | 119.25 | 317.02 | 0.00 | 382469.25 | 713863.00 N 32 258.72 W 103 38 35 | 5.07 |
| | 3600.00 | 8.00 | 69.38 | 3576.21 | -122.60 | 124.15 | 330.04 | 0.00 | 382474.15 | 713876.03 N 32 258.76 W 103 38 34 | |
| | 3700.00 | 8.00 | 69.38 | 3675.24 | -127.44 | 129.05 | 343.07 | 0.00 | 382479.05 | 713889.06 N 32 258.81 W 103 38 34 | |
| | 3800.00 | 8.00 | 69.38 | 3774.26 | -132.28 | 133.95 | 356.10 | 0.00 | 382483.95 | 713902.08 N 32 2 58.86 W 103 38 34 | |
| | 3900.00 4000.00 | 8.00 8.00 | 69.38 69.38 | 3873.29 3972.32 | -137.11 -141.95 | 138.85 143.75 | 369.12 382.15 | 0.00 | 382488.85 382493.75 | 713915.11 N 32 2 58.91 W 103 38 34 713928.13 N 32 2 58.96 W 103 38 34 | |
| | 4100.00 | 8.00 | 69.38 | 4071.35 | -146.79 | 148.65 | 395.17 | 0.00 | 382498.65 | 713941.16 N 32 2 59.90 W 103 38 34 | |
| | 4200.00 | 8.00 | 69.38 | 4170.37 | -151.63 | 153.55 | 408.20 | 0.00 | 382503.55 | 713954.18 N 32 2 59.05 W 103 38 34 | |
| | 4300.00 | 8.00 | 69.38 | 4269.40 | -156.47 | 158.45 | 421.22 | 0.00 | 382508.45 | 713967.21 N 32 2 59.10 W 103 38 33 | |
| | 4400.00 | 8.00 | 69.38 | 4368.43 | -161.31 | 163.35 | 434.25 | 0.00 | 382513.35 | 713980.23 N 32 2 59.15 W 103 38 33 | 3.71 |
| | 4500.00 | 8.00 | 69.38 | 4467.45 | -166.14 | 168.25 | 447.28 | 0.00 | 382518.25 | 713993.26 N 32 259.19 W 103 38 33 | 3.56 |
| | 4600.00 | 8.00 | 69.38 | 4566.48 | -170.98 | 173.15 | 460.30 | 0.00 | 382523.15 | 714006.28 N 32 2 59.24 W 103 38 33 | |
| Lamar (LMAR) | 4652.19 | 8.00 | 69.38 | 4618.16 | -173.51 | 175.71 | 467.10 | 0.00 | 382525.70 | 714013.08 N 32 2 59.27 W 103 38 33. | |
| Bell Canyon (BLCN) | 4657.04 4700.00 | 8.00 8.00 | 69.38 69.38 | 4622.96 4665.51 | -173.74 -175.82 | 175.95 178.05 | 467.73 473.33 | 0.00 0.00 | 382525.94 382528.05 | 714013.71 N 32 2 59.27 W 103 38 33. 714019.31 N 32 2 59.29 W 103 38 33 | |
| | 4800.00 | 8.00 | 69.38 | 4764.53 | -180.66 | 182.95 | 486.35 | 0.00 | 382532.95 | 714019.31 N 32 2 59.29 W 103 38 33 714032.33 N 32 2 59.34 W 103 38 33 | |
| | 4900.00 | 8.00 | 69.38 | 4863.56 | -185.50 | 187.85 | 499.38 | 0.00 | 382537.85 | 714045.36 N 32 2 59.38 W 103 38 32 | |
| | 5000.00 | 8.00 | 69.38 | 4962.59 | -190.34 | 192.75 | 512.40 | 0.00 | 382542.75 | 714058.38 N 32 2 59.43 W 103 38 32 | 2.80 |
| | 5100.00 | 8.00 | 69.38 | 5061.61 | -195.18 | 197.65 | 525.43 | 0.00 | 382547.65 | 714071.41 N 32 2 59.48 W 103 38 32 | |
| | 5200.00 | 8.00 | 69.38 | 5160.64 | -200.01 | 202.55 | 538.46 | 0.00 | 382552.55 | 714084.43 N 32 2 59.53 W 103 38 32 | |
| | 5300.00 | 8.00 | 69.38 | 5259.67 | -204.85 | 207.45 | 551.48 | 0.00 | 382557.45 | 714097.46 N 32 259.58 W 103 38 32 | |
| | 5400.00 | 8.00 | 69.38 | 5358.69 | -209.69 | 212.35 | 564.51 | 0.00 | 382562.35 | 714110.48 N 32 2 59.62 W 103 38 32 | |
| | 5500.00 5600.00 | 8.00 8.00 | 69.38 69.38 | 5457.72 5556.75 | -214.53 -219.37 | 217.25 222.15 | 577.53 590.56 | 0.00 | 382567.25 | 714123.51 N 32 2 59.67 W 103 38 32 714136.53 N 32 2 59.72 W 103 38 31 | |
| | 5700.00 | 8.00 | 69.38 69.38 | 5556.75 5655.78 | -219.37 -224.21 | 222.15 227.05 | 603.58 | 0.00 | 382572.15 382577.05 | 714136.53 N 32 2 59.72 W 103 38 31 714149.56 N 32 2 59.77 W 103 38 31 | |
| Cherry Canyon (CRCN) | 5703.31 | 8.00 | 69.38 | 5659.05 | -224.21 | 227.22 | 604.02 | 0.00 | 382577.21 | 714149.99 N 32 259.77 W 103 38 31. | |
| ,, (0.1019) | 5800.00 | 8.00 | 69.38 | 5754.80 | -229.05 | 231.95 | 616.61 | 0.00 | 382581.94 | 714162.59 N 32 2 59.81 W 103 38 31 | |
| | 5900.00 | 8.00 | 69.38 | 5853.83 | -233.88 | 236.85 | 629.64 | 0.00 | 382586.84 | 714175.61 N 32 259.86 W 103 38 31 | |
| Drop .75°/100ft | 5981.24 | 8.00 | 69.38 | 5934.28 | -237.82 | 240.83 | 640.22 | 0.00 | 382590.83 | 714186.19 N 32 2 59.90 W 103 38 31 | |
| | 6000.00 | 7.86 | 69.38 | 5952.86 | -238.72 | 241.75 | 642.64 | 0.75 | 382591.74 | 714188.61 N 32 2 59.91 W 103 38 31 | |
| | 6100.00 | 7.11 | 69.38 | 6052.01 | -243.24 | 246.33 | 654.83 | 0.75 | 382596.32 | 714200.80 N 32 2 59.95 W 103 38 31 | |
| | 6200.00 | 6.36 | 69.38 | 6151.32 | -247.32 | 250.46 | 665.81 | 0.75 | 382600.45 | 714211.78 N 32 2 59.99 W 103 38 31 | |
| | 6300.00 | 5.61 | 69.38 | 6250.77 | -250.95 | 254.13 | 675.56 | 0.75 | 382604.12 | 714221.54 N 32 3 0.03 W 103 38 30 | |
| | 6400.00 6500.00 | 4.86 4.11 | 69.38 69.38 | 6350.35 6450.05 | -254.12 -256.83 | 257.34 260.10 | 684.10 691.42 | 0.75 0.75 | 382607.33 382610.09 | 714230.07 N 32 3 0.06 W 103 38 30 714237.39 N 32 3 0.09 W 103 38 30 | |
| | 0300.00 | 4.11 | 05.30 | 0430.03 | -230.03 | 200.10 | 051.42 | 0.75 | 302010.09 | 117251.55 IN 52 5 0.05 W 105 50 50 | 7.7 1 |

...SD 14 23 FED P305 No. 307H\SD 14 23 FED P305 No. 307H\SD 14 23 FED P305 No. 307H R0 mdv 24May22

| omments | MD (ft) | Incl (°) | Azim Grid (°) | TVD (ff) | VSEC (ft) | NS (ft) | EW (ft) | DLS (°/100ft) | Northing (ftUS) | | atitude Longitu /S°'") (E/W° |
|----------------------------|----------------------|----------------|------------------|----------------------|--------------------|----------------------|------------------|------------------|------------------------|----------------------------------|-----------------------------------------------------|
| | (π) 6600.00 | 3.36 | 69.38 | (ft) 6549.83 | -259.10 | 262.39 | 697.52 | 0.75 | 382612.38 | | 3 0.11 W 103 38 30 |
| | 6700.00 | 2.61 | 69.38 | 6649.70 | -260.91 | 264.22 | 702.39 | 0.75 | 382614.21 | | 3 0.13 W 103 38 30 |
| | 6800.00 6900.00 | 1.86 1.11 | 69.38 69.38 | 6749.62 6849.59 | -262.26 -263.16 | 265.59 266.51 | 706.04 708.46 | 0.75 0.75 | 382615.58 382616.50 | | 3 0.14 W 103 38 30 3 0.15 W 103 38 30 |
| | 7000.00 | 0.36 | 69.38 | 6949.58 | -263.61 | 266.96 | 709.66 | 0.75 | 382616.95 | | 3 0.15 W 103 38 30 |
| old | 7047.87 | 0.00 | 69.38 | 6997.45 | -263.66 | 267.01 | 709.80 | 0.75 | 382617.00 | | 3 0.15 W 103 38 30 |
| | 7100.00 7200.00 | 0.00 | 69.38 69.38 | 7049.58 7149.58 | -263.66 -263.66 | 267.01 267.01 | 709.80 709.80 | 0.00 0.00 | 382617.00 382617.00 | | 3 0.15 W 103 38 30 3 0.15 W 103 38 30 |
| ushy Canyon (BCN) | 7271.20 | 0.00 | 69.38 | 7220.78 | -263.66 | 267.01 | 709.80 | 0.00 | 382617.00 | | 3 0.15 W 103 38 30. |
| | 7300.00 | 0.00 | 69.38 | 7249.58 | -263.66 | 267.01 | 709.80 | 0.00 | 382617.00 | 714255.77 N 32 | 3 0.15 W 103 38 30 |
| | 7400.00 | 0.00 | 69.38 | 7349.58 | -263.66 | 267.01 | 709.80 | 0.00 | 382617.00 | | 3 0.15 W 103 38 30 |
| | 7500.00 7600.00 | 0.00 | 69.38 69.38 | 7449.58 7549.58 | -263.66 -263.66 | 267.01 267.01 | 709.80 709.80 | 0.00 0.00 | 382617.00 382617.00 | | 3 0.15 W 103 38 30 3 0.15 W 103 38 30 |
| | 7700.00 | 0.00 | 69.38 | 7649.58 | -263.66 | 267.01 | 709.80 | 0.00 | 382617.00 | | 3 0.15 W 103 38 30 |
| | 7800.00 | 0.00 | 69.38 | 7749.58 | -263.66 | 267.01 | 709.80 | 0.00 | 382617.00 | | 3 0.15 W 103 38 30 |
| | 7900.00 8000.00 | 0.00 | 69.38 69.38 | 7849.58 7949.58 | -263.66 -263.66 | 267.01 | 709.80 709.80 | 0.00 0.00 | 382617.00 382617.00 | | 3 0.15 W 103 38 30 3 0.15 W 103 38 30 |
| | 8100.00 | 0.00 | 69.38 | 8049.58 | -263.66 | 267.01 267.01 | 709.80 | 0.00 | 382617.00 | | 3 0.15 W 103 38 30 3 0.15 W 103 38 30 |
| | 8200.00 | 0.00 | 69.38 | 8149.58 | -263.66 | 267.01 | 709.80 | 0.00 | 382617.00 | | 3 0.15 W 103 38 30 |
| | 8300.00 | 0.00 | 69.38 | 8249.58 | -263.66 | 267.01 | 709.80 | 0.00 | 382617.00 | | 3 0.15 W 103 38 30 |
| | 8400.00 8500.00 | 0.00 | 69.38 69.38 | 8349.58 8449.58 | -263.66 -263.66 | 267.01 267.01 | 709.80 709.80 | 0.00 | 382617.00 382617.00 | | 3 0.15 W 103 38 30 3 0.15 W 103 38 30 |
| | 8600.00 | 0.00 | 69.38 | 8549.58 | -263.66 | 267.01 | 709.80 | 0.00 | 382617.00 | | 3 0.15 W 103 38 30 |
| | 8700.00 | 0.00 | 69.38 | 8649.58 | -263.66 | 267.01 | 709.80 | 0.00 | 382617.00 | | 3 0.15 W 103 38 30 |
| | 8800.00 8900.00 | 0.00 | 69.38 69.38 | 8749.58 8849.58 | -263.66 -263.66 | 267.01 267.01 | 709.80 709.80 | 0.00 0.00 | 382617.00 382617.00 | | 3 0.15 W 103 38 30 3 0.15 W 103 38 30 |
| ne Spring (BSGL) | 8960.65 | 0.00 | 69.38 | 8910.23 | -263.66 | 267.01 | 709.80 | 0.00 | 382617.00 | | 3 0.15 W 103 38 30. 3 0.15 W 103 38 30. |
| per Avalon (AVU) | 8975.14 | 0.00 | 69.38 | 8924.72 | -263.66 | 267.01 | 709.80 | 0.00 | 382617.00 | | 3 0.15 W 103 38 30. |
| | 9000.00 | 0.00 | 69.38 | 8949.58 | -263.66 | 267.01 | 709.80 | 0.00 | 382617.00 | | 3 0.15 W 103 38 30 |
| | 9100.00 9200.00 | 0.00 | 69.38 69.38 | 9049.58 9149.58 | -263.66 -263.66 | 267.01 267.01 | 709.80 709.80 | 0.00 | 382617.00 382617.00 | | 3 0.15 W 103 38 30 3 0.15 W 103 38 30 |
| | 9300.00 | 0.00 | 69.38 | 9249.58 | -263.66 | 267.01 | 709.80 | 0.00 | 382617.00 | | 3 0.15 W 103 38 30 3 0.15 W 103 38 30 |
| er Avalon (AVL) | 9370.93 | 0.00 | 69.38 | 9320.51 | -263.66 | 267.01 | 709.80 | 0.00 | 382617.00 | 714255.77 N 32 | 3 0.15 W 103 38 30. |
| Duild 40°/400# | 9400.00 | 0.00 | 69.38 | 9349.58 | -263.66 | 267.01 | 709.80 | 0.00 | 382617.00 | | 3 0.15 W 103 38 30 |
| P, Build 10°/100ft | 9457.87 9500.00 | 0.00 4.21 | 69.38 179.66 | 9407.45 9449.54 | -263.66 -262.11 | 267.01 265.46 | 709.80 709.81 | 0.00 10.00 | 382617.00 382615.45 | | 3 0.15 W 103 38 30 3 0.14 W 103 38 30 |
| | 9600.00 | 14.21 | 179.66 | 9548.12 | -246.12 | 249.47 | 709.90 | 10.00 | 382599.46 | | 2 59.98 W 103 38 30 |
| Cross | 9698.80 | 24.09 | 179.66 | 9641.34 | -213.75 | 217.10 | 710.09 | 10.00 | 382567.09 | | 2 59.66 W 103 38 30 |
| er Avalon TGT1 (AVL_TGT1) | 9700.00 9799.27 | 24.21 34.14 | 179.66 179.66 | 9642.43 9729.00 | -213.26 -164.93 | 216.61 168.28 | 710.10 710.38 | 10.00 10.00 | 382566.60 382518.27 | | 2 59.66 W 103 38 30 2 59.18 <i>W 103 38 30</i> . |
| rer Avaion TGTT (AVL_TGTT) | 9800.00 | 34.74 | 179.66 | 9729.60 | -164.52 | 167.87 | 710.39 | 10.00 | 382517.86 | | 2 59.17 W 103 38 30. 2 59.17 W 103 38 30 |
| t Bone Upper (FBU) | 9878.10 | 42.02 | 179.66 | 9791.00 | -116.35 | 119.70 | 710.67 | 10.00 | 382469.69 | | 2 58.70 W 103 38 30. |
| | 9900.00 | 44.21 | 179.66 | 9806.99 | -101.38 | 104.73 | 710.76 | 10.00 | 382454.72 | | 2 58.55 W 103 38 30 |
| | 10000.00 10100.00 | 54.21 64.21 | 179.66 179.66 | 9872.23 9923.35 | -25.76 60.04 | 29.11 -56.69 | 711.21 711.71 | 10.00 10.00 | 382379.11 382293.32 | | 2 57.80 W 103 38 30 2 56.95 W 103 38 30 |
| | 10200.00 | 74.21 | 179.66 | 9958.79 | 153.41 | -150.06 | 712.26 | 10.00 | 382199.95 | | 2 56.03 W 103 38 30 |
| | 10300.00 | 84.21 | 179.66 | 9977.49 | 251.52 | -248.16 | 712.84 | 10.00 | 382101.85 | | 2 55.06 W 103 38 30 |
| ding Point | 10350.62 | 89.27 | 179.66 | 9980.36 | 302.04 | -298.68 | 713.14 | 10.00 | 382051.33 | | 2 54.56 W 103 38 30 |
| | 10400.00 10500.00 | 89.27 89.27 | 179.66 179.66 | 9980.99 9982.25 | 351.42 451.41 | -348.06 -448.05 | 713.43 714.02 | 0.00 0.00 | 382001.95 381901.97 | | 2 54.07 W 103 38 30 2 53.08 W 103 38 30 |
| | 10600.00 | 89.27 | 179.66 | 9983.52 | 551.40 | -548.04 | 714.61 | 0.00 | 381801.98 | | 2 52.09 W 103 38 30 |
| | 10700.00 | 89.27 | 179.66 | 9984.79 | 651.39 | -648.03 | 715.21 | 0.00 | 381702.00 | | 2 51.10 W 103 38 30 |
| | 10800.00 10900.00 | 89.27 89.27 | 179.66 179.66 | 9986.05 9987.32 | 751.39 851.38 | -748.02 -848.01 | 715.80 716.39 | 0.00 0.00 | 381602.01 381502.02 | | 2 50.11 W 103 38 30 2 49.12 W 103 38 30 |
| | 11000.00 | 89.27 | 179.66 | 9988.58 | 951.37 | -948.00 | 716.98 | 0.00 | 381402.04 | | 2 48.13 W 103 38 30 |
| | 11100.00 | 89.27 | 179.66 | 9989.85 | 1051.36 | -1047.99 | 717.57 | 0.00 | 381302.05 | 714263.54 N 32 | 2 47.14 W 103 38 30 |
| | 11200.00 | 89.27 | 179.66 | 9991.12 | 1151.35 | -1147.98 | 718.16 | 0.00 | 381202.07 | | 2 46.15 W 103 38 30 |
| | 11300.00 11400.00 | 89.27 89.27 | 179.66 179.66 | 9992.38 9993.65 | 1251.34 1351.34 | -1247.97 -1347.96 | 718.75 719.34 | 0.00 0.00 | 381102.08 381002.09 | | 2 45.16 W 103 38 30 2 44.17 W 103 38 30 |
| | 11500.00 | 89.27 | 179.66 | 9994.91 | 1451.33 | -1447.95 | 719.93 | 0.00 | 380902.11 | | 2 43.18 W 103 38 3 |
| | 11600.00 | 89.27 | 179.66 | 9996.18 | 1551.32 | -1547.94 | 720.52 | 0.00 | 380802.12 | | 2 42.19 W 103 38 3 |
| | 11700.00 11800.00 | 89.27 89.27 | 179.66 179.66 | 9997.45 9998.71 | 1651.31 1751.30 | -1647.93 -1747.92 | 721.11 721.70 | 0.00 0.00 | 380702.13 380602.15 | | 2 41.20 W 103 38 30 2 40.21 W 103 38 30 |
| | 11900.00 | 89.27 | 179.66 | 9999.98 | 1851.30 | -1847.91 | 721.70 | 0.00 | 380502.16 | 714268.26 N 32 | |
| , Build 2°/100ft | 11934.97 | 89.27 | 179.66 | 10000.42 | 1886.26 | -1882.88 | 722.50 | 0.00 | 380467.20 | 714268.47 N 32 | 2 38.88 W 103 38 3 |
| | 11977.49 | 90.13 | 179.66 | 10000.64 | 1928.78 | -1925.40 | 722.75 | 2.00 | 380424.68 | 714268.72 N 32 | |
| | 12000.00 12100.00 | 90.13 90.13 | 179.66 179.66 | 10000.59 10000.38 | 1951.29 2051.29 | -1947.91 -2047.91 | 722.88 723.47 | 0.00 0.00 | 380402.17 380302.18 | 714268.85 N 32 714269.44 N 32 | |
| | 12200.00 | 90.13 | 179.66 | 10000.36 | 2151.29 | -2147.90 | 724.06 | 0.00 | 380202.18 | 714209.44 N 32 714270.03 N 32 | |
| | 12300.00 | 90.13 | 179.66 | 9999.94 | 2251.29 | -2247.90 | 724.65 | 0.00 | 380102.19 | 714270.62 N 32 | |
| | 12400.00 | 90.13 | 179.66 | 9999.72 | 2351.29 | -2347.90 | 725.24 | 0.00 | 380002.20 | | 2 34.28 W 103 38 3 |
| | 12500.00 12600.00 | 90.13 90.13 | 179.66 179.66 | 9999.50 9999.28 | 2451.29 2551.29 | -2447.90 -2547.90 | 725.83 726.42 | 0.00 0.00 | 379902.20 379802.21 | 714271.80 N 32 714272.39 N 32 | 2 33.29 W 103 38 3 2 32 30 W 103 38 3 |
| | 12700.00 | 90.13 | 179.66 | 9999.07 | 2651.29 | -2647.89 | 727.01 | 0.00 | 379702.21 | 714272.98 N 32 | |
| | 12800.00 | 90.13 | 179.66 | 9998.85 | 2751.29 | -2747.89 | 727.60 | 0.00 | 379602.22 | 714273.57 N 32 | 2 30.32 W 103 38 3 |
| | 12900.00 13000.00 | 90.13 90.13 | 179.66 | 9998.63 9998.41 | 2851.29 2951.29 | -2847.89 -2947.89 | 728.19 728.78 | 0.00 0.00 | 379502.23 379402.23 | 714274.16 N 32 714274.75 N 32 | |
| | 13100.00 | 90.13 | 179.66 179.66 | 9998.19 | 3051.29 | -3047.89 | 729.37 | 0.00 | 379302.24 | 714274.75 N 32 | |
| | 13200.00 | 90.13 | 179.66 | 9997.97 | 3151.29 | -3147.88 | 729.96 | 0.00 | 379202.24 | 714275.93 N 32 | |
| | 13300.00 | 90.13 | 179.66 | 9997.76 | 3251.29 | -3247.88 | 730.55 | 0.00 | 379102.25 | 714276.52 N 32 | |
| | 13400.00 13500.00 | 90.13 90.13 | 179.66 179.66 | 9997.54 9997.32 | 3351.29 3451.29 | -3347.88 -3447.88 | 731.14 731.73 | 0.00 0.00 | 379002.26 378902.26 | 714277.11 N 32 714277.70 N 32 | |
| | 13600.00 | 90.13 | 179.66 | 9997.10 | 3551.29 | -3547.88 | 732.32 | 0.00 | 378802.27 | 714277.70 N 32 | |
| | 13700.00 | 90.13 | 179.66 | 9996.88 | 3651.29 | -3647.87 | 732.91 | 0.00 | 378702.27 | 714278.88 N 32 | 2 21.41 W 103 38 3 |
| | 13800.00 | 90.13 | 179.66 | 9996.67 | 3751.29 | -3747.87 | 733.50 | 0.00 | 378602.28 | 714279.47 N 32 | |
| | 13900.00 | 90.13 | 179.66 | 9996.45 | 3851.29 | -3847.87 | 734.09 | 0.00 | 378502.29 | 714280.06 N 32 | |
| | 14000.00 14100.00 | 90.13 90.13 | 179.66 179.66 | 9996.23 9996.01 | 3951.29 4051.29 | -3947.87 -4047.87 | 734.68 735.27 | 0.00 0.00 | 378402.29 378302.30 | 714280.65 N 32 714281.24 N 32 | |
| | 14200.00 | 90.13 | 179.66 | 9995.79 | 4151.29 | -4147.86 | 735.86 | 0.00 | 378202.30 | 714281.83 N 32 | 2 16.47 W 103 38 3 |
| | 14300.00 | 90.13 | 179.66 | 9995.57 | 4251.29 | -4247.86 | 736.45 | 0.00 | 378102.31 | 714282.42 N 32 | |
| | 14400.00 14500.00 | 90.13 90.13 | 179.66 179.66 | 9995.36 9995.14 | 4351.28 4451.28 | -4347.86 -4447.86 | 737.04 737.63 | 0.00 0.00 | 378002.32 | 714283.01 N 32 714283.60 N 32 | |
| | 14500.00 14600.00 | 90.13 | 179.66 | 9995.14 9994.92 | 4451.28 4551.28 | -4447.86 -4547.86 | 737.63 | 0.00 | 377902.32 377802.33 | 714283.60 N 32 714284.19 N 32 | |
| | 14700.00 | 90.13 | 179.66 | 9994.70 | 4651.28 | -4647.85 | 738.81 | 0.00 | 377702.34 | 714284.78 N 32 | |
| | 14800.00 | 90.13 | 179.66 | 9994.48 | 4751.28 | -4747.85 | 739.40 | 0.00 | 377602.34 | 714285.37 N 32 | |
| | 14900.00 | 90.13 | 179.66 | 9994.26 | 4851.28 | -4847.85 4047.85 | 739.99 | 0.00 | 377502.35 | 714285.96 N 32 | |
| Turn 2°/100ft | 15000.00 15076.36 | 90.13 90.13 | 179.66 179.66 | 9994.05 9993.88 | 4951.28 5027.64 | -4947.85 -5024.20 | 740.58 741.03 | 0.00 0.00 | 377402.35 377326.00 | 714286.55 N 32 714287.00 N 32 | |
| | 15100.00 | 90.13 | 179.72 | 9993.73 | 5051.28 | -5024.20 | 741.03 | 2.00 | 377302.36 | 714287.13 N 32 | |
| I | 15120.85 | 91.01 | 179.76 | 9993.44 | 5072.13 | -5068.69 | 741.25 | 2.00 | 377281.51 | 714287.22 N 32 | 2 7.35 W 103 38 30 |
| | 15200.00 | 91.01 | 179.76 | 9992.05 | 5151.27 | -5147.83 | 741.58 | 0.00 | 377202.38 | 714287.55 N 32 | 2 6 57 W 103 38 3 |
| | 15300.00 | 91.01 | 179.76 | 9990.28 | 5251.25 | -5247.81 | 741.99 | 0.00 | 377102.40 | 714287.96 N 32 | |

...SD 14 23 FED P305 No. 307H\SD 14 23 FED P305 No. 307H\SD 14 23 FED P305 No. 307H R0 mdv 24May22

| Comments | MD (ft) | Inci (°) | Azim Grid (°) | TVD (ft) | VSEC (ft) | NS (ft) | EW (ft) | DLS (°/100ft) | Northing (ftUS) | Easting (ftUS) | Latitude (N/S ° ' ") | Longitude (E/W ° ' ") |
|--------------------------------|----------------------|----------------|------------------|--------------------|--------------------|----------------------|------------------|------------------|------------------------|----------------------------|-------------------------|--------------------------|
| - | 15500.00 | 91.01 | 179.76 | 9986.76 | 5451.22 | -5447.78 | 742.81 | 0.00 | 376902.44 | | 32 2 3.60 V | |
| | 15600.00 | 91.01 | 179.76 | 9985.00 | 5551.21 | -5547.77 | 743.23 | 0.00 | 376802.46 | 714289.20 N | 32 2 2.61 V | N 103 38 30.54 |
| | 15700.00 | 91.01 | 179.76 | 9983.24 | 5651.19 | -5647.75 | 743.64 | 0.00 | 376702.48 | 714289.61 N | 32 2 1.62 V | N 103 38 30.55 |
| | 15800.00 | 91.01 | 179.76 | 9981.48 | 5751.17 | -5747.73 | 744.05 | 0.00 | 376602.50 | 714290.02 N | 32 2 0.63 V | V 103 38 30.55 |
| | 15900.00 | 91.01 | 179.76 | 9979.72 | 5851.16 | -5847.72 | 744.46 | 0.00 | 376502.52 | 714290.43 N | 32 1 59.64 V | V 103 38 30.55 |
| | 16000.00 | 91.01 | 179.76 | 9977.96 | 5951.14 | -5947.70 | 744.87 | 0.00 | 376402.54 | 714290.84 N | | |
| | 16100.00 | 91.01 | 179.76 | 9976.20 | 6051.13 | -6047.68 | 745.28 | 0.00 | 376302.56 | 714291.25 N | | |
| | 16200.00 | 91.01 | 179.76 | 9974.44 | 6151.11 | -6147.67 | 745.70 | 0.00 | 376202.58 | 714291.67 N | | |
| | 16300.00 | 91.01 | 179.76 | 9972.67 | 6251.10 | -6247.65 | 746.11 | 0.00 | 376102.60 | 714292.08 N | | |
| | 16400.00 | 91.01 | 179.76 | 9970.91 | 6351.08 | -6347.63 | 746.52 | 0.00 | 376002.62 | 714292.49 N | | |
| | 16500.00 | 91.01 | 179.76 | 9969.15 | 6451.07 | -6447.62 | 746.93 | 0.00 | 375902.64 | 714292.90 N | | |
| | 16600.00 | 91.01 | 179.76 | 9967.39 | 6551.05 | -6547.60 | 747.34 | 0.00 | 375802.66 | 714293.31 N | | |
| | 16700.00 | 91.01 | 179.76 | 9965.63 | 6651.03 | -6647.59 | 747.75 | 0.00 | 375702.69 | 714293.72 N | | |
| | 16800.00 | 91.01 | 179.76 | 9963.87 | 6751.02 | -6747.57 | 748.17 | 0.00 | 375602.71 | 714294.14 N | | |
| | 16900.00 | 91.01 | 179.76 | 9962.11 | 6851.00 | -6847.55 | 748.58 | 0.00 | 375502.73 | 714294.55 N | | |
| | 17000.00 | 91.01 | 179.76 | 9960.35 | 6950.99 | -6947.54 | 748.99 | 0.00 | 375402.75 | 714294.96 N | | |
| | 17100.00 | 91.01 | 179.76 | 9958.59 | 7050.97 | -7047.52 | 749.40 | 0.00 | 375302.77 | 714295.37 N | | |
| | 17200.00 | 91.01 | 179.76 | 9956.83 | 7150.96 | -7147.50 | 749.81 | 0.00 | 375202.79 | 714295.78 N | | |
| | 17300.00 | 91.01 | 179.76 | 9955.06 | 7250.94 | -7247.49 | 750.22 | 0.00 | 375102.81 | 714296.19 N | | |
| | 17400.00 | 91.01 91.01 | 179.76 179.76 | 9953.30 9951.54 | 7350.93 7450.91 | -7347.47 -7447.45 | 750.64 751.05 | 0.00 0.00 | 375002.83 374902.85 | 714296.61 N 714297.02 N | | |
| | 17500.00 | 91.01 | | 9951.54 | | | | 0.00 | 374802.85 374802.87 | 714297.02 N 714297.43 N | | |
| | 17600.00 17700.00 | 91.01 | 179.76 | 9949.78 | 7550.90 7650.88 | -7547.44 -7647.42 | 751.46 751.87 | 0.00 | 374702.89 | 714297.43 N 714297.84 N | | |
| | 17800.00 | 91.01 | 179.76 179.76 | 9946.26 | 7750.86 | -7647.42 -7747.41 | 751.87 752.28 | 0.00 | 374702.89 | 714297.84 N 714298.25 N | | |
| | 17900.00 | 91.01 | 179.76 | 9946.26 | 7850.85 | -7847.39 | 752.70 | 0.00 | 374502.91 | 714298.25 N 714298.66 N | | |
| | 18000.00 | 91.01 | 179.76 | 9942.74 | 7950.83 | -7947.37 | 753.11 | 0.00 | 374402.95 | 714299.08 N | | |
| | 18100.00 | 91.01 | 179.76 | 9940.98 | 8050.82 | -8047.36 | 753.52 | 0.00 | 374302.97 | 714299.49 N | | |
| | 18200.00 | 91.01 | 179.76 | 9939.22 | 8150.80 | -8147.34 | 753.93 | 0.00 | 374202.99 | 714299.90 N | | |
| | 18300.00 | 91.01 | 179.76 | 9937.45 | 8250.79 | -8247.32 | 754.34 | 0.00 | 374103.01 | 714300.31 N | | |
| | 18400.00 | 91.01 | 179.76 | 9935.69 | 8350.77 | -8347.31 | 754.75 | 0.00 | 374003.03 | 714300.72 N | | |
| | 18500.00 | 91.01 | 179.76 | 9933.93 | 8450.76 | -8447.29 | 755.17 | 0.00 | 373903.05 | 714301.13 N | | |
| | 18600.00 | 91.01 | 179.76 | 9932.17 | 8550.74 | -8547.27 | 755.58 | 0.00 | 373803.07 | 714301.55 N | | |
| | 18700.00 | 91.01 | 179.76 | 9930.41 | 8650.72 | -8647.26 | 755.99 | 0.00 | 373703.09 | 714301.96 N | | |
| | 18800.00 | 91.01 | 179.76 | 9928.65 | 8750.71 | -8747.24 | 756.40 | 0.00 | 373603.11 | 714302.37 N | 32 1 30.95 V | N 103 38 30.63 |
| | 18900.00 | 91.01 | 179.76 | 9926.89 | 8850.69 | -8847.23 | 756.81 | 0.00 | 373503.13 | 714302.78 N | | |
| | 19000.00 | 91.01 | 179.76 | 9925.13 | 8950.68 | -8947.21 | 757.22 | 0.00 | 373403.16 | 714303.19 N | 32 128.97 V | N 103 38 30.63 |
| | 19100.00 | 91.01 | 179.76 | 9923.37 | 9050.66 | -9047.19 | 757.64 | 0.00 | 373303.18 | 714303.60 N | 32 1 27.98 V | N 103 38 30.64 |
| | 19200.00 | 91.01 | 179.76 | 9921.61 | 9150.65 | -9147.18 | 758.05 | 0.00 | 373203.20 | 714304.02 N | 32 1 26.99 V | N 103 38 30.64 |
| | 19300.00 | 91.01 | 179.76 | 9919.84 | 9250.63 | -9247.16 | 758.46 | 0.00 | 373103.22 | 714304.43 N | 32 1 26.00 V | V 103 38 30.64 |
| | 19400.00 | 91.01 | 179.76 | 9918.08 | 9350.62 | -9347.14 | 758.87 | 0.00 | 373003.24 | 714304.84 N | 32 1 25.01 V | V 103 38 30.64 |
| | 19500.00 | 91.01 | 179.76 | 9916.32 | 9450.60 | -9447.13 | 759.28 | 0.00 | 372903.26 | 714305.25 N | 32 1 24.02 V | N 103 38 30.65 |
| | 19600.00 | 91.01 | 179.76 | 9914.56 | 9550.58 | -9547.11 | 759.69 | 0.00 | 372803.28 | 714305.66 N | 32 1 23.03 V | V 103 38 30.65 |
| | 19700.00 | 91.01 | 179.76 | 9912.80 | 9650.57 | -9647.09 | 760.11 | 0.00 | 372703.30 | 714306.08 N | 32 1 22.05 V | V 103 38 30.65 |
| | 19800.00 | 91.01 | 179.76 | 9911.04 | 9750.55 | -9747.08 | 760.52 | 0.00 | 372603.32 | 714306.49 N | | |
| | 19900.00 | 91.01 | 179.76 | 9909.28 | 9850.54 | -9847.06 | 760.93 | 0.00 | 372503.34 | 714306.90 N | | |
| | 20000.00 | 91.01 | 179.76 | 9907.52 | 9950.52 | -9947.05 | 761.34 | 0.00 | 372403.36 | 714307.31 N | | |
| | 20100.00 | 91.01 | 179.76 | 9905.76 | 10050.51 | -10047.03 | 761.75 | 0.00 | 372303.38 | 714307.72 N | | |
| | 20200.00 | 91.01 | 179.76 | 9904.00 | 10150.49 | -10147.01 | 762.16 | 0.00 | 372203.40 | 714308.13 N | | |
| | 20300.00 | 91.01 | 179.76 | 9902.23 | 10250.48 | -10247.00 | 762.58 | 0.00 | 372103.42 | 714308.55 N | | |
| LTP Cross | 20335.31 | 91.01 | 179.76 | 9901.61 | 10285.78 | -10282.30 | 762.72 | 0.00 | 372068.12 | 714308.69 N | | |
| | 20400.00 | 91.01 | 179.76 | 9900.47 | 10350.46 | -10346.98 | 762.99 | 0.00 | 372003.44 | 714308.96 N | | |
| SD 14 23 FED P305 No. 307H BHL | 20410.44 | 91.01 | 179.76 | 9900.29 | 10360.90 | -10357.42 | 763.03 | 0.00 | 371993.00 | 714309.00 N | 32 115.02 V | V 103 38 30.67 |

Survey Type:

Def Plan

Survey Error Model: Survey Program: ISCWSA Rev 3 *** 3-D 97.071% Confidence 3.0000 sigma

| Description | Part | MD From (ft) | MD To (ft) | EOU Freq (ft) | Hole Size Cas (in) | ing Diameter (in) | Expected Max Inclination (deg) | Survey Tool Type | Borehole / Survey |
|-------------|------|-----------------|---------------|------------------|-----------------------|----------------------|--------------------------------------|-------------------------------|------------------------------------------------------------------------------|
| | 1 | 0.000 | 28.000 | 1/100.000 | 30.000 | 30.000 | | B001Mb_MWD+HRGM-Depth Only | SD 14 23 FED P305 No. 307H / SD 14 23 FED P305 No. 307H R0 mdv 24May22 |
| | 1 | 28.000 | 20410.443 | 1/100.000 | 30.000 | 30.000 | | B001Mb_MWD+HRGM | SD 14 23 FED P305 No. 307H / SD 14 23 FED P305 No. 307H R0 |

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME: EOG Resources Inc
WELL NAME & NO.: LAKEWOOD 28 FED COM 742H
LOCATION: Section 28, T.25S., R.34E.
COUNTY: Lea County, New Mexico

COA

| H2S | • Yes | O No | |
|----------------------|------------------|-----------------------------|------------------|
| Potash | None | O Secretary | O R-111-P |
| Cave/Karst Potential | • Low | O Medium | O High |
| Cave/Karst Potential | O Critical | | |
| Variance | O None | • Flex Hose | Other |
| Wellhead | Conventional | Multibowl | O Both |
| Wellhead Variance | O Diverter | | |
| Other | □4 String | ☐ Capitan Reef | □WIPP |
| Other | ▼ Fluid Filled | ☐ Pilot Hole | ☐ Open Annulus |
| Cementing | ☐ Contingency | | ☑ Primary Cement |
| | Cement Squeeze | | Squeeze |
| Special Requirements | ☐ Water Disposal | ☑ COM | □ Unit |
| Special Requirements | ☐ Batch Sundry | | |
| Special Requirements | ☑ Break Testing | ☑ Offline | |
| Variance | | Cementing | Clearance |

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated AT SPUD. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

Primary Casing Design:

- 1. The **9-5/8** inch surface casing shall be set at approximately **930** feet (a minimum of 25 feet (Lea County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run

- to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8** hours or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.
- 2. The **7-5/8** inch intermediate casing shall be set at approximately **12,130 feet TVD**. The minimum required fill of cement behind the **7-5/8** inch intermediate casing is:

Option 1 (Single Stage):

• Cement to surface. If cement does not circulate see B.1.a, c-d above.

Option 2:

Operator has proposed to cement in two stages by conventionally cementing the first stage and performing a bradenhead squeeze on the second stage, contingent upon no returns to surface.

- a. First stage: Operator will cement with intent to reach the top of the **Brushy** Canyon
- b. Second stage:
 - Operator will perform bradenhead squeeze and top-out. Cement to surface. If cement does not reach surface, the appropriate BLM office shall be notified.

Operator has proposed to pump down 7-5/8" X 9-5/8" annulus. Operator must top out cement after the bradenhead squeeze and verify cement to surface. Operator can also check TOC with Echo-meter. CBL must be run from TD of the 7-5/8" casing to surface if confidence is lacking on the quality of the bradenhead squeeze cement job. Submit results to BLM.

If cement does not tie-back into the previous casing shoe, a third stage remediation BH may be performed. The appropriate BLM office shall be notified.

Bradenhead squeeze in the production interval is only as an edge case remediation measure and is NOT approved in this COA. If production cement job experiences losses and a bradenhead squeeze is needed for tie-back, BLM Engineering should be

<u>notified prior to job with volumes and planned wellbore schematic. CBL will be</u> needed when this occurs.

If cement does not reach surface, the next casing string must come to surface.

Operator must use a limited flush fluid volume of 1 bbl following backside cementing procedures.

3. The **5-1/2** inch production casing shall be set at approximately **23,410** feet. The minimum required fill of cement behind the **5-1/2** inch production casing is:

Option 1 (Single Stage):

• Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

Alternate Casing Design:

- 1. The **10-3/4** inch surface casing shall be set at approximately **930** feet (a minimum of 25 feet (Lea County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
 - e. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - f. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - g. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - h. If cement falls back, remedial cementing will be done prior to drilling out that string.
- 2. The 8-3/4 inch intermediate casing shall be set at approximately 12,130 feet TVD. The minimum required fill of cement behind the 8-3/4 inch intermediate casing is:

Option 1 (Single Stage):

• Cement to surface. If cement does not circulate see B.1.a, c-d above.

Option 2:

Operator has proposed to cement in two stages by conventionally cementing the first stage and performing a bradenhead squeeze on the second stage, contingent upon no returns to surface.

- c. First stage: Operator will cement with intent to reach the top of the **Brushy** Canyon
- d. Second stage:
 - Operator will perform bradenhead squeeze and top-out. Cement to surface. If cement does not reach surface, the appropriate BLM office shall be notified.

Operator has proposed to pump down 10-3/4 X 8-3/4" annulus. Operator must top out cement after the bradenhead squeeze and verify cement to surface. Operator can also check TOC with Echo-meter. CBL must be run from TD of the 8-3/4" casing to surface if confidence is lacking on the quality of the bradenhead squeeze cement job. Submit results to BLM.

If cement does not tie-back into the previous casing shoe, a third stage remediation BH may be performed. The appropriate BLM office shall be notified.

Bradenhead squeeze in the production interval is only as an edge case remediation measure and is NOT approved in this COA. If production cement job experiences losses and a bradenhead squeeze is needed for tie-back, BLM Engineering should be notified prior to job with volumes and planned wellbore schematic. CBL will be needed when this occurs.

If cement does not reach surface, the next casing string must come to surface.

Operator must use a limited flush fluid volume of 1 bbl following backside cementing procedures.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

3. The 6 inch production casing shall be set at approximately 23,410 feet. The minimum required fill of cement behind the 6 inch production casing is:

Option 1 (Single Stage):

• Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

Production casing must be kept fluid filled to meet BLM minimum collapse requirement.

C. PRESSURE CONTROL

- 1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
- 2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 10,000 (10M) psi. Variance is approved to use a 5000 (5M) Annular which shall be tested to 3500 (70% Working Pressure) psi.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in Onshore Order 1 and 2.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

(Note: For a minimum 5M BOPE or less (Utilizing a 10M BOPE system) BOPE Break Testing Variance

- BOPE Break Testing is ONLY permitted for 5M BOPE or less. (Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP)
- BOPE Break Testing is NOT permitted to drilling the production hole section.
- Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer (575-706-2779) prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).
- The BLM is to be contacted (575-689-5981 Lea County) 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per 43 CFR part 3170 Subpart 3172.
- If in the event break testing is not utilized, then a full BOPE test would be conducted.

Offline Cementing

Offline cementing approved for surface and intermediate intervals. Contact the BLM PETs prior to the commencement of any offline cementing procedure.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Contact Eddy County Petroleum Engineering Inspection Staff:

Email or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220; **BLM NM CFO DrillingNotifications@BLM.GOV**; (575) 361-2822

Contact Lea County Petroleum Engineering Inspection Staff:

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575) 689-5981

- 1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig

- i.Notify the BLM when moving in and removing the Spudder Rig.
- ii.Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
- iii.BOP/BOPE test to be conducted per **43 CFR 3172** as soon as 2nd Rig is rigged up on well.
- 2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
- 3. For intervals in which cement to surface is required, cement to surface should be verified with a visual check and density or pH check to differentiate cement from spacer and drilling mud. The results should be documented in the driller's log and daily reports.

A. CASING

- 1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
- 2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- 3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- 4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
- 5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
- 6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.

- 7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
- 8. Whenever a casing string is cemented in the R-111-Q potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

- 1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in 43 CFR 3172.
- 2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
- 3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
- 4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - i. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - ii. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - iii.Manufacturer representative shall install the test plug for the initial BOP test.
 - iv. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
 - v. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- 5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - i.In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - ii.In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing

- valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
- iii. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to 43 CFR 3172 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- iv. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- v.The results of the test shall be reported to the appropriate BLM office.
- vi.All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- vii. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- viii.BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per 43 CFR 3172.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

KPI 9/18/2024



Training

MCBU Drilling and Completions H₂S training requirements are intended to define the minimum level of training required for employees, contractors and visitors to enter or perform work at MCBU Drilling and Completions locations that have known concentrations of H₂S.

Awareness Level

Employees and visitors to MCBU Drilling and Completions locations that have known concentrations of H₂S, who are not required to perform work in H₂S areas, will be provided with an awareness level of H₂S training prior to entering any H₂S areas. At a minimum, awareness level training will include:

- 1. Physical and chemical properties of H₂S
- 2. Health hazards of H₂S
- 3. Personal protective equipment
- 4. Information regarding potential sources of H₂S
- 5. Alarms and emergency evacuation procedures

Awareness level training will be developed and conducted by personnel who are qualified either by specific training, educational experience and/or work-related background.

Advanced Level H₂S Training

Employees and contractors required to work in areas that may contain H₂S will be provided with Advanced Level H₂S training prior to initial assignment. In addition to the Awareness Level requirements, Advanced Level H₂S training will include:

- 1. H₂S safe work practice procedures;
- 2. Emergency contingency plan procedures;
- 3. Methods to detect the presence or release of H₂S (e.g., alarms, monitoring equipment), including hands-on training with direct reading and personal monitoring H₂S equipment.
- 4. Basic overview of respiratory protective equipment suitable for use in H₂S environments. Note: Employees who work at sites that participate in the Chevron Respirator User program will require separate respirator training as required by the MCBU Respiratory Protection Program;
- 5. Basic overview of emergency rescue techniques, first aid, CPR and medical evaluation procedures. Employees who may be required to perform "standby" duties are required to receive additional first aid and CPR training, which is not covered in the Advanced Level H₂S training;
- 6. Proficiency examination covering all course material.

Advanced H₂S training courses will be instructed by personnel who have successfully completed an appropriate H₂S train-the-trainer development course (ANSI/ASSE Z390.1-2006) or who possess significant past experience through educational or work-related background.



H₂S Training Certification

All employees and visitors will be issued an H_2S training certification card (or certificate) upon successful completion of the appropriate H_2S training course. Personnel working in an H_2S environment will carry a current H_2S training certification card as proof of having received the proper training on their person at all times.

Briefing Area

A minimum of two briefing areas will be established in locations that at least one area will be upwind from the well at all times. Upon recognition of an emergency situation, all personnel should assemble at the designated upwind briefing areas for instructions.

H₂S Equipment

Respiratory Protection

- a) Six 30 minute SCBAs 2 at each briefing area and 2 in the Safety Trailer.
- b) Eight 5 minute EBAs 5 in the dog house at the rig floor, 1 at the accumulator, 1 at the shale shakers and 1 at the mud pits.

Visual Warning System

- a) One color code sign, displaying all possible conditions, will be placed at the entrance to the location with a flag displaying the current condition.
- b) Two windsocks will be on location, one on the dog house and one on the Drill Site Manager's Trailer.

H₂S Detection and Monitoring System

- a) H₂S monitoring system (sensor head, warning light and siren) placed throughout rig.
 - Drilling Rig Locations: at a minimum, in the area of the Shale shaker, rig floor, and bell nipple.
 - Workover Rig Locations: at a minimum, in the area of the Cellar, rig floor and circulating tanks or shale shaker.



Well Control Equipment

- a) Flare Line 150' from wellhead with igniter.
- b) Choke manifold with a remotely operated choke.
- c) Mud / gas separator

Mud Program

In the event of drilling, completions, workover and well servicing operations involving a hydrogen sulfide concentration of 100 ppm or greater the following shall be considered:

- 1. Use of a degasser
- 2. Use of a zinc based mud treatment
- 3. Increasing mud weight

Public Safety - Emergency Assistance

| <u>Agency</u> | Telephone Number |
|------------------------------------|------------------|
| Lea County Sheriff's Department | 575-396-3611 |
| Fire Department: | |
| Carlsbad | 575-885-3125 |
| Artesia | 575-746-5050 |
| Lea County Regional Medical Center | 575-492-5000 |
| Jal Community Hospital | 505-395-2511 |
| Lea County Emergency Management | 575-396-8602 |
| Poison Control Center | 800-222-1222 |





Chevron MCBU D&C Emergency Notifications

Below are lists of contacts to be used in emergency situations.

| | Name | Title | Office Number | Cell Phone |
|----|------------------|---------------------|----------------|------------|
| 1. | TBD | Drilling Engineer | | |
| 2. | Sergio Hernandez | Superintendent | 713 372 1402 | |
| 5. | Dennis Mchugh | Drilling Manager | (713) 372-4496 | |
| 6. | Kyle Eastman | Operations Manager | 713-372-5863 | |
| 7. | TBD | D&C HES | | |
| 8. | TBD | Completion Engineer | | |



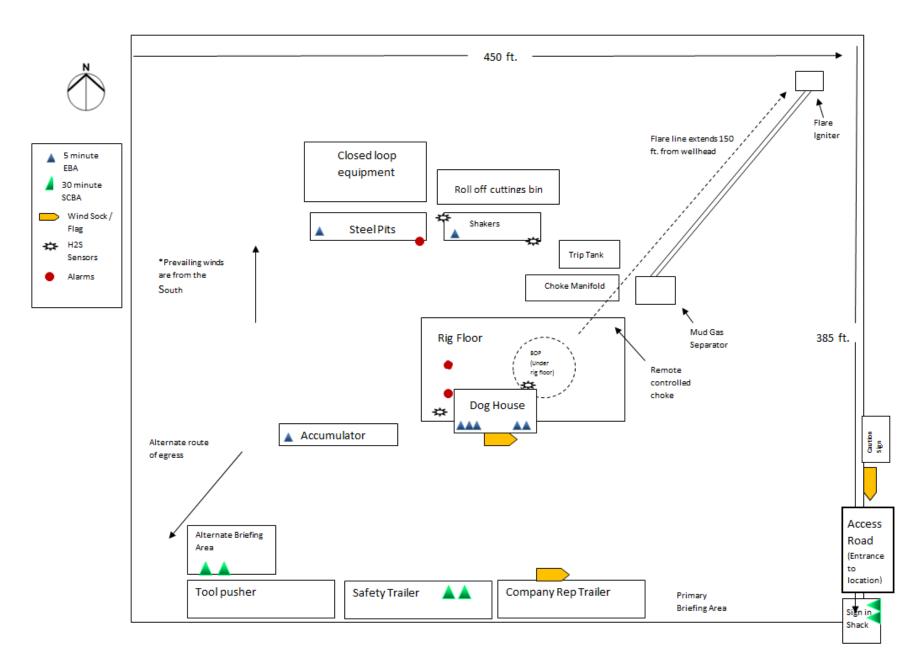

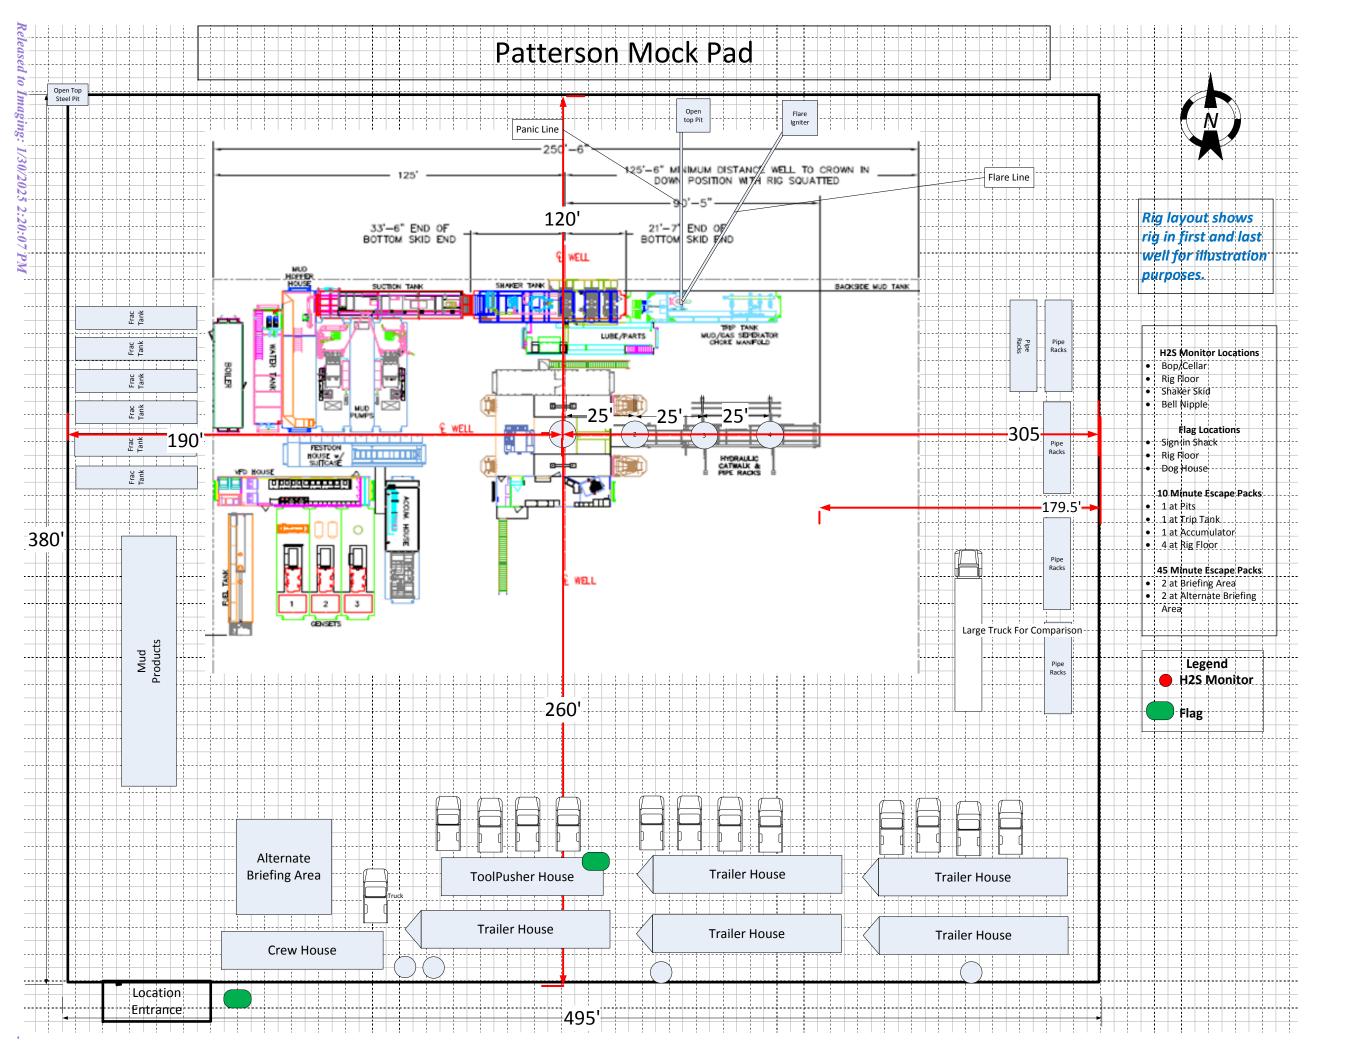



APD ID: 10400088467

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

Submission Date: 09/30/2022

Operator Name: CHEVRON USA INCORPORATED

Well Number: 307H

Well Type: OIL WELL

Well Name: SD 14 23 FED P305

Well Work Type: Drill

Highlighted data reflects the most recent changes

Show Final Text

Section 1 - Geologic Formations

| Formation ID | Formation Name | Elevation | True Vertical | Measured Depth | Lithologies | Mineral Resources | Producing Formatio |
|--------------|------------------|-----------|---------------|-------------------|------------------|-------------------|-----------------------|
| 14190239 | RUSTLER | 3207 | 685 | 685 | DOLOMITE | NATURAL GAS, OIL | N |
| 14190240 | SALADO | 2127 | 1080 | 1080 | HALITE, SALT | NATURAL GAS, OIL | N |
| 14190241 | CASTILE | 408 | 2799 | 2799 | ANHYDRITE | NONE | N |
| 14190242 | LAMAR | -1411 | 4618 | 4658 | LIMESTONE | NATURAL GAS, OIL | N |
| 14190243 | BELL CANYON | -1416 | 4623 | 4663 | SANDSTONE | NATURAL GAS, OIL | N |
| 14190244 | CHERRY CANYON | -2452 | 5659 | 5699 | SANDSTONE | NATURAL GAS, OIL | N |
| 14190245 | BRUSHY CANYON | -4014 | 7221 | 7271 | SANDSTONE | NATURAL GAS, OIL | N |
| 14190250 | BONE SPRING LIME | -5703 | 8910 | 8960 | LIMESTONE | NATURAL GAS, OIL | N |
| 14190251 | AVALON SAND | -5718 | 8925 | 8975 | LIMESTONE, SHALE | NATURAL GAS, OIL | N |
| 14190252 | BONE SPRING 1ST | -6584 | 9791 | 9841 | SANDSTONE | NATURAL GAS, OIL | Y |

Section 2 - Blowout Prevention

Pressure Rating (PSI): 10M Rating Depth: 9901

Equipment: Chevron will have a minimum of a 5,000 psi rig stack (see proposed schematic) for drill out below surface

casing.

Requesting Variance? YES

Variance request: "Chevron respectfully request to vary from the Onshore Order 2 where it states: "(A full BOP Test) shall be performed: when initially installed and whenever any seal subject to test pressure is broken." We propose to break test if able to finish the next hole section within 21 days of the previous full BOP test. No BOP components nor any break will ever surpass 21 days between testing. A break test will consist of a 250 psi low / 5,000 psi high for 10 min each test against the connection that was broken when skidding the rig. Upon the first nipple up of the pad a full BOP test will be performed. A full BOP test will be completed prior to drilling the production lateral sections unless the BOP connection was not broken prior to drilling that hole section (example: drilling straight from production into production liner hole section). A break test will only be performed on operations where BLM documentation states a 5M or less BOP can be

BLOWOUT PREVENTER SCHEMATIC


Operation: Intermediate & Production Drilling Operations

BOP Stack Pressure Part Size Description Rating 13-5/8" N/A Rotating Head/Bell nipple 13-5/8" 5,000 Annular В 13-5/8" C 10,000 Blind Ram 13-5/8" 10,000 D Pipe Ram Ē 13-5/8" 10,000 **Mud Cross** F 13-5/8" 10,000 Pipe Ram Vill Lina

Minimum System operation pressure

| | KIII LINE | | | | | | | | | |
|------|-----------|----------|------------------------------|--|--|--|--|--|--|--|
| Part | Size | Pressure | Description | | | | | | | |
| rait | Size | Rating | Description | | | | | | | |
| G | 2" | 10,000 | Inside Kill Line Valve (gate | | | | | | | |
| פ | 2 | 10,000 | valve) | | | | | | | |
| н | 2" | 10,000 | Outside Kill Line Valve | | | | | | | |
| П | 2 | 10,000 | (gate valve) | | | | | | | |
| | 2" | 10,000 | Kill Line Check valve | | | | | | | |
| | | | | | | | | | | |





| <u>Choke line</u> | | | | | |
|-------------------|---------|--------------------|-------------------------|--|--|
| Part | Size | Pressure Rating | Description | | |
| J | 3" | 10,000 | HCR (gate valve) | | |
| K | 3" | 10,000 | Manual HCR (gate valve) | | |
| <u>Wellhead</u> | | | | | |
| Part | Size | Pressure Rating | Description | | |
| L | 13-5/8" | 5,000 | FMC Multibowl wellhead | | |

BOP Installation Checklist: The following items must be verified and checked off prior to pressure testing BOP equipment

The installed BOP equipment meets at least the minimum requirements (rating, type, size, configuration) as shown on this schematic. Components may be substituted for equivalent equipment rated to higher pressures. Additional components may be put into place as long as they meet or exceed the minimum pressure rating of the system.

All valves on the kill line and choke line will be full opening and will allow straight flow through.

Manual (hand wheels) or automatic locking devices will be installed on all ram preventers. Hand wheels will also be install on all manual valves on the choke and kill line

A valve will be installed in the closing line as close as possible to the annular preventer to act as a locking device. This valve will remain open unless accumulator is inoperative.

Upper kelly cock valve with handle will be available on rig floor along with saved valve and subs to fit all drill string connections in use.

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Action 421829

CONDITIONS

| Operator: | OGRID: |
|---------------------|-------------------------------------------------------|
| CHEVRON U S A INC | 4323 |
| 6301 Deauville Blvd | Action Number: |
| Midland, TX 79706 | 421829 |
| | Action Type: |
| | [C-101] BLM - Federal/Indian Land Lease (Form 3160-3) |

CONDITIONS

| Created By | Condition | Condition Date |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
| ntaylor | lor Cement is required to circulate on both surface and intermediate1 strings of casing. | |
| ntaylor | aylor If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing. | |
| pkautz | Prior to production of this well a change to the well name/number is required to comply with the OCD well naming convention. | 1/30/2025 |
| pkautz | File As Drilled C-102 and a directional Survey with C-104 completion packet. | 1/30/2025 |
| pkautz | Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string. | 1/30/2025 |
| pkautz | Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system. | 1/30/2025 |