Distribution: O+4 (BLM);	1-Accounting; 1-Land; 1-F	île .		
Form 3160-5 (June 1990) DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill or to deepen or reentry to a different reservoir. Use "APPLICATION FOR PERMIT" for such proposals			FORM APPROVED Budget Bureau No. 1004-0135 Expires: March 31, 1993 5. Lease Designation and Serial No. SF-080384-B 6. If Indian, Allottee or Tribe Name	
	7. If Unit or CA, Agreement Designation			
Name of Operator Merrion Oil & Gas Address and Telephone No.	mington, NM 87401-2634 , R., M., or Survey Descriptior) (nw sw)	(505) 327-9801	8. Well Name and No. Hiccup A No. 2 9. API Well No. 30-045-30257 10. Field and Pool, or Exploratory Area Basin Fruitland Coal (71629) 11. County or Parish, State San Juan County,	
CHECK APPROPRIATE BOX (s) TO INDICATE NATURE OF NOTICE, REPO			New Mexico	
TYPE OF SUBMIS			OKI, OK OTTEK DATA	
X Notice of Inte		X Abandonment (Temporary) Recompletion	Change of Plans New Construction	
Subsequent F	onment Notice	Plugging Back Casing Repair Altering Casing Other	Non-Routine Fracturing Water Shut-Off Conversion to Injection Dispose Water (Note: Report results of multiple completion on Completion or Recompletion Report and Log form)	
give subsurface locations and	measured and true vertical depths for all man	and give pertinent dates, including estimated date of start rekers and zones pertinent to this work.)* Dject wellbore according to the atta	ting any proposed work. If well is directionally drilled,	
Signed Connie S. Dinning	<u> </u>	Title Production Engineer	Date 6/6/02	
(This space for Federal or State of Approved By	ffice use)	Title PF	Date 6/25/1.	

Merrion Oil & Gas Corporation Plug & Abandon Procedure

June 6, 2002



Well: Location: Hiccup A No. 2

1820' fsl & 820' fwl (nw sw)

Sec. 3, T26N, R12W, NMPM

San Juan County, New Mexico

Field: Elevation: Basin Fruitland Coal

6,045' GR 6,050' KB

By:


Connie Dinning

Note: Cement volume use 100' excess inside pipe. The stabilizing wellbore fluid will be 8.33 ppg, sufficient to balance all exposed formation pressures.

- 1. Comply with all NMOCD, BLM and Merrion safety regulations.
- 2. POH w/ 54 ea. 3/4" plain rods, LD and haul to town.
- 3. Load casing w/ water. NU BOP and POH w/ 2 3/8" tubing, LD haul to town.
- 4. Pump in 15 bbls. water to establish injection.
- 5. Mix 116 sx (137 cu. ft) Class B cement. Pump wellbore full of cement from top to bottom.
- 6. Cut off casing below surface. Install P&A marker with cement to comply with regulations. RDMOL, cut off anchors and restore location.
- 7. Restore location per BLM stipulations.

Merrion Oil & Gas Corporation Wellbore Schematic

Hiccup A No. 2

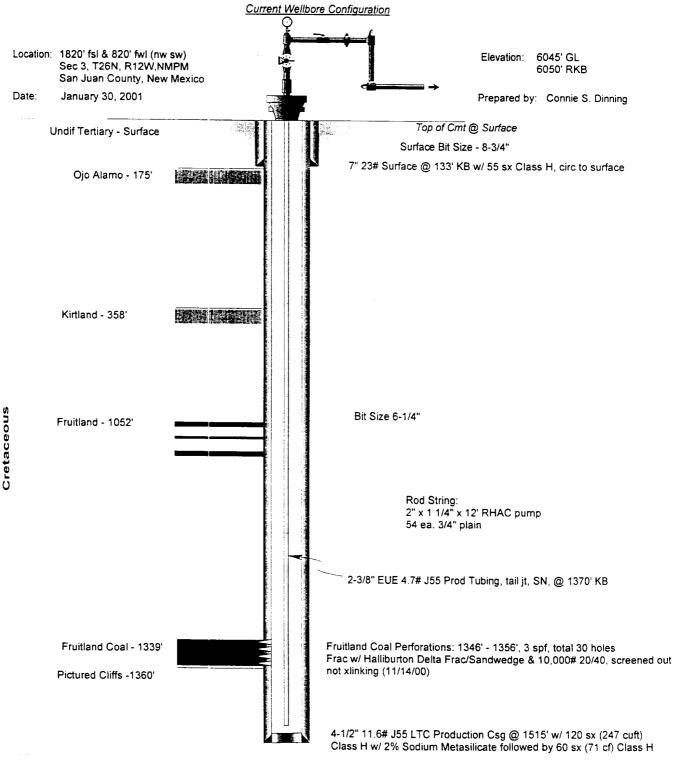

TD @ 1550' KB PBTD @ 1470' KB

Merrion Oil & Gas Corporation Wellbore Schematic

Hiccup A No. 2

