	•					
Form 3160-3				FORM APP	ROVED	
(August 1999)	OMB No. 1004-0136					
UNITED STAT	Expires November 30, 2000					
DEPARTMENT OF TH	5. Lease Serial No.					
BUREAU OF LAND MAN	NAGEMENT		A PA	NO-G-990		
APPLICATION FOR PERMIT TO	DRILL O	REENPER	2001	6. If Indian, Allottee or	Inde Name	
la. Type of Work: X DRILL RE	ENTER	S ON CO	V50 a	7. If Unit or CA Agreen	nent, Name and No.	
	,	Diez	DIV A	(×3929	
/	`	100	3 🚕	8. Lease Name and Wel	l No.	
b. Type of Well: Oil Well Gas Well Other	؛ لعا	Si ngle Zone	Multiple 2006	Purls C	om #1	
Name of Operator Coleman Oil and Gas	s Compan	y CERTIFIC	1600	9. API Well No. 30-045	-30693	
3A. Address		o. (include area co	de)	10. Field and Pool, or Ex		
c/o Walsh Engineering, 7415 E. Main, Farmington, NM 87402		505.327.48	392	Basin Fruit		
4. Location of Well (Report location clearly and in accordance with	n any State req	uirements.*)		11. Sec., T., R., M., or B	lk, and Survey or Area	
At surface 715' FSL and 2405' FWL				N Section 24, T26N, R12W		
	Attroposed prod. Zone				13. State	
14. Distance in miles and direction from nearest town or post office 15 miles south of Fari		ım		12. County or Parish San Juan	NM	
15. Distance from proposed*		cres in lease	17. Spacing Unit de	1		
location to nearest property or lease line, ft. 235' / 715'						
(Also to nearest drig. unit line, if any)		160		320 acres S/2		
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft 1970'	19. Propose	d Depth 390'	20. BLM/BIA Bond	0. BLM/BIA Bond No. on file 013002853		
21. Elevations (Show whether DF, KDB, RT, GL, etc.)	22. Approx	mate date work wi	l start*	23. Estimated duration		
6151' GL		August 20	001	2 we	eks	
	24. <i>A</i>	Attachments				
The following, completed in accordance with the requirements of Or	nshore Oil and	Gas Order No. 1,	shall be attached to thi	s form:		
Well plat certified by a registered surveyor.		l 4 Rond to co	ver the operations up	nless covered by an existing	bond on file (see	
A Drilling Plan.		Item 20 ab	•		,	
3. A Surface Use Plan (if the location is on National Forest System	Lands the	5. Operator ce	•			
SUPO shall be filed with the appropriate Forest Service Office.	Lanus, iii	,		on and/or plans as may be r	equired by the	
SOLO shall be fried with the appropriate Potest Service Office.		authorized	•	on and or plans as may be t	equired by the	
25. Signature	Na	ne (Printed/Typed))	Da	te	
Tand 6. Thomps -		Paul	C. Thompson,	P.E.	6/6/01	
Title		Agent				
Approved by (Signature)	Na	me (Printed/Typed,)	Da		
					9/25/01	
Title	jom	ce				
Application approval does not warrant or certify that the applicant h	olds legal or e	quitable title to the	se rights in the subjec	t lease which would entitle	the applicant to conduc	
operations thereon.						
Conditions of approval, if any, are attached.	ف داد داد د د					
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make States any false, fictitious or fraudulent statements or representation				nake to any department or a	agency of the United	
*(Instructions on reverse)						
procedural review pursuant to 43 CPR 3165.3	an Maria. Marianta	and the state of t				
end spieci pursuant to 43 CFR 3186.4	OUTSELL History		SEE WILL ATTACKS	E)		
The second secon	While	KAL REQUIREME	R:37			

NMOCO

1-

District I PO Box 1980, Hobbs, NM 88241-1980

District II PO Drawer DD, Artesia, NM 88211-0719

District III 1000 Rio Brazos Rd., Aztec, NM 87410

District IV PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION PO Box 2088 Santa Fe, NM 87504-2088

Form C-102 Revised February 21, 1994 Instructions on back


Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

AMENDED REPORT

6857

			WELL	LOCAT	ION AND A	CREAGE DED:	ICATION PL	.AT		
'API Number 'Pool Code 71629				1	PACIAL EDITION COM					
Property	Code 1	06/3	<u> </u>		Property	BASIN FRUILTAND COAL				
2890	39				PURLS				Well Number	
70GRID N 004838	10.	*Operator Name COLEMAN OIL & GAS.						*Elevation 6151		
					¹⁰ Surface	Location		<u></u> -		
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/We	st line	County
N	24	26N	12W		715	SOUTH	2405	WE	ST	SAN JUAN
		11 B	ottom	Hole L	ocation I	f Different	From Surf	ace		
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/We	st line	County
¹² Dedicated Acres	320	Acres -	(S/2)	·	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.			
NO ALLOW	ABLE W	ILL BE A OR A	SSIGNEI NON-ST	D TO TH ANDARD	IS COMPLETI UNIT HAS BE	ON UNTIL ALL EEN APPROVED	INTERESTS H BY THE DIVI	IAVE BE SION	EN CON	NSOL IDATED
16			52	283.96	SEF RECOLUMN	2001 2001 2001 2001 2001 2001 2001 2001	I hereby centrule and cond Signatur Paul Printed	e L C. Th	information best of my	FICATION n contained herein is knowledge and belief
				ı	A STATE	21.11.01.6.25	Ager Title 6/5/			

ŏ ŏ Date 5280 89 18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and connect to the best of my belief. APRIL 26, 2001 NO-G-9909-1359 NO-G-0101-1436 Date of 2405' Certificate MORDER 5282.64

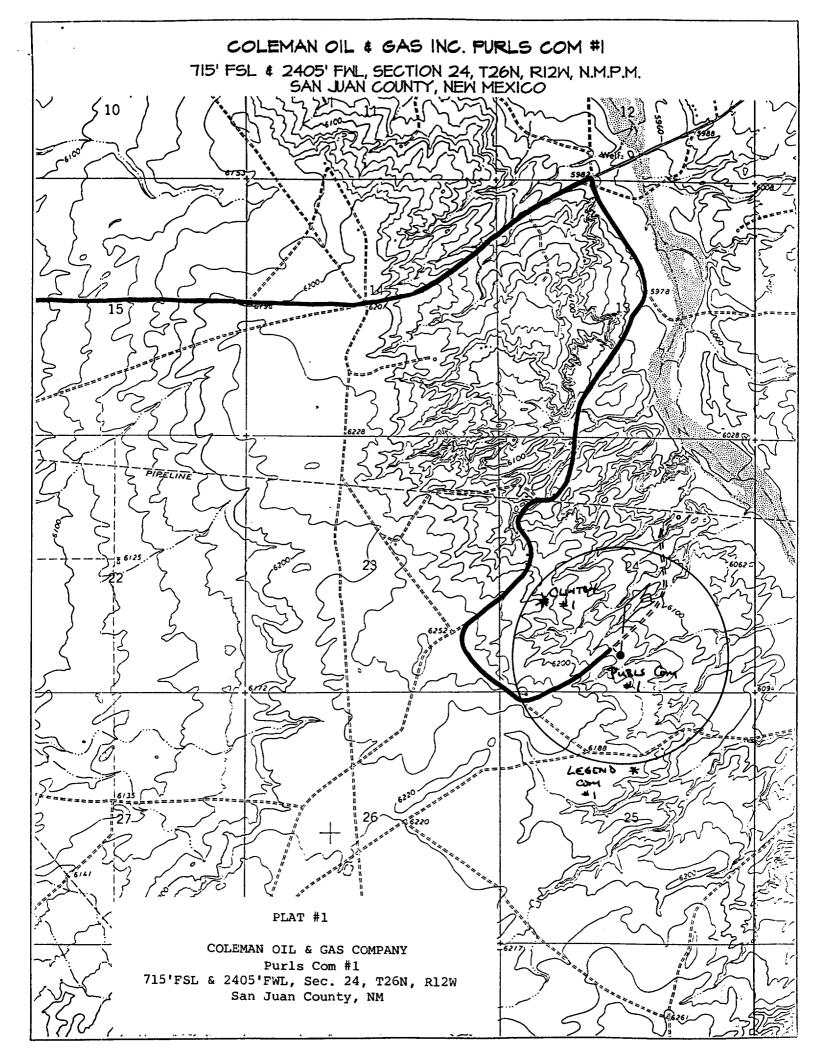

COLEMAN OIL AND GAS OPERATIONS PLAN Purls Com #1

I. Location: 715' FSL & 2405' FWL

Date: June 4, 2001

Sec 24 T26N R12W San Juan County, NM

Field: Basin Fruitland Coal

Elev: GL 6151'

Surface: Navajo Allotted Minerals: NO-G-9909-1359

II. Geology: Surface formation _ Nacimiento

Α.	Formation Tops	Depths
	Ojo Alamo	200'
	Kirtland	315'
	Fruitland	1075′
	Fruitland Coal	1245′
	Pictured Cliffs	1265'
	Total Depth	1390'

Estimated depths of anticipated water, oil, gas, and other mineral bearing formations which are expected to be encountered:

Water and gas - 1075'; gas - 1265'.

- B. Logging Program: Induction/GR and density logs at TD.
- C. No over pressured zones are expected in this well. No H₂S zones will be penetrated in this well. Max. BHP = 500 psig.

III. Drilling

- A. Contractor:
- B. Mud Program:

The surface hole will be drilled with a fresh water mud.

The production hole will be drilled with a fresh water polymer mud. The weighting material will be drill solids or if conditions dictate, barite. The maximum mud weight expected is 8.5 ppg.

C. Minimum Blowout Control Specifications:

Double ram type or annular type 2000 psi working pressure BOP with a rotating head. See the attached exhibits (#1 through #3) for details on the BOP equipment. All ram type preventers and related equipment will be hydraulically tested at nipple-up and after any use under pressure to 1000 psi.

Purls Com #1 Operations Plan Pg #2

C. Cont.

The blind rams will be hydraulically activated and checked for operational readiness each time pipe is pulled out of the hole. All checks of the BOP stack and equipment will be noted on the daily drilling report. The BOP equipment will include a kelly cock, floor safety valve, and choke manifold all rated to 2000 psi.

IV. Materials

A. Casing Program:

Hole Size	Depth	Casing Size	Wt. & Grade
8-3/4"	120'	7"	20# J-55
6-1/4"	、1390 <i>1</i>	4-1/2"	10.5# J-55

- B. Float Equipment:
- a) Surface Casing: None
- b) Production Casing: 4-1/2" cement guide shoe and self fill insert float collar. Place float one joint above shoe. Five centralizers spaced every other joint above shoe and five turbolizers every other joint from the top of the well.

V. Cementing:

Surface casing: 7" - Use 30 sx (36 cu. ft.) of Cl "B" with 2% CaCl₂ and ½ #/sk. celloflake. Yield = 1.18 cu. ft./sk; slurry weight = 15.6 PPG). 100% excess to circulate cement to surface. WOC 12 hours. Pressure test surface casing to 600 psi for 30 min.

Production Casing: 4-1/2" - Before cementing circulate hole with at least 1-1/2 hole volumes of mud. Precede cement with 30 bbls of fresh water. Lead with 110 sx (227 cu.ft) of Cl "B" with 2% metasilicate and ½ #/sk. celloflake. (Yield = 2.06 cu.ft./sk; slurry weight = 12.5 PPG). Tail with 50 sx (59 cu.ft.) of Cl "B" with 2% CaCl₂ and ½ #/sk. celloflake (Yield = 1.18 cu. ft./sk; slurry weight = 15.6 PPG). Total cement volume is 286 cu.ft. (100% excess to circulate cement to surface).

Paul C. Thompson, P.E.