Form 3160-3 FORM APPROVED OMB No. 1004-0137 (June 2015) Expires: January 31, 2018 **UNITED STATES** DEPARTMENT OF THE INTERIOR 5. Lease Serial No. NMNM15317 BUREAU OF LAND MANAGEMENT APPLICATION FOR PERMIT TO DRILL OR REENTER 6. If Indian, Allotee or Tribe Name 7. If Unit or CA Agreement, Name and No. **✓** DRILL REENTER 1a. Type of work: 1b. Type of Well: ✓ Oil Well Gas Well Other 8. Lease Name and Well No. 1c. Type of Completion: Hydraulic Fracturing Single Zone ✓ Multiple Zone **VALIANT 24 FED COM** 757H 2. Name of Operator 9. API Well No. EOG RESOURCES INCORPORATED 30-025-54463 3a. Address 3b. Phone No. (include area code) 10. Field and Pool, or Exploratory WC-025 G-09 S253309P; UPPER WOLFCAMP 1111 BAGBY SKY LOBBY 2, HOUSTON, TX 77002 (713) 651-7000 4. Location of Well (Report location clearly and in accordance with any State requirements.\*) 11. Sec., T. R. M. or Blk. and Survey or Area SEC 24/T25S/R32E/NMP At surface TR G / 2492 FNL / 1587 FEL / LAT 32.116473 / LONG -103.6250357 At proposed prod. zone TR P / 100 FSL / 990 FEL / LAT 32.0945735 / LONG -103.623115 14. Distance in miles and direction from nearest town or post office\* 12. County or Parish 13 State LEA NM 15. Distance from proposed\* 16. No of acres in lease 17. Spacing Unit dedicated to this well 100 feet location to nearest property or lease line, ft. 480.0 (Also to nearest drig. unit line, if any) 18. Distance from proposed location\* 19. Proposed Depth 20. BLM/BIA Bond No. in file to nearest well, drilling, completed, 20 feet 12963 feet / 20562 feet FED: NM2308 applied for, on this lease, ft. 21. Elevations (Show whether DF, KDB, RT, GL, etc.) 22. Approximate date work will start\* 23. Estimated duration 3463 feet 04/30/2024 25 days 24. Attachments The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable) 1. Well plat certified by a registered surveyor. 4. Bond to cover the operations unless covered by an existing bond on file (see 2. A Drilling Plan. Item 20 above) 3. A Surface Use Plan (if the location is on National Forest System Lands, the 5. Operator certification. 6. Such other site specific information and/or plans as may be requested by the SUPO must be filed with the appropriate Forest Service Office). 25. Signature Name (Printed/Typed) Date SHEA BAILEY / Ph: (713) 651-7000 (Electronic Submission) 06/29/2023 Title Regulatory Contractor Approved by (Signature) Name (Printed/Typed) Date (Electronic Submission) CODY LAYTON / Ph: (575) 234-5959 02/21/2025 Title Office Assistant Field Manager Lands & Minerals Carlsbad Field Office Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Conditions of approval, if any, are attached. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction



(Continued on page 2)

\*(Instructions on page 2)

| C-102 Submit Electronically   |                  |                 | Energy        |               | State of New<br>ls & Natura      | w Mexico<br>al Resources  | Department                           |                                     | Revised July 9, 2024 |                |  |
|---|------------------|-----------------|---------------|---------------|----------------------------------|---|--------------------------------------|-------------------------------------|----------------------|----------------|--|
| Via OCD Permitting  |                  |                 |               |               |                                  | TION DIVIS  | VISION   Initial Submittal           |                                     |                      |                |  |
|   |                  |                 |               |               |                                  |   |                                      | Submittal Type:                     | Amended Report       |                |  |
|   |                  |                 |               |               |                                  | Type.   | As Drilled                           |                                     |                      |                |  |
|   |                  | W               | ELL LC        | CATIO         | N AND AC                         | CREAGE DEDICATION PLAT  |                                      |                                     |                      |                |  |
| API Number 30   | -025-544         | 163             |               | 98180         | Pool                             |   | 5 G-09 S25330                        | 09P; Uppe                           | r Wolfcamp           |                |  |
| Property Code Property Name VALIANT 2   |                  |                 |               | 24 FED COM    | I                                |   | Well Number                          | 757H                                |                      |                |  |
| OGRID No.   | 7377             |                 | Operator Name |               | EOG RESC                         | OURCES, INC   | <b>)</b> .                           |                                     | Ground Level Elev    | ation<br>3463' |  |
| Surface Owner:  | State Fee        | Tribal Federal  |               |               |                                  | Mineral Owner:  | State Fee Tribal                     | Federal                             |                      |                |  |
|   |                  |                 |               |               | Surface                          | Location  |                                      |                                     |                      |                |  |
| UL or lot no.   | Section          | Township        | Range         | Lot Idn       | Feet from the N/S                |   | Latitude                             |                                     | Longitude            | County         |  |
| G   | 24               | 25-S            | 32-E          |               | 2492' N                          | 1587' E   | N 32.11647                           | 30 W 1                              | 03.6250357           | LEA            |  |
|   |                  |                 |               |               |                                  | ole Location  |                                      |                                     |                      |                |  |
| UL or lot no.   | Section          | Township        | Range         | Lot Idn       | Feet from the N/S                |   | Latitude                             |                                     | Longitude            | County         |  |
| Р   | 25               | 25-S            | 32-E          | -             | 100' S                           | 990' E  | N 32.09457                           | 35   W 1                            | 03.6231150           | LEA            |  |
| Dedicated Acres 480.00  | Infill or Defi   | ning Well Defin | ing Well API  |               |                                  | Overlapping Spacing   | g Unit (Y/N)                         | Consolidat                          | ed Code              |                |  |
|   | FNDING           | COM AGE         | REMENT        | NIMNIM        | 105737606                        | Well Setbacks are under Common Ownership: Yes No                          |                                      |                                     |                      |                |  |
| oraci ramioris  | LINDING          | OOM AOI         | CLLIVILIAI    | TAIVITAIVI    |                                  | 1   | act common o wherein                 |                                     |                      |                |  |
| UL or lot no.   | Section          | Township        | Range         | Lot Idn       | Kick Off                         | Point (KOP) Feet from the E/W   | Latitude                             |                                     | Longitude            | County         |  |
| CE of lot no.   | 24               | 25-S            | 32-E          | -             | 2592' S                          | 990' E  | N 32.11593                           | 51 W 1                              | 03.6231066           | LEA            |  |
|   |                  |                 | 1 0           |               |                                  | 1   |                                      | <u> </u>                            |                      |                |  |
| UL or lot no.   | Section          | Township        | Range         | Lot Idn       |                                  | Point (FTP) Feet from the E/W   | Latitude                             | - 1                                 | Longitude            | County         |  |
| OL of lot no.   | 24               | 25-S            | 32-E          | Lot Idii      | 2542' S                          | 990' E  | N 32.11579                           | 77   W 1                            | 03.6231066           | LEA            |  |
| '   | 24               | 20-0            | 02-L          |               | 2042 0                           | 330 L   | 14 02.11070                          | 77   VV 1                           | 00.0201000           |                |  |
|   |                  |                 |               |               |                                  | Point (LTP)   |                                      |                                     |                      | -              |  |
| UL or lot no.   | Section          | Township        | Range         | Lot Idn       | Feet from the N/S                |   | Latitude                             | 205   144                           | Longitude            | County         |  |
| P   | 25               | 25-S            | 32-E          | -             | 100' S                           | 990' E  | N 32.09457                           | 35   W 1                            | 03.6231150           | LEA            |  |
|   |                  |                 |               | _             |                                  |   |                                      |                                     |                      |                |  |
| Unitized Area or A  | rea of Uniform I | ntrest          |               | Spacing Unity | Type Horizor                     | tal Vertical  | Ground I                             | Floor Elevation                     | 3488'                |                |  |
|   |                  |                 |               | 1             |                                  |   |                                      |                                     |                      |                |  |
| OPERATOR CERTIFICATION  I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief; and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.  If this well is a horizontal well, I further certify that this organization has received The consent of at least one lessee or owner of a working interest or |                  |                 |               |               | I hereby certify notes of actual | RS CERTIFICA  I that the well local surveys made by n rect to the best of | ion shown on ne or under mmy belief. | this big was mate with the was made | But the same         |                |  |
| unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.  Star L Harrell Signature  Date  |                  |                 |               |               |                                  |   | 3/3/2025 4                           | SS:55:06 PM                         | RICHIE               |                |  |
| Signature Star L Ha   |                  |                 | Date          |               |                                  | Signature and Seal  | of Professional Surveyor             | Date                                |                      |                |  |
| Print Name  |                  |                 |               |               |                                  | Certificate Number  | Date of                              | Survey                              |                      |                |  |
|   | ell@eoare        | sources.c       | om            |               |                                  |   |                                      | 10/01/2021                          |                      |                |  |
| star_harrell@eogresources.com  E-mail Address   |                  |                 |               | ·             |                                  |   |                                      |                                     |                      |                |  |

| C-102 Submit Electronically Via OCD Permitting   | Energy, Mineral                |              | Mexico<br>Resources Departi<br>ON DIVISION | ment          | Submittal<br>Type: | Revised July 9, 2024 |
|--|--------------------------------|--------------|--|---------------|--------------------|----------------------|
| Property Name and Well Number  | <u> </u><br>VA                 | ALIANT 24 FE | ED COM 757H                                |               |                    | As Drilled           |
| SURFACE LOCATION (SHL)  NEW MEXICO EAST NAD 1983  X=760626 Y=406830  LAT.: N 32.1164730  LONG.: W 103.6250357  NAD 1927  X=719440 Y=406772  LAT.: N 32.1163485  LONG.: W 103.6245624  2492' FNL 1587' FEL  NON-PRODUCING LEASE  REFERENCE POINT  NEW MEXICO EAST NAD 1983  X=761074 Y=406686  LAT.: N 32.1160702  LONG.: W 103.6235910  NAD 1927  X=719888 Y=406628  LAT.: N 32.1159456  LONG.: W 103.6231178  2641' FNL 1140' FEL  KICK OFF POINT (KOP)  NEW MEXICO EAST NAD 1983  X=761224 Y=406638  LAT.: N 32.1159351  LONG.: W 103.6231066  NAD 1927  X=720038 Y=406580  LAT.: N 32.1158105  LONG.: W 103.6226334  2592' FSL 990' FEL | 23 24 26 25 35 36 36 SP-58 4 M | <del> </del> | BHL 990' 36                                | 19 - X=762215 | SUR   LC   BOTT    |                      |

#### State of New Mexico Energy, Minerals and Natural Resources Department

Submit Electronically Via E-permitting

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

### NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

### Section 1 – Plan Description Effective May 25, 2021

| I. Operator:EOG l   | Resources, Inc                             | eOGRID   | <b>):</b> 7377           |                          | Da         | te: 3/4/2        | 2025   |                                 |
|---|--|--|--------------------------|--------------------------|------------|------------------|--------|---------------------------------|
| II. Type: ⊠ Origina   | I □ Amendm                                 | ent due to 🗆 19.15.                                | 27.9.D(6)(a) N           | MAC □ 19.15.27.          | 9.D(6)(b   | ) NMAC           | C□ Otl | ner.                            |
| If Other, please describe   | :  |  |                          |                          |            |                  |        |                                 |
| <b>III. Well(s):</b> Provide the be recompleted from a si   |  |  |                          |                          | wells pr   | oposed to        | be dri | lled or proposed to             |
| Well Name   | API  | ULSTR  | Footages                 | Anticipated<br>Oil BBL/D |            | cipated<br>MCF/D | P      | Anticipated roduced Water BBL/D |
| VALIANT 24 FED COM 757H   |  | G-24-25S-32E                                       | 2492' FNL &<br>1587' FEL | +/- 1000                 | +/- 35     | 00               | +/- 30 | 000                             |
| IV. Central Delivery Point Name: Valiant 24 Fed Com CTB [See 19.15.27.9(D)(1) NMAC]  V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.  Well Name |  |  |                          |                          |            |                  |        |                                 |
|   |  | 1  | Date                     | Commencement             |            | Back I           | Date   | Date                            |
| VALIANT 24 FED COM 757H   |  | 5/15/25  | 5/30/25                  | 8/01/25                  |            | 9/01/25          |        | 12/01/25                        |
| VI. Separation Equipm VII. Operational Pract Subsection A through F VIII. Best Managemen during active and planne   | ices: ⊠ Attacof 19.15.27.8  t Practices: [ | ch a complete descr<br>NMAC.<br>⊠ Attach a complet | iption of the ac         | tions Operator wi        | ll take to | comply           | with t | he requirements of              |

### Section 2 – Enhanced Plan EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

🖾 Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

#### IX. Anticipated Natural Gas Production:

| Well | API | Anticipated Average<br>Natural Gas Rate MCF/D | Anticipated Volume of Natural Gas for the First Year MCF |
|------|-----|---|--|
|      |     |   |  |
|      |     |   |  |

#### X. Natural Gas Gathering System (NGGS):

| Operator | System | ULSTR of Tie-in | Anticipated Gathering | Available Maximum Daily Capacity |
|----------|--------|-----------------|-----------------------|----------------------------------|
|          |        |                 | Start Date            | of System Segment Tie-in         |
|          |        |                 |                       |                                  |
|          |        |                 |                       |                                  |

| XI. Map. $\square$ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the |
|---|
| production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of       |
| the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.   |

| XII. Line Capacity. The natural gas gathering system     | $\square$ will $\square$ will not have capacity t | to gather 100% of the anticipated | natural gas |
|--|---|-----------------------------------|-------------|
| production volume from the well prior to the date of fin | rst production.                                   |                                   |             |

| <b>XIII.</b> Line Pressure. Operator $\square$ does $\square$ does not anticipate that its existing well(s) connected to the same segment, o | r portion, | of the  |
|--|------------|---------|
| natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the                   | ne new we  | ıll(s). |

| Attach Operator's plan to manage production in respons | e to the increased line pressure |
|--|----------------------------------|

| XIV. Confidentiality: $\square$ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information prov  | vided in |
|---|----------|
| Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information of the | rmation  |
| for which confidentiality is asserted and the basis for such assertion.   |          |

## Section 3 - Certifications Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☑ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or
 ☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. If Operator checks this box, Operator will select one of the following:
 Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

**Venting and Flaring Plan.** □ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- **(b)** power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- **(f)** reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

### **Section 4 - Notices**

- 1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:
- (a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or
- (b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.
- 2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

| Signature: Star L Harrell                             |
|---|
| Printed Name: Star L Harrell                          |
| Title: Regulatory Advisor                             |
| E-mail Address: Star_Harrell@eogresources.com         |
| Date: 3/4/2025  |
| Phone: (432) 848-9161                                 |
| OIL CONSERVATION DIVISION                             |
| (Only applicable when submitted as a standalone form) |
| Approved By:  |
| Title:  |
| Approval Date:  |
| Conditions of Approval:                               |
|   |
|   |
|   |
|   |

#### Natural Gas Management Plan Items VI-VIII

## VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.

- Separation equipment will be sized to provide adequate separation for anticipated rates.
- Adequate separation relates to retention time for Liquid Liquid separation and velocity for Gas-Liquid separation.
- Collection systems are appropriately sized to handle facility production rates on all (3) phases.
- Ancillary equipment and metering is selected to be serviced without flow interruptions or the need to release
  gas from the well.

## VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F 19.15.27.8 NMAC.

#### **Drilling Operations**

- All flare stacks will be properly sized. The flare stacks will be located at a minimum 100' from the nearest surface hole location on the pad.
- All natural gas produced during drilling operations will be flared, unless there is an equipment malfunction and/or to avoid risk of an immediate and substantial adverse impact on safety and the environment, at which point the gas will be vented.

#### **Completions/Recompletions Operations**

- New wells will not be flowed back until they are connected to a properly sized gathering system.
- The facility will be built/sized for maximum anticipated flowrates and pressures to minimize waste.
- For flowback operations, multiple stages of separation will be used as well as excess VRU and blowers to make sure waste is minimized off the storage tanks and facility.
- During initial flowback, the well stream will be routed to separation equipment.
- At an existing facility, when necessary, post separation natural gas will be flared until it meets pipeline specifications, at which point it will be turned into a collection system.
- At a new facility, post separation natural gas will be vented until storage tanks can safely function, at which point it will be flared until it meets pipeline spec.

#### **Production Operations**

- Weekly AVOs will be performed on all facilities.
- All flares will be equipped with auto-ignition systems and continuous pilot operations.
- After a well is stabilized from liquid unloading, the well will be turned back into the collection system.
- All plunger lift systems will be optimized to limit the amount of waste.
- All tanks will have automatic gauging equipment installed.
- Leaking thief hatches found during AVOs will be cleaned and properly re-sealed.

#### Performance Standards

- Production equipment will be designed to handle maximum anticipated rates and pressure.
- All flared gas will be combusted in a flare stack that is properly sized and designed to ensure proper combustion.
- Weekly AVOs will be performed on all wells and facilities that produce more than 60 Mcfd.

#### Measurement & Estimation

- All volume that is flared and vented that is not measured will be estimated.
- All measurement equipment for flared volumes will conform to API 14.10.
- No meter bypasses with be installed.

• When metering is not practical due to low pressure/low rate, the vented or flared volume will be estimated.

## VIII. Best Management Practices: Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

- During downhole well maintenance, EOG will use best management practices to vent as minimally as possible.
- Prior to the commencement of any maintenance, the tank or vessel will be isolated from the rest of the facilities.
- All valves upstream of the equipment will be closed and isolated.
- After equipment has been isolated, the equipment will be blown down to as low a pressure as possible into the collection system.
- If the equipment being maintained cannot be relieved into the collection system, it shall be released to a tank where the vapor can either be captured or combusted if possible.
- After downhole well maintenance, natural gas will be flared until it reaches pipeline specification.



#### 1. GEOLOGIC NAME OF SURFACE FORMATION:

Permian

#### 2. ESTIMATED TOPS OF IMPORTANT GEOLOGICAL MARKERS:

| Rustler                | 790'    |
|------------------------|---------|
| Rustiei                | 790     |
| Tamarisk Anhydrite     | 890'    |
| Top of Salt            | 1,155'  |
| Base of Salt           | 4,645'  |
| Lamar                  | 4,880'  |
| Bell Canyon            | 4,905'  |
| Cherry Canyon          | 5,885'  |
| Brushy Canyon          | 7,385'  |
| Bone Spring Lime       | 9,020'  |
| Leonard (Avalon) Shale | 9,095'  |
| 1st Bone Spring Sand   | 10,030' |
| 2nd Bone Spring Shale  | 10,205' |
| 2nd Bone Spring Sand   | 10,505' |
| 3rd Bone Spring Carb   | 11,030' |
| 3rd Bone Spring Sand   | 11,685' |
| Wolfcamp               | 12,152' |
| TD                     | 12,963' |
|                        |         |

## 3. ESTIMATED DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS:

| LD I KLDII WIIILIN, OIL OK |
|----------------------------|
| 0-400' Fresh Water         |
| 4,905' Oil                 |
| 5,885' Oil                 |
| 7,385' Oil                 |
| 9,020' Oil                 |
| 9,095' Oil                 |
| 10,030' Oil                |
| 10,205' Oil                |
| 10,505' Oil                |
| 11,030' Oil                |
| 11,685' Oil                |
| 12,152' Oil                |
|                            |

No other formations are expected to give up oil, gas or fresh water in measurable quantities. Surface fresh water sands will be protected by setting 9-5/8" or 10-3/4" casing at 915' and circulating cement back to surface.



### 4. CASING PROGRAM - Design A

| Hole    | Interval MD |         | Interval TVD |         | Csg    |        |          |               |
|---------|-------------|---------|--------------|---------|--------|--------|----------|---------------|
| Size    | From (ft)   | To (ft) | From (ft)    | To (ft) | OD     | Weight | Grade    | Conn          |
| 12-1/4" | 0           | 915     | 0            | 915     | 9-5/8" | 36#    | J-55     | LTC           |
| 8-3/4"  | 0           | 12,519  | 0            | 12,486  | 7-5/8" | 29.7#  | ICYP-110 | MO FXL        |
| 6-3/4"  | 0           | 12,018  | 0            | 11,986  | 5-1/2" | 20#    | P110-EC  | DWC/C IS MS   |
| 6-3/4"  | 12,018      | 12,519  | 11,986       | 12,486  | 5-1/2" | 20#    | P110-EC  | VAM Sprint SF |
| 6-3/4"  | 12,519      | 20,562  | 12,486       | 12,963  | 5-1/2" | 20#    | P110-EC  | DWC/C IS MS   |

Variance is requested to waive the centralizer requirements for the 7-5/8" casing in the 8-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 8-3/4" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 5-1/2" casing in the 6-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 6-3/4" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive the annular clearance requirements for the 5-1/2" casing by 7-5/8" casing annulus to the proposed top of cement.

EOG requests permission to allow deviation from the 0.422" annulus clearance requirement from Title 43 CFR Part 3170 under the following conditions:

- Annular clearance to meet or exceed 0.422" between intermediate casing ID and production casing coupling only on the first 500" overlap between both casing strings.
- Annular clearance less than 0.422" is acceptable for the production open hole section.

#### **5. CEMENTING PROGRAM:**

| Depth<br>MD       | No.<br>Sacks | Wt.  | Yld<br>Ft3/sk | Slurry Description   |
|-------------------|--------------|------|---------------|--|
| 915'<br>9-5/8"    | 270          | 13.5 | 1.73          | Lead: Class C/H + 4.0% Bentonite Gel + 0.5% CaCl2 + 0.25 lb/sk Cello-Flake (TOC @ Surface)           |
|                   | 100          | 14.8 | 1.34          | Tail: Class C/H + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 715')        |
| 12,519'<br>7-5/8" | 630          | 14.2 | 1.11          | 1st Stage (Tail): Class C/H + 0.6% Halad-9 + 0.45% HR-601 + 3% Microbond (TOC @ 7,190')              |
|                   | 1000         | 14.8 | 1.5           | 2nd Stage (Bradenhead squeeze): Class C/H + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (TOC @ surface) |
| 20,562'<br>5-1/2" | 1433         | 12.5 | 2.05          | Lead: Class C/H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ Surface)                       |
| 5-1/2"            | 753          | 13.2 | 1.47          | Tail: Class C/H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 10,163')                       |



| Additive            | Purpose                                 |
|---------------------|---|
| Bentonite Gel       | Lightweight/Lost circulation prevention |
| Calcium Chloride    | Accelerator                             |
| Cello-flake         | Lost circulation prevention             |
| Sodium Metasilicate | Accelerator                             |
| MagOx               | Expansive agent                         |
| Pre-Mag-M           | Expansive agent                         |
| Sodium Chloride     | Accelerator                             |
| FL-62               | Fluid loss control                      |
| Halad-344           | Fluid loss control                      |
| Halad-9             | Fluid loss control                      |
| HR-601              | Retarder                                |
| Microbond           | Expansive Agent                         |

EOG requests variance from minimum standards to pump a two stage cement job on the 7-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon (7,385') and the second stage performed as a 1000 sack bradenhead squeeze with planned cement from the Brushy Canyon to surface. If necessary, a top out consisting of 100 sacks of Class C/H cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (2.30 yld, 12.91 ppg) will be executed as a contingency. Top will be verified by Echo-meter.

EOG will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program.

EOG will report to the BLM the volume of fluid (limited to 5 bbls) used to flush intermediate casing valves following backside cementing procedures.

Cement integrity tests will be performed immediately following plug bump.

Note: Cement volumes based on bit size plus at least 25% excess in the open hole plus 10% excess in the cased-hole overlap section.

EOG requests a variance to set the intermediate casing shoe in the Bone Spring formation OR the Wolfcamp formation, depending on depletion in the area and well conditions. EOG will monitor the well and ensure the well is static before casing operations begin.

#### 6. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

Variance is requested to use a co-flex line between the BOP and choke manifold (instead of using a 4" OD steel line).

The minimum blowout preventer equipment (BOPE) shown in Exhibit #1 will consist of a single ram, mud cross and double ram-type (10,000 psi WP) preventer and an annular preventer (5,000 psi WP). Both units will be hydraulically operated and the ram-type will be equipped with blind rams on bottom and drill pipe rams on top.



EOG will utilize wing unions on BOPE connections that can be isolated from wellbore pressure through means of a choke. All wing unions will be rated to a pressure that meets or exceeds the pressure rating of the BOPE system.

Variance is requested to use a 5,000 psi annular BOP with the 10,000 psi BOP stack.

Pipe rams and blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

A hydraulically operated choke will be installed prior to drilling out of the intermediate casing shoe.

#### 7. TYPES AND CHARACTERISTICS OF THE PROPOSED MUD SYSTEM:

During this procedure we plan to use a Closed-Loop System and haul contents to the required disposal.

The applicable depths and properties of the drilling fluid systems are as follows:

| ٠. | 1 1 1             |             |              |           |            |
|----|-------------------|-------------|--------------|-----------|------------|
|    | Depth             | Type        | Weight (ppg) | Viscosity | Water Loss |
|    | 0 – 915'          | Fresh - Gel | 8.6-8.8      | 28-34     | N/c        |
|    | 915' – 11,130'    | Brine       | 10.0-10.2    | 28-34     | N/c        |
|    | 11,130' – 12,518' | Oil Base    | 8.7-9.4      | 58-68     | N/c - 6    |
|    | 12,518' – 20,562' | Oil Base    | 10.0-14.0    | 58-68     | 4 - 6      |
|    | Lateral           |             |              |           |            |

The highest mud weight needed to balance formation is expected to be 11.5 ppg. In order to maintain hole stability, mud weights up to 14.0 ppg may be utilized.

An electronic pit volume totalizer (PVT) will be utilized on the circulating system, to monitor pit volume, flow rate, pump pressure and stroke rate.

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the wellsite at all times.

#### 8. AUXILIARY WELL CONTROL AND MONITORING EQUIPMENT:

- (A) A kelly cock will be kept in the drill string at all times.
- (B) A full opening drill pipe-stabbing valve (inside BOP) with proper drill pipe connections will be on the rig floor at all times.
- (C) H2S monitoring and detection equipment will be utilized from surface casing point to TD.



#### 9. LOGGING, TESTING AND CORING PROGRAM:

Open-hole logs are not planned for this well.

GR-CCL Will be run in cased hole during completions phase of operations.

## 10. ABNORMAL CONDITIONS, PRESSURES, TEMPERATURES AND POTENTIAL HAZARDS:

The estimated bottom-hole temperature (BHT) at TD is 200 degrees F with an estimated maximum bottom-hole pressure (BHP) at TD of 9,437 psig and a maximum anticipated surface pressure of 6,585 psig (based on 14.0 ppg MW). No hydrogen sulfide or other hazardous gases or fluids have been encountered, reported or are known to exist at this depth in this area. Severe loss circulation is expected from 7,385' to intermediate casing point.

#### 11. ANTICIPATED STARTING DATE AND DURATION OF OPERATIONS:

The drilling operation should be finished in approximately one month. If the well is productive, an additional 60-90 days will be required for completion and testing before a decision is made to install permanent facilities.

EOG Resources requests the option to contract a Surface Rig to drill, set surface casing, and Cement on the subject well. After WOC 8 hours or 500 psi compressive strength (whichever is greater), the Surface Rig will move off so the wellhead can be installed. A welder will cut the casing to the proper height and weld on the wellhead (both "A" and "B" sections). The weld will be tested to 1,500 psi. All valves will be closed and a wellhead cap will be installed (diagram attached). If the timing between rigs is such that EOG Resources would not be able to preset the surface, the Primary Rig will MIRU and drill the well in its entirety per the APD.

#### 12. WELLHEAD:

A multi-bowl wellhead system will be utilized.

After running the surface casing, a BOP/BOPE system with a minimum working pressure of 10,000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 10,000 psi pressure test. This pressure test will be repeated at least every 30 days, as per Title 43 CFR Part 3170.

The minimum working pressure of the BOP and related BOPE required for drilling below the surface casing shoe shall be 10,000 psi.

The multi-bowl wellhead will be installed by vendor's representative(s). A copy of the installation instructions for the Cactus Multi-Bowl WH system has been sent to the NM BLM office in Carlsbad, NM.



The wellhead will be installed by a third party welder while being monitored by WH vendor's representative.

All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type. EOG Resources reserves the option to conduct BOPE testing during wait on cement periods provided a test plug is utilized.

A solid steel body pack-off will be utilized after running and cementing the intermediate casing. After installation the pack-off and lower flange will be pressure tested to 5,000 psi.

Casing strings will be tested as per Title 43 CFR Part 3170 to at least 0.22 psi/ft or 1,500 psi, whichever is greater.

EOG Resources Inc. (EOG) respectfully requests a variance from the minimum standards for well control equipment testing of Title 43 CFR Part 3170 (§ 3172.6 b.1.i) to allow a testing schedule of the blow out preventer (BOP) and blow out prevention equipment (BOPE) along with Batch Drilling & Offline cement operations to include the following:

- Full BOPE test at first installation on the pad.
- Full BOPE test every 21 days per Title 43 CFR Part 3170.
- Function test BOP elements per Title 43 CFR Part 3170.
- Break testing BOP and BOPE coupled with batch drilling operations and option to offline cement and/or remediate (if needed) any surface or intermediate sections, according to attached offline cementing support documentation.
- After the well section is secured, the BOP will be disconnected from the wellhead and walked with the rig to another well on the pad.
- TA cap will also be installed per Wellhead vendor procedure and pressure inside
  the casing will be monitored via the valve on the TA cap as per standard batch
  drilling ops.
- See attached "EOG BLM Variance 3a\_b BOP Break-test and Offline Intermediate Cement 8.15.2023"



#### 13. TUBING REQUIREMENTS

EOG respectively requests an exception to the following NMOCD rule:

19.15.16.10 Casing AND TUBING RQUIREMENTS:
 J (3): "The operator shall set tubing as near the bottom as practical and tubing perforations shall not be more than 250 feet above top of pay zone."


With horizontal flowing and gas lifted wells an end of tubing depth placed at or slightly above KOP is a conservative way to ensure the tubing stays clean from debris, plugging, and allows for fewer well interventions post offset completion. The deeper the tubulars are run into the curve, the higher the probability is that the tubing will become stuck in sand and or well debris as the well produces over time. An additional consideration for EOT placement during artificial lift installations is avoiding the high dog leg severity and inclinations found in the curve section of the wellbore to help improve reliability and performance. Dog leg severity and inclinations tend not to hamper gas lifted or flowing wells, but they do effect other forms of artificial lift like rod pump or ESP (electric submersible pump). Keeping the EOT above KOP is an industry best practice for those respective forms of artificial lift.

#### 14. VARIANCE REQUESTS:

EOG requests the additional variance(s) in the attached document(s):

- Intermediate Bradenhead Cement: see attached "EOG BLM Variance 2a Intermediate Bradenhead Cement 8.15.2023" document
- Break-test BOP and Offline Cementing: see attached "EOG BLM Variance 3a\_b BOP Break-test and Offline Intermediate Cement 8.15.2023" document
- Production Offline Cement EOG BLM Variance 3d document
- EOG requests a variance to set the intermediate casing shoe in the Bone Spring formation OR the Wolfcamp formation, depending on depletion in the area and well conditions. EOG will monitor the well and ensure the well is static before casing operations begin. See attached "EOG BLM Variance 2b Wolfcamp Intermediate Casing Setpoint 2024.06.26" document



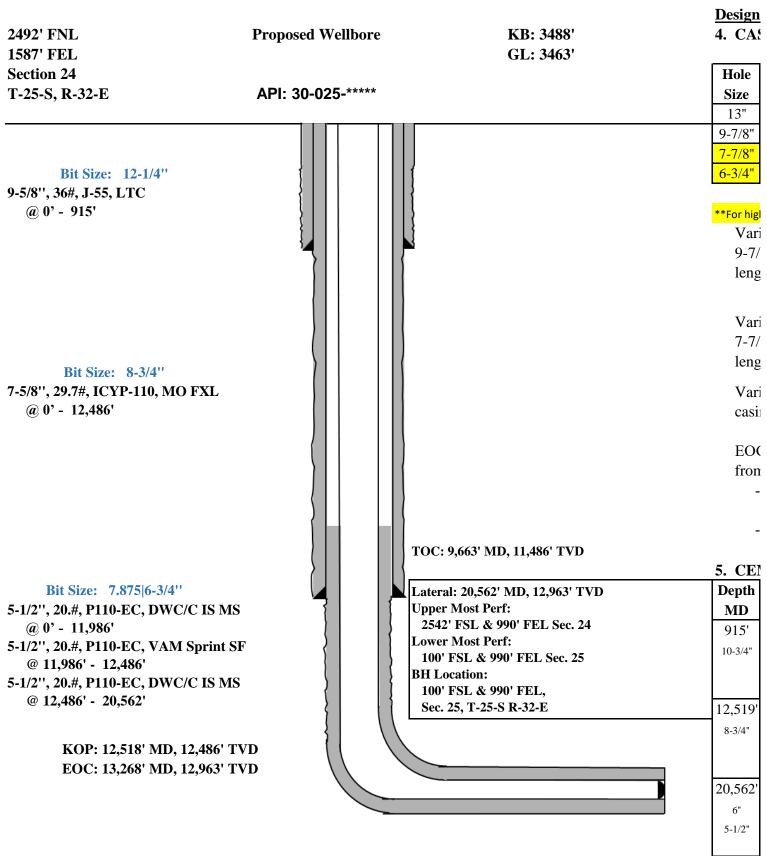



#### <u>B</u> SING PROGRAM

**Interval MD Interval TVD** Csg From (ft) To (ft) To (ft) From (ft) OD Weight Grade Conn **STC** 0 915 915 10-3/4" 40.5# J-55 0 12,519 0 8-3/4" P110-EC VAM Sprint-SF 12,486 38.5# 0 12,019 0 11,986 22.3# P110-EC DWC/C IS 6" 12,019 20,562 11,986 12,963 5-1/2" 20# P110-EC DWC/C IS MS

hlighted rows above, variance is requested to run entire string of either 6" or 5-1/2" casing string above.

iance is requested to waive the centralizer requirements for the 8-3/4" casing in the 8" hole size. An expansion additive will be utilized, in the cement slurry, for the entire th of the 9-7/8" hole interval to maximize cement bond and zonal isolation.

iance is also requested to waive any centralizer requirements for the 6" casing in the 8" hole size. An expansion additive will be utilized, in the cement slurry, for the entire th of the 7-7/8" hole interval to maximize cement bond and zonal isolation.

iance is also requested to waive the annular clearance requirements for the 6" and 5-1/2" ngs by 8-3/4" casing annulus to the proposed top of cement.

3 requests permission to allow deviation from the 0.422" annulus clearance requirement 1 Title 43 CFR Part 3170 under the following conditions:

Annular clearance to meet or exceed 0.422" between intermediate casing ID and

production casing coupling only on the first 500' overlap between both casing strings.

Annular clearance less than 0.422'' is acceptable for the production open hole section.

#### **MENTING PROGRAM:**

| No.<br>Sacks | Wt.  | Yld<br>Ft3/sk | Slurry Description   |
|--------------|------|---------------|--|
| 250          | 13.5 | 1.73          | Lead: Class C/H + 4.0% Bentonite Gel + 0.5% CaCl2 + 0.25 lb/sk Cello-Flake (TOC @ Surface)           |
| 100          | 14.8 | 1.34          | Tail: Class C/H + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 715')        |
| 710          | 14.2 | 1.11          | 1st Stage (Tail): Class C/H + 0.6% Halad-9 + 0.45% HR-601 + 3% Microbond (TOC @ 7,190')              |
| 1000         | 14.8 | 1.5           | 2nd Stage (Bradenhead squeeze): Class C/H + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (TOC @ surface) |
| 990          | 12.5 | 2.05          | Lead: Class C/H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ Surface)                       |
| 760          | 13.2 | 1.47          | Tail: Class C/H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 10,163')                       |

EOG req 8-3/4" in calculate a 1000 si If necess PreMag-Top will

EOG wil above th cement r

EOG wil

Cement i

Note: C 10% exc

EOG req Wolfcan well and

EOG Re for well testing so (BOPE)

- Full
- Full
- Fun
- Bread offli
- Afte
- TA the drill
- See Proc



quests variance from minimum standards to pump a two stage cement job on the termediate casing string with the first stage being pumped conventionally with the cd top of cement at the Brushy Canyon (7,385') and the second stage performed as ack bradenhead squeeze with planned cement from the Brushy Canyon to surface. ary, a top out consisting of 100 sacks of Class C/H cement + 3% Salt + 1% M + 6% Bentonite Gel (2.30 yld, 12.91 ppg) will be executed as a contingency. be verified by Echo-meter.

2492' FNL 1587' FEL Section 24 T-25-S, R-32-E

Bit Size: 1

10-3/4'', 40.5#, J-55, S 0' - 915'

ll include the Echo-meter verified fluid top and the volume of displacement fluid e cement slurry in the annulus in all post-drill sundries on wells utilizing this program.

ll report to the BLM the volume of fluid (limited to 5 bbls) used to ermediate casing valves following backside cementing procedures.

integrity tests will be performed immediately following plug bump.

ement volumes based on bit size plus at least 25% excess in the open hole plus ess in the cased-hole overlap section.

quests a variance to set the intermediate casing shoe in the Bone Spring formation OR the up formation, depending on depletion in the area and well conditions. EOG will monitor the ensure the well is static before casing operations begin.

#### **IEAD:**

sources Inc. (EOG) respectfully requests a variance from the minimum standards control equipment testing of Title 43 CFR Part 3170 (§ 3172.6 b.1.i) to allow a chedule of the blow out preventer (BOP) and blow out prevention equipment along with Batch Drilling & Offline cement operations to include the following:

BOPE test at first installation on the pad.

BOPE test every 20 days per Title 43 CFR Part 3170.

ction test BOP elements per Title 43 CFR Part 3170.

ak testing BOP and BOPE coupled with batch drilling operations and option to ne cement and/or remediate (if needed) any surface or intermediate sections, ording to attached offline cementing support documentation.

er the well section is secured, the BOP will be disconnected from the wellhead walked with the rig to another well on the pad.

cap will also be installed per Wellhead vendor procedure and pressure inside casing will be monitored via the valve on the TA cap as per standard batch ing ops.

attached "EOG BLM Variance 3a -Offline Cement Intermediate Operational redure"

Bit Size: 9-8-3/4", 38.5#, P110-E0

@ 0' - 12,486'

Bit Size: 7-7/8'

6'', 22.3#, P110-EC, D @ 0' - 11,986' 5-1/2'', 20.#, P110-EC @ 11,986' - 20,562

> KOP: 12,518' EOC: 13,268'




**Proposed Wellbore** 

KB: 3488'

GL: 3463'

API: 30-025-\*\*\*\*

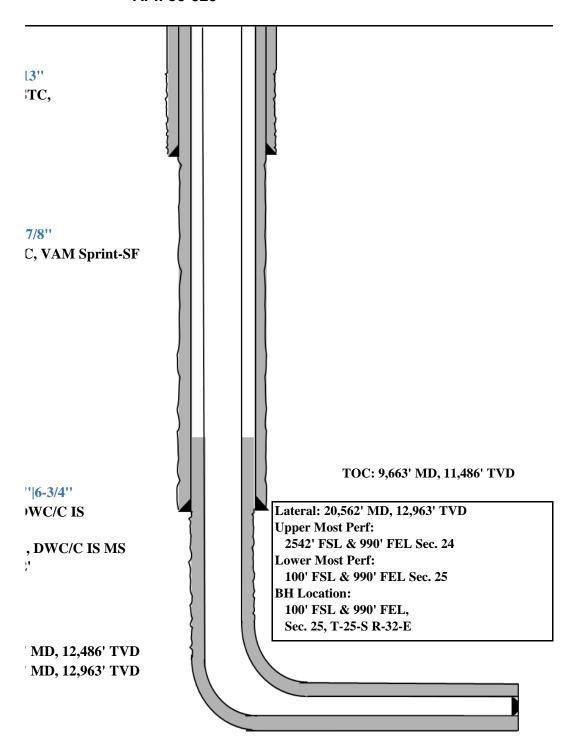



## **Midland**

Lea County, NM (NAD 83 NME) Valiant 24 Fed Com #757H

OH

Plan: Plan #0.2

## **Standard Planning Report**

27 June, 2023



#### **Planning Report**

Database: PEDM Company: Midlan

Company: Midland
Project: Lea County, NM (NAD 83 NME)

Site: Valiant 24 Fed Com
Well: #757H

 Well:
 #757H

 Wellbore:
 OH

 Design:
 Plan #0.2

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

**Survey Calculation Method:** 

Well #757H kb @ 3488.0usft kb @ 3488.0usft

Grid

Minimum Curvature

Project Lea County, NM (NAD 83 NME)

Map System:US State Plane 1983Geo Datum:North American Datum 1983Map Zone:New Mexico Eastern Zone

System Datum:

Mean Sea Level

Site Valiant 24 Fed Com

 Site Position:
 Northing:
 406,151.00 usft
 Latitude:
 32° 6′ 52.620 N

 From:
 Map
 Easting:
 760,107.00 usft
 Longitude:
 103° 37′ 36.212 W

Position Uncertainty: 0.0 usft Slot Radius: 13-3/16 "

Well #757H

0.0 usft **Well Position** +N/-S Northing: 406,830.00 usft Latitude: 32° 6' 59.306 N 760,626.00 usft +E/-W 0.0 usft Easting: Longitude: 103° 37' 30.126 W **Position Uncertainty** 0.0 usft Wellhead Elevation: usft **Ground Level:** 3,463.0 usft

Grid Convergence: 0.38  $^{\circ}$ 

Wellbore OH

 Magnetics
 Model Name
 Sample Date
 Declination (°)
 Dip Angle (°)
 Field Strength (nT)

 IGRF2020
 5/1/2023
 6.34
 59.73
 47,229.06553780

Design Plan #0.2

Audit Notes:

Version:Phase:PLANTie On Depth:0.0

 Vertical Section:
 Depth From (TVD) (usft)
 +N/-S +E/-W (usft)
 Direction (usft)

 0.0
 0.0
 0.0
 175.35

Plan Survey Tool Program Date 6/27/2023

Depth From Depth To

(usft) (usft) Survey (Wellbore) Tool Name Remarks

1 0.0 20,561.9 Plan #0.2 (OH) EOG MWD+IFR1

MWD + IFR1



#### **Planning Report**

Database: PEDM Company: Midland

Project: Lea County, NM (NAD 83 NME)

Site: Valiant 24 Fed Com

 Well:
 #757H

 Wellbore:
 OH

 Design:
 Plan #0.2

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Well #757H kb @ 3488.0usft kb @ 3488.0usft

Grid

Minimum Curvature

| Plan Sections               |                    |                |                             |                 |                 |                               |                              |                             |            |                      |
|-----------------------------|--------------------|----------------|-----------------------------|-----------------|-----------------|-------------------------------|------------------------------|-----------------------------|------------|----------------------|
| Measured<br>Depth<br>(usft) | Inclination<br>(°) | Azimuth<br>(°) | Vertical<br>Depth<br>(usft) | +N/-S<br>(usft) | +E/-W<br>(usft) | Dogleg<br>Rate<br>(°/100usft) | Build<br>Rate<br>(°/100usft) | Turn<br>Rate<br>(°/100usft) | TFO<br>(°) | Target               |
| 0.0                         | 0.00               | 0.00           | 0.0                         | 0.0             | 0.0             | 0.00                          | 0.00                         | 0.00                        | 0.00       |                      |
| 1,155.0                     | 0.00               | 0.00           | 1,155.0                     | 0.0             | 0.0             | 0.00                          | 0.00                         | 0.00                        | 0.00       |                      |
| 1,457.9                     | 6.06               | 107.77         | 1,457.3                     | -4.9            | 15.2            | 2.00                          | 2.00                         | 0.00                        | 107.77     |                      |
| 7,114.8                     | 6.06               | 107.77         | 7,082.7                     | -187.1          | 583.8           | 0.00                          | 0.00                         | 0.00                        | 0.00       |                      |
| 7,417.7                     | 0.00               | 0.00           | 7,385.0                     | -192.0          | 599.0           | 2.00                          | -2.00                        | 0.00                        | 180.00     |                      |
| 12,518.2                    | 0.00               | 0.00           | 12,485.5                    | -192.0          | 599.0           | 0.00                          | 0.00                         | 0.00                        | 0.00       | KOP(Valiant 24 Fed C |
| 12,738.7                    | 26.46              | 180.00         | 12,698.2                    | -242.0          | 599.0           | 12.00                         | 12.00                        | 81.65                       | 180.00     | FTP(Valiant 24 Fed C |
| 13,268.2                    | 90.00              | 179.63         | 12,962.9                    | -669.4          | 600.9           | 12.00                         | 12.00                        | -0.07                       | -0.41      |                      |
| 14,061.8                    | 90.00              | 179.63         | 12,963.0                    | -1,463.0        | 606.0           | 0.00                          | 0.00                         | 0.00                        | 0.00       | FPP1(Valiant 24 Fed  |
| 20,561.9                    | 90.00              | 179.65         | 12,963.0                    | -7,963.0        | 647.0           | 0.00                          | 0.00                         | 0.00                        | 59.59      | PBHL(Valiant 24 Fed  |

| lanned Survey               |                    |                |                             |                 |                 |                               |                               |                              |                             |
|-----------------------------|--------------------|----------------|-----------------------------|-----------------|-----------------|-------------------------------|-------------------------------|------------------------------|-----------------------------|
| Measured<br>Depth<br>(usft) | Inclination<br>(°) | Azimuth<br>(°) | Vertical<br>Depth<br>(usft) | +N/-S<br>(usft) | +E/-W<br>(usft) | Vertical<br>Section<br>(usft) | Dogleg<br>Rate<br>(°/100usft) | Build<br>Rate<br>(°/100usft) | Turn<br>Rate<br>(°/100usft) |
| 0.0                         | 0.00               | 0.00           | 0.0                         | 0.0             | 0.0             | 0.0                           | 0.00                          | 0.00                         | 0.00                        |
| 1,155.0                     | 0.00               | 0.00           | 1,155.0                     | 0.0             | 0.0             | 0.0                           | 0.00                          | 0.00                         | 0.00                        |
| 1,457.9                     | 6.06               | 107.77         | 1,457.3                     | -4.9            | 15.2            | 6.1                           | 2.00                          | 2.00                         | 0.00                        |
| 7,114.8                     | 6.06               | 107.77         | 7,082.7                     | -187.1          | 583.8           | 233.8                         | 0.00                          | 0.00                         | 0.00                        |
| 7,417.7                     | 0.00               | 0.00           | 7,385.0                     | -192.0          | 599.0           | 239.9                         | 2.00                          | -2.00                        | 0.00                        |
| 12,518.2                    | 0.00               | 0.00           | 12,485.5                    | -192.0          | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 12,738.7                    | 26.46              | 180.00         | 12,698.2                    | -242.0          | 599.0           | 289.7                         | 12.00                         | 12.00                        | 0.00                        |
| 13,268.2                    | 90.00              | 179.63         | 12,962.9                    | -669.4          | 600.9           | 715.9                         | 12.00                         | 12.00                        | -0.07                       |
| 14,061.8                    | 90.00              | 179.63         | 12,963.0                    | -1,463.0        | 606.0           | 1,507.3                       | 0.00                          | 0.00                         | 0.00                        |
| 20,561.9                    | 90.00              | 179.65         | 12,963.0                    | -7,963.0        | 647.0           | 7,989.2                       | 0.00                          | 0.00                         | 0.00                        |

| Design Targets   |                  |                 |               |                 |                 |                    |                   |                 |                   |
|--|------------------|-----------------|---------------|-----------------|-----------------|--------------------|-------------------|-----------------|-------------------|
| Target Name - hit/miss target - Shape                          | Dip Angle<br>(°) | Dip Dir.<br>(°) | TVD<br>(usft) | +N/-S<br>(usft) | +E/-W<br>(usft) | Northing<br>(usft) | Easting<br>(usft) | Latitude        | Longitude         |
| KOP(Valiant 24 Fed Cor<br>- plan hits target center<br>- Point | 0.00<br>er       | 0.00            | 12,485.5      | -192.0          | 599.0           | 406,638.00         | 761,225.00        | 32° 6′ 57.367 N | 103° 37' 23.176 W |
| FTP(Valiant 24 Fed Com<br>- plan hits target center<br>- Point | 0.00<br>er       | 0.00            | 12,698.2      | -242.0          | 599.0           | 406,588.00         | 761,225.00        | 32° 6' 56.872 N | 103° 37' 23.179 W |
| PBHL(Valiant 24 Fed Co<br>- plan hits target centor<br>- Point | 0.00<br>er       | 0.00            | 12,963.0      | -7,963.0        | 647.0           | 398,867.00         | 761,273.00        | 32° 5′ 40.466 N | 103° 37' 23.213 W |
| FPP1(Valiant 24 Fed Co - plan hits target center - Point       | 0.00<br>er       | 0.00            | 12,963.0      | -1,463.0        | 606.0           | 405,367.00         | 761,232.00        | 32° 6′ 44.789 N | 103° 37' 23.192 W |



2000

2400-

7200-

8000-

8400

9200-

9600-

10000

10400

10800-

11200-


**11600**→

12000

12400

12800

+ + + + + + +



Azimuths to Grid North
True North: -0.38°
Magnetic North: 5.96°

Magnetic Field Strength: 47229.1nT Dip Angle: 59.73° Date: 5/1/2023 Model: IGRF2020

To convert a Magnetic Direction to a Grid Direction, Add 5.96°
To convert a Magnetic Direction to a True Direction, Add 6.34° East
To convert a True Direction to a Grid Direction, Subtract 0.38°

Lea County, NM (NAD 83 NME)

Valiant 24 Fed Com #757H

**Plan #0.2** 

PROJECT DETAILS: Lea County, NM (NAD 83 NME)

Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone
System Datum: Mean Sea Level

WELL DETAILS: #757H

3463.0

kb @ 3488.0usft


Northing Easting Latittude Longitude
406830.00 760626.00 32° 6' 59.306 N 103° 37' 30.126 W

|     | SECTION DETAILS |       |        |         |         |       |       |        |        |                                |  |  |
|-----|-----------------|-------|--------|---------|---------|-------|-------|--------|--------|--------------------------------|--|--|
| Sec | MD              | Inc   | Azi    | TVD     | +N/-S   | +E/-W | Dleg  | TFace  | VSect  | Target                         |  |  |
| 1   | 0.0             | 0.00  | 0.00   | 0.0     | 0.0     | 0.0   | 0.00  | 0.00   | 0.0    |                                |  |  |
| 2   | 1155.0          | 0.00  | 0.00   | 1155.0  | 0.0     | 0.0   | 0.00  | 0.00   | 0.0    |                                |  |  |
| 3   | 1457.9          | 6.06  | 107.77 | 1457.3  | -4.9    | 15.2  | 2.00  | 107.77 | 6.1    |                                |  |  |
| 4   | 7114.8          | 6.06  | 107.77 | 7082.7  | -187.1  | 583.8 | 0.00  | 0.00   | 233.8  |                                |  |  |
| 5   | 7417.7          | 0.00  | 0.00   | 7385.0  | -192.0  | 599.0 | 2.00  | 180.00 | 239.9  |                                |  |  |
| 6   | 12518.2         | 0.00  | 0.00   | 12485.5 | -192.0  | 599.0 | 0.00  | 0.00   | 239.9  | KOP(Valiant 24 Fed Com #757H)  |  |  |
| 7   | 12738.7         | 26.46 | 180.00 | 12698.2 | -242.0  | 599.0 | 12.00 | 180.00 | 289.7  | FTP(Valiant 24 Fed Com #757H)  |  |  |
| 8   | 13268.2         | 90.00 | 179.63 | 12962.9 | -669.4  | 600.9 | 12.00 | -0.41  | 715.9  |                                |  |  |
| 9   | 14061.8         | 90.00 | 179.63 | 12963.0 | -1463.0 | 606.0 | 0.00  | 0.00   | 1507.3 | FPP1(Valiant 24 Fed Com #757H) |  |  |
| 10  | 20561.9         | 90.00 | 179.65 | 12963.0 | -7963.0 | 647.0 | 0.00  | 59.59  | 7989.2 | PBHL(Valiant 24 Fed Com #757H) |  |  |

CASING DETAILS

No casing data is available

WELLBORE TARGET DETAILS (MAP CO-ORDINATES) TVD Northing **Easting** KOP(Valiant 24 Fed Com #757H) 12485.5 -192.0 406638.00 761225.00 406588.00 FTP(Valiant 24 Fed Com #757H) 12698.2 -242.0 761225.00 FPP1(Valiant 24 Fed Com #757H) -1463.0 405367.00 761232.00 12963.0 -7963.0 PBHL(Valiant 24 Fed Com #757H) 647.0 398867.00 12963.0 761273.00

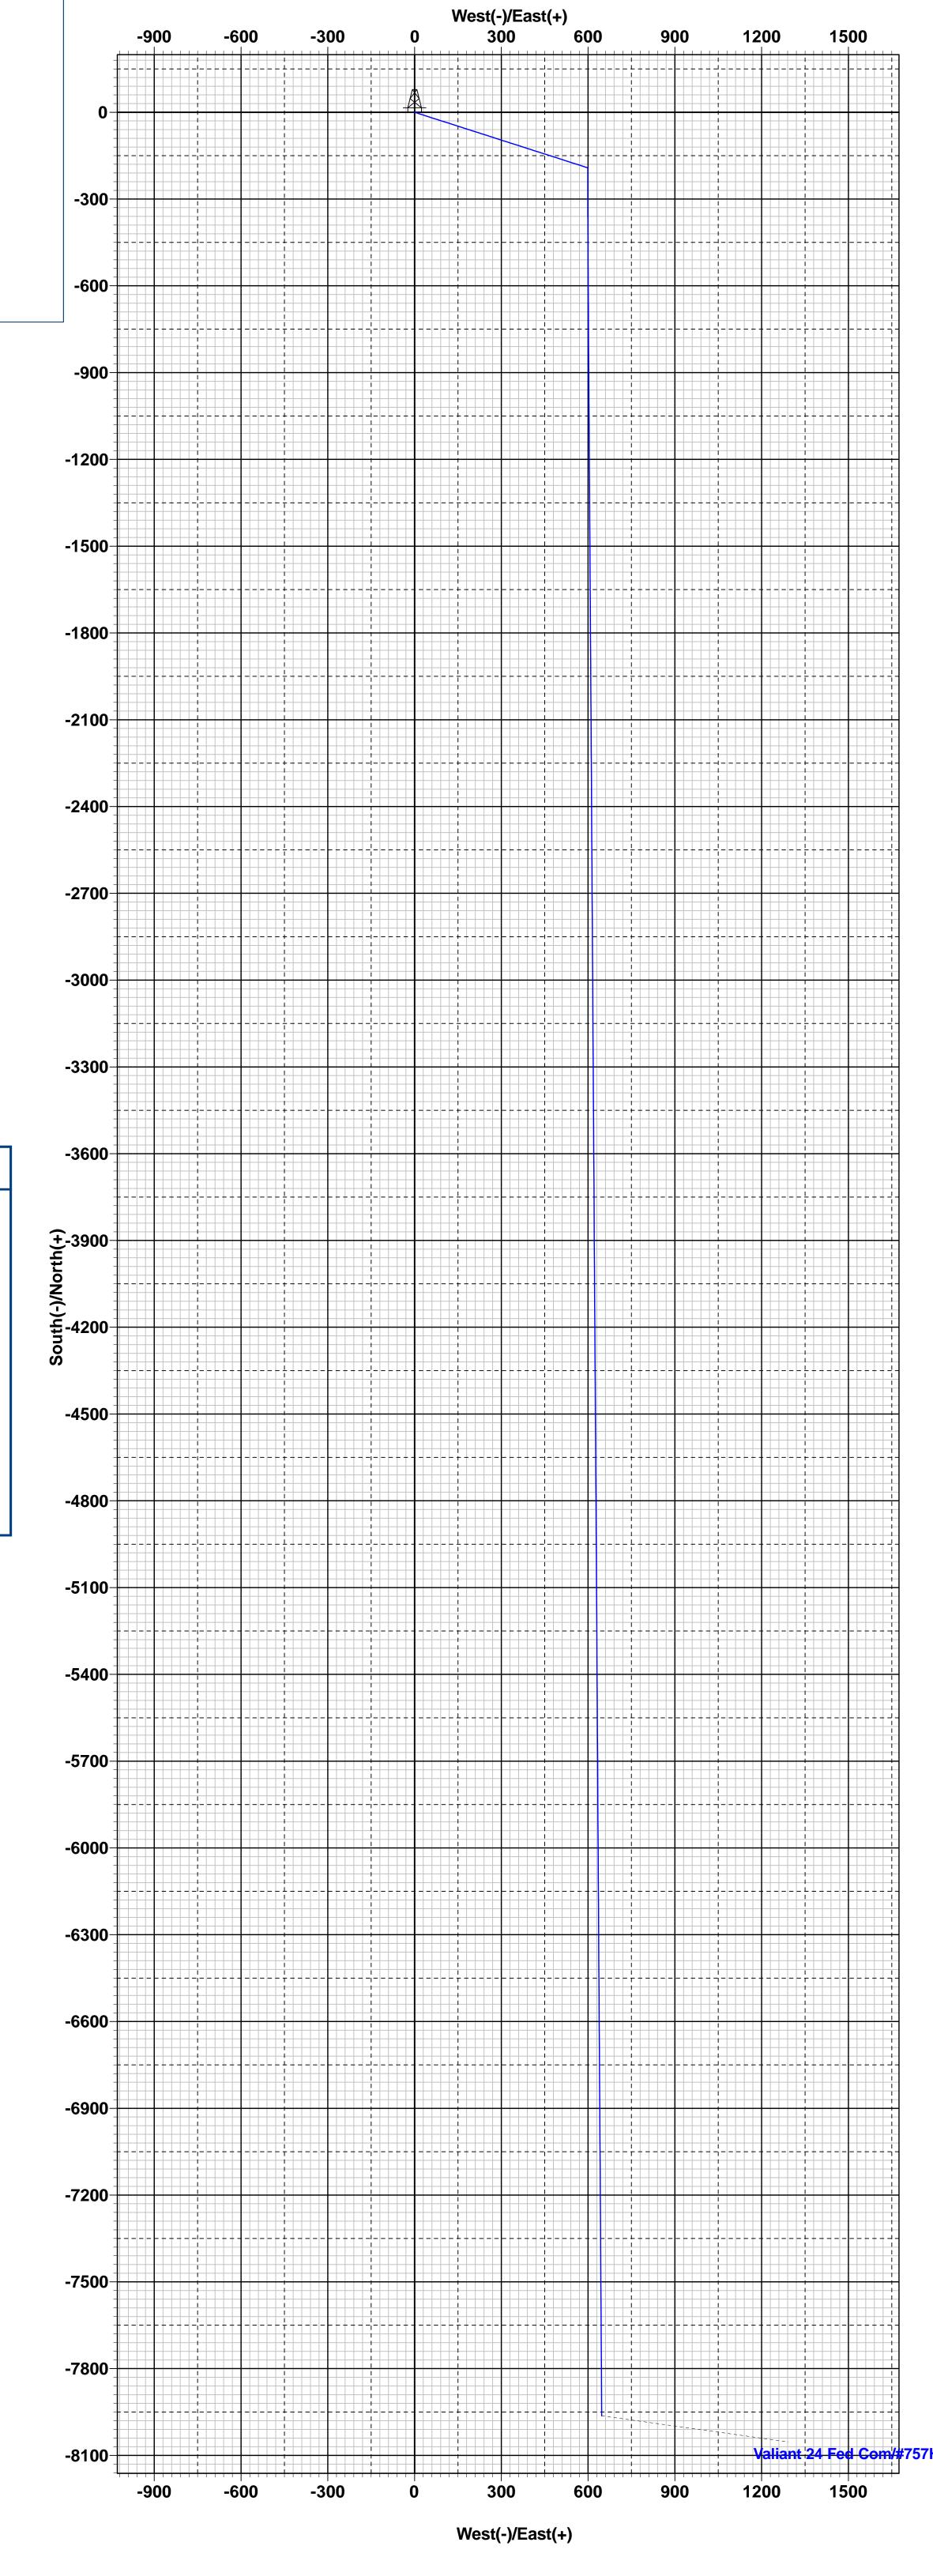

Valiant 24 Fled Com/#757H/Plan #0.2 550 700 1050 1400 1750 2100 2450 2800 3150 3500 3850 4200 4550 4900 5250 5600 5950 6300 6650 7000 7350 7700 8050 Vertical Section at 175.35°

Lea County, NM (NAD 83 NME)
Valiant 24 Fed Com
#757H
OH
Plan #0.2
9:47, June 27 2023

# PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME: EOG Resources Inc
WELL NAME & NO.: VALIANT 24 FED COM 757H
LOCATION: Section 24, T.25S., R.32E.
COUNTY: Lea County, New Mexico

COA

| H2S                  | • Yes            | O No                        |                  |
|----------------------|------------------|-----------------------------|------------------|
| Potash               | None             | O Secretary                 | O R-111-P        |
| Cave/Karst Potential | • Low            | O Medium                    | O High           |
| Cave/Karst Potential | O Critical       |                             |                  |
| Variance             | O None           | • Flex Hose                 | Other            |
| Wellhead             | Conventional     | <ul><li>Multibowl</li></ul> | O Both           |
| Wellhead Variance    | O Diverter       |                             |                  |
| Other                | □4 String        | ☐ Capitan Reef              | □WIPP            |
| Other                | ▼ Fluid Filled   | ☐ Pilot Hole                | ☐ Open Annulus   |
| Cementing            | ☐ Contingency    |                             | ☑ Primary Cement |
|                      | Cement Squeeze   |                             | Squeeze          |
| Special Requirements | ☐ Water Disposal | <b>☑</b> COM                | □ Unit           |
| Special Requirements | ☐ Batch Sundry   |                             |                  |
| Special Requirements | ☑ Break Testing  | ☑ Offline                   |                  |
| Variance             |                  | Cementing                   | Clearance        |

#### A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated AT SPUD. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

#### **B. CASING**

#### **Primary Casing Design:**

- 1. The **9-5/8** inch surface casing shall be set at approximately **920** feet (a minimum of 25 feet (Lea County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
  - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run

- to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8** hours or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.
- 2. The **7-5/8** inch intermediate casing shall be set at approximately **11,130 feet TVD**. The minimum required fill of cement behind the **7-5/8** inch intermediate casing is:

#### **Option 1 (Single Stage):**

• Cement to surface. If cement does not circulate see B.1.a, c-d above.

#### Option 2:

Operator has proposed to cement in two stages by conventionally cementing the first stage and performing a bradenhead squeeze on the second stage, contingent upon no returns to surface.

- a. First stage: Operator will cement with intent to reach the top of the **Brushy** Canyon
- b. Second stage:
  - Operator will perform bradenhead squeeze and top-out. Cement to surface. If cement does not reach surface, the appropriate BLM office shall be notified.

Operator has proposed to pump down 7-5/8" X 9-5/8" annulus. <u>Operator must top out cement after the bradenhead squeeze and verify cement to surface. Operator can also check TOC with Echo-meter. CBL must be run from TD of the 7-5/8" casing to surface if confidence is lacking on the quality of the bradenhead squeeze cement job. Submit results to BLM.</u>

If cement does not tie-back into the previous casing shoe, a third stage remediation BH may be performed. The appropriate BLM office shall be notified.

Bradenhead squeeze in the production interval is only as an edge case remediation measure and is NOT approved in this COA. If production cement job experiences losses and a bradenhead squeeze is needed for tie-back, BLM Engineering should be

## notified prior to job with volumes and planned wellbore schematic. CBL will be needed when this occurs.

If cement does not reach surface, the next casing string must come to surface.

Operator must use a limited flush fluid volume of 1 bbl following backside cementing procedures.

3. The **5-1/2** inch production casing shall be set at approximately **20,562** feet. The minimum required fill of cement behind the **5-1/2** inch production casing is:

#### **Option 1 (Single Stage):**

• Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

#### **Alternate Casing Design:**

- 1. The **10-3/4** inch surface casing shall be set at approximately **920** feet (a minimum of 25 feet (Lea County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
  - e. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
  - f. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
  - g. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
  - h. If cement falls back, remedial cementing will be done prior to drilling out that string.
- 2. The 8-3/4 inch intermediate casing shall be set at approximately 11,130 feet TVD. The minimum required fill of cement behind the 8-3/4 inch intermediate casing is:

#### **Option 1 (Single Stage):**

• Cement to surface. If cement does not circulate see B.1.a, c-d above.

#### Option 2:

Operator has proposed to cement in two stages by conventionally cementing the first stage and performing a bradenhead squeeze on the second stage, contingent upon no returns to surface.

- c. First stage: Operator will cement with intent to reach the top of the **Brushy** Canyon
- d. Second stage:
  - Operator will perform bradenhead squeeze and top-out. Cement to surface. If cement does not reach surface, the appropriate BLM office shall be notified.

Operator has proposed to pump down 10-3/4 X 8-3/4" annulus. Operator must top out cement after the bradenhead squeeze and verify cement to surface. Operator can also check TOC with Echo-meter. CBL must be run from TD of the 8-3/4" casing to surface if confidence is lacking on the quality of the bradenhead squeeze cement job. Submit results to BLM.

If cement does not tie-back into the previous casing shoe, a third stage remediation BH may be performed. The appropriate BLM office shall be notified.

Bradenhead squeeze in the production interval is only as an edge case remediation measure and is NOT approved in this COA. If production cement job experiences losses and a bradenhead squeeze is needed for tie-back, BLM Engineering should be notified prior to job with volumes and planned wellbore schematic. CBL will be needed when this occurs.

If cement does not reach surface, the next casing string must come to surface.

Operator must use a limited flush fluid volume of 1 bbl following backside cementing procedures.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

3. The **6** inch production casing shall be set at approximately **20,562** feet. The minimum required fill of cement behind the **6** inch production casing is:

### **Option 1 (Single Stage):**

• Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

Production casing must be kept fluid filled to meet BLM minimum collapse requirement.

#### C. PRESSURE CONTROL

- 1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
- 2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 10,000 (10M) psi. Variance is approved to use a 5000 (5M) Annular which shall be tested to 3500 (70% Working Pressure) psi.
  - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
  - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
  - c. Manufacturer representative shall install the test plug for the initial BOP test.
  - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
  - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

#### D. SPECIAL REQUIREMENT (S)

#### **Communitization Agreement**

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in Onshore Order 1 and 2.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

(Note: For a minimum 5M BOPE or less (Utilizing a 10M BOPE system) BOPE Break Testing Variance

- BOPE Break Testing is ONLY permitted for 5M BOPE or less. (Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP)
- BOPE Break Testing is NOT permitted to drilling the production hole section.
- Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer (575-706-2779) prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).
- The BLM is to be contacted (575-689-5981 Lea County) 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per 43 CFR part 3170 Subpart 3172.
- If in the event break testing is not utilized, then a full BOPE test would be conducted.

#### **Offline Cementing**

Offline cementing approved for surface and intermediate intervals. Contact the BLM PETs prior to the commencement of any offline cementing procedure.

## **GENERAL REQUIREMENTS**

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)
  - Eddy County

**EMAIL** or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220.

**BLM\_NM\_CFO\_DrillingNotifications@BLM.GOV** (575) 361-2822

- ✓ Lea CountyCall the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575) 689-5981
- 1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.

- a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
- b. When the operator proposes to set surface casing with Spudder Rig
  - Notify the BLM when moving in and removing the Spudder Rig.
  - Notify the BLM when moving in the 2<sup>nd</sup> Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
  - BOP/BOPE test to be conducted per **43 CFR part 3170 Subpart 3172** as soon as 2nd Rig is rigged up on well.
- 2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
- 3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

#### A. CASING

- 1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
- 2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing intergrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- 3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive

strength of 500 psi at the shoe, 2) until cement has been in place at least <u>8 hours</u>. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.

- 4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
- 5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
- 6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
- 7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
- 8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

#### B. PRESSURE CONTROL

- 1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in 43 CFR part 3170 Subpart 3172 and API STD 53 Sec. 5.3.
- 2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
- 3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.

- 4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
  - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
  - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
  - c. Manufacturer representative shall install the test plug for the initial BOP test.
  - d. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR part 3170 Subpart 3172 must be followed.
  - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- 5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
  - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
  - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
  - c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR part 3170 Subpart 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever

- is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per 43 CFR part 3170 Subpart 3172.

#### C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

#### D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

**KPI** 7/17/2024



### **Hydrogen Sulfide Plan Summary**

- A. All personnel shall receive proper H2S training in accordance with Onshore Order III.C.3.a.
- B. Briefing Area: two perpendicular areas will be designated by signs and readily accessible.
- C. Required Emergency Equipment:
- **■** Well control equipment
  - a. Flare line 150' from wellhead to be ignited by flare gun.
  - b. Choke manifold with a remotely operated choke.
  - c. Mud/gas separator

#### ■ Protective equipment for essential personnel:

- a. Breathing Apparatus:
  - i. Rescue Packs (SCBA) 1 unit shall be placed at each breathing area, 2 shall be stored in the safety trailer.
  - ii. Work/Escape packs —4 packs shall be stored on the rig floor with sufficient air hose not to restrict work activity.
  - iii. Emergency Escape Packs —4 packs shall be stored in the doghouse for emergency evacuation.
- b. Auxiliary Rescue Equipment:
  - i. Stretcher
  - ii. Two OSHA full body harness
  - iii. 100 ft 5/8 inch OSHA approved rope
  - iv. 1-20# class ABC fire extinguisher

#### **■ H2S Detection and Monitoring Equipment:**

The stationary detector with three sensors will be placed in the upper dog house if equipped, set to visually alarm @ 10 ppm and audible @ 14 ppm. Calibrate a minimum of every 30 days or as needed. The sensors will be placed in the following places: Rig floor / Bell nipple / End of flow line or where well bore fluid is being discharged. (Gas sample tubes will be stored in the safety trailer)

### ■ Visual Warning System:

- a. One color code condition sign will be placed at the entrance to the site reflecting the possible conditions at the site.
- b. A colored condition flag will be on display, reflecting the current condition at the site at the time.
- c. Two wind socks will be placed in strategic locations, visible from all angles.



#### ■ Mud Program:

The mud program has been designed to minimize the volume of H2S circulated to surface. The operator will have the necessary mud products to minimize hazards while drilling in H2S bearing zones.

#### ■ Metallurgy:

All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.

#### **■** Communication:

Communication will be via cell phones and land lines where available.



### Valiant 24 Fed Com #757H

### **Emergency Assistance Telephone List**

| PUBLIC SAFETY:                                 | 911 or         |
|--|----------------|
| Lea County Sheriff's Department                | (575) 396-3611 |
| Corey Helton                                   |                |
| Fire Department                                |                |
| Carlsbad                                       | (575) 885-3125 |
| Artesia  | (575) 746-5050 |
| Hospitals                                      |                |
| Carlsbad                                       | (575) 887-4121 |
| Artesia  | (575) 748-3333 |
| Hobbs  | (575) 392-1979 |
| Dept. of Public Safety/Carlsbad                | (575) 748-9718 |
| Highway Department                             | (575) 885-3281 |
| U.S. Department of Labor                       | (575) 887-1174 |
| Bureau of Land Management - Hobbs (Lea Co)     | (575) 393-3612 |
| PET On Call - Hobbs                            | (575) 706-2779 |
| Bureau of Land Management - Carlsbad (Eddy Co) | (575) 234-5972 |
| PET On Call - Carlsbad                         | (575) 706-2779 |
| New Mexico Oil Conservation Division - Artesia | (575) 748-1283 |
| Inspection Group South - Gilbert Gordero       | (575) 626-0830 |
| EOG Resources, Inc.                            |                |
| EOG Midland                                    | (432) 686-3600 |
| Company Drilling Consultants:                  |                |
| Jett Dueitt                                    | (432) 230-4840 |
| Blake Burney                                   |                |
| Drilling Engineers                             |                |
| Stephen Davis                                  | (432) 235-9789 |
| Matt Day                                       | (210) 296-4456 |
|  |                |
| Drilling Managers                              |                |
| Branden Keener                                 | (210) 294-3729 |
|  |                |
| <b>Drilling Superintendents</b>                |                |
| Lance Hardy                                    | (432) 215-8152 |
| Ryan Reynolds                                  | (432) 215-5978 |
| Steve Kelly                                    | (210) 416-7894 |
| H&P Drilling                                   |                |
| H&P Drilling                                   | (432) 563-5757 |
| Nabors Drilling                                | (132) 303 3737 |
| Nabors Drilling                                | (432) 363-8180 |
| Patterson UTI                                  | (.22) 202 0100 |
| Patterson UTI                                  | (432) 561-9382 |
| EOG Safety                                     | (102) 001 7002 |
| Brian Chandler (HSE Manager)                   | (817) 239-0251 |
| Zilan zilandisi (1122 iliangsi)                | (017) 237 0231 |



### **Wolfcamp Intermediate Casing Setpoint:**

EOG Resources Inc. (EOG) requests a variance to set the intermediate casing shoe in the Bone Spring formation OR the Wolfcamp formation, depending on depletion in the area and well conditions. EOG will monitor the well and ensure the well is static before casing operations begin.



2/24/2022

### **Cement Program**

1. No changes to the cement program will take place for offline cementing.

### **Summarized Operational Procedure for Intermediate Casing**

- 1. Run casing as per normal operations. While running casing, conduct negative pressure test and confirm integrity of the float equipment back pressure valves.
  - a. Float equipment is equipped with two back pressure valves rated to a minimum of 5,000 psi.
- 2. Land production casing on mandrel hanger through BOP.
  - a. If casing is unable to be landed with a mandrel hanger, then the casing will be cemented online.
- 3. Break circulation and confirm no restrictions.
  - a. Ensure no blockage of float equipment and appropriate annular returns.
  - b. Perform flow check to confirm well is static.
- 4. Set pack-off
  - a. If utilizing a fluted/ported mandrel hanger, ensure well is static on the annulus and inside the casing by filling the pipe with kill weight fluid, remove landing joint, and set annular packoff through BOP. Pressure test to 5,000 psi for 10 min.
  - b. If utilizing a solid mandrel hanger, ensure well is static on the annulus and inside the casing by filling the pipe with kill weight fluid. Pressure test seals to 5,000 psi for 10 min. Remove landing joint through BOP.
- 5. After confirmation of both annular barriers and the two casing barriers, install TA plug and pressure test to 5,000 psi for 10 min. Notify the BLM with intent to proceed with nipple down and offline cementing.
  - a. Minimum 4 hrs notice.
- 6. With the well secured and BLM notified, nipple down BOP and secure on hydraulic carrier or cradle.
  - a. Note, if any of the barriers fail to test, the BOP stack will not be nippled down until after the cement job has concluded and both lead and tail slurry have reached 500 psi.
- 7. Skid/Walk rig off current well.
- 8. Confirm well is static before removing TA Plug.
  - a. Cementing operations will not proceed until well is under control. (If well is not static, notify BLM and proceed to kill)
  - b. Casing outlet valves will provide access to both the casing ID and annulus. Rig or third party pump truck will kill well prior to cementing.
  - c. Well control plan can be seen in Section B, Well Control Procedures.
  - d. If need be, rig can be moved back over well and BOP nippled back up for any further remediation.



- e. Diagram for rig positioning relative to offline cementing can be seen in Figure 4.
- 9. Rig up return lines to take returns from wellhead to pits and rig choke.
  - a. Test all connections and lines from wellhead to choke manifold to 5,000 psi high for 10 min.
  - b. If either test fails, perform corrections and retest before proceeding.
  - c. Return line schematics can be seen in Figure 3.
- 10. Remove TA Plug from the casing.
- 11. Install offline cement tool.
  - a. Current offline cement tool schematics can be seen in Figure 1 (Cameron) and Figure 2 (Cactus).
- 12. Rig up cement head and cementing lines.
  - a. Pressure test cement lines against cement head to 80% of casing burst for 10 min.
- 13. Break circulation on well to confirm no restrictions.
  - a. If gas is present on circulation, well will be shut in and returns rerouted through gas buster.
  - b. Max anticipated time before circulating with cement truck is 6 hrs.
- 14. Pump cement job as per plan.
  - a. At plug bump, test casing to 0.22 psi/ft or 1500 psi, whichever is greater.
  - b. If plug does not bump on calculated, shut down and wait 8 hrs or 500 psi compressive strength, whichever is greater before testing casing.
- 15. Confirm well is static and floats are holding after cement job.
  - a. With floats holding and backside static:
    - i. Remove cement head.
  - b. If floats are leaking:
    - i. Shut-in well and WOC (Wait on Cement) until tail slurry reaches 500 psi compressive strength and the casing is static prior to removing cement head.
  - c. If there is flow on the backside:
    - i. Shut in well and WOC until tail slurry reaches 500 psi compressive strength. Ensure that the casing is static prior to removing cement head.
- 16. Remove offline cement tool.
- 17. Install night cap with pressure gauge for monitoring.
- 18. Test night cap to 5,000 psi for 10 min.



2/24/2022

### **Example Well Control Plan Content**

### A. Well Control Component Table

The table below, which covers the cementing of the <u>5M MASP (Maximum Allowable Surface Pressure) portion of the well</u>, outlines the well control component rating in use. This table, combined with the mud program, documents that two barriers to flow can be maintained at all times, independent of the BOP nippled up to the wellhead.

Intermediate hole section, 5M requirement

| Component                | RWP |
|--------------------------|-----|
| Pack-off                 | 10M |
| Casing Wellhead Valves   | 10M |
| Annular Wellhead Valves  | 5M  |
| TA Plug                  | 10M |
| Float Valves             | 5M  |
| 2" 1502 Lo-Torque Valves | 15M |

### **B.** Well Control Procedures

Well control procedures are specific to the rig equipment and the operation at the time the kick occurs. Below are the minimal high-level tasks prescribed to assure a proper shut-in while circulating and cementing through the Offline Cement Adapter.

### **General Procedure While Circulating**

- 1. Sound alarm (alert crew).
- 2. Shut down pumps.
- 3. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
- 4. Confirm shut-in.
- 5. Notify tool pusher/company representative.

Page | 3



2/24/2022

- 6. Read and record the following:
  - a. SICP (Shut in Casing Pressure) and AP (Annular Pressure)
  - b. Pit gain
  - c. Time
  - d. Regroup and identify forward plan to continue circulating out kick via rig choke and mud/gas separator. Circulate and adjust mud density as needed to control well.

### **General Procedure While Cementing**

- 1. Sound alarm (alert crew).
- 2. Shut down pumps.
- 3. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
- 4. Confirm shut-in.
- 5. Notify tool pusher/company representative.
- 6. Open rig choke and begin pumping again taking returns through choke manifold and mud/gas separator.
- 7. Continue to place cement until plug bumps.
- 8. At plug bump close rig choke and cement head.
- 9. Read and record the following
  - a. SICP and AP
  - b. Pit gain
  - c. Time
  - d. Shut-in annulus valves on wellhead

### **General Procedure After Cementing**

- 1. Sound alarm (alert crew).
- 2. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
- 3. Confirm shut-in.
- 4. Notify tool pusher/company representative.
- 5. Read and record the following:
  - a. SICP and AP
  - b. Pit gain
  - c. Time
  - d. Shut-in annulus valves on wellhead

Figure 1: Cameron TA Plug and Offline Adapter Schematic


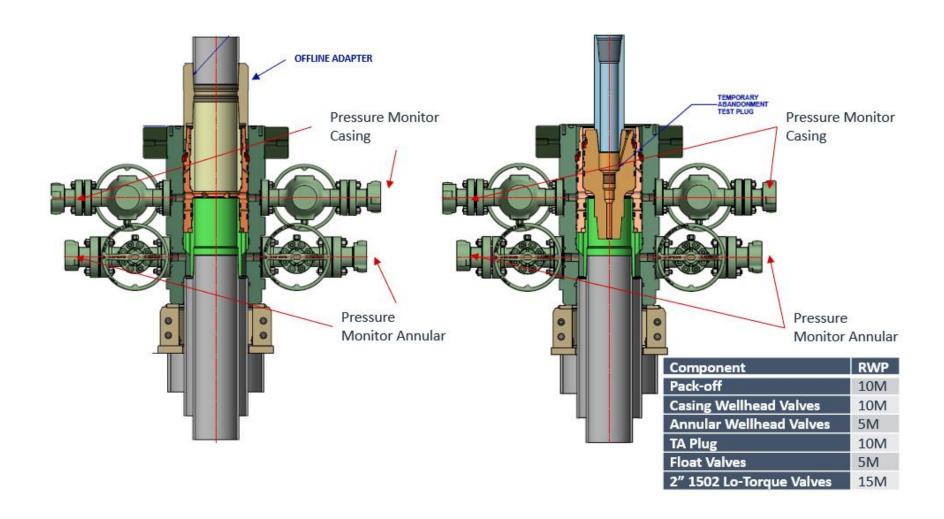




Figure 2: Cactus TA Plug and Offline Adapter Schematic




Page | 6

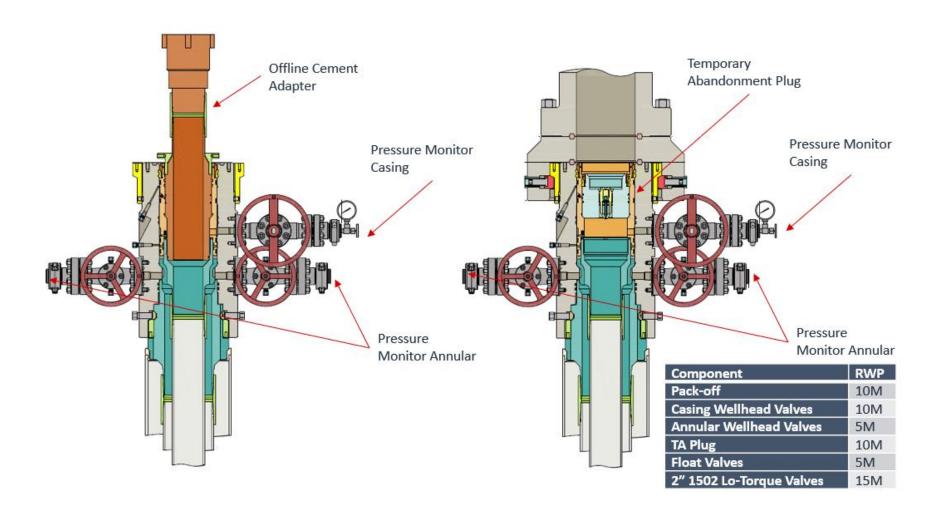

2/24/2022

Figure 3: Back Yard Rig Up

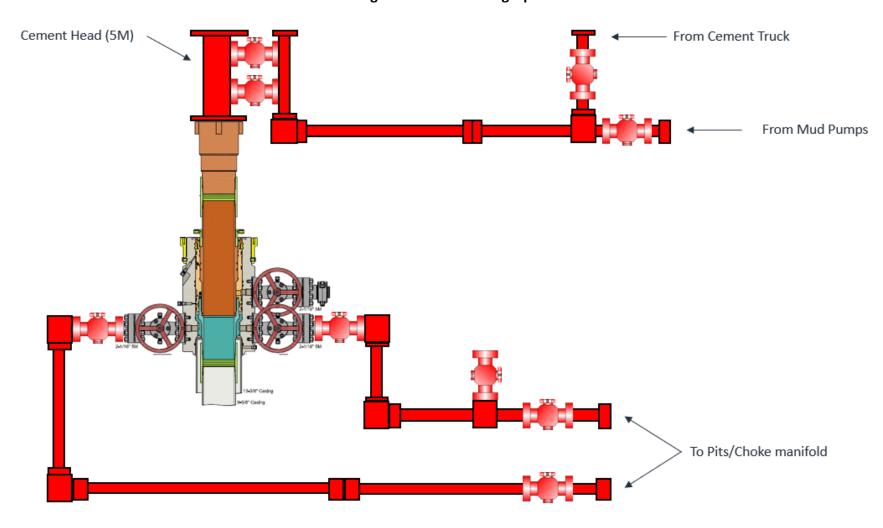


\*\*\* All Lines 10M rated working pressure

Page | 7



Figure 4: Rig Placement Diagram

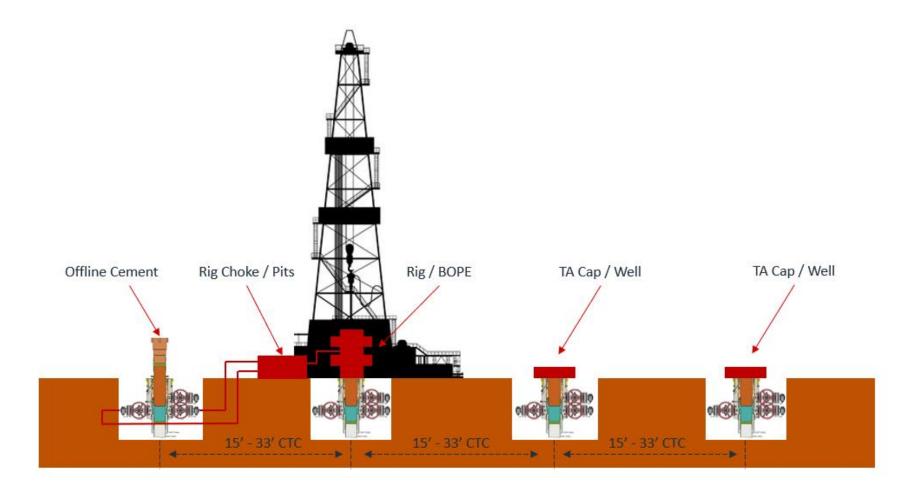

Page | 8

Received by OCD: 3/4/2025 2:36:12 PM



# Offline Production Cement Variance

Received by OCD: 3/4/2025 2:36:12 PM

# **EOG Offline Production Checklist**

### Offline Checklist

All items below must be met. If not, the production cement will be done online.

- 1. Offline production cement jobs must be above the Atoka formation.
- Nothing out of the ordinary observed during drilling, tripping or casing running operations in the Production Hole Section.
- 3. Casing must be landed with Hanger.
- EOG Company Man and Superintendent with Well Control certification must be present to monitor returns.
- 5. EOG Cement Advisor must be present to oversee the Cement Job.
- 6. Rig Manager is responsible for walking the rig to the next well.
- 7. The BOP will NOT be nippled down if:
  - ANY barrier fails to test.
  - ANY offset frac operations are observed within 1 mile and within the same producing horizon.
- After all barriers test and the BLM has been notified, the BOP may be nippled down to proceed with offline operations.
- EOG will not Drill out of the next well until Cement Operations have concluded on the offline well.

Received by OCD: 3/4/2025 2:36:12 PM

Page 49 of 75

# **Offline Procedure**

- 1. Run casing as per normal operations. Review EOG Offline Requirements Checklist, if the well is a candidate for Offline Cement on the Production continue following this procedure. Conduct negative pressure test while running casing and confirm integrity of the float equipment back pressure valves.
  - a. Float equipment is equipped with two back pressure valves rated to 15,000 psi.
- 2. Land production casing on mandrel hanger.
  - a. If casing is unable to be landed with a mandrel hanger, then the casing will be cemented online.
  - b. If utilizing a fluted/ported mandrel hanger, ensure well is static on the annulus and inside the casing by filling the pipe with kill weight fluid, remove landing joint, and set annular packoff rated to 10,000 psi. Pressure test same to 10,000 psi.
  - c. If utilizing a solid mandrel hanger, ensure well is static on the annulus and inside the casing by filling the pipe with kill weight fluid. Pressure test seals to 10,000 psi. Remove landing joint.
- 3. Install back pressure valve in the casing for a 3<sup>rd</sup> casing barrier.
  - a. Back pressure valve rated to a minimum of 10,000 psi.
- 4. With the well Secured and BLM notified; Nipple down BOP and secure on hydraulic carrier or cradle and Skid/Walk rig to next well on pad.
  - a. Note, if any of the barriers fail to test, the BOP stack will not be nippled down until after the cement job has concluded.
  - b. Note, EOG Company Man and Cement Advisor will oversee Cementing Operations while Rig Manager walks the rig and nipples up the BOP.
  - c. Note, EOG will not drill out of the subsequent well until after plug bump.
- 5. Install 10M Gate Valve, with Wellhead Adapter.
  - This creates an additional barrier on the annulus and inside the casing.
  - b. Gate valve rated to a minimum of 10,000 psi.
- 6. Test connection between Wellhead Adapter seals against hanger neck and ring gasket to 10,000 psi.
- 7. Remove backpressure valve from the casing.
- 8. Rig up cement head and cementing lines.
- After rig up of cement head and cement lines, and confirmation of the annular barriers and casing barriers, notify the BLM with intent to proceed offline cementing.
- 10. Perform cement job.
- 11. \*Note\* Procedure continued on the next page.

eog


# **Offline Procedure**

- 12. If an influx is noted during the Cement Job:
  - a. It is the Company Man and Superintendent's responsibility to maintain well control.
  - b. The aux manifold will be redirected to the rig's chokes.
  - c. Backpressure will be held on the well with the chokes to ensure well control is maintained through the remainder of the cement job while circulating out the influx.
  - d. If annular surface pressure approaches 90% tested pressure of the manifold or if circulating the influx out with the cementing pumps is not feasible, the well can be secured by closing the casing valves (10M).
  - e. Once cement is in place, we will close the casing valves and confirm the well is static and floats are holding.
  - f. If the floats fail, the gate valve (10M) or cement head (10M) can be closed to secure the well.
- 13. Confirm well is static and floats are holding after cement job.
- 14. Remove cement head.
- 15. Install back pressure valve.
- 16. Remove 10M Gate Valve and Wellhead Adapter.
- 17. Install night cap with pressure gauge for monitoring.
- 18. Test night cap to 5,000 psi.

Received by OCD: 3/4/2025 2:36:12 PM

Page 51 of 75

# **Offline Barrier Overview**

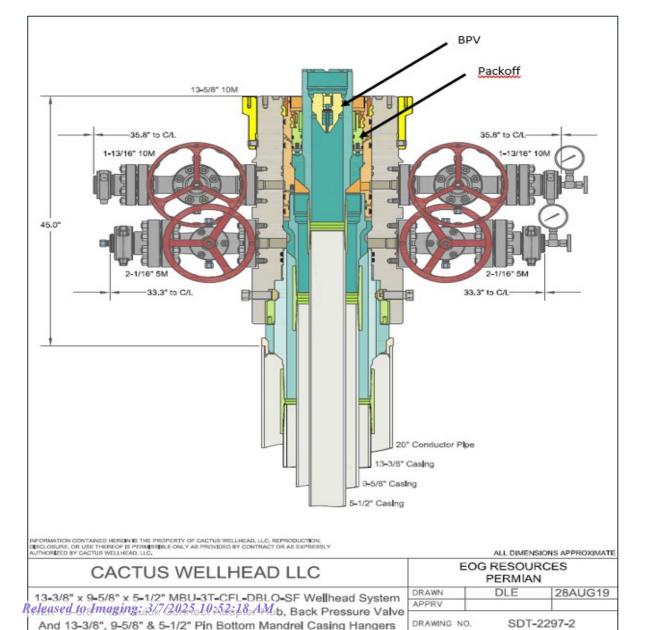


| Barriers in Place during removal of BOP |  |  |  |  |  |
|---|--|--|--|--|--|
| Operation                               | Casing   | Annulus  |  |  |  |
| Nippling Down BOP                       | <ol> <li>BPV</li> <li>Hydrostatic Barrier</li> <li>Float Valves</li> </ol> | Hydrostatic Barrier     Mechanical 10M Packoff |  |  |  |

| Barriers in Place during Offline Cementing of Production Casing |  |  |  |  |  |  |
|---|--|--|--|--|--|--|
| Operation   | Casing   | Annulus  |  |  |  |  |
| Pull BPV  | <ol> <li>Hydrostatic Barrier</li> <li>Float Valves</li> <li>10M Gate Valve</li> </ol>                      | Hydrostatic Barrier     Mechanical Packoff     10M Wellhead Adapter        |  |  |  |  |
| Install Cement Head   | <ol> <li>Hydrostatic Barrier</li> <li>Float Valves</li> <li>10M Gate Valve</li> </ol>                      | Hydrostatic Barrier     Mechanical 10M Packoff     10M Wellhead Adapter    |  |  |  |  |
| Cement Job  | <ol> <li>Hydrostatic Barrier</li> <li>Float Valves</li> <li>10M Gate Valve</li> <li>Cement Head</li> </ol> | Hydrostatic Barrier     Mechanical 10M Packoff     10M Wellhead Adapter    |  |  |  |  |
| Remove Cement Head  | 1. Float Valves<br>2. 10M Gate Valve   | Hydrostatic Barrier     Mechanical 10M Packoff     3. 10M Wellhead Adapter |  |  |  |  |
| Install BPV   | 1. Float Valves<br>2. 10M Gate Valve   | Hydrostatic Barrier     Mechanical 10M Packoff     3. 10M Wellhead Adapter |  |  |  |  |
| Remove 10M Gate Valve   | <ol> <li>Float Valves</li> <li>BPV</li> </ol>  | Hydrostatic Barrier     Mechanical 10M Packoff                             |  |  |  |  |
| Nipple Up TA Cap  | <ol> <li>Float Valves</li> <li>BPV</li> </ol>  | Hydrostatic Barrier     Mechanical 10M Packoff                             |  |  |  |  |

Received by OCD: 3/4/2025 2:36:12 PM

Page 52 of 75

# **Offline Barrier Overview**

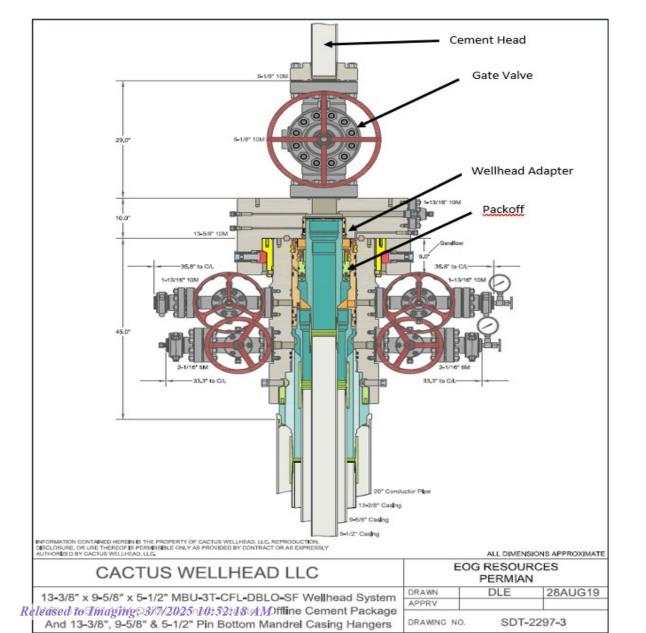

| Barriers in Place during removal of BOP |  |  |  |  |  |
|---|--|--|--|--|--|
| Operation                               | Casing   | Annulus  |  |  |  |
| Nippling Down BOP                       | <ol> <li>BPV</li> <li>Hydrostatic Barrier</li> <li>Float Valves</li> </ol> | Hydrostatic Barrier     Mechanical 10M Packoff |  |  |  |

| Barriers in Place during Offline Cementing of Production Casing |  |   |  |  |  |  |
|---|--|---|--|--|--|--|
| Operation   | Casing   | Annulus   |  |  |  |  |
| Pull BPV  | <ol> <li>Hydrostatic Barrier</li> <li>Float Valves</li> <li>10M Gate Valve</li> </ol>                      | Hydrostatic Barrier     Mechanical Packoff     3. 10M Wellhead Adapter                                |  |  |  |  |
| Install Cement Head   | <ol> <li>Hydrostatic Barrier</li> <li>Float Valves</li> <li>10M Gate Valve</li> </ol>                      | <ol> <li>Hydrostatic Barrier</li> <li>Mechanical 10M Packoff</li> <li>10M Wellhead Adapter</li> </ol> |  |  |  |  |
| Cement Job  | <ol> <li>Hydrostatic Barrier</li> <li>Float Valves</li> <li>10M Gate Valve</li> <li>Cement Head</li> </ol> | Hydrostatic Barrier     Mechanical 10M Packoff     10M Wellhead Adapter                               |  |  |  |  |
| Remove Cement Head  | 1. Float Valves<br>2. 10M Gate Valve   | Hydrostatic Barrier     Mechanical 10M Packoff     3. 10M Wellhead Adapter                            |  |  |  |  |
| Install BPV   | 1. Float Valves<br>2. 10M Gate Valve   | <ol> <li>Hydrostatic Barrier</li> <li>Mechanical 10M Packoff</li> <li>10M Wellhead Adapter</li> </ol> |  |  |  |  |
| Remove 10M Gate Valve   | <ol> <li>Float Valves</li> <li>BPV</li> </ol>  | Hydrostatic Barrier     Mechanical 10M Packoff  |  |  |  |  |
| Nipple Up TA Cap  | <ol> <li>Float Valves</li> <li>BPV</li> </ol>  | Hydrostatic Barrier     Mechanical 10M Packoff  |  |  |  |  |

Received by OCD: 3/4/2025 2:36:12 PM

Page 53 of 75

# More Control: Meeting/Exceeding Barrier Requirements

| Casing Barriers – Online vs Offline                |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|
| Operation  | Online   | Offline  |  |  |  |  |  |
| Install Cement Head                                | <ol> <li>Hydrostatic Barrier</li> <li>Float Valves</li> </ol>                      | <ol> <li>Hydrostatic Barrier</li> <li>Float Valves</li> <li>10M Gate Valve</li> </ol>                      |  |  |  |  |  |
| Cement Job   | <ol> <li>Hydrostatic Barrier</li> <li>Float Valves</li> <li>Cement Head</li> </ol> | <ol> <li>Hydrostatic Barrier</li> <li>Float Valves</li> <li>10M Gate Valve</li> <li>Cement Head</li> </ol> |  |  |  |  |  |
| Remove Cement Head                                 | 1. Float Valves  | <ol> <li>Float Valves</li> <li>10M Gate Valve</li> </ol>   |  |  |  |  |  |
| Install BPV & Nipple Down<br>BOP / Offline Adapter | 1. Float Valves  | <ol> <li>Float Valves</li> <li>BPV</li> </ol>  |  |  |  |  |  |
| Nipple Up TA Cap                                   | 1. Float Valves  | <ol> <li>Float Valves</li> <li>BPV</li> </ol>  |  |  |  |  |  |

| Annulus Barriers – Online vs Offline               |   |  |  |  |  |  |  |  |
|--|---|--|--|--|--|--|--|--|
| Operation  | on Online Offline   |  |  |  |  |  |  |  |
| Install Cement Head                                | <ol> <li>Hydrostatic Barrier</li> <li>Annular</li> <li>VBR</li> </ol> | <ol> <li>Hydrostatic Barrier</li> <li>Mechanical Pack-off</li> <li>10M Wellhead Adapter</li> </ol> |  |  |  |  |  |  |
| Cement Job   | <ol> <li>Hydrostatic Barrier</li> <li>Annular</li> <li>VBR</li> </ol> | <ol> <li>Hydrostatic Barrier</li> <li>Mechanical Pack-off</li> <li>10M Wellhead Adapter</li> </ol> |  |  |  |  |  |  |
| Remove Cement Head                                 | <ol> <li>Hydrostatic Barrier</li> <li>Annular</li> <li>VBR</li> </ol> | <ol> <li>Hydrostatic Barrier</li> <li>Mechanical Pack-off</li> <li>10M Wellhead Adapter</li> </ol> |  |  |  |  |  |  |
| Install BPV & Nipple Down<br>BOP / Offline Adapter | <ol> <li>Hydrostatic barrier</li> <li>Mechanical Pack-off</li> </ol>  | <ol> <li>Hydrostatic Barrier</li> <li>Mechanical Pack-off</li> </ol>                               |  |  |  |  |  |  |
| Nipple Up TA Cap                                   | <ol> <li>Hydrostatic barrier</li> <li>Mechanical Pack-off</li> </ol>  | <ol> <li>Hydrostatic Barrier</li> <li>Mechanical Pack-off</li> </ol>                               |  |  |  |  |  |  |

Received by OCD: 3/4/2025 2:36:12 PM Page 54 of 75

# **Return Rig Up Diagram**

Offline Online Annular Tested: Lines Tested: 5000psi f/10min 5000psi f/10min 250psi f/10min 250psi f/10min ~5-30days Before every job Aux Choke Manifold Kill line Pits Rig Choke Rig Choke Kill line Open Top Manifold Manifold Note:

- 1) Have the Rig's same Well Control Capabilities as Online
- 2) Have more flexibility with Gate Valve than with a Landing Joint through BOP 3) Released to Imaging: 3/7/2025 10:52:18 AM Never had to circulate out a kick during Offline




### **Break-test BOP & Offline Cementing:**

EOG Resources Inc. (EOG) respectfully requests a variance from the minimum standards for well control equipment testing of ECFR Title 43 Part 3172.6(b)(9)(iv) to allow a testing schedule of the blow out preventer (BOP) and blow out prevention equipment (BOPE) along with Batch Drilling & Offline cement operations to include the following:

- Full BOPE test at first installation on the pad.
- Full BOPE test every 21 days.
- This test will be conducted for 5M rated hole intervals only.
- Each rig requesting the break-test variance is capable of picking up the BOP without damaging components using winches, following API Standard 53, Well Control Equipment Systems for Drilling Wells (Fifth edition, December 2018, Annex C. Table C.4) which recognizes break testing as an acceptable practice.
- Function tests will be performed on the following BOP elements:
  - Annular à during each full BOPE test
  - Upper Pipe Rams à On trip ins where FIT required
  - Blind Rams à Every trip
  - Lower Pipe Rams à during each full BOPE test
- Break testing BOP and BOPE coupled with batch drilling operations and option to offline cement and/or remediate (if needed) any surface or intermediate sections, according to attached offline cementing support documentation.
- After the well section is secured, the BOP will be disconnected from the wellhead and walked with the rig to another well on the pad.
- TA cap will also be installed per Wellhead vendor procedure and pressure inside the
  casing will be monitored via the valve on the TA cap as per standard batch drilling
  ops.


# **Break Test Diagram (HCR valve)**

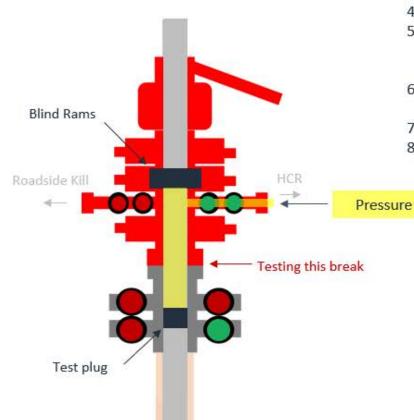


### Steps

- 1. Set plug in wellhead (lower barrier)
- 2. Close Blind Rams (upper barrier)
- 3. Close roadside kill
- 4. Open HCR (pressure application)
- Open wellhead valves below test plug to ensure if leak past test plug, pressure won't be applied to wellbore
- Tie BOP testers high pressure line to main choke manifold crown valve
- 7. Pressure up to test break
- Bleed test pressure from BOP testing unit

# **Break Test Diagram (Test Joint)**

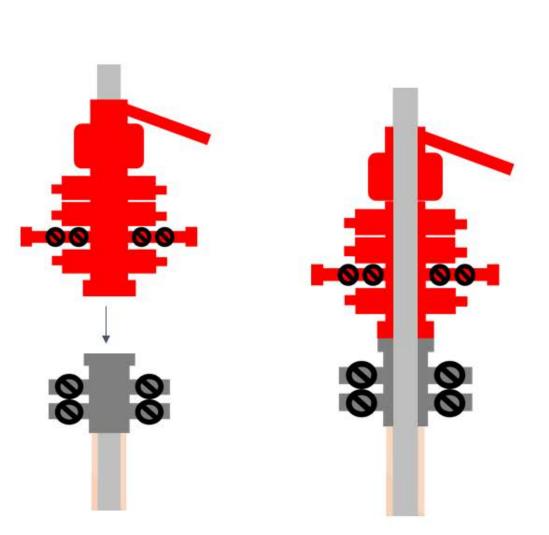

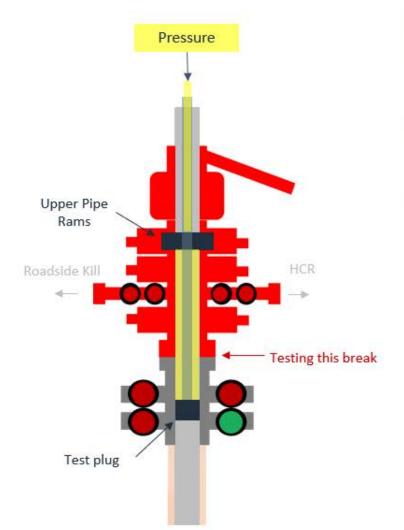

### Steps

- Set plug in with test joint wellhead (lower barrier)
- 2. Close Upper Pipe Rams (upper barrier)
- 3. Close roadside kill
- 4. Close HCR
- Open wellhead valves below test plug to ensure if leak past test plug, pressure won't be applied to wellbore
- Tie BOP testers high pressure line to top of test joint
- 7. Pressure up to test break
- Bleed test pressure from BOP testing unit



2/24/2022

### **Cement Program**

1. No changes to the cement program will take place for offline cementing.

### **Summarized Operational Procedure for Intermediate Casing**

- 1. Run casing as per normal operations. While running casing, conduct negative pressure test and confirm integrity of the float equipment back pressure valves.
  - a. Float equipment is equipped with two back pressure valves rated to a minimum of 5,000 psi.
- 2. Land production casing on mandrel hanger through BOP.
  - a. If casing is unable to be landed with a mandrel hanger, then the casing will be cemented online.
- 3. Break circulation and confirm no restrictions.
  - a. Ensure no blockage of float equipment and appropriate annular returns.
  - b. Perform flow check to confirm well is static.
- 4. Set pack-off
  - a. If utilizing a fluted/ported mandrel hanger, ensure well is static on the annulus and inside the casing by filling the pipe with kill weight fluid, remove landing joint, and set annular packoff through BOP. Pressure test to 5,000 psi for 10 min.
  - b. If utilizing a solid mandrel hanger, ensure well is static on the annulus and inside the casing by filling the pipe with kill weight fluid. Pressure test seals to 5,000 psi for 10 min. Remove landing joint through BOP.
- 5. After confirmation of both annular barriers and the two casing barriers, install TA plug and pressure test to 5,000 psi for 10 min. Notify the BLM with intent to proceed with nipple down and offline cementing.
  - a. Minimum 4 hrs notice.
- 6. With the well secured and BLM notified, nipple down BOP and secure on hydraulic carrier or cradle.
  - a. Note, if any of the barriers fail to test, the BOP stack will not be nippled down until after the cement job has concluded and both lead and tail slurry have reached 500 psi.
- 7. Skid/Walk rig off current well.
- 8. Confirm well is static before removing TA Plug.
  - a. Cementing operations will not proceed until well is under control. (If well is not static, notify BLM and proceed to kill)
  - b. Casing outlet valves will provide access to both the casing ID and annulus. Rig or third party pump truck will kill well prior to cementing.
  - c. Well control plan can be seen in Section B, Well Control Procedures.
  - d. If need be, rig can be moved back over well and BOP nippled back up for any further remediation.



- e. Diagram for rig positioning relative to offline cementing can be seen in Figure 4.
- 9. Rig up return lines to take returns from wellhead to pits and rig choke.
  - a. Test all connections and lines from wellhead to choke manifold to 5,000 psi high for 10 min.
  - If either test fails, perform corrections and retest before proceeding.
  - c. Return line schematics can be seen in Figure 3.
- 10. Remove TA Plug from the casing.
- 11. Install offline cement tool.
  - a. Current offline cement tool schematics can be seen in Figure 1 (Cameron) and Figure 2 (Cactus).
- 12. Rig up cement head and cementing lines.
  - a. Pressure test cement lines against cement head to 80% of casing burst for 10 min.
- 13. Break circulation on well to confirm no restrictions.
  - a. If gas is present on circulation, well will be shut in and returns rerouted through gas buster.
  - b. Max anticipated time before circulating with cement truck is 6 hrs.
- 14. Pump cement job as per plan.
  - a. At plug bump, test casing to 0.22 psi/ft or 1500 psi, whichever is greater.
  - b. If plug does not bump on calculated, shut down and wait 8 hrs or 500 psi compressive strength, whichever is greater before testing casing.
- 15. Confirm well is static and floats are holding after cement job.
  - a. With floats holding and backside static:
    - i. Remove cement head.
  - b. If floats are leaking:
    - i. Shut-in well and WOC (Wait on Cement) until tail slurry reaches 500 psi compressive strength and the casing is static prior to removing cement head.
  - c. If there is flow on the backside:
    - i. Shut in well and WOC until tail slurry reaches 500 psi compressive strength. Ensure that the casing is static prior to removing cement head.
- 16. Remove offline cement tool.
- 17. Install night cap with pressure gauge for monitoring.
- 18. Test night cap to 5,000 psi for 10 min.



2/24/2022

### **Example Well Control Plan Content**

### A. Well Control Component Table

The table below, which covers the cementing of the <u>5M MASP (Maximum Allowable Surface Pressure) portion of the well</u>, outlines the well control component rating in use. This table, combined with the mud program, documents that two barriers to flow can be maintained at all times, independent of the BOP nippled up to the wellhead.

Intermediate hole section, 5M requirement

| Component                | RWP |
|--------------------------|-----|
| Pack-off                 | 10M |
| Casing Wellhead Valves   | 10M |
| Annular Wellhead Valves  | 5M  |
| TA Plug                  | 10M |
| Float Valves             | 5M  |
| 2" 1502 Lo-Torque Valves | 15M |

### **B.** Well Control Procedures

Well control procedures are specific to the rig equipment and the operation at the time the kick occurs. Below are the minimal high-level tasks prescribed to assure a proper shut-in while circulating and cementing through the Offline Cement Adapter.

### **General Procedure While Circulating**

- 1. Sound alarm (alert crew).
- 2. Shut down pumps.
- 3. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
- 4. Confirm shut-in.
- 5. Notify tool pusher/company representative.

Page | 3



2/24/2022

- 6. Read and record the following:
  - a. SICP (Shut in Casing Pressure) and AP (Annular Pressure)
  - b. Pit gain
  - c. Time
  - d. Regroup and identify forward plan to continue circulating out kick via rig choke and mud/gas separator. Circulate and adjust mud density as needed to control well.

### **General Procedure While Cementing**

- 1. Sound alarm (alert crew).
- 2. Shut down pumps.
- 3. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
- 4. Confirm shut-in.
- 5. Notify tool pusher/company representative.
- 6. Open rig choke and begin pumping again taking returns through choke manifold and mud/gas separator.
- 7. Continue to place cement until plug bumps.
- 8. At plug bump close rig choke and cement head.
- 9. Read and record the following
  - a. SICP and AP
  - b. Pit gain
  - c. Time
  - d. Shut-in annulus valves on wellhead

### **General Procedure After Cementing**

- 1. Sound alarm (alert crew).
- 2. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
- 3. Confirm shut-in.
- 4. Notify tool pusher/company representative.
- 5. Read and record the following:
  - a. SICP and AP
  - b. Pit gain
  - c. Time
  - d. Shut-in annulus valves on wellhead



Figure 1: Cameron TA Plug and Offline Adapter Schematic


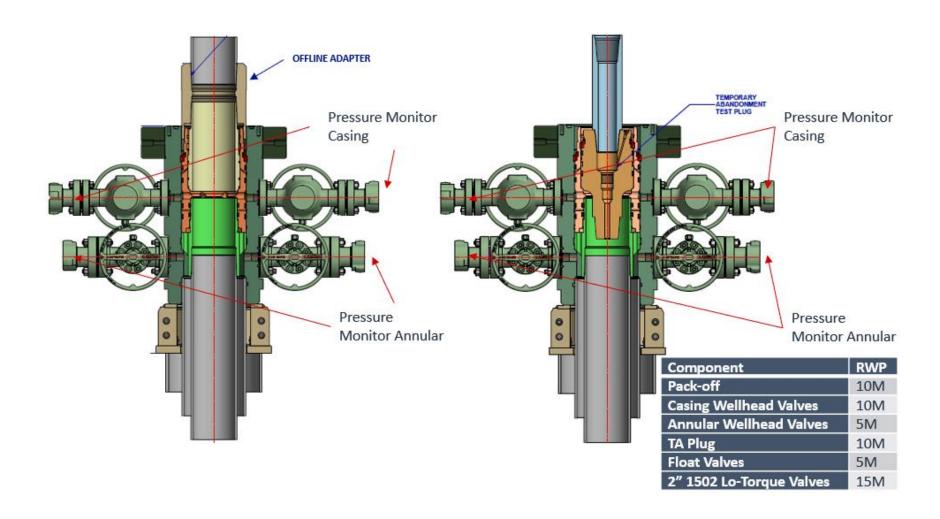




Figure 2: Cactus TA Plug and Offline Adapter Schematic




Page | 6

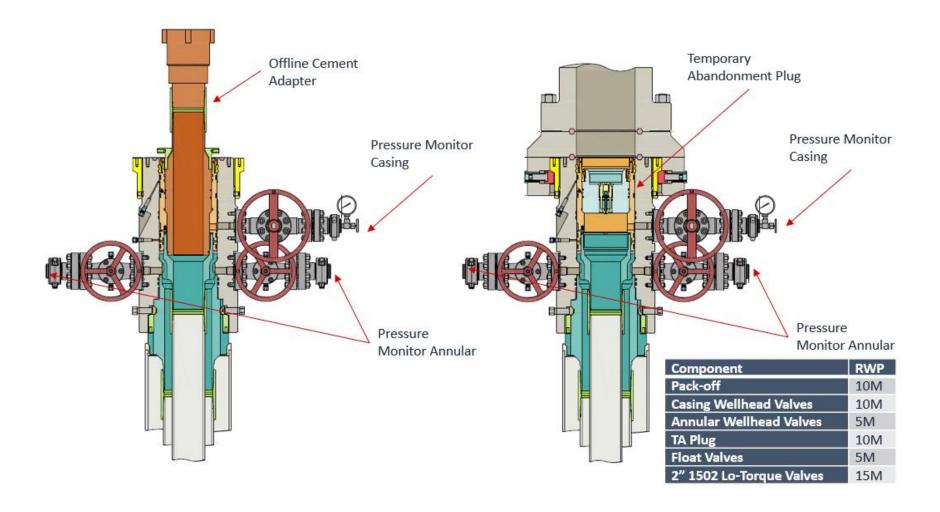

2/24/2022

Figure 3: Back Yard Rig Up

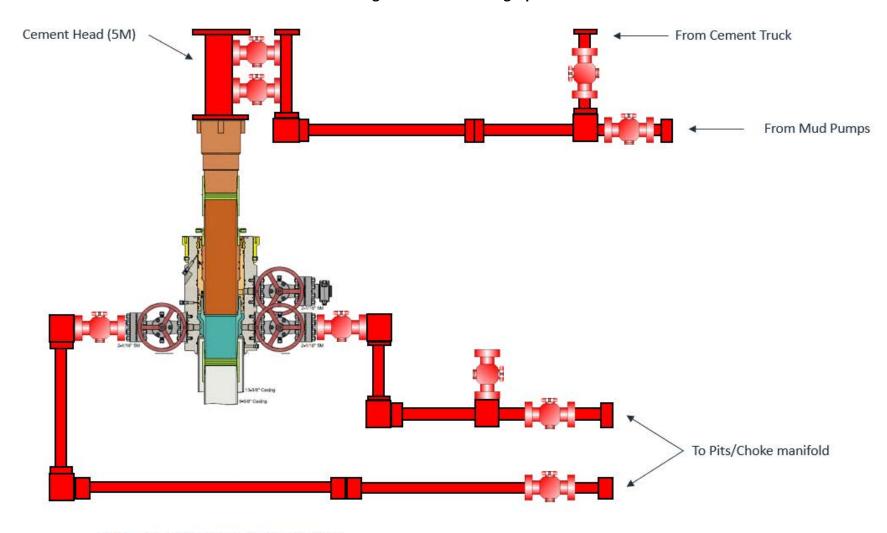


\*\*\* All Lines 10M rated working pressure

Page | 7



Figure 4: Rig Placement Diagram

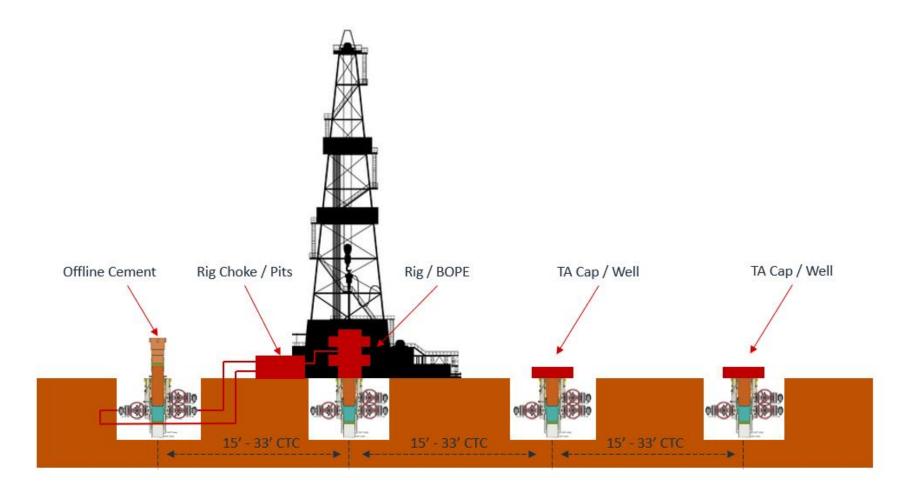

Page | 8



### **Intermediate Bradenhead Cement:**

EOG requests variance from minimum standards to pump a two stage cement job on the intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon and the second stage performed as 1000 sack bradenhead squeeze with planned cement from the Brushy Canyon to surface. If necessary, a top out consisting of Class C cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (2.30 yld, 12.91 ppg) will be executed as a contingency. Top of cement will be verified by Echo-meter.

EOG will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program.

EOG will report to the BLM the volume of fluid (limited to 5 bbls) used to flush intermediate casing valves following backside cementing procedures.



## **Midland**

Lea County, NM (NAD 83 NME) Valiant 24 Fed Com #757H

OH

Plan: Plan #0.2

# **Standard Planning Report**

07 March, 2025



### **Planning Report**

Database: PEDMB Company: Midland

Project: Lea County, NM (NAD 83 NME)

Site: Valiant 24 Fed Com Well: #757H

 Well:
 #757H

 Wellbore:
 OH

 Design:
 Plan #0.2

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Well #757H kb @ 3488.0usft kb @ 3488.0usft

Grid

Minimum Curvature

Project Lea County, NM (NAD 83 NME)

Map System:US State Plane 1983Geo Datum:North American Datum 1983Map Zone:New Mexico Eastern Zone

System Datum:

Mean Sea Level

Site Valiant 24 Fed Com

 Site Position:
 Northing:
 406,151.00 usft
 Latitude:
 32° 6' 52.620 N

 From:
 Map
 Easting:
 760,107.00 usft
 Longitude:
 103° 37' 36.212 W

Position Uncertainty: 0.0 usft Slot Radius: 13-3/16 "

Well #757H

 Well Position
 +N/-S
 0.0 usft
 Northing:
 406,830.00 usft
 Latitude:
 32° 6′ 59.306 N

 +E/-W
 0.0 usft
 Easting:
 760,626.00 usft
 Longitude:
 103° 37′ 30.126 W

+E/-W 0.0 usft Easting: 760,626.00 usft Longitude: 103° 37' 30.126 W

Position Uncertainty 0.0 usft Wellhead Elevation: usft Ground Level: 3,463.0 usft

Grid Convergence: 0.38 °

Wellbore OH

 Magnetics
 Model Name
 Sample Date (°)
 Declination (°)
 Dip Angle (°)
 Field Strength (nT)

 IGRF2020
 5/1/2023
 6.34
 59.73
 47,229.06553780

Design Plan #0.2

Audit Notes:

Version:Phase:PLANTie On Depth:0.0

 Vertical Section:
 Depth From (TVD) (usft)
 +N/-S +E/-W (usft)
 Direction (°)

 0.0
 0.0
 0.0
 175.35

Plan Survey Tool Program Date 6/27/2023

Depth From Depth To

(usft) (usft) Survey (Wellbore) Tool Name Remarks

1 0.0 20,561.9 Plan #0.2 (OH) EOG MWD+IFR1

MWD + IFR1



### Planning Report

Database: Company:

Project:

PEDMB

Midland

Lea County, NM (NAD 83 NME)

Site: Valiant 24 Fed Com

 Well:
 #757H

 Wellbore:
 OH

 Design:
 Plan #0.2

Local Co-ordinate Reference:

TVD Reference: MD Reference:

North Reference: Survey Calculation Method: Well #757H kb @ 3488.0usft

kb @ 3488.0usft Grid

| Plan Sections               |                    |                |                             |                 |                 |                               |                              |                             |            |                      |
|-----------------------------|--------------------|----------------|-----------------------------|-----------------|-----------------|-------------------------------|------------------------------|-----------------------------|------------|----------------------|
| Measured<br>Depth<br>(usft) | Inclination<br>(°) | Azimuth<br>(°) | Vertical<br>Depth<br>(usft) | +N/-S<br>(usft) | +E/-W<br>(usft) | Dogleg<br>Rate<br>(°/100usft) | Build<br>Rate<br>(°/100usft) | Turn<br>Rate<br>(°/100usft) | TFO<br>(°) | Target               |
| 0.0                         | 0.00               | 0.00           | 0.0                         | 0.0             | 0.0             | 0.00                          | 0.00                         | 0.00                        | 0.00       |                      |
| 1,155.0                     | 0.00               | 0.00           | 1,155.0                     | 0.0             | 0.0             | 0.00                          | 0.00                         | 0.00                        | 0.00       |                      |
| 1,457.9                     | 6.06               | 107.77         | 1,457.3                     | -4.9            | 15.2            | 2.00                          | 2.00                         | 0.00                        | 107.77     |                      |
| 7,114.8                     | 6.06               | 107.77         | 7,082.7                     | -187.1          | 583.8           | 0.00                          | 0.00                         | 0.00                        | 0.00       |                      |
| 7,417.7                     | 0.00               | 0.00           | 7,385.0                     | -192.0          | 599.0           | 2.00                          | -2.00                        | 0.00                        | 180.00     |                      |
| 12,518.2                    | 0.00               | 0.00           | 12,485.5                    | -192.0          | 599.0           | 0.00                          | 0.00                         | 0.00                        | 0.00       | KOP(Valiant 24 Fed C |
| 12,738.7                    | 26.46              | 180.00         | 12,698.2                    | -242.0          | 599.0           | 12.00                         | 12.00                        | 81.65                       | 180.00     | FTP(Valiant 24 Fed C |
| 13,268.2                    | 90.00              | 179.63         | 12,962.9                    | -669.4          | 600.9           | 12.00                         | 12.00                        | -0.07                       | -0.41      |                      |
| 14,061.8                    | 90.00              | 179.63         | 12,963.0                    | -1,463.0        | 606.0           | 0.00                          | 0.00                         | 0.00                        | 0.00       | FPP1(Valiant 24 Fed  |
| 20,561.9                    | 90.00              | 179.65         | 12,963.0                    | -7,963.0        | 647.0           | 0.00                          | 0.00                         | 0.00                        | 59.59      | PBHL(Valiant 24 Fed  |

# eog resources

### Planning Report

Database: PEDMB Company: Midland

Project: Lea County, NM (NAD 83 NME)

Site: Valiant 24 Fed Com

 Well:
 #757H

 Wellbore:
 OH

 Design:
 Plan #0.2

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

**Survey Calculation Method:** 

Well #757H kb @ 3488.0usft kb @ 3488.0usft

Grid

| Design:                     | Plan #0.2          |                |                             |                 |                 |                               |                               |                              |                             |
|-----------------------------|--------------------|----------------|-----------------------------|-----------------|-----------------|-------------------------------|-------------------------------|------------------------------|-----------------------------|
| Planned Survey              |                    |                |                             |                 |                 |                               |                               |                              |                             |
| Measured<br>Depth<br>(usft) | Inclination<br>(°) | Azimuth<br>(°) | Vertical<br>Depth<br>(usft) | +N/-S<br>(usft) | +E/-W<br>(usft) | Vertical<br>Section<br>(usft) | Dogleg<br>Rate<br>(°/100usft) | Build<br>Rate<br>(°/100usft) | Turn<br>Rate<br>(°/100usft) |
| 0.0                         | 0.00               | 0.00           | 0.0                         | 0.0             | 0.0             | 0.0                           | 0.00                          | 0.00                         | 0.00                        |
| 100.0                       | 0.00               | 0.00           | 100.0                       | 0.0             | 0.0             | 0.0                           | 0.00                          | 0.00                         | 0.00                        |
| 200.0                       | 0.00               | 0.00           | 200.0                       | 0.0             | 0.0             | 0.0                           | 0.00                          | 0.00                         | 0.00                        |
| 300.0                       | 0.00               | 0.00           | 300.0                       | 0.0             | 0.0             | 0.0                           | 0.00                          | 0.00                         | 0.00                        |
| 400.0                       | 0.00               | 0.00           | 400.0                       | 0.0             | 0.0             | 0.0                           | 0.00                          | 0.00                         | 0.00                        |
|                             |                    |                |                             |                 |                 |                               |                               |                              |                             |
| 500.0                       | 0.00               | 0.00           | 500.0                       | 0.0             | 0.0             | 0.0                           | 0.00                          | 0.00                         | 0.00                        |
| 600.0                       | 0.00               | 0.00           | 600.0                       | 0.0             | 0.0             | 0.0                           | 0.00                          | 0.00                         | 0.00                        |
| 700.0                       | 0.00               | 0.00           | 700.0                       | 0.0             | 0.0             | 0.0                           | 0.00                          | 0.00                         | 0.00                        |
| 800.0                       | 0.00               | 0.00           | 800.0                       | 0.0             | 0.0             | 0.0                           | 0.00                          | 0.00                         | 0.00                        |
| 900.0                       | 0.00               | 0.00           | 900.0                       | 0.0             | 0.0             | 0.0                           | 0.00                          | 0.00                         | 0.00                        |
| 1,000.0                     | 0.00               | 0.00           | 1,000.0                     | 0.0             | 0.0             | 0.0                           | 0.00                          | 0.00                         | 0.00                        |
| 1,100.0                     | 0.00               | 0.00           | 1,100.0                     | 0.0             | 0.0             | 0.0                           | 0.00                          | 0.00                         | 0.00                        |
|                             | 0.00               |                |                             |                 |                 | 0.0                           |                               |                              |                             |
| 1,155.0                     |                    | 0.00           | 1,155.0                     | 0.0             | 0.0             |                               | 0.00                          | 0.00                         | 0.00                        |
| 1,200.0                     | 0.90               | 107.77         | 1,200.0                     | -0.1            | 0.3             | 0.1                           | 2.00                          | 2.00                         | 0.00                        |
| 1,300.0                     | 2.90               | 107.77         | 1,299.9                     | -1.1            | 3.5             | 1.4                           | 2.00                          | 2.00                         | 0.00                        |
| 1,400.0                     | 4.90               | 107.77         | 1,399.7                     | -3.2            | 10.0            | 4.0                           | 2.00                          | 2.00                         | 0.00                        |
| 1,457.9                     | 6.06               | 107.77         | 1,457.3                     | -4.9            | 15.2            | 6.1                           | 2.00                          | 2.00                         | 0.00                        |
| 1,500.0                     | 6.06               | 107.77         | 1,499.2                     | -6.2            | 19.5            | 7.8                           | 0.00                          | 0.00                         | 0.00                        |
| 1,600.0                     | 6.06               | 107.77         | 1,598.6                     | -9.5            | 29.5            | 11.8                          | 0.00                          | 0.00                         | 0.00                        |
| 1,700.0                     | 6.06               | 107.77         | 1,698.1                     | -12.7           | 39.6            | 15.8                          | 0.00                          | 0.00                         | 0.00                        |
|                             |                    |                |                             |                 |                 |                               |                               |                              |                             |
| 1,800.0                     | 6.06               | 107.77         | 1,797.5                     | -15.9           | 49.6            | 19.9                          | 0.00                          | 0.00                         | 0.00                        |
| 1,900.0                     | 6.06               | 107.77         | 1,897.0                     | -19.1           | 59.7            | 23.9                          | 0.00                          | 0.00                         | 0.00                        |
| 2,000.0                     | 6.06               | 107.77         | 1,996.4                     | -22.3           | 69.7            | 27.9                          | 0.00                          | 0.00                         | 0.00                        |
| 2,100.0                     | 6.06               | 107.77         | 2,095.8                     | -25.6           | 79.8            | 31.9                          | 0.00                          | 0.00                         | 0.00                        |
| 2,200.0                     | 6.06               | 107.77         | 2,195.3                     | -28.8           | 89.8            | 36.0                          | 0.00                          | 0.00                         | 0.00                        |
| 2,300.0                     | 6.06               | 107.77         | 2,294.7                     | -32.0           | 99.9            | 40.0                          | 0.00                          | 0.00                         | 0.00                        |
| 2,400.0                     | 6.06               | 107.77         | 2,394.2                     | -35.2           | 109.9           |                               | 0.00                          | 0.00                         | 0.00                        |
|                             |                    |                |                             |                 |                 | 44.0                          |                               |                              |                             |
| 2,500.0                     | 6.06               | 107.77         | 2,493.6                     | -38.5           | 120.0           | 48.0                          | 0.00                          | 0.00                         | 0.00                        |
| 2,600.0                     | 6.06               | 107.77         | 2,593.1                     | -41.7           | 130.0           | 52.1                          | 0.00                          | 0.00                         | 0.00                        |
| 2,700.0                     | 6.06               | 107.77         | 2,692.5                     | -44.9           | 140.1           | 56.1                          | 0.00                          | 0.00                         | 0.00                        |
| 2,800.0                     | 6.06               | 107.77         | 2,791.9                     | -48.1           | 150.1           | 60.1                          | 0.00                          | 0.00                         | 0.00                        |
| 2,900.0                     | 6.06               | 107.77         | 2,891.4                     | -51.3           | 160.2           | 64.1                          | 0.00                          | 0.00                         | 0.00                        |
| 3,000.0                     | 6.06               | 107.77         | 2,990.8                     | -54.6           | 170.2           | 68.2                          | 0.00                          | 0.00                         | 0.00                        |
| 3,100.0                     | 6.06               | 107.77         | 3,090.3                     | -57.8           | 180.3           | 72.2                          | 0.00                          | 0.00                         | 0.00                        |
| 3,200.0                     | 6.06               | 107.77         | 3,189.7                     | -61.0           | 190.3           | 76.2                          | 0.00                          | 0.00                         | 0.00                        |
|                             |                    |                |                             |                 |                 |                               |                               |                              |                             |
| 3,300.0                     | 6.06               | 107.77         | 3,289.1                     | -64.2           | 200.4           | 80.2                          | 0.00                          | 0.00                         | 0.00                        |
| 3,400.0                     | 6.06               | 107.77         | 3,388.6                     | -67.4           | 210.4           | 84.3                          | 0.00                          | 0.00                         | 0.00                        |
| 3,500.0                     | 6.06               | 107.77         | 3,488.0                     | -70.7           | 220.5           | 88.3                          | 0.00                          | 0.00                         | 0.00                        |
| 3,600.0                     | 6.06               | 107.77         | 3,587.5                     | -73.9           | 230.5           | 92.3                          | 0.00                          | 0.00                         | 0.00                        |
| 3,700.0                     | 6.06               | 107.77         | 3,686.9                     | -77.1           | 240.6           | 96.3                          | 0.00                          | 0.00                         | 0.00                        |
| 3,800.0                     | 6.06               | 107.77         | 3,786.4                     | -80.3           | 250.6           | 100.4                         | 0.00                          | 0.00                         | 0.00                        |
| 3,900.0                     |                    | 107.77         |                             | -83.6           | 260.7           | 100.4                         | 0.00                          | 0.00                         | 0.00                        |
|                             | 6.06               |                | 3,885.8                     |                 |                 |                               |                               |                              |                             |
| 4,000.0                     | 6.06               | 107.77         | 3,985.2                     | -86.8           | 270.7           | 108.4                         | 0.00                          | 0.00                         | 0.00                        |
| 4,100.0                     | 6.06               | 107.77         | 4,084.7                     | -90.0           | 280.8           | 112.4                         | 0.00                          | 0.00                         | 0.00                        |
| 4,200.0                     | 6.06               | 107.77         | 4,184.1                     | -93.2           | 290.8           | 116.5                         | 0.00                          | 0.00                         | 0.00                        |
| 4,300.0                     | 6.06               | 107.77         | 4,283.6                     | -96.4           | 300.9           | 120.5                         | 0.00                          | 0.00                         | 0.00                        |
| 4,400.0                     | 6.06               | 107.77         | 4,383.0                     | -99.7           | 310.9           | 124.5                         | 0.00                          | 0.00                         | 0.00                        |
| 4,500.0                     | 6.06               | 107.77         | 4,482.4                     | -102.9          | 321.0           | 128.5                         | 0.00                          | 0.00                         | 0.00                        |
| 4,600.0                     | 6.06               | 107.77         | 4,581.9                     | -106.1          | 331.0           | 132.6                         | 0.00                          | 0.00                         | 0.00                        |
| 4,700.0                     | 6.06               | 107.77         | 4,681.3                     | -100.1          | 341.1           | 136.6                         | 0.00                          | 0.00                         | 0.00                        |
|                             |                    |                |                             |                 |                 |                               |                               |                              |                             |
| 4,800.0                     | 6.06               | 107.77         | 4,780.8                     | -112.5          | 351.1           | 140.6                         | 0.00                          | 0.00                         | 0.00                        |
| 4,900.0                     | 6.06               | 107.77         | 4,880.2                     | -115.8          | 361.2           | 144.6                         | 0.00                          | 0.00                         | 0.00                        |
| 5,000.0                     | 6.06               | 107.77         | 4,979.7                     | -119.0          | 371.2           | 148.7                         | 0.00                          | 0.00                         | 0.00                        |
| 5,100.0                     | 6.06               | 107.77         | 5,079.1                     | -122.2          | 381.3           | 152.7                         | 0.00                          | 0.00                         | 0.00                        |



### **Planning Report**

Database: PEDMB Company: Midland

Project: Lea County, NM (NAD 83 NME)

Site: Valiant 24 Fed Com

 Well:
 #757H

 Wellbore:
 OH

 Design:
 Plan #0.2

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Well #757H kb @ 3488.0usft kb @ 3488.0usft

Grid

| anned Survey                |                      |                      |                             |                  |                 |                               |                               |                              |                             |
|-----------------------------|----------------------|----------------------|-----------------------------|------------------|-----------------|-------------------------------|-------------------------------|------------------------------|-----------------------------|
| Measured<br>Depth<br>(usft) | Inclination<br>(°)   | Azimuth<br>(°)       | Vertical<br>Depth<br>(usft) | +N/-S<br>(usft)  | +E/-W<br>(usft) | Vertical<br>Section<br>(usft) | Dogleg<br>Rate<br>(°/100usft) | Build<br>Rate<br>(°/100usft) | Turn<br>Rate<br>(°/100usft) |
| 5,200.0                     | 6.06                 | 107.77               | 5,178.5                     | -125.4           | 391.3           | 156.7                         | 0.00                          | 0.00                         | 0.00                        |
| 5,300.0                     | 6.06                 | 107.77               | 5,278.0                     | -128.7           | 401.4           | 160.7                         | 0.00                          | 0.00                         | 0.00                        |
|                             |                      |                      | ,                           |                  |                 |                               |                               |                              |                             |
| 5,400.0                     | 6.06                 | 107.77               | 5,377.4                     | -131.9           | 411.4           | 164.8                         | 0.00                          | 0.00                         | 0.00                        |
| 5,500.0                     | 6.06                 | 107.77               | 5,476.9                     | -135.1           | 421.5           | 168.8                         | 0.00                          | 0.00                         | 0.00                        |
| 5,600.0                     | 6.06                 | 107.77               | 5,576.3                     | -138.3           | 431.5           | 172.8                         | 0.00                          | 0.00                         | 0.00                        |
| 5,700.0                     | 6.06                 | 107.77               | 5,675.7                     | -141.5           | 441.6           | 176.8                         | 0.00                          | 0.00                         | 0.00                        |
| 5,800.0                     | 6.06                 | 107.77               | 5,775.2                     | -144.8           | 451.6           | 180.9                         | 0.00                          | 0.00                         | 0.00                        |
| 5,900.0                     | 6.06                 | 107.77               | 5,874.6                     | -148.0           | 461.7           | 184.9                         | 0.00                          | 0.00                         | 0.00                        |
| 6,000.0                     | 6.06                 | 107.77               | 5,974.1                     |                  | 471.7           | 188.9                         | 0.00                          | 0.00                         |                             |
|                             |                      |                      |                             | -151.2           |                 |                               |                               |                              | 0.00                        |
| 6,100.0                     | 6.06                 | 107.77               | 6,073.5                     | -154.4           | 481.8           | 192.9                         | 0.00                          | 0.00                         | 0.00                        |
| 6,200.0                     | 6.06                 | 107.77               | 6,173.0                     | -157.6           | 491.8           | 197.0                         | 0.00                          | 0.00                         | 0.00                        |
| 6,300.0                     | 6.06                 | 107.77               | 6,272.4                     | -160.9           | 501.9           | 201.0                         | 0.00                          | 0.00                         | 0.00                        |
| 6,400.0                     | 6.06                 | 107.77               | 6,371.8                     | -164.1           | 511.9           | 205.0                         | 0.00                          | 0.00                         | 0.00                        |
| 6,500.0                     | 6.06                 | 107.77               | 6,471.3                     | -167.3           | 522.0           | 209.0                         | 0.00                          | 0.00                         | 0.00                        |
| 6,600.0                     | 6.06                 | 107.77               | 6,570.7                     | -170.5           | 532.0           | 213.1                         | 0.00                          | 0.00                         | 0.00                        |
| 6,700.0                     | 6.06                 | 107.77               | 6,670.2                     | -173.8           | 542.1           | 217.1                         | 0.00                          | 0.00                         | 0.00                        |
|                             |                      |                      |                             |                  |                 |                               |                               |                              |                             |
| 6,800.0                     | 6.06                 | 107.77               | 6,769.6                     | -177.0           | 552.1           | 221.1                         | 0.00                          | 0.00                         | 0.00                        |
| 6,900.0                     | 6.06                 | 107.77               | 6,869.0                     | -180.2           | 562.2           | 225.1                         | 0.00                          | 0.00                         | 0.00                        |
| 7,000.0                     | 6.06                 | 107.77               | 6,968.5                     | -183.4           | 572.2           | 229.2                         | 0.00                          | 0.00                         | 0.00                        |
| 7,100.0                     | 6.06                 | 107.77               | 7,067.9                     | -186.6           | 582.3           | 233.2                         | 0.00                          | 0.00                         | 0.00                        |
| 7,114.8                     | 6.06                 | 107.77               | 7,082.7                     | -187.1           | 583.8           | 233.8                         | 0.00                          | 0.00                         | 0.00                        |
| 7,200.0                     | 4.35                 | 107.77               | 7,167.5                     | -189.5           | 591.1           | 236.7                         | 2.00                          | -2.00                        | 0.00                        |
| 7,300.0                     | 2.35                 | 107.77               | 7,267.3                     | -191.3           | 596.7           | 239.0                         | 2.00                          | -2.00                        | 0.00                        |
|                             | 0.35                 | 107.77               |                             | -191.0           | 598.9           | 239.9                         | 2.00                          | -2.00                        |                             |
| 7,400.0                     |                      |                      | 7,367.3                     |                  |                 |                               |                               |                              | 0.00                        |
| 7,417.7                     | 0.00                 | 0.00                 | 7,385.0                     | -192.0           | 599.0           | 239.9                         | 2.00                          | -2.00                        | 0.00                        |
| 7,500.0                     | 0.00                 | 0.00                 | 7,467.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 7,600.0                     | 0.00                 | 0.00                 | 7,567.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 7,700.0                     | 0.00                 | 0.00                 | 7,667.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 7,800.0                     | 0.00                 | 0.00                 | 7,767.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 7,900.0                     | 0.00                 | 0.00                 | 7,867.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 8,000.0                     | 0.00                 | 0.00                 | 7,967.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
|                             |                      |                      |                             |                  |                 |                               |                               |                              |                             |
| 8,100.0                     | 0.00                 | 0.00                 | 8,067.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 8,200.0                     | 0.00                 | 0.00                 | 8,167.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 8,300.0                     | 0.00                 | 0.00                 | 8,267.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 8,400.0                     | 0.00                 | 0.00                 | 8,367.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 8,500.0                     | 0.00                 | 0.00                 | 8,467.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 8,600.0                     | 0.00                 | 0.00                 | 8,567.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| ,                           |                      |                      | ,                           |                  |                 |                               |                               |                              |                             |
| 8,700.0                     | 0.00                 | 0.00                 | 8,667.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 8,800.0                     | 0.00                 | 0.00                 | 8,767.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 8,900.0                     | 0.00                 | 0.00                 | 8,867.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 9,000.0                     | 0.00                 | 0.00                 | 8,967.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 9,100.0                     | 0.00                 | 0.00                 | 9,067.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 9,200.0                     | 0.00                 | 0.00                 | 9,167.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 9,300.0                     | 0.00                 | 0.00                 | 9,267.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 9,400.0                     | 0.00                 | 0.00                 | 9,367.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 9,400.0                     | 0.00                 | 0.00                 | 9,367.3<br>9,467.3          | -192.0<br>-192.0 | 599.0<br>599.0  | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
|                             |                      |                      |                             |                  |                 |                               |                               |                              |                             |
| 9,600.0                     | 0.00                 | 0.00                 | 9,567.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 9,700.0                     | 0.00                 | 0.00                 | 9,667.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 9,800.0                     | 0.00                 | 0.00                 | 9,767.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
|                             | 0.00                 | 0.00                 | 9,867.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 9,900.0                     |                      |                      | 9,967.3                     | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 9,900.0<br>10,000.0         | 0.00                 | 0.00                 | 9,907.3                     | -132.0           | 000.0           |                               |                               |                              |                             |
| 10,000.0                    |                      |                      |                             |                  |                 |                               |                               |                              |                             |
| -,                          | 0.00<br>0.00<br>0.00 | 0.00<br>0.00<br>0.00 | 10,067.3<br>10,167.3        | -192.0<br>-192.0 | 599.0<br>599.0  | 239.9<br>239.9                | 0.00<br>0.00                  | 0.00                         | 0.00                        |



### Planning Report

Database: Company:

Project:

PEDMB Midland

Lea County, NM (NAD 83 NME)

Site: Valiant 24 Fed Com

 Well:
 #757H

 Wellbore:
 OH

 Design:
 Plan #0.2

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

**Survey Calculation Method:** 

Well #757H kb @ 3488.0usft kb @ 3488.0usft

Grid

| esigii.                     | 1 1011 #0.2        |                |                             |                  |                 |                               |                               |                              |                             |
|-----------------------------|--------------------|----------------|-----------------------------|------------------|-----------------|-------------------------------|-------------------------------|------------------------------|-----------------------------|
| Planned Survey              |                    |                |                             |                  |                 |                               |                               |                              |                             |
| Measured<br>Depth<br>(usft) | Inclination<br>(°) | Azimuth<br>(°) | Vertical<br>Depth<br>(usft) | +N/-S<br>(usft)  | +E/-W<br>(usft) | Vertical<br>Section<br>(usft) | Dogleg<br>Rate<br>(°/100usft) | Build<br>Rate<br>(°/100usft) | Turn<br>Rate<br>(°/100usft) |
| (doit)                      | ( )                | ()             | (doit)                      | (usit)           | (usit)          | (40.1)                        | ( / 1000011)                  | (71000011)                   | ( / 1000011)                |
| 10,400.0<br>10,500.0        | 0.00<br>0.00       | 0.00<br>0.00   | 10,367.3<br>10,467.3        | -192.0<br>-192.0 | 599.0<br>599.0  | 239.9<br>239.9                | 0.00<br>0.00                  | 0.00<br>0.00                 | 0.00<br>0.00                |
|                             |                    |                |                             |                  |                 |                               |                               |                              |                             |
| 10,600.0                    | 0.00               | 0.00           | 10,567.3                    | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 10,700.0<br>10,800.0        | 0.00<br>0.00       | 0.00<br>0.00   | 10,667.3<br>10,767.3        | -192.0<br>-192.0 | 599.0<br>599.0  | 239.9<br>239.9                | 0.00<br>0.00                  | 0.00<br>0.00                 | 0.00<br>0.00                |
| 10,900.0                    | 0.00               | 0.00           | 10,767.3                    | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 11,000.0                    | 0.00               | 0.00           | 10,967.3                    | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
|                             |                    |                |                             |                  |                 |                               |                               |                              |                             |
| 11,100.0                    | 0.00<br>0.00       | 0.00           | 11,067.3<br>11,167.3        | -192.0           | 599.0<br>599.0  | 239.9<br>239.9                | 0.00                          | 0.00<br>0.00                 | 0.00<br>0.00                |
| 11,200.0<br>11,300.0        | 0.00               | 0.00<br>0.00   | 11,167.3                    | -192.0<br>-192.0 | 599.0<br>599.0  | 239.9                         | 0.00<br>0.00                  | 0.00                         | 0.00                        |
| 11,400.0                    | 0.00               | 0.00           | 11,367.3                    | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 11,500.0                    | 0.00               | 0.00           | 11,467.3                    | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
|                             |                    |                |                             |                  |                 |                               |                               |                              |                             |
| 11,600.0                    | 0.00               | 0.00           | 11,567.3                    | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 11,700.0<br>11,800.0        | 0.00<br>0.00       | 0.00<br>0.00   | 11,667.3<br>11,767.3        | -192.0<br>-192.0 | 599.0<br>599.0  | 239.9<br>239.9                | 0.00<br>0.00                  | 0.00<br>0.00                 | 0.00<br>0.00                |
| 11,800.0                    | 0.00               | 0.00           | 11,767.3                    | -192.0<br>-192.0 | 599.0<br>599.0  | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 12,000.0                    | 0.00               | 0.00           | 11,967.3                    | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
|                             |                    |                |                             |                  |                 |                               |                               |                              |                             |
| 12,100.0                    | 0.00               | 0.00           | 12,067.3                    | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 12,200.0                    | 0.00               | 0.00           | 12,167.3                    | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 12,300.0<br>12,400.0        | 0.00<br>0.00       | 0.00           | 12,267.3<br>12,367.3        | -192.0<br>-192.0 | 599.0<br>599.0  | 239.9<br>239.9                | 0.00                          | 0.00<br>0.00                 | 0.00                        |
| 12,400.0                    | 0.00               | 0.00<br>0.00   | 12,367.3                    | -192.0<br>-192.0 | 599.0<br>599.0  | 239.9                         | 0.00<br>0.00                  | 0.00                         | 0.00<br>0.00                |
|                             |                    |                |                             |                  |                 |                               |                               |                              |                             |
| 12,518.2                    | 0.00               | 0.00           | 12,485.5                    | -192.0           | 599.0           | 239.9                         | 0.00                          | 0.00                         | 0.00                        |
| 12,525.0                    | 0.81               | 180.00         | 12,492.3                    | -192.0           | 599.0           | 239.9                         | 12.00                         | 12.00                        | 0.00                        |
| 12,550.0                    | 3.81               | 180.00         | 12,517.3                    | -193.1           | 599.0           | 240.9                         | 12.00                         | 12.00                        | 0.00                        |
| 12,575.0                    | 6.81               | 180.00         | 12,542.1                    | -195.4           | 599.0           | 243.2                         | 12.00                         | 12.00                        | 0.00                        |
| 12,600.0                    | 9.81               | 180.00         | 12,566.9                    | -199.0           | 599.0           | 246.8                         | 12.00                         | 12.00                        | 0.00                        |
| 12,625.0                    | 12.81              | 180.00         | 12,591.4                    | -203.9           | 599.0           | 251.7                         | 12.00                         | 12.00                        | 0.00                        |
| 12,650.0                    | 15.82              | 180.00         | 12,615.6                    | -210.1           | 599.0           | 257.9                         | 12.00                         | 12.00                        | 0.00                        |
| 12,675.0                    | 18.82              | 180.00         | 12,639.5                    | -217.5           | 599.0           | 265.3                         | 12.00                         | 12.00                        | 0.00                        |
| 12,700.0                    | 21.82              | 180.00         | 12,662.9                    | -226.2           | 599.0           | 274.0                         | 12.00                         | 12.00                        | 0.00                        |
| 12,725.0                    | 24.82              | 180.00         | 12,685.9                    | -236.1           | 599.0           | 283.8                         | 12.00                         | 12.00                        | 0.00                        |
| 12,738.7                    | 26.46              | 180.00         | 12,698.2                    | -242.0           | 599.0           | 289.7                         | 12.00                         | 12.00                        | 0.00                        |
| 12,750.0                    | 27.82              | 179.98         | 12,708.3                    | -247.2           | 599.0           | 294.9                         | 12.00                         | 12.00                        | -0.18                       |
| 12,775.0                    | 30.82              | 179.94         | 12,730.1                    | -259.4           | 599.0           | 307.1                         | 12.00                         | 12.00                        | -0.16                       |
| 12,800.0                    | 33.82              | 179.91         | 12,751.2                    | -272.8           | 599.0           | 320.4                         | 12.00                         | 12.00                        | -0.13                       |
| 12,825.0                    | 36.82              | 179.88         | 12,771.6                    | -287.2           | 599.1           | 334.8                         | 12.00                         | 12.00                        | -0.12                       |
| 12,850.0                    | 39.82              | 179.85         | 12,791.2                    | -302.7           | 599.1           | 350.2                         | 12.00                         | 12.00                        | -0.10                       |
| 12,875.0                    | 42.82              | 179.83         | 12,810.0                    | -319.2           | 599.1           | 366.7                         | 12.00                         | 12.00                        | -0.09                       |
| 12,900.0                    | 45.82              | 179.81         | 12,827.9                    | -336.7           | 599.2           | 384.1                         | 12.00                         | 12.00                        | -0.08                       |
| 12,925.0                    | 48.82              | 179.79         | 12,844.8                    | -355.1           | 599.3           | 402.4                         | 12.00                         | 12.00                        | -0.07                       |
| 12,950.0                    | 51.82              | 179.78         | 12,860.8                    | -374.3           | 599.3           | 421.6                         | 12.00                         | 12.00                        | -0.06                       |
| 12,975.0                    | 54.82              | 179.76         | 12,875.7                    | -394.3           | 599.4           | 441.6                         | 12.00                         | 12.00                        | -0.06                       |
| 13,000.0                    | 57.82              | 179.75         | 12,889.6                    | -415.1           | 599.5           | 462.3                         | 12.00                         | 12.00                        | -0.06                       |
| 13,025.0                    | 60.82              | 179.73         | 12,902.3                    | -436.6           | 599.6           | 483.8                         | 12.00                         | 12.00                        | -0.05                       |
| 13,050.0                    | 63.82              | 179.72         | 12,913.9                    | -458.8           | 599.7           | 505.8                         | 12.00                         | 12.00                        | -0.05                       |
| 13,075.0                    | 66.82              | 179.71         | 12,924.4                    | -481.5           | 599.8           | 528.5                         | 12.00                         | 12.00                        | -0.05                       |
| 13,100.0                    | 69.82              | 179.70         | 12,933.6                    | -504.7           | 599.9           | 551.6                         | 12.00                         | 12.00                        | -0.04                       |
| 13,125.0                    | 72.82              | 179.69         | 12,941.6                    | -528.4           | 600.1           | 575.3                         | 12.00                         | 12.00                        | -0.04                       |
| 13,150.0                    | 75.82              | 179.68         | 12,948.4                    | -552.5           | 600.2           | 599.3                         | 12.00                         | 12.00                        | -0.04                       |
| 13,175.0                    | 78.82              | 179.67         | 12,953.9                    | -576.8           | 600.3           | 623.6                         | 12.00                         | 12.00                        | -0.04                       |
| 13,200.0                    | 81.82              | 179.66         | 12,958.1                    | -601.5           | 600.5           | 648.1                         | 12.00                         | 12.00                        | -0.04                       |
| 13,225.0                    | 84.82              | 179.65         | 12,961.0                    | -626.3           | 600.6           | 672.9                         | 12.00                         | 12.00                        | -0.04                       |
| 10,220.0                    |                    |                |                             |                  |                 |                               |                               |                              |                             |

# eog resources

### Planning Report

Database: Company:

Company: Midland
Project: Lea County, NM (NAD 83 NME)

PEDMB

Site: Valiant 24 Fed Com

 Well:
 #757H

 Wellbore:
 OH

 Design:
 Plan #0.2

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

**Survey Calculation Method:** 

Well #757H kb @ 3488.0usft kb @ 3488.0usft

Grid

| Design.              | F Id11 #0.2        |                  |                      |                      |                 |                     |                |               |              |
|----------------------|--------------------|------------------|----------------------|----------------------|-----------------|---------------------|----------------|---------------|--------------|
| Planned Survey       |                    |                  |                      |                      |                 |                     |                |               |              |
| Measured             |                    |                  | Vertical             |                      | .=/             | Vertical<br>Section | Dogleg<br>Rate | Build<br>Rate | Turn<br>Rate |
| Depth<br>(usft)      | Inclination<br>(°) | Azimuth<br>(°)   | Depth<br>(usft)      | +N/-S<br>(usft)      | +E/-W<br>(usft) | (usft)              | (°/100usft)    | (°/100usft)   | (°/100usft)  |
| 13,268.2             | 90.00              | 179.63           | 12,962.9             | -669.4               | 600.9           | 715.9               | 12.00          | 12.00         | -0.04        |
| 13,300.0             | 90.00              | 179.63           | 12,962.9             | -701.3               | 601.1           | 747.6               | 0.00           | 0.00          | 0.00         |
| 13,400.0             | 90.00              | 179.63           | 12,963.0             | -801.3               | 601.7           | 847.4               | 0.00           | 0.00          | 0.00         |
| 13,500.0             | 90.00              | 179.63           | 12,963.0             | -901.3               | 602.4           | 947.1               | 0.00           | 0.00          | 0.00         |
| 13,600.0             | 90.00              | 179.63           | 12,963.0             | -1,001.2             | 603.0           | 1,046.8             | 0.00           | 0.00          | 0.00         |
| 13,700.0             | 90.00              | 179.63           | 12,963.0             | -1,101.2             | 603.7           | 1,146.5             | 0.00           | 0.00          | 0.00         |
| 13,800.0             | 90.00              | 179.63           | 12,963.0             | -1,201.2             | 604.3           | 1,246.2             | 0.00           | 0.00          | 0.00         |
| 13,900.0             | 90.00              | 179.63           | 12,963.0             | -1,301.2             | 605.0           | 1,346.0             | 0.00           | 0.00          | 0.00         |
|                      |                    |                  |                      |                      |                 |                     |                |               |              |
| 14,000.0             | 90.00              | 179.63           | 12,963.0             | -1,401.2             | 605.6           | 1,445.7             | 0.00           | 0.00          | 0.00         |
| 14,061.8             | 90.00              | 179.63           | 12,963.0             | -1,463.0             | 606.0           | 1,507.3             | 0.00           | 0.00          | 0.00         |
| 14,100.0             | 90.00              | 179.63           | 12,963.0             | -1,501.2             | 606.2           | 1,545.4             | 0.00           | 0.00          | 0.00         |
| 14,200.0             | 90.00              | 179.63           | 12,963.0             | -1,601.2             | 606.9           | 1,645.1             | 0.00           | 0.00          | 0.00         |
| 14,300.0             | 90.00              | 179.63           | 12,963.0             | -1,701.2             | 607.5           | 1,744.8             | 0.00           | 0.00          | 0.00         |
| 14,400.0             | 90.00              | 179.63           | 12,963.0             | -1,801.2             | 608.2           | 1,844.6             | 0.00           | 0.00          | 0.00         |
| 14,500.0             | 90.00              | 179.63           | 12,963.0             | -1,901.2             | 608.8           | 1,944.3             | 0.00           | 0.00          | 0.00         |
| 14,600.0             | 90.00              | 179.63           | 12,963.0             | -2,001.2             | 609.5           | 2,044.0             | 0.00           | 0.00          | 0.00         |
| 14,700.0             | 90.00              | 179.63           | 12,963.0             | -2,101.2             | 610.1           | 2,143.7             | 0.00           | 0.00          | 0.00         |
| 14,800.0             | 90.00              | 179.63           | 12,963.0             | -2,201.2             | 610.7           | 2,243.5             | 0.00           | 0.00          | 0.00         |
| 14,900.0             | 90.00              | 179.63           | 12.963.1             | -2,301.2             | 611.4           | 2,343.2             | 0.00           | 0.00          | 0.00         |
| 15,000.0             | 90.00              | 179.63           | 12,963.1             | -2,401.2             | 612.0           | 2,442.9             | 0.00           | 0.00          | 0.00         |
| 15,100.0             | 90.00              | 179.63           | 12,963.1             | -2,501.2             | 612.7           | 2,542.6             | 0.00           | 0.00          | 0.00         |
| 15,200.0             | 90.00              | 179.63           | 12,963.1             | -2,601.2             | 613.3           | 2,642.3             | 0.00           | 0.00          | 0.00         |
| 15,300.0             | 90.00              | 179.63           | 12,963.1             | -2,701.2             | 613.9           | 2,742.1             | 0.00           | 0.00          | 0.00         |
|                      |                    |                  |                      |                      |                 |                     |                |               |              |
| 15,400.0             | 90.00<br>90.00     | 179.63           | 12,963.1<br>12,963.1 | -2,801.2             | 614.6           | 2,841.8<br>2,941.5  | 0.00           | 0.00<br>0.00  | 0.00<br>0.00 |
| 15,500.0             | 90.00              | 179.63<br>179.64 | 12,963.1             | -2,901.2             | 615.2           | 3,041.2             | 0.00           | 0.00          |              |
| 15,600.0<br>15,700.0 | 90.00              | 179.64           | 12,963.1             | -3,001.2<br>-3,101.2 | 615.8<br>616.5  | 3,140.9             | 0.00<br>0.00   | 0.00          | 0.00<br>0.00 |
| 15,800.0             | 90.00              | 179.64           | 12,963.1             | -3,201.2             | 617.1           | 3,140.9             | 0.00           | 0.00          | 0.00         |
|                      |                    |                  |                      | -5,201.2             | 017.1           |                     |                |               |              |
| 15,900.0             | 90.00              | 179.64           | 12,963.1             | -3,301.2             | 617.8           | 3,340.4             | 0.00           | 0.00          | 0.00         |
| 16,000.0             | 90.00              | 179.64           | 12,963.1             | -3,401.2             | 618.4           | 3,440.1             | 0.00           | 0.00          | 0.00         |
| 16,100.0             | 90.00              | 179.64           | 12,963.1             | -3,501.2             | 619.0           | 3,539.8             | 0.00           | 0.00          | 0.00         |
| 16,200.0             | 90.00              | 179.64           | 12,963.1             | -3,601.2             | 619.7           | 3,639.6             | 0.00           | 0.00          | 0.00         |
| 16,300.0             | 90.00              | 179.64           | 12,963.1             | -3,701.2             | 620.3           | 3,739.3             | 0.00           | 0.00          | 0.00         |
| 16,400.0             | 90.00              | 179.64           | 12,963.1             | -3,801.2             | 620.9           | 3,839.0             | 0.00           | 0.00          | 0.00         |
| 16,500.0             | 90.00              | 179.64           | 12,963.1             | -3,901.2             | 621.6           | 3,938.7             | 0.00           | 0.00          | 0.00         |
| 16,600.0             | 90.00              | 179.64           | 12,963.1             | -4,001.2             | 622.2           | 4,038.4             | 0.00           | 0.00          | 0.00         |
| 16,700.0             | 90.00              | 179.64           | 12,963.1             | -4,101.2             | 622.8           | 4,138.2             | 0.00           | 0.00          | 0.00         |
| 16,800.0             | 90.00              | 179.64           | 12,963.1             | -4,201.2             | 623.5           | 4,237.9             | 0.00           | 0.00          | 0.00         |
| 16,900.0             | 90.00              | 179.64           | 12,963.1             | -4,301.2             | 624.1           | 4,337.6             | 0.00           | 0.00          | 0.00         |
| 17,000.0             | 90.00              | 179.64           | 12,963.1             | -4,401.2             | 624.7           | 4,437.3             | 0.00           | 0.00          | 0.00         |
| 17,100.0             | 90.00              | 179.64           | 12,963.1             | -4,501.2             | 625.4           | 4,537.0             | 0.00           | 0.00          | 0.00         |
| 17,200.0             | 90.00              | 179.64           | 12,963.1             | -4,601.2             | 626.0           | 4,636.8             | 0.00           | 0.00          | 0.00         |
| 17,300.0             | 90.00              | 179.64           | 12,963.1             | -4,701.2             | 626.6           | 4,736.5             | 0.00           | 0.00          | 0.00         |
|                      |                    |                  |                      |                      |                 |                     |                |               |              |
| 17,400.0             | 90.00              | 179.64           | 12,963.1             | -4,801.2<br>4,001.2  | 627.2           | 4,836.2<br>4,935.9  | 0.00           | 0.00          | 0.00         |
| 17,500.0<br>17,600.0 | 90.00<br>90.00     | 179.64<br>179.64 | 12,963.1<br>12,963.1 | -4,901.2<br>-5,001.2 | 627.9<br>628.5  | 4,935.9<br>5,035.6  | 0.00<br>0.00   | 0.00<br>0.00  | 0.00<br>0.00 |
| 17,700.0             | 90.00              | 179.64           | 12,963.1             | -5,001.2<br>-5,101.2 | 629.1           | 5,035.6             | 0.00           | 0.00          | 0.00         |
| 17,800.0             | 90.00              | 179.64           | 12,963.1             | -5,101.2<br>-5,201.2 | 629.8           | 5,135.4             | 0.00           | 0.00          | 0.00         |
|                      |                    |                  |                      |                      |                 |                     |                |               |              |
| 17,900.0             | 90.00              | 179.64           | 12,963.1             | -5,301.2             | 630.4           | 5,334.8             | 0.00           | 0.00          | 0.00         |
| 18,000.0             | 90.00              | 179.64           | 12,963.1             | -5,401.2             | 631.0           | 5,434.5             | 0.00           | 0.00          | 0.00         |
| 18,100.0             | 90.00              | 179.64           | 12,963.1             | -5,501.2             | 631.7           | 5,534.2             | 0.00           | 0.00          | 0.00         |
| 18,200.0             | 90.00              | 179.64           | 12,963.1             | -5,601.2             | 632.3           | 5,634.0             | 0.00           | 0.00          | 0.00         |
| 18,300.0             | 90.00              | 179.64           | 12,963.1             | -5,701.2             | 632.9           | 5,733.7             | 0.00           | 0.00          | 0.00         |
| 18,400.0             | 90.00              | 179.64           | 12,963.1             | -5,801.2             | 633.5           | 5,833.4             | 0.00           | 0.00          | 0.00         |



### **Planning Report**

Database: Company: PEDMB Midland

Project: Lea County, NM (NAD 83 NME)

Site: Valiant 24 Fed Com

 Well:
 #757H

 Wellbore:
 OH

 Design:
 Plan #0.2

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Well #757H kb @ 3488.0usft kb @ 3488.0usft

Grid

| nned Survey                 |                    |                |                             |                 |                 |                               |                               |                              |                             |
|-----------------------------|--------------------|----------------|-----------------------------|-----------------|-----------------|-------------------------------|-------------------------------|------------------------------|-----------------------------|
| Measured<br>Depth<br>(usft) | Inclination<br>(°) | Azimuth<br>(°) | Vertical<br>Depth<br>(usft) | +N/-S<br>(usft) | +E/-W<br>(usft) | Vertical<br>Section<br>(usft) | Dogleg<br>Rate<br>(°/100usft) | Build<br>Rate<br>(°/100usft) | Turn<br>Rate<br>(°/100usft) |
| 18,500.0                    | 90.00              | 179.64         | 12,963.1                    | -5,901.2        | 634.2           | 5,933.1                       | 0.00                          | 0.00                         | 0.00                        |
| 18,600.0                    | 90.00              | 179.64         | 12,963.1                    | -6,001.1        | 634.8           | 6,032.8                       | 0.00                          | 0.00                         | 0.00                        |
| 18,700.0                    | 90.00              | 179.64         | 12,963.1                    | -6,101.1        | 635.4           | 6,132.6                       | 0.00                          | 0.00                         | 0.00                        |
| 18,800.0                    | 90.00              | 179.64         | 12,963.1                    | -6,201.1        | 636.0           | 6,232.3                       | 0.00                          | 0.00                         | 0.00                        |
| 18,900.0                    | 90.00              | 179.64         | 12,963.1                    | -6,301.1        | 636.7           | 6,332.0                       | 0.00                          | 0.00                         | 0.00                        |
| 19,000.0                    | 90.00              | 179.64         | 12,963.1                    | -6,401.1        | 637.3           | 6,431.7                       | 0.00                          | 0.00                         | 0.00                        |
| 19,100.0                    | 90.00              | 179.64         | 12,963.1                    | -6,501.1        | 637.9           | 6,531.4                       | 0.00                          | 0.00                         | 0.00                        |
| 19,200.0                    | 90.00              | 179.64         | 12,963.1                    | -6,601.1        | 638.5           | 6,631.2                       | 0.00                          | 0.00                         | 0.00                        |
| 19,300.0                    | 90.00              | 179.64         | 12,963.1                    | -6,701.1        | 639.2           | 6,730.9                       | 0.00                          | 0.00                         | 0.00                        |
| 19,400.0                    | 90.00              | 179.64         | 12,963.1                    | -6,801.1        | 639.8           | 6,830.6                       | 0.00                          | 0.00                         | 0.00                        |
| 19,500.0                    | 90.00              | 179.64         | 12,963.1                    | -6,901.1        | 640.4           | 6,930.3                       | 0.00                          | 0.00                         | 0.00                        |
| 19,600.0                    | 90.00              | 179.64         | 12,963.1                    | -7,001.1        | 641.0           | 7,030.0                       | 0.00                          | 0.00                         | 0.00                        |
| 19,700.0                    | 90.00              | 179.64         | 12,963.1                    | -7,101.1        | 641.7           | 7,129.8                       | 0.00                          | 0.00                         | 0.00                        |
| 19,800.0                    | 90.00              | 179.64         | 12,963.0                    | -7,201.1        | 642.3           | 7,229.5                       | 0.00                          | 0.00                         | 0.00                        |
| 19,900.0                    | 90.00              | 179.64         | 12,963.0                    | -7,301.1        | 642.9           | 7,329.2                       | 0.00                          | 0.00                         | 0.00                        |
| 20,000.0                    | 90.00              | 179.64         | 12,963.0                    | -7,401.1        | 643.5           | 7,428.9                       | 0.00                          | 0.00                         | 0.00                        |
| 20,100.0                    | 90.00              | 179.64         | 12,963.0                    | -7,501.1        | 644.1           | 7,528.6                       | 0.00                          | 0.00                         | 0.00                        |
| 20,200.0                    | 90.00              | 179.64         | 12,963.0                    | -7,601.1        | 644.8           | 7,628.4                       | 0.00                          | 0.00                         | 0.00                        |
| 20,300.0                    | 90.00              | 179.64         | 12,963.0                    | -7,701.1        | 645.4           | 7,728.1                       | 0.00                          | 0.00                         | 0.00                        |
| 20,400.0                    | 90.00              | 179.65         | 12,963.0                    | -7,801.1        | 646.0           | 7,827.8                       | 0.00                          | 0.00                         | 0.00                        |
| 20,500.0                    | 90.00              | 179.65         | 12,963.0                    | -7,901.1        | 646.6           | 7,927.5                       | 0.00                          | 0.00                         | 0.00                        |
| 20,561.9                    | 90.00              | 179.65         | 12,963.0                    | -7,963.0        | 647.0           | 7,989.2                       | 0.00                          | 0.00                         | 0.00                        |

| Design Targets   |                  |                 |               |                 |                 |                    |                   |                 |                   |
|--|------------------|-----------------|---------------|-----------------|-----------------|--------------------|-------------------|-----------------|-------------------|
| Target Name - hit/miss target - Shape                        | Dip Angle<br>(°) | Dip Dir.<br>(°) | TVD<br>(usft) | +N/-S<br>(usft) | +E/-W<br>(usft) | Northing<br>(usft) | Easting<br>(usft) | Latitude        | Longitude         |
| KOP(Valiant 24 Fed Cor<br>- plan hits target cent<br>- Point | 0.00<br>er       | 0.00            | 12,485.5      | -192.0          | 599.0           | 406,638.00         | 761,225.00        | 32° 6′ 57.367 N | 103° 37' 23.176 W |
| FTP(Valiant 24 Fed Com<br>- plan hits target cent<br>- Point | 0.00<br>er       | 0.00            | 12,698.2      | -242.0          | 599.0           | 406,588.00         | 761,225.00        | 32° 6′ 56.872 N | 103° 37' 23.179 W |
| PBHL(Valiant 24 Fed Co<br>- plan hits target cent<br>- Point | 0.00<br>er       | 0.00            | 12,963.0      | -7,963.0        | 647.0           | 398,867.00         | 761,273.00        | 32° 5′ 40.466 N | 103° 37' 23.213 W |
| FPP1(Valiant 24 Fed Co<br>- plan hits target cent<br>- Point | 0.00<br>er       | 0.00            | 12,963.0      | -1,463.0        | 606.0           | 405,367.00         | 761,232.00        | 32° 6′ 44.789 N | 103° 37' 23.192 W |

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory <a href="https://www.emnrd.nm.gov/ocd/contact-us">https://www.emnrd.nm.gov/ocd/contact-us</a>

# State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Action 438829

### **CONDITIONS**

| Operator:            | OGRID:  |
|----------------------|---|
| EOG RESOURCES INC    | 7377  |
| 5509 Champions Drive | Action Number:  |
| Midland, TX 79706    | 438829  |
|                      | Action Type:  |
|                      | [C-101] BLM - Federal/Indian Land Lease (Form 3160-3) |

### CONDITIONS

| Created By | Condition   | Condition<br>Date |
|------------|---|-------------------|
| sharrell1  | Cement is required to circulate on both surface and intermediate1 strings of casing.  | 3/4/2025          |
| sharrell1  | If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.  | 3/4/2025          |
| pkautz     | File As Drilled C-102 and a directional Survey with C-104 completion packet.  | 3/7/2025          |
| pkautz     | Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string. | 3/7/2025          |
| pkautz     | Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.                  | 3/7/2025          |