

Company: OIL INDUSTRIES
Well: [illegible]
Location: [illegible]
Elevation: [illegible]
Date: [illegible]
Run No.: [illegible]
Depth Driller: [illegible]
Depth Logger: [illegible]
Bottom Log Interval: [illegible]
Top Log Interval: [illegible]
Casing Driller: [illegible]
Casing Logger: [illegible]
Bit Size: [illegible]
Type Fluid in Hole: [illegible]
Density: [illegible]
Viscosity: [illegible]
pH: [illegible]
Fluid Loss: [illegible]
Source of Sample: [illegible]
Rm @ Meas. Temp.: [illegible]
Rmf @ Meas. Temp.: [illegible]
Rmc @ Meas. Temp.: [illegible]
Source of Rmf & Rmc: [illegible]
Rm @ BHT: [illegible]
Time Since Circ.: [illegible]
Max. Rec. Temp.: [illegible]
Equip. No. & Location: [illegible]
Recorded By: [illegible]
Witnessed By: [illegible]

RUN NO. | BIT | CASING | WEIGHT | FROM | TO

Remarks: Casing collar & 4.5" tie down/correlation depths are indicated.

TEMPERATURE °F
RESISTIVITY

150° 100° 50°

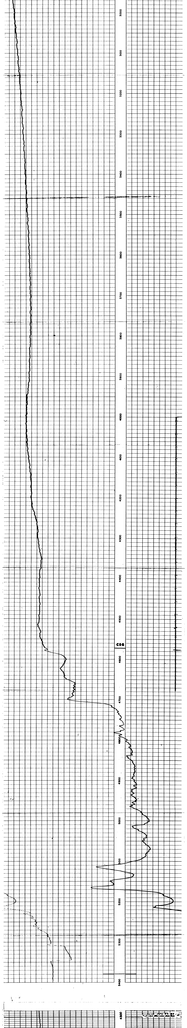

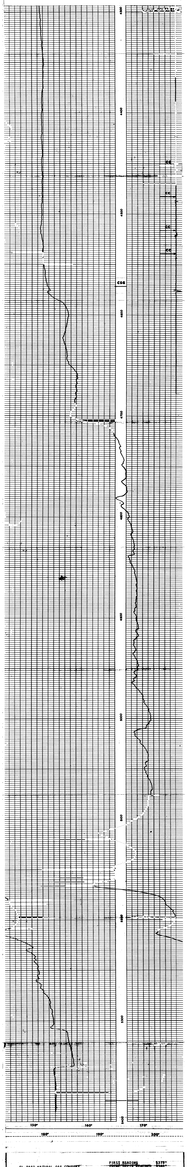

FIELD PRINTS
DATE:
FILM RECORDED BY: