

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other

2. NAME OF OPERATOR
Northwest Pipeline Corporation

3. ADDRESS OF OPERATOR
P.O. Box 90, Farmington, N.M. 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1100' FSL & 850' FWL
AT TOP PROD. INTERVAL: Same as above
AT TOTAL DEPTH: Same as above

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

5. LEASE
SF 079727-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Valencia Canyon

9. WELL NO.
#1

10. FIELD OR WILDCAT NAME
Undesignated Pictured Cliffs

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec 10, T28N, R4W

12. COUNTY OR PARISH
Rio Arriba

13. STATE
New Mexico

14. API NO.
30-039-22502


15. ELEVATIONS (SHOW DF, KDB, AND WD)
7370' GR

REQUEST FOR APPROVAL TO:

- TEST WATER SHUT-OFF
- FRACTURE TREAT
- SHOOT OR ACIDIZE
- REPAIR WELL
- PULL OR ALTER CASING
- MULTIPLE COMPLETE
- CHANGE ZONES
- ABANDON*
- (other)

SUBSEQUENT REPORT OF:

-
-
-
-
-
-
-
-

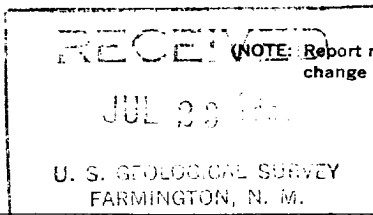

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)* *wrny*

4-25-81 GO ran GR/CCI logs. Perfed 12 holes from ~~3753'~~ to ~~3823'~~. SI well.

6-4-81 Halliburton spearheaded 500 gal 7-1/2% HCl. Pumped 500 gal pad of slick wtr (2-1/2# FR-20/1000 gal) followed w/ 50,000# 10/20 sand @ 1/2 - 1 ppg. Total fluid injected 61,020 gallons. Job completed @ 1400 hrs SI well after frac.

6-5-81 to 6-8-81 SI for buildup.

6-9-81 to 7-8-81 Open & dead.

7-9-81 swabbing. Tagged btm @ 4300' (Top perf @ 4190') PBDT @ 4712'. Well goes on vacuum after each swab run.

7-10-81 to 7-17-81 Swabbing well

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Donna J. Brace TITLE Production Clerk DATE 7-21-81
Donna J. Brace
(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

NMOCC

*See Instructions on Reverse Side

dib/