

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

1. TYPE OF WELL GAS		5. LEASE NUMBER SF-080505A	
2. OPERATOR <i>Meredith</i> EL PASO NATURAL GAS CO.		6. IF INDIAN, ALL. OR TRIBE NAME	
3. ADDRESS & PHONE NO. OF OPERATOR P O BOX 4289 FARMINGTON, NM 87499		7. UNIT AGREEMENT NAME SAN JUAN 28-6 UNIT	
4. LOCATION OF WELL 1525'S 2505'W		8. FARM OR LEASE NAME SAN JUAN 28-6 UNIT	
14. PERMIT NO.		9. WELL NO. 402	
15. ELEVATIONS 6475'GL		10. FIELD, POOL, OR WILDCAT BASIN FRUITLAND COAL	
		11. SEC. T. R. M OR BLK. SEC. 11 T28N R06W NMPM	
		12. COUNTY RIO ARRIBA	13. STATE NM
16. NOTICE OF INTENTION TO: Change Plans			
17. Describe proposed or completed operations			

Attached is a revised operations plan, BOPE diagram and anticipated production facilities diagram on the subject well.

18. AUTHORIZED BY: *POZ*
REGULATORY AFFAIRS

RECEIVED
JAN 08 1990
OIL CON. DIV
DIST. 3
9/19/89
DATE

APPROVED
JAN 04 1990
Mark D Holmes
DATE
for AREA MANAGER
FARMINGTON RESOURCE AREA

NOTE: THIS FORMAT IS ISSUED IN LIEU OF US BLM FORM 3160-5.

=====
(This space for Federal or State office use)

APPROVED BY _____ TITLE _____
CONDITION OF APPROVAL, IF ANY:

Well Name: 402 SAN JUAN 28-6 UNIT
 Sec. 11 T28N R06W
 BASIN FRUITLAND COAL

1525'S 2505'W
 RIO ARRIBA NEW MEXICO
 Elevation 6475'GL

Formation tops: Surface- SAN JOSE
 Ojo Alamo- 2547
 Kirtland- 2718
 Fruitland- 3045
 Fruitland Coal Top- 3219
 Fruitland Coal Base- 3355
 Total Depth- 3356
 Pictured Cliffs- 3358

Logging Program: Mud logs from 3045 to total depth.

Mud Program:	Interval	Type	Weight	Visc.	Fl. Loss
	0 - 200	Spud	8.4 - 8.9	40-50	no control
	200 - 3356	Non-dispersed	8.4 - 9.5	30-60	no control

Casing Program:	Hole Size	Depth Interval	Csg. Size	Weight	Grade
	12 1/4"	0 - 200	8 5/8"	24.0#	K-40
	7 7/8"	0 - 3356	5 1/2"	15.5#	K-55
Tubing Program:		0 - 3356	2 3/8"	4.7#	J-55

Float Equipment: 8 5/8" surface casing - saw tooth guide shoe.

5 1/2" production casing - float shoe on bottom.

Three centralizers run every other joint above shoe.

Wellhead Equipment: 8 5/8" x 5 1/2" x 2 3/8" x 11" 3000 psi xmas tree assembl

Cementing:

8 5/8" surface casing - cement with 140 sacks of class "B" cement with 1/4# flocele/sack and 3% calcium chloride (165 cu ft. of slurry, 100% excess to circulate to surface). WOC 12 hours. Test casing to 600 psi for 30 minutes.

5 1/2" production casing - lead with 84 sacks of 65/35 class "B" poz with 6% gel, 2% calcium chloride and 1/2 cu.ft. Perlite/sack (10.3 gallons of water/sack) tail with 100 sacks of class "B" with 2% calcium chloride. 280 cu ft. of slurry, 100% excess to cover the Ojo Alamo. Run temperature survey at 8 hours. WOC 12 hours. Test casing to 1500 psi for 30 minutes.

RECEIVED

JAN 08 1990

OIL CON. DIV.
 DIST. 3

BOP and Tests:

Surface to TD - 11" 2000 psi(minimum) double gate BOP stack

From surface to TD - choke manifold (Reference Figure #3).

Pipe rams will be actuated at least once each day and blind rams actuated once each trip to test proper functioning. A kelly cock valve and drill string safety valves to fit each drill string will be maintained and available on the rig floor.

Addition Information:


The Fruitland coal formation will be completed.

This gas is dedicated.

The S/2 of Section 11 is dedicated to this well.

LONG STRING FRUITLAND COAL


FIGURE #1

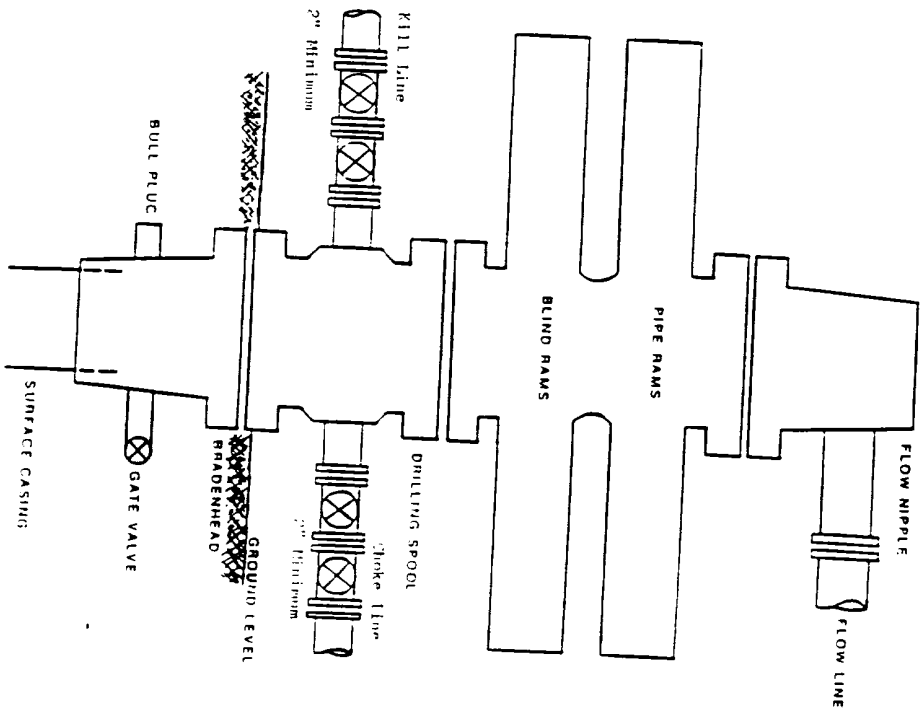

Minimum POPE installation for a typical Fruitland Coal well from surface to Total Depth. 11", 2000 psi working pressure double gate BOP equipped with blind and pipe rams.

LONG STRING FRUITLAND COAL


FIGURE #3

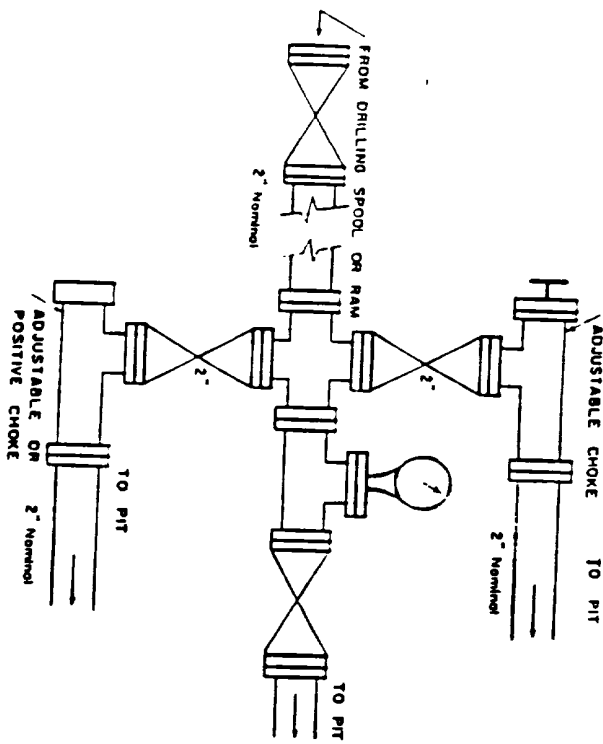

Minimum choke manifold configuration for a typical Fruitland Coal well from surface to TD. 2", 2000 psi working pressure equipment with two chokes.

LONG STRING FCCW BOP

UPDZAO 9/8/81

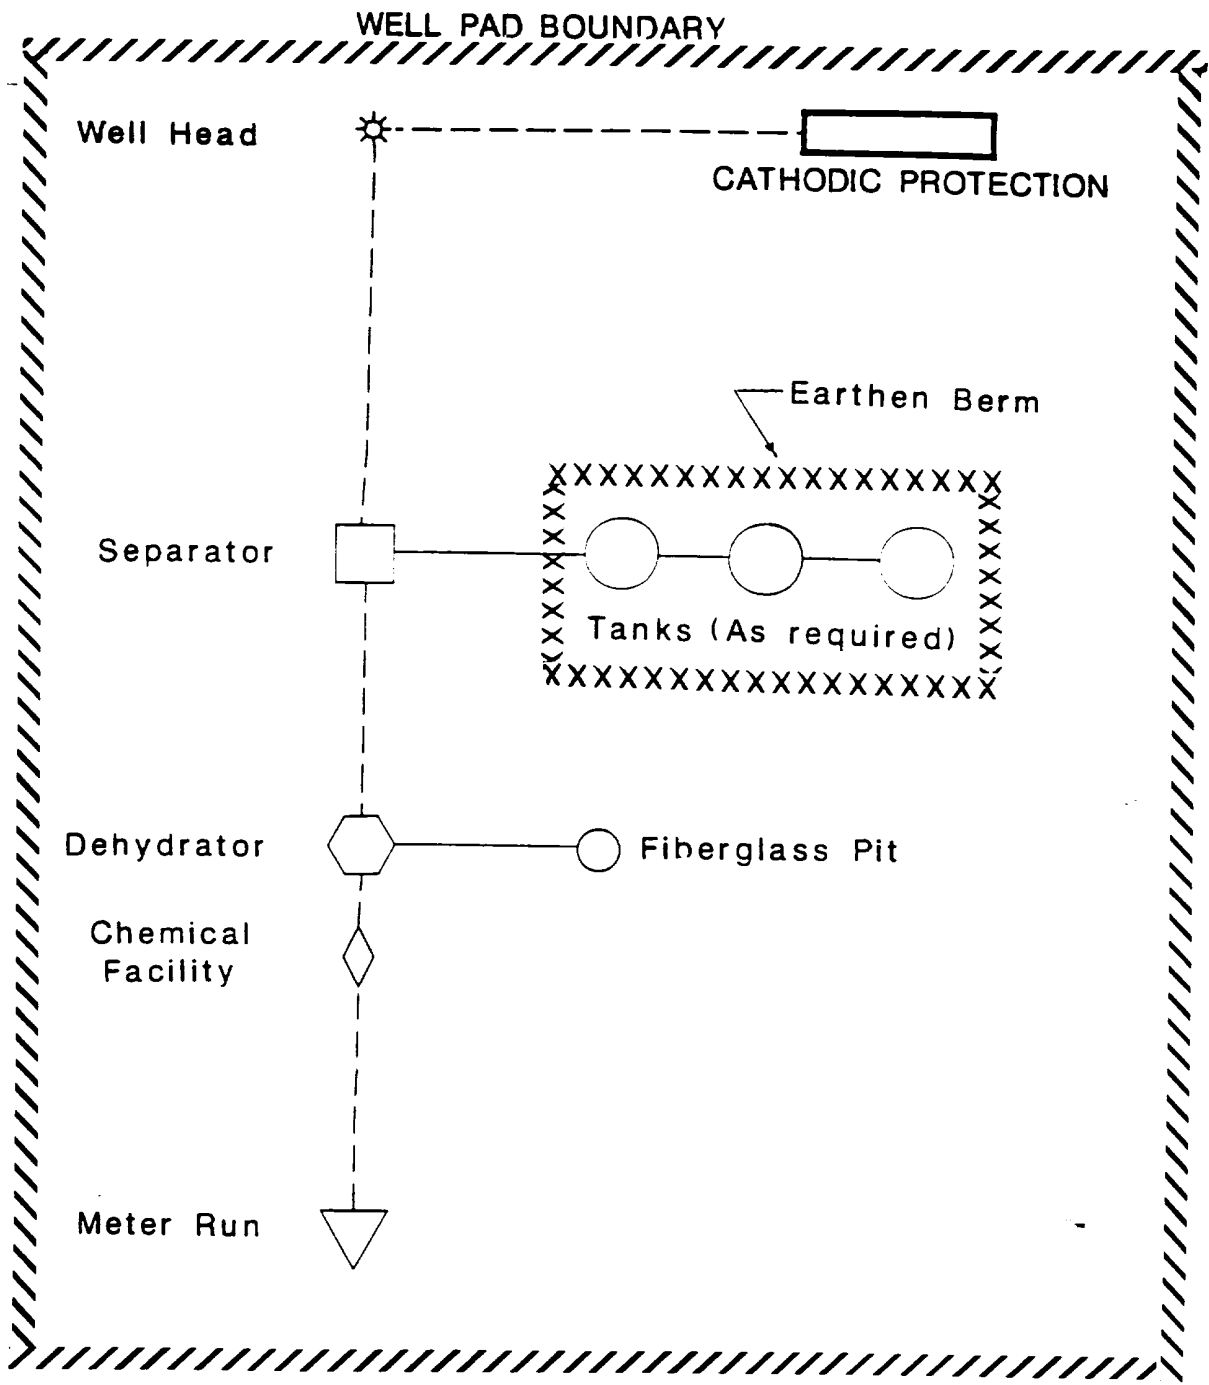

MERIDIAN OIL
 ANTICIPATED
 PRODUCTION FACILITIES
 FOR A
 FRUITLAND WELL

J. Falconi 4/28/89