

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Sundry Notices and Reports on Wells

1. Type of Well
GAS

2. Name of Operator
BURLINGTON RESOURCES OIL & GAS COMPANY

3. Address & Phone No. of Operator
PO Box 4289, Farmington, NM 87499 (505) 326-9700

4. Location of Well, Footage, Sec., T, R, M
790'FNL, 1815'FWL, Sec.16, T-28-N, R-5-W, NMPM

5. Lease Number
SF-079250

6. If Indian, All. or Tribe Name

7. Unit Agreement Name
San Juan 28-5 Unit

8. Well Name & Number
San Juan 28-5 U #83M

9. API Well No.
30-039-25972

10. Field and Pool
Blanco MV/Basin DK

11. County and State
Rio Arriba Co, NM

12. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OTHER DATA

Type of Submission	Type of Action	
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Abandonment	<input type="checkbox"/> Change of Plans
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion	<input type="checkbox"/> New Construction
<input type="checkbox"/> Final Abandonment	<input type="checkbox"/> Plugging Back	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> Water Shut off
	<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Conversion to Injection
	<input checked="" type="checkbox"/> Other - Spinner Survey	

13. Describe Proposed or Completed Operations

It is intended to run a spinner survey on the subject well according to the attached procedure and wellbore diagram.

SEP 13 1999

SEP 15 1999

SEP 16 1999

14. I hereby certify that the foregoing is true and correct.

Signed [Signature] Title Regulatory Administrator Date 8/13/99
trc

(This space for Federal or State Office use)
APPROVED BY [Signature] Title _____ Date SEP 10 1999

CONDITION OF APPROVAL, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

San Juan 28-5 Unit #83M

Unit C, Section 16, T28N, R05W

Rio Arriba County, New Mexico

Elevation 6545' GL, 6557' KB

LAT: 36° 40.0' Long: 107° 22.0'

Summary:

The San Juan 28-5 Unit #83M was spudded in February of 1999 and was originally completed in the Dakota, Point Lookout, Menefee, Cliff House, and Lewis in four stages. A spinner survey will be run on this well to help quantify the contribution of the Lewis in the 28-5 Unit. This data, along with data from other spinner surveys and the Shale Data Wells, will also be used in the completion design optimization of the Lewis.

Procedure:

1. Comply with all NMOCD, BLM, and BR regulations. Conduct daily safety meetings for all personnel on location.

DO NOT KILL WELL. ANY FLUIDS USED IN WELLBORE WILL INVALIDATE DATA. IF FLUIDS ARE REQUIRED, CONTACT MICHELE QUISEL TO DISCUSS ALTERNATIVES.

2. Inspect location and wellhead and install rig anchors prior to rig move if needed.
3. RU slickline unit. RIH w/ slickline and set tubing choke in SN @ 7825' (1.76" ID). RD slickline unit.
4. MIRU. Check all safety equipment to insure proper location and working order. ND wellhead and NU BOP, spool, stripping head and blocie line to pit. Continue to flow well through casing valve. Flow well through casing valve and blow well through blooie line to pit.
5. Strip 251 jts. 2-3/8" 4.7# J-55 tubing through stripping head and stand back. SI rams on BOP. ND stripping head. Place well back on production down the line.

THE WELL WILL REMAIN ON PRODUCTION DURING THE ENTIRE SPINNER SURVEY.

6. RU Schlumberger and full lubricator. Open rams on BOP and RIH w/ spinner flowmeter tool/GR/CCL/Gradio. Correlate depth to GR/CCL logs provided by the engineer on location.
7. Take spinner survey readings at the following stations:

• Station #1	4250'	Top of Navajo City
• Station #2	4450'	Top of Otero Chacra
• Station #3	4600'	Top of Middle Bench
• Station #4	5030'	Top of Upper Cliff House
• Station #5	5240'	Top of Massive Cliff House
• Station #6	6050'	Top of Dakota

San Juan 28-5 Unit #83M

Unit C, Section 16, T28N, R05W

Rio Arriba County, New Mexico

Elevation 6545' GL, 6557' KB

LAT: 36° 40.0' Long: 107° 22.0'

8. Tag bottom w/ spinner tool. POOH w/ spinner flowmeter tool/GR/CCL/Gradio and SI rams on BOP. RD and release Schlumberger.
- 9A. If fill, TIH w/ 3-7/8" bit and CO to PBTD. TOOH.
9. NU stripping head. Open rams on BOP. Strip 251jts. 2-3/8" 4.7# J-55 tubing w/ expendable check and seating nipple one joint off bottom and land tubing @ 7856'. ND stripping head, BOP, spool, and blooie line. NU wellhead. Pump off expendable check. Place well on production. RD and release rig.

Recommend: Michele Quisel
Production Engineer 8-11-99

Approve: Bruce D. Boyer 8-13-99
Drilling Superintendent

Approve: Steve Campbell 8/12/99
Team Leader

Vendors:

Wireline: Schlumberger 328-5006

Michele Quisel	Office: 324-6162	Pager: 326-8196	Home: 564-9097
Steve Campbell	Office: 326-9546	Pager: 564-1902	Home: 325-8218
Hans Dube	Office: 326-9555		Home: 564-9401
Glen Christiansen	Office: 326-9733		Home: 327-5089

San Juan 28-5 Unit #83M

790' FNL, 1815' FWL

Unit C Sec. 16, T-28 R-05W

Rio Arriba County, New Mexico

KB 6557

GL 6545

LAT: 36 40.0'

LONG: 107 22.0'

9-5/8" 32.3# H-40
275 sks TOC circ

239

8-3/4" Hole
7" 23 # J-55
440sx

TOC circ


3280

3646

6-1/4" Hole
4-1/2" 10.5# J-55
495 sks TOC 3470' by CBL
Liner: 3280 to 7905

Tubing: 2-3/8" 4.7# J-55 EUE
@ 7856

P3TD 7903
TD 7910

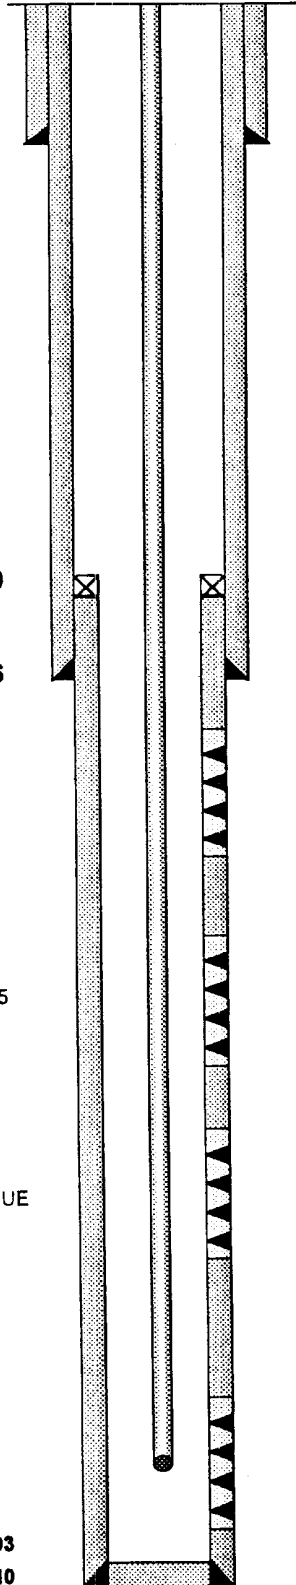

Formation Tops

Ojo Alamo	2772
Kirtland Shale	2890
Fruitland Coal	2995
Pictured Cliffs	3460
Lewis	3582
Huer. Bent.	4088
Navajo City	4198
Otero Chacra	4450
Middle Bench	4605
Upper Cliff House	5043
Massive Cliff House	5295
Menefee	5335
Point Lookout	5618
Mancos	6047
Galup	6845
Greenhorn	7592
Dakota	7768

Lewis:

4259, 62, 64, 66, 4350, 52, 54, 56, 58, 4484, 86, 88, 92, 94,
4618, 20, 22, 30, 32, 4756, 58, 60, 62, 64
Frac w/ 70Q Foam, 200,000# 20/40 sand

Upper Menefee--Cliff House

4860, 77, 94, 4901, 5009, 54, 65, 76, 89, 98, 5117, 31, 42, 70, 79,
5200, 15, 60, 77, 88, 99, 5315, 37, 49, 60, 90, 5402, 10, 45
Frac w/ SW, 100,000 # 20/40 sand

Point Lookout--Lower Menefee:

5500, 09, 31, 44, 70, 5621, 41, 59, 72, 5702, 27, 45, 56, 63, 73,
5806, 60, 76, 5905, 33, 47, 98
Frac w/ SW, 100,000 # 20/40 sand

Dakota:

7710-7806, 7784-7806, 7830-7886 w/ 1 SPF

Frac w/ SW & 40,000# 40/70 & 47,000 20/40 TLC sand