

P. O. Box 965
Farmington, New Mexico

July 31, 1956

Standard Oil & Gas Company
P. O. Box 487
Farmington, New Mexico

Re: Santa Fe 077973
Gentlemen:

Your "Subsequent Report of Abandonment" dated August 6, 1956, covering your well No. 1 R. H. Newman, located in the SE 1/4 sec. 31, T. 27 N., R. 13 W., M.M.P.H., San Juan County, New Mexico, is hereby approved.


Very truly yours,

(Orig. Sgd.) P. T. McGRATH

P. T. McGrath
District Engineer

P.T. McGrath:al

Inspected by:
P.T. McGrath
July 31, 1956

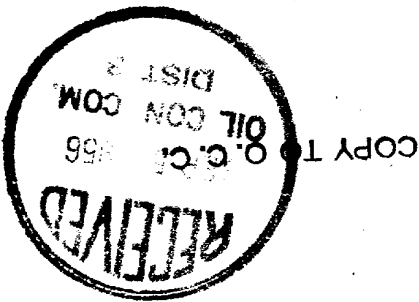



SEP 21 1950
F. I. McGraw
Hawthorne, Pa.

RECEIVED

RECEIVED
F. I. McGraw

SEP 21 1950

RECEIVED

RECEIVED

RECEIVED

RECEIVED

RECEIVED


RECEIVED

RECEIVED

RECEIVED
F. I. McGraw
Hawthorne, Pa.

RECEIVED

RECEIVED
F. I. McGraw



(SUBMIT IN TRIPLICATE)
**UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY**

Land Office Santa Fe
Lease No. 077973
Unit R. H. Newman

SUNDRY NOTICES AND REPORTS ON WELLS

RECEIVED
AUG 9 1956

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT	X
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Farmington, New Mexico August 6, 19 56

Well No. 1 is located 660 ft. from S line and 660 ft. from E line of sec. 31

SE/4 of Section 31 T-27-N R-13-W KMPH
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Wilcat San Juan New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 6185 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

On May 31, 1956, this well was plugged as follows: sixty sack plugs were set at 5900 to 5738 feet, 4150 to 3988 feet, 2150 to 1988 feet; seventy sack plug was set at 1400 to 1215 feet; fifty sack plug was set at 525 to 399 feet. A ten sack cement plug was set at surface and a four foot marker erected. The hole was filled with mud between the plugs. Ground was restored to original contours.



I understand that this plan of work must receive approval in writing by the Geological Survey before operation is recommended.

Company STANDARD OIL & GAS COMPANY

Address Farmington, New Mexico

By J. S. G. Smith

Title Field Clerk




A blank 10x10 grid for graphing, consisting of 10 columns and 10 rows of squares.

LOCATE WELL CORRECTLY

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

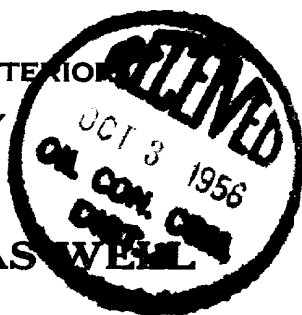

Company W. H. HARRIS Address Box 487, Farmington, New Mexico
 Lessor or Tract E. H. NEWMAN Field Wildcat State New Mexico
 Well No. 1 Sec. 31 T. 27N R. 13W Meridian NMPN County San Juan
 Location 660 ft. N. of 3 Line and 660 ft. SE of E Line of Section 31 Elevation 6185

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Date August 6, 1956 Title Field Clerk

The summary on this page is for the condition of the well at above date.

Commenced drilling April 25, 1956 Finished drilling May 25, 1956

OIL OR GAS SANDS OR ZONES
(Denote gas by (g))

No. 1, from ----- to -----

No. 2, from ----- to -----

No. 3, from ----- to -----

No. 4, from ----- to -----

No. 5, from ----- to -----

No. 6, from ----- to -----

IMPORTANT WATER SANDS

No. 1, from _____ to _____

No. 2, from _____ to _____

No. 3, from _____ to _____

No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
9-5/8"	36#	SRT	National	\$25	Quids				Surface
							2 - 43094-S	1 - 43095-S	

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
9-5/8"	525'	260	Circulated		

PLUGS AND ADAPTERS

Heaving plug—Material	Length	Depth set
Adapters—Material	Size	

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

TOOLS USED

Rotary tools were used from 0 feet to 613 feet, and from _____ feet to _____ feet

Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

-----May 31,-----, 1956----- The production for the first 24 hours was ----- emulsion; -----% water; and -----% sediment. If gas well, cu. ft. per 24 hours ----- Rock pressure, lbs. per sq. in. -----	Put to producing Plugged & Abandoned, 19----- ----- barrels of fluid of which -----% was oil; -----% Gravity, °Bé. ----- Gallons gasoline per 1,000 cu. ft. of gas -----
--	---

EMPLOYEES

----- **G. R. Rogers** -----, Driller
----- **J. A. Gray** -----, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	1090	1090	Surface sand and shale Ojo-Alamo-Kirtland
1090	1335	245	Fruitland Coal and HELEN Shale
1335	1372	37	Pictured Cliffs Sand
1372	2790	1418	Lewis Sand and Shale
2790	2866	76	Cliffhouse Sand and Shale
2866	3890	1024	Manatee Shale
3890	4012	122	Point Lookout Sand.
4012	5877	1865	Maneas Shale
5877	6050	173	Dakota
6050	6102	52	Morrison

FROM—
TO—
TOTAL FEET
[OVER]


10-48004-3

LEASE OR PERMIT TO PROSPECT
SERIAL NUMBER
U.S. LAND OFFICE



UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

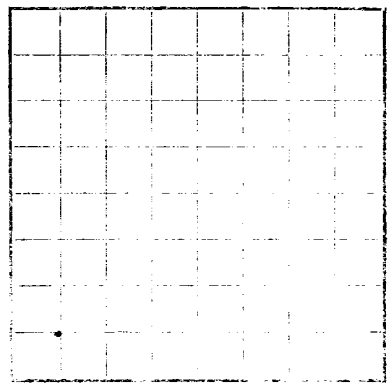

LOCATE WELL CORRECTLY

Completed drilling _____ ADP-1 SS. 10 SS Finished drilling _____ May SS, 1956

The summary on this page is for the condition of the well at above date.

Date _____ ADP-1 SS, 1956 Title _____

Signed _____

so far as can be determined from all available records

The information given herewith is a complete and correct record of the well and all work done thereon

located _____ of _____ and _____ of _____

Well No. _____ Sec. 31 T. 27S R. 18E Attention _____ County _____ State _____

Location of Plant _____

Company and address _____ Address _____ Box 457, Farmington, New Mexico

On April 25, 1956, this well was spudded and 9-5/8" casing landed at 525 feet, cemented with 260 sacks. After waiting on cement for 24 hours, casing and water shut off were tested with 600 pounds for 30 minutes with no drop in pressure. Drilling operations were resumed.

On May 31, 1956, this well was plugged as follows: sixty sack plugs were set at 5900 to 5738 feet, 4150 to 3968 feet, 2150 to 1968 feet; seventy sack plug was set at 1400 to 1215 feet; fifty sack plug was set at 525 to 399 feet. A ten sack cement plug was set at surface and a four-foot marker erected. The hole was filled with mud between the plugs. Ground was restored to original contours.

HISTORY OF OIL OR GAS WELL

7-12	7-11	7-10	7-9	7-8	7-7	7-6	7-5	7-4	7-3	7-2	7-1
It is of the greatest importance to have a complete history of the well. Please state in detail the dates of redrilling, together with the reasons for the work and its results. If there were any changes made in the casing, state fully, and if any casing was "sidetracked" or left in the well, give the size and location. If the well has been dismantled, state date, etc., position, and number of shots. If plugs or bridges were put in to seal for water, state kind of material used, position, and results of pumping or pulling.											

[illegible]

FORMATION RECORD—Continued