


U. S. LAND OFFICE **Santa Fe**
SERIAL NUMBER **S. F. 081067**
LEASE OR PERMIT TO PROSPECT

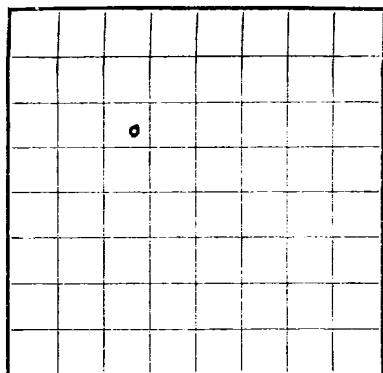

LOCATE WELL CORRECTLY

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

C. A. McAdams

LOG OF OIL OR GAS WELL

Company **Skelly Oil Company** Address **Box 426, Farmington, New Mexico**
Lessor or Tract **C. A. McAdams** Field **Fulcher Kutz** State **New Mexico**
Well No. **1** Sec. **34** T. **27N** R. **10W** Meridian **N. M. P. M.** County **San Juan**
Location **1750** ft. ^{N.} of **N** Line and **1750** ft. ^{E.} of **W** Line of **Section 34** Elevation **6735** ft.
(Derrick floor relative to level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed **J. E. Cooper**

Date **March 19, 1953** Title **District Foreman**

The summary on this page is for the condition of the well at above date.

Commenced drilling **January 7, 1953** Finished drilling **January 13, 1953**

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from **None** to _____ No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from **None** to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
10-3/4"	40.5	8R	H-40	125'	Guide				
7"	26	Speedite	J-55	882'	Comb.				
7"	23	8R	J-55	1591'	Guide & Float				

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
10-3/4"	131'	100	Circulated		
7"	2412'	150	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
5" x 30'	I	Du Pont SOWE #1	262 lbs.	2-16-53	2420-2470'	2470'

TOOLS USED

Rotary tools were used from **0'** feet to **2502'** feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

Put to producing _____, 19____
March 3, 1953
The production for the first 24 hours was _____ barrels of fluid of which _____% was oil; _____% emulsion; _____% water; and _____% sediment. Gravity, °Bé. _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____ **Dry Hole**

EMPLOYEES

_____, Driller _____, Driller
Murray-Gray Drilling Company, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0'	1547'	1547'	Sand and Shale
1547'	2210'	663'	Kirtland
2210'	2409'	199'	Fruitland
2409'	2458'	49'	Pictured Cliffs
2458'	2502' 1/2		Lewis

