

U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Well Name: WELLER 21 16 FEDERAL COM	Well Location: T25S / R27E / SEC 21 / NWSE / 32.112118 / -104.194767	County or Parish/State: EDDY / NM
Well Number: 276H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM107369	Unit or CA Name: WHITE CITY 21 25 27 FED COM 5H	Unit or CA Number: NMNM135707
US Well Number: 3001556280	Operator: CHEVRON USA INCORPORATED	

Notice of Intent

Sundry ID: 2886329

Type of Submission: Notice of Intent

Type of Action: APD Change

Date Sundry Submitted: 12/10/2025

Time Sundry Submitted: 12:40

Date proposed operation will begin: 12/09/2025

Procedure Description: CHEVRON USA, INC. REQUESTS THE FOLLOWING: WELLER 21 16 FEDERAL COM 276H / API # 30-015-56280 CHEVRON REQUESTS TO MOVE THE WELL FROM THE E/2 E/2 OF SECTIONS 21&16 TO THE W/2 E/2 OF SECTIONS 21&16 (PLEASE SEE ATTACHED C-102'S AND DIRECTIONAL DRILLING SURVEY) CHEVRON REQUESTS TO CHANGE THE WELLER 21 16 FEDERAL COM 276H FROM INFILL WELL TO DEFINING WELL CHEVRON REQUESTS TO CHANGE THE DRILLING DESIGN FROM FOUR-STRING DESIGN TO THREE-STRING DESIGN (PLEASE SEE ATTACHED REVISED 9-POINT)

NOI Attachments

Procedure Description

ALL__WELLER_21_16_FEDERAL_COM_276H_20251210124046.pdf

Well Name: WELLER 21 16 FEDERAL COM

Well Location: T25S / R27E / SEC 21 / NWSE / 32.112118 / -104.194767

County or Parish/State: EDDY 7 NM

Well Number: 276H

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM107369

Unit or CA Name: WHITE CITY 21 25 27 FED COM 5H

Unit or CA Number: NMNM135707

US Well Number: 3001556280

Operator: CHEVRON USA INCORPORATED

Conditions of Approval

Additional

SEC21_T26SR27E_WELLER_21_16_FED_COM_Eddy__CHEVRON_USA_INCORPORATED_46065_JS_20260212103533.pdf
WELLER_21_16_FED_COM_276H_COAs_20260212103533.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: CAROL ADLER

Signed on: DEC 10, 2025 12:40 PM

Name: CHEVRON USA INCORPORATED

Title: Sr Regulatory Affairs Coordinator

Street Address: 6301 DEAUVILLE BLVD

City: MIDLAND **State:** TX

Phone: (432) 687-7148

Email address: CAROLADLER@CHEVRON.COM

Field

Representative Name:

Street Address:

City: **State:** **Zip:**

Phone:

Email address:

BLM Point of Contact

BLM POC Name: CHRISTOPHER WALLS

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5752342234

BLM POC Email Address: CWALLS@BLM.GOV

Disposition: Approved

Disposition Date: 02/12/2026

Signature: Chris Walls

Form 3160-5
(October 2024)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0220
Expires: October 31, 2027

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No. **NMNM107369**

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator **CHEVRON USA INCORPORATED**

3a. Address **PO BOX 1392, BAKERSFIELD, CA 93302** 3b. Phone No. (include area code) **(661) 633-4000**

4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description)
SEC 21/T25S/R27E/NMP

7. If Unit of CA/Agreement, Name and/or No.
WHITE CITY 21 25 27 FED COM 5H/NMNM135707

8. Well Name and No.
WELLER 21 16 FEDERAL COM/276H

9. API Well No. **3001556280**

10. Field and Pool or Exploratory Area
WC-025 G-05 S253307O/WOLFCAMP

11. Country or Parish, State
EDDY/NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input checked="" type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

CHEVRON USA, INC. REQUESTS THE FOLLOWING:

WELLER 21 16 FEDERAL COM 276H / API # 30-015-56280
 CHEVRON REQUESTS TO MOVE THE WELL FROM THE E/2 E/2 OF SECTIONS 21&16 TO THE W/2 E/2 OF SECTIONS 21&16
 (PLEASE SEE ATTACHED C-102'S AND DIRECTIONAL DRILLING SURVEY)
 CHEVRON REQUESTS TO CHANGE THE WELLER 21 16 FEDERAL COM 276H FROM INFILL WELL TO DEFINING WELL
 CHEVRON REQUESTS TO CHANGE THE DRILLING DESIGN FROM FOUR-STRING DESIGN TO THREE-STRING DESIGN
 (PLEASE SEE ATTACHED REVISED 9-POINT)

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)
CAROL ADLER / Ph: (432) 687-7148

Signature (Electronic Submission) _____ Title **Sr Regulatory Affairs Coordinator**

Date **12/10/2025**

THE SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by **CHRISTOPHER WALLS / Ph: (575) 234-2234 / Approved** Title **Petroleum Engineer** Date **02/12/2026**

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Office **CARLSBAD**

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Location of Well

0. SHL: NWSE / 1394 FSL / 2544 FEL / TWSP: 25S / RANGE: 27E / SECTION: 21 / LAT: 32.112118 / LONG: -104.194767 (TVD: 0 feet, MD: 0 feet)

PPP: NENE / 0 FNL / 1260 FEL / TWSP: 25S / RANGE: 27E / SECTION: 21 / LAT: 32.122878 / LONG: -104.190782 (TVD: 7640 feet, MD: 7994 feet)

PPP: SESE / 100 FSL / 1260 FEL / TWSP: 25S / RANGE: 27E / SECTION: 21 / LAT: 32.108619 / LONG: -104.190565 (TVD: 7640 feet, MD: 7994 feet)

PPP: NESE / 1322 FSL / 1260 FEL / TWSP: 25S / RANGE: 27E / SECTION: 21 / LAT: 32.111978 / LONG: -104.190616 (TVD: 7640 feet, MD: 7994 feet)

BHL: NENE / 25 FNL / 1260 FEL / TWSP: 25S / RANGE: 27E / SECTION: 16 / LAT: 32.137342 / LONG: -104.190839 (TVD: 7953 feet, MD: 18580 feet)

SEC21-T26SR27E_WELLER 21 16 FED COM_Eddy__CHEVRON USA INCORPORATED_46065_JS

WELLER 21 16 FED COM

10 3/4		surface csg in a		13 1/2		inch hole.		Design Factors				Surface	
Segment	#/ft	Grade		Coupling	Body	Collapse	Burst	Length	B@s	a-B	a-C	Weight	
"A"	40.50		j 55	btc	34.51	6.38	2.59	450	16	4.31	10.62	18,225	
"B"				btc				0				0	
w/8.4#/g mud, 30min Sfc Csg Test psig: 1,500								Totals:				450	18,225
Comparison of Proposed to Minimum Required Cement Volumes Tail Cmt does not circ to sfc.													
Hole Size	Annular Volume	1 Stage Cmt Sx	1 Stage CuFt Cmt	Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE				Min Dist Hole-Cplg	
13 1/2	0.3637	172	259	164	58	10.60	726	2M				0.88	
Site plat (pipe racks S or E) as per O.O. 1.111 D.4.1: not found.													

8 5/8		casing inside the		10 3/4		Design Factors				Int 1			
Segment	#/ft	Grade		Coupling	Body	Collapse	Burst	Length	B@s	a-B	a-C	Weight	
"A"	32.00		j 55	btc	7.16	2.09	0.95	2,195	3	1.65	3.49	70,240	
"B"								0				0	
w/8.4#/g mud, 30min Sfc Csg Test psig: 1,500								Totals:				2,195	70,240
The cement volume(s) are intended to achieve a top of 0 ft from surface or a 450 overlap.													
Hole Size	Annular Volume	1 Stage Cmt Sx	1 Stage CuFt Cmt	Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE				Min Dist Hole-Cplg	
9 7/8	0.1261	268	524	285	84	10.60	2388	3M				0.13	
D V Tool(s):								sum of sx		Σ CuFt		Σ%excess	
t by stage % :									268	524		84	
Class 'C' tail cmt yld > 1.35													
Burst Frac Gradient(s) for Segment(s): A, B, C, D = 1.79, b, c, d All > 0.70, OK.													

5 1/2		casing inside the		8 5/8		Design Factors				Prod 1			
Segment	#/ft	Grade		Coupling	Body	Collapse	Burst	Length	B@s	a-B	a-C	Weight	
"A"	20.00		p 110	w441	4.04	2.99	3.47	7,929	3	6.01	5.18	158,580	
"B"								0				0	
w/8.4#/g mud, 30min Sfc Csg Test psig: 1,744								Totals:				7,929	158,580
The cement volume(s) are intended to achieve a top of 1995 ft from surface or a 200 overlap.													
Hole Size	Annular Volume	1 Stage Cmt Sx	1 Stage CuFt Cmt	Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE				Min Dist Hole-Cplg	
7 7/8	0.1733	393	1576	1029	53	10.00	2388	3M				1.01	
Class 'C' tail cmt yld > 1.35													

5 1/2		Liner w/top @		7729		Design Factors				Liner			
Segment	#/ft	Grade		Coupling	Body	Collapse	Burst	Length	B@s	a-B	a-C	Weight	
"A"	20.00		p 110	w441	4.02	2.97	3.47	11,022	3	6.01	5.15	220,440	
"B"								0.00				0	
w/8.4#/g mud, 30min Sfc Csg Test psig: 1,754								Totals:				11,022	220,440
The cement volume(s) are intended to achieve a top of 7729 ft from surface or a 200 overlap.													
Hole Size	Annular Volume	1 Stage Cmt Sx	1 Stage CuFt Cmt	Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE				Min Dist Hole-Cplg	
6 3/4	0.0835	1733	2496	896	179	10.00						0.45	
Class 'H' tail cmt yld > 1.20													
Capitan Reef est top XXXX.													

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	CHEVRON USA INCORPORATED
WELL NAME & NO.:	WELLER 21 16 FED COM 276H
LOCATION:	Section 21, T.26 S., R.27 E., NMP
COUNTY:	<input type="text" value="Eddy County, New Mexico"/>

Create COAs

H₂S	Cave / Karst	Waste Prevention Rule
<input type="text" value="Present"/>	<input type="text" value="High"/>	<input type="text" value="Waste Minimization Plan"/>
Potash	R-111-Q Design	
<input type="text" value="None"/>	<input type="text"/>	
Wellhead	Casing	
<input type="text" value="Multibowl"/>	<input type="text" value="4-String Well"/>	
<input checked="" type="checkbox"/> Flex Hose <input checked="" type="checkbox"/> Break Testing	<input checked="" type="checkbox"/> Liner <input type="checkbox"/> Fluid Filled <input checked="" type="checkbox"/> Casing Clearance	
	Cementing	
	<input type="checkbox"/> DV Tool <input type="checkbox"/> Bradenhead <input type="checkbox"/> Echometer <input checked="" type="checkbox"/> Offline Cement <input type="checkbox"/> Open Annulus <input type="checkbox"/> Pilot Hole	
Special Requirements		
<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> Water Disposal	<input checked="" type="checkbox"/> COM <input type="checkbox"/> Unit

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H₂S) Drilling Plan shall be activated AT SPUD. As a result, the Hydrogen Sulfide area must meet 43 CFR part 3170 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

1. The **10-3/4** inch surface casing shall be set at approximately **450** feet (a minimum of **70'** into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface. **Surface hole size can be 13.5 or 17.5 inches**
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic-type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the

- cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or **500 pounds compressive strength**, whichever is greater (including lead cement.)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Operator is approved to use contingency cementing for the Intermediate and Production section. Operator shall notify the BLM before proceeding with contingency operation.

2. The minimum required fill of cement behind the **8-5/8** inch 1st intermediate casing is **cement to surface**. If cement does not circulate, see B.1.a, c-d above.
 - **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry** due to the presence of cave/karst, Capitan Reef, or potash features.
3. The minimum required fill of cement behind the **5-1/2** inch production casing is at least **200 feet** into previous casing string. Operator shall use one of the approved methods for cement verification located in the **General Requirements, Section A.1. Liner hole size can be either 6.75 or 7.875 inches**
 - **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry** due to the presence of cave/karst, Capitan Reef, or potash features.
4. The minimum required fill of cement behind the **5-1/2** inch production liner is **100 feet** into the previous casing. Operator shall use one of the approved methods for cement verification located in the **General Requirements, Section A.1.**

C. PRESSURE CONTROL

1. Operator has proposed a multi-bowl wellhead assembly. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M) psi**
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.

- d. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172 must be followed.
2. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
 3. Break testing has been approved for this well ONLY on those intervals utilizing a 5M BOPE or less. **(Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP.)** If in the event break testing is not utilized, then a full BOPE test would be conducted.
 - a. Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation. **BOPE Break Testing is NOT permitted to drill the production hole section.**
 - b. While in transfer between wells, BOPE shall be secured by the hydraulic carrier or cradle.
 - c. A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).
 - d. As a minimum, a full BOPE test shall be performed at 21-day intervals.
 - e. In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per **43 CFR 3172**. Any well control event while drilling require notification to the BLM Petroleum Engineer (**575-706-2779**) prior to the commencement of any BOPE Break Testing operations.

D. SPECIAL REQUIREMENT(S)

Communitization Agreement:

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in 43 CFR 3171 and 3172.

- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

Offline Cementing

Offline cementing has been approved for **all hole sections, excluding production**. Contact the BLM prior to the commencement of any offline cementing procedure.

Casing Clearance

String does not meet 0.422" clearance requirement per 43 CFR 3172. Cement tieback requirement increased 100' for 1st Intermediate casing tieback. Operator may contact approving engineer to discuss changing casing set depth or grade to meet clearance requirement.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Contact Eddy County Petroleum Engineering Inspection Staff:

Email or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220; [BLM NM CFO DrillingNotifications@BLM.GOV](mailto:BLM_NM_CFO_DrillingNotifications@BLM.GOV); (575) 361-2822

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator proposed to drill multiple wells utilizing a skid / walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - i. Notify the BLM when moving in and removing the Spudder Rig.
 - ii. Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - iii. BOP/BOPE test to be conducted per **43 CFR 3172** as soon as 2nd Rig is rigged up on swell.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will always be operational during

drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the doghouse or stairway area.

3. For intervals in which cement to surface is required, cement to surface should be verified with a visual check and density or pH check to differentiate cement from spacer and drilling mud. The results should be documented in the driller's log and daily reports.

A. CASING & CEMENT

1. The current acceptable methods of cement verification are as follows:
 - i. Observing cement circulated to surface,
 - ii. Cement Bond Log (CBL),
 - iii. Temperature log within 8-10 hours after completing the cement job,
 - iv. Echometer (if a second-stage bradenhead is being utilized and operator was granted approval prior to operations.)
2. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
3. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
5. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Well specific cement details must be onsite prior to pumping the cement for each casing string.
6. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

7. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
8. If hard band drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
9. Whenever a casing string is cemented in the R-111-Q potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR 3172**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - i. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - ii. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - iii. Manufacturer representative shall install the test plug for the initial BOP test.
 - iv. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
 - v. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.

5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - i. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - ii. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (This only applies to single stage cement jobs, prior to the cement setting up.)
 - iii. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - iv. The test shall be run on a 5000-psi chart for a 2-3M BOP/BOP, on a 10000-psi chart for a 5M BOP/BOPE and on a 15000-psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one-hour chart. A circular chart shall have a maximum 2-hour clock. If a twelve hour or twenty-four-hour chart is used, tester shall make a notation that it is run with a two -our clock.
 - v. The results of the test shall be reported to the appropriate BLM office.
 - vi. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
 - vii. The BOP/BOPE test shall include a low-pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.

- viii. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created because of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

Julio Sanchez 2/12/2026

Santa Fe Main Office Phone: (505) 476-3441 Fax: (55) 476-3462 General Information Phone: (505) 629-6116 Online Phone Directory Visit: https://www.emnrd.nm.gov/ocd/contact-us/	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	C-102 Revised July 9, 2024 Submit Electronically via OCD Permitting			
		Submittal Type: <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td><input checked="" type="checkbox"/> Initial Submittal</td> </tr> <tr> <td><input type="checkbox"/> Amended Report</td> </tr> <tr> <td><input type="checkbox"/> As Drilled</td> </tr> </table>	<input checked="" type="checkbox"/> Initial Submittal	<input type="checkbox"/> Amended Report	<input type="checkbox"/> As Drilled
<input checked="" type="checkbox"/> Initial Submittal					
<input type="checkbox"/> Amended Report					
<input type="checkbox"/> As Drilled					

WELL LOCATION INFORMATION

API Number 30-015-56280	Pool Code - 30216	Pool Name - HAY HALLOW; BONE SPRING, NORTH
Property Code N/A	Property Name - WELLER 21 16 FEDERAL COM	Well Number - 276H
OGRID No. - 4323	Operator Name - CHEVRON U.S.A. INC.	Ground Level Elevation 3102'
Surface Owner: <input type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input checked="" type="checkbox"/> Federal		Mineral Owner: <input type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input checked="" type="checkbox"/> Federal

Surface Location

UL K	Section 21	Township 25 SOUTH	Range 27 EAST, N.M.P.M.	Lot N/A	Ft. from N/S 1394' SOUTH	Ft. from E/W 2325' WEST	Latitude 32.112101° N	Longitude 104.196082° W	County EDDY
------	------------	-------------------	-------------------------	---------	--------------------------	-------------------------	-----------------------	-------------------------	-------------

Bottom Hole Location

UL B	Section 16	Township 25 SOUTH	Range 27 EAST, N.M.P.M.	Lot N/A	Ft. from N/S 25' NORTH	Ft. from E/W 1647' EAST	Latitude 32.137325° N	Longitude 104.192090° W	County EDDY
------	------------	-------------------	-------------------------	---------	------------------------	-------------------------	-----------------------	-------------------------	-------------

Dedicated Acres 320	Infill or Defining Well DEFINING	Defining Well API - 30-015-56280	Overlapping Spacing Unit (Y/N) YES	Consolidation Code P
Order Numbers- N/A			Well setbacks are under Common Ownership: <input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> N/A	

Kick Off Point (KOP)

UL O	Section 21	Township 25 SOUTH	Range 27 EAST, N.M.P.M.	Lot N/A	Ft. from N/S 100' SOUTH	Ft. from E/W 1647' EAST	Latitude 32.108602° N	Longitude 104.191816° W	County EDDY
------	------------	-------------------	-------------------------	---------	-------------------------	-------------------------	-----------------------	-------------------------	-------------

First Take Point (FTP)

UL O	Section 21	Township 25 SOUTH	Range 27 EAST, N.M.P.M.	Lot N/A	Ft. from N/S 100' SOUTH	Ft. from E/W 1647' EAST	Latitude 32.108602° N	Longitude 104.191816° W	County EDDY
------	------------	-------------------	-------------------------	---------	-------------------------	-------------------------	-----------------------	-------------------------	-------------

Last Take Point (LTP)

UL B	Section 16	Township 25 SOUTH	Range 27 EAST, N.M.P.M.	Lot N/A	Ft. from N/S 100' NORTH	Ft. from E/W 1647' EAST	Latitude 32.137127° N	Longitude 104.192089° W	County EDDY
------	------------	-------------------	-------------------------	---------	-------------------------	-------------------------	-----------------------	-------------------------	-------------

Unitized Area or Area of Uniform Interest PENDING	Spacing Unit Type <input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical	Ground Floor Elevation: 3102'
--	--	-------------------------------

OPERATOR CERTIFICATIONS

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.

Carol Adler 11/19/2025

Signature

Date

Carol Adler

Printed Name

caroladler@chevron.com

Email Address

SURVEYOR CERTIFICATIONS

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

See Sheet 2 of 2 for plat.

Signature and Seal of Professional Surveyor

Certificate Number

Date of Survey

March 27, 2024

T:\2023\2236832\DWG\Weller 21 16 Federal Com 276H C-102(Sec. 21).dwg

ACREAGE DEDICATION PLATS

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

See Sheet 1 of 2 for notes & certification.

PROPOSED BOTTOM HOLE LOCATION

X = 543,872.87' (NAD27 NM E)
Y = 413,665.66'
LAT. 32.137204° N (NAD27)
LONG. 104.191594° W
X = 585,055.83' (NAD83/2011 NM E)
Y = 413,723.28'
LAT. 32.137325° N (NAD83/2011)
LONG. 104.192090° W

PROPOSED LAST TAKE POINT

X = 543,873.20' (NAD27 NM E)
Y = 413,593.37'
LAT. 32.137005° N (NAD27)
LONG. 104.191593° W
X = 585,056.17' (NAD83/2011 NM E)
Y = 413,650.99'
LAT. 32.137127° N (NAD83/2011)
LONG. 104.192089° W

PROPOSED MID POINT/PPP #4

X = 543,897.24' (NAD27 NM E)
Y = 408,405.36'
LAT. 32.122743° N (NAD27)
LONG. 104.191538° W
X = 585,080.30' (NAD83/2011 NM E)
Y = 408,462.89'
LAT. 32.122865° N (NAD83/2011)
LONG. 104.192033° W

PPP #3

X = 543,934.95' (NAD27 NM E)
Y = 405,761.60'
LAT. 32.115475° N (NAD27)
LONG. 104.191427° W
X = 585,118.07' (NAD83/2011 NM E)
Y = 405,819.09'
LAT. 32.115597° N (NAD83/2011)
LONG. 104.191923° W

PPP #2

X = 543,953.83' (NAD27 NM E)
Y = 404,439.33'
LAT. 32.111840° N (NAD27)
LONG. 104.191372° W
X = 585,136.96' (NAD83/2011 NM E)
Y = 404,496.79'
LAT. 32.111962° N (NAD83/2011)
LONG. 104.191867° W

PROPOSED KICK OFF POINT/ PROPOSED FIRST TAKE POINT

X = 543,971.27' (NAD27 NM E)
Y = 403,217.13'
LAT. 32.108480° N (NAD27)
LONG. 104.191321° W
X = 585,154.43' (NAD83/2011 NM E)
Y = 403,274.56'
LAT. 32.108602° N (NAD83/2011)
LONG. 104.191816° W

PPP #1


X = 542,722.40' (NAD27 NM E)
Y = 404,418.61'
LAT. 32.111788° N (NAD27)
LONG. 104.195349° W
X = 583,905.51' (NAD83/2011 NM E)
Y = 404,476.05'
LAT. 32.111909° N (NAD83/2011)
LONG. 104.195845° W

WELLER 21 16 FEDERAL COM NO. 276H WELL

X = 542,648.93' (NAD27 NM E)
Y = 404,488.32'
LAT. 32.111980° N (NAD27)
LONG. 104.195586° W
X = 583,832.04' (NAD83/2011 NM E)
Y = 404,545.76'
LAT. 32.112101° N (NAD83/2011)
LONG. 104.196082° W

CORNER COORDINATES TABLE (NAD 27)

A- Y= 413654.70, X= 540232.49
B- Y= 413668.74, X= 541554.29
C- Y= 413682.78, X= 542876.08
D- Y= 413696.82, X= 544197.88
E- Y= 413710.86, X= 545519.67
F- Y= 408353.74, X= 540251.14
G- Y= 408372.47, X= 541574.37
H- Y= 408391.21, X= 542897.61
I- Y= 408409.94, X= 544220.85
J- Y= 408428.67, X= 545544.09
K- Y= 403053.05, X= 540350.85
L- Y= 403076.38, X= 541667.43
M- Y= 403099.71, X= 542984.01
N- Y= 403122.93, X= 544301.74
O- Y= 403146.16, X= 545619.46

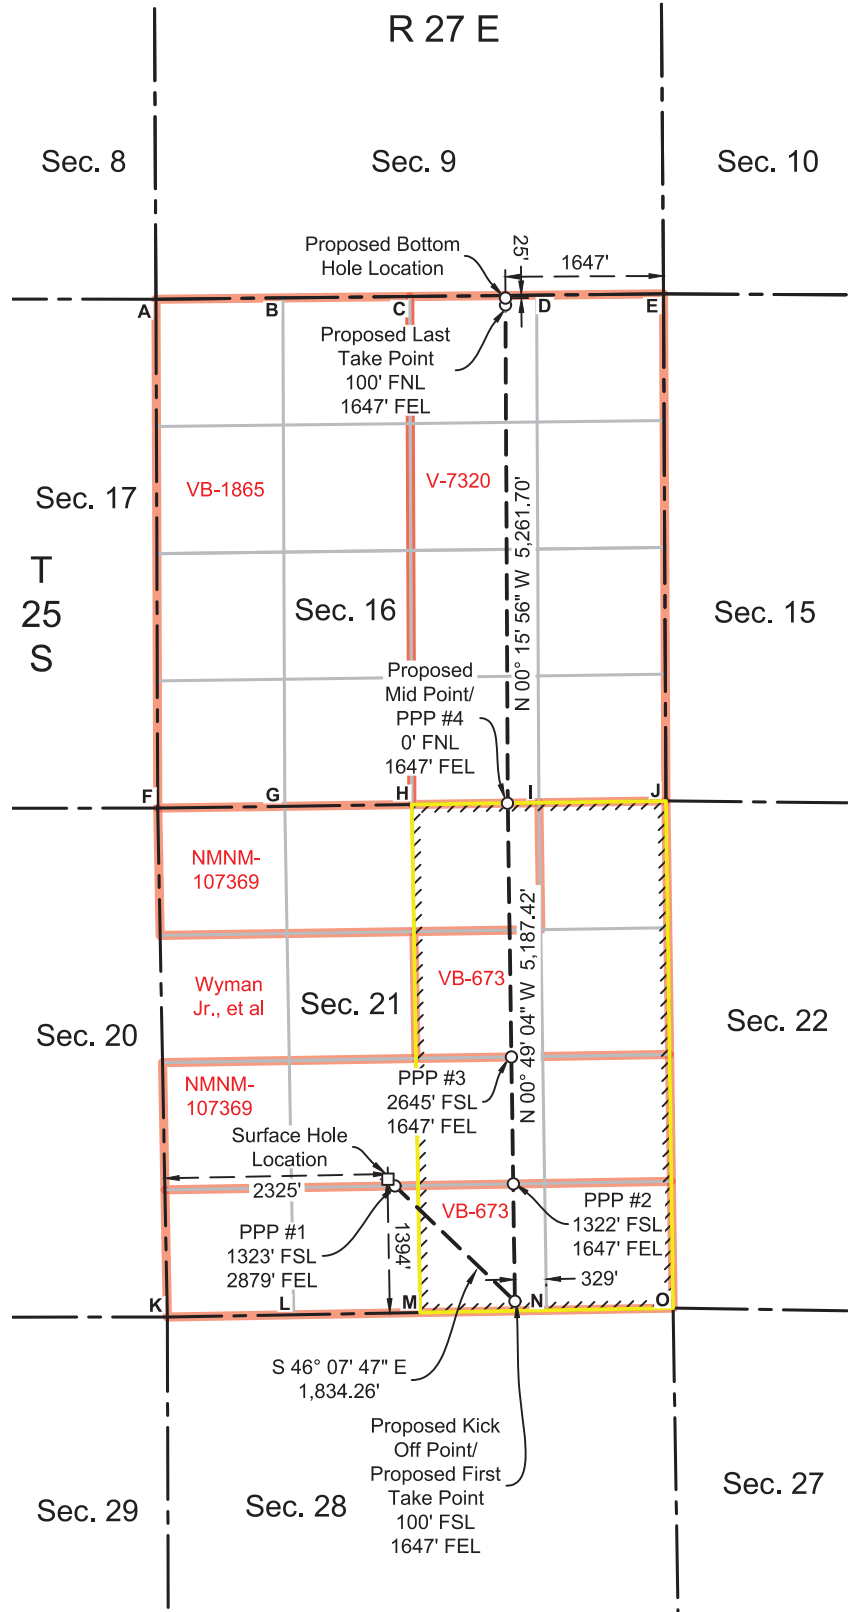

T:\2023\2236832\DWG\Weller_21_16_Federal_C-102(Sec. 21).dwg

Santa Fe Main Office Phone: (505) 476-3441 Fax: (55) 476-3462 General Information Phone: (505) 629-6116 Online Phone Directory Visit: https://www.emnrd.nm.gov/ocd/contact-us/	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	C-102 Revised July 9, 2024 Submit Electronically via OCD Permitting			
		Submittal Type: <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td><input checked="" type="checkbox"/> Initial Submittal</td> </tr> <tr> <td><input type="checkbox"/> Amended Report</td> </tr> <tr> <td><input type="checkbox"/> As Drilled</td> </tr> </table>	<input checked="" type="checkbox"/> Initial Submittal	<input type="checkbox"/> Amended Report	<input type="checkbox"/> As Drilled
<input checked="" type="checkbox"/> Initial Submittal					
<input type="checkbox"/> Amended Report					
<input type="checkbox"/> As Drilled					

WELL LOCATION INFORMATION

API Number 30-015-56280	Pool Code - 97816	Pool Name - WC-015 G-02 S252715A; BONE SPRING
Property Code N/A	Property Name - WELLER 21 16 FEDERAL COM	Well Number - 276H
OGRID No. - 4323	Operator Name - CHEVRON U.S.A. INC.	Ground Level Elevation 3102'
Surface Owner: <input type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input checked="" type="checkbox"/> Federal		Mineral Owner: <input checked="" type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input type="checkbox"/> Federal

Surface Location

UL K	Section 21	Township 25 SOUTH	Range 27 EAST, N.M.P.M.	Lot N/A	Ft. from N/S 1394' SOUTH	Ft. from E/W 2325' WEST	Latitude 32.112101° N	Longitude 104.196082° W	County EDDY
------	------------	-------------------	-------------------------	---------	--------------------------	-------------------------	-----------------------	-------------------------	-------------

Bottom Hole Location

UL B	Section 16	Township 25 SOUTH	Range 27 EAST, N.M.P.M.	Lot N/A	Ft. from N/S 25' NORTH	Ft. from E/W 1647' EAST	Latitude 32.137325° N	Longitude 104.192090° W	County EDDY
------	------------	-------------------	-------------------------	---------	------------------------	-------------------------	-----------------------	-------------------------	-------------

Dedicated Acres 320	Infill or Defining Well DEFINING	Defining Well API - 30-015-56280	Overlapping Spacing Unit (Y/N) YES	Consolidation Code P
Order Numbers- N/A			Well setbacks are under Common Ownership: <input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> N/A	

Kick Off Point (KOP)

UL O	Section 21	Township 25 SOUTH	Range 27 EAST, N.M.P.M.	Lot N/A	Ft. from N/S 100' SOUTH	Ft. from E/W 1647' EAST	Latitude 32.108602° N	Longitude 104.191816° W	County EDDY
------	------------	-------------------	-------------------------	---------	-------------------------	-------------------------	-----------------------	-------------------------	-------------

First Take Point (FTP)

UL O	Section 21	Township 25 SOUTH	Range 27 EAST, N.M.P.M.	Lot N/A	Ft. from N/S 100' SOUTH	Ft. from E/W 1647' EAST	Latitude 32.108602° N	Longitude 104.191816° W	County EDDY
------	------------	-------------------	-------------------------	---------	-------------------------	-------------------------	-----------------------	-------------------------	-------------

Last Take Point (LTP)

UL B	Section 16	Township 25 SOUTH	Range 27 EAST, N.M.P.M.	Lot N/A	Ft. from N/S 100' NORTH	Ft. from E/W 1647' EAST	Latitude 32.137127° N	Longitude 104.192089° W	County EDDY
------	------------	-------------------	-------------------------	---------	-------------------------	-------------------------	-----------------------	-------------------------	-------------

Unitized Area or Area of Uniform Interest PENDING	Spacing Unit Type <input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical	Ground Floor Elevation: 3102'
--	--	-------------------------------

OPERATOR CERTIFICATIONS

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.

Carol Adler 11/19/2025

Signature _____ Date _____

Carol Adler

Printed Name _____


caroladler@chevron.com

Email Address _____

SURVEYOR CERTIFICATIONS

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

See Sheet 2 of 2 for plat.

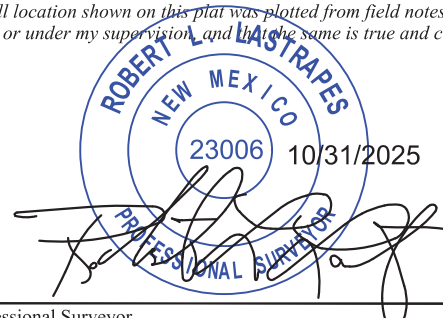

Signature and Seal of Professional Surveyor _____

Certificate Number	Date of Survey
	March 27, 2024

T:\2023\2226832\DWG\Weller 21 16 Federal Com 276H C-102(Sec. 16).dwg

ACREAGE DEDICATION PLATS

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

See Sheet 1 of 2 for notes & certification.

PROPOSED BOTTOM HOLE LOCATION

X = 543,872.87' (NAD27 NM E)
Y = 413,665.64'
LAT. 32.137204° N (NAD27)
LONG. 104.191594° W
X = 585,055.83' (NAD83/2011 NM E)
Y = 413,723.26'
LAT. 32.137325° N (NAD83/2011)
LONG. 104.192090° W

PROPOSED LAST TAKE POINT

X = 543,873.19' (NAD27 NM E)
Y = 413,593.37'
LAT. 32.137005° N (NAD27)
LONG. 104.191593° W
X = 585,056.16' (NAD83/2011 NM E)
Y = 413,650.99'
LAT. 32.137127° N (NAD83/2011)
LONG. 104.192089° W

PROPOSED MID POINT/PPP #4

X = 543,897.24' (NAD27 NM E)
Y = 408,405.36'
LAT. 32.122743° N (NAD27)
LONG. 104.191538° W
X = 585,080.30' (NAD83/2011 NM E)
Y = 408,462.89'
LAT. 32.122865° N (NAD83/2011)
LONG. 104.192033° W

PPP #3

X = 543,934.95' (NAD27 NM E)
Y = 405,761.60'
LAT. 32.115475° N (NAD27)
LONG. 104.191427° W
X = 585,118.06' (NAD83/2011 NM E)
Y = 405,819.09'
LAT. 32.115597° N (NAD83/2011)
LONG. 104.191923° W

PPP #2

X = 543,953.83' (NAD27 NM E)
Y = 404,439.33'
LAT. 32.111840° N (NAD27)
LONG. 104.191372° W
X = 585,136.96' (NAD83/2011 NM E)
Y = 404,496.79'
LAT. 32.111962° N (NAD83/2011)
LONG. 104.191867° W

PROPOSED KICK OFF POINT/ PROPOSED FIRST TAKE POINT

X = 543,971.27' (NAD27 NM E)
Y = 403,217.10'
LAT. 32.108480° N (NAD27)
LONG. 104.191321° W
X = 585,154.43' (NAD83/2011 NM E)
Y = 403,274.54'
LAT. 32.108602° N (NAD83/2011)
LONG. 104.191816° W

PPP #1


X = 542,722.46' (NAD27 NM E)
Y = 404,418.55'
LAT. 32.111788° N (NAD27)
LONG. 104.195349° W
X = 583,905.57' (NAD83/2011 NM E)
Y = 404,476.00'
LAT. 32.111909° N (NAD83/2011)
LONG. 104.195845° W

WELLER 21 16 FEDERAL COM NO. 276H WELL

X = 542,648.93' (NAD27 NM E)
Y = 404,488.30'
LAT. 32.111980° N (NAD27)
LONG. 104.195586° W
X = 583,832.04' (NAD83/2011 NM E)
Y = 404,545.74'
LAT. 32.112101° N (NAD83/2011)
LONG. 104.196082° W

CORNER COORDINATES TABLE (NAD 27)

A- Y= 413654.70, X= 540232.49
B- Y= 413668.74, X= 541554.29
C- Y= 413682.78, X= 542876.08
D- Y= 413696.82, X= 544197.88
E- Y= 413710.86, X= 545519.67
F- Y= 408353.74, X= 540251.14
G- Y= 408372.47, X= 541574.37
H- Y= 408391.21, X= 542897.61
I- Y= 408409.94, X= 544220.85
J- Y= 408428.67, X= 545544.09
K- Y= 403053.05, X= 540350.85
L- Y= 403076.38, X= 541667.43
M- Y= 403099.71, X= 542984.01
N- Y= 403122.93, X= 544301.74
O- Y= 403146.16, X= 545619.46

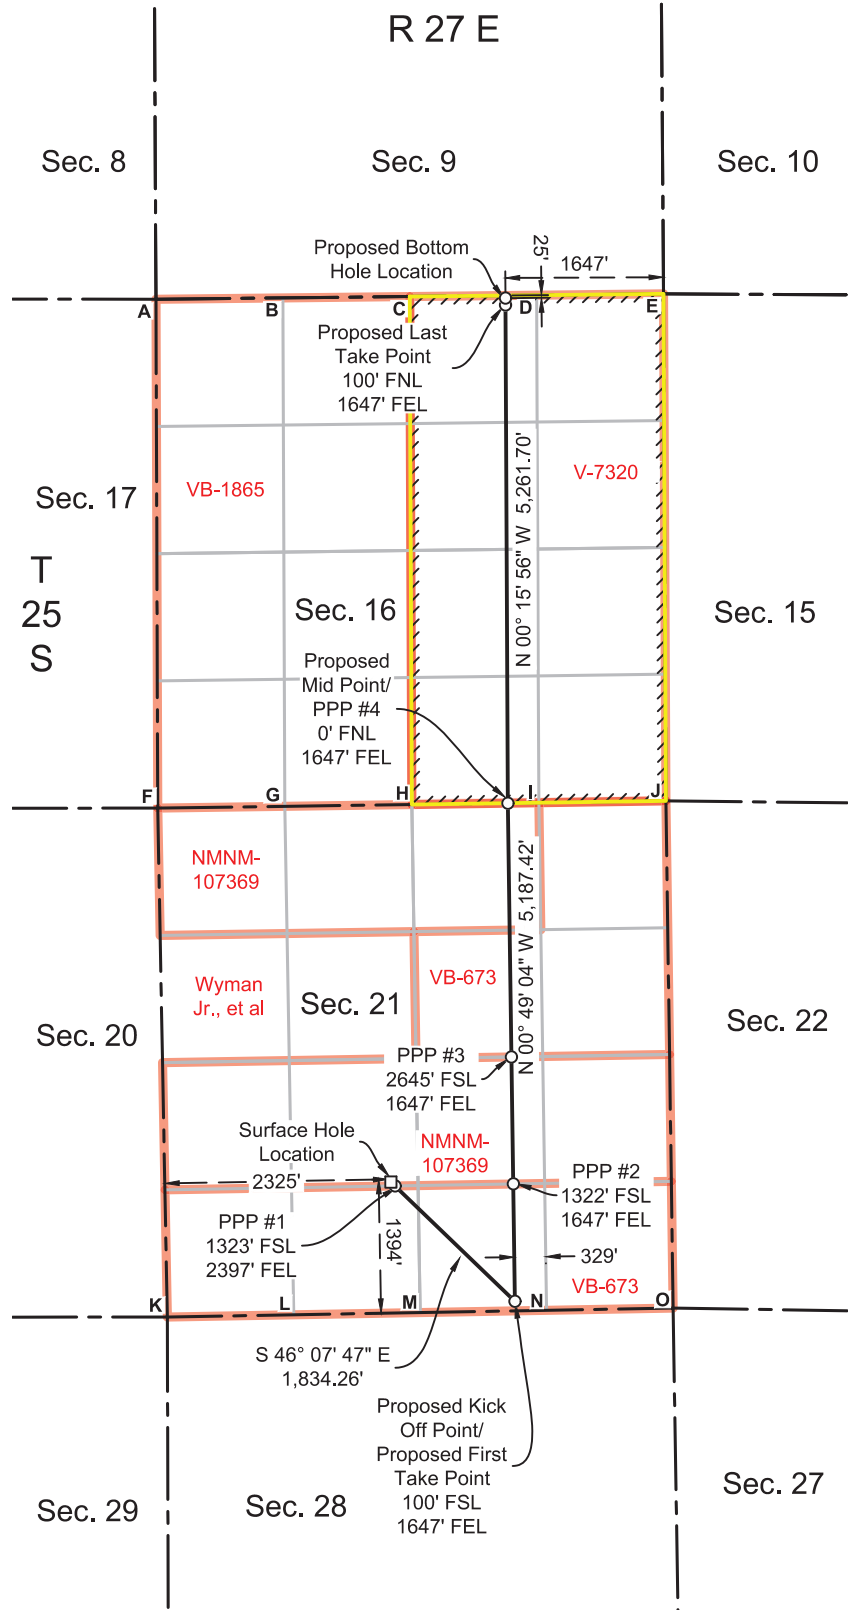

T:\2023\22236832\DWG\Weller-21 16 Federal Com 276H C-102(Sec. 16).dwg



Weller 21 16 Federal Com No. 276H R2 mdv 13Nov25 Proposal Geodetic



Report
Def Plan

Report Date: November 13, 2025 - 10:15 PM (UTC 0)
Client: Chevron
Field: Nk Esby County (NAD 27 EZ)
Structure / Slot: Chevron HNM Pad 64 (Weller) / 276H
Well: Weller 21 16 Federal Com No. 276H
Borehole: Weller 21 16 Federal Com No. 276H
UBH / APH: Unknown / Unknown
Survey Name: Weller 21 16 Federal Com No. 276H R2 mdv 13Nov25
Survey Date: November 13, 2025
Tort / AHD / DDI / ERD Ratio: 134.166 * / 12370.015 ft / 6.587 / 1.550
Coordinate Reference System: NAD27 New Mexico State Plane, Eastern Zone, US Feet
Location Lat / Long: 32°04'3.12689"N, 104°11'44.11021"W
Location Grid N/E Y/X: N 404498.300 RUS, E 542848.930 RUS
CRS Grid Convergence Angle: 0.073°
Grid Scale Factor: 0.99991117(Applied)
Version / Patch: 2025.1.0.1

Survey / DLS Computation: Minimum Curvature / Lubinski
Vertical Section Azimuth: 359.460 (°GRID North)
Vertical Section Origin: 0.000 ft, 0.000 ft
TVD Reference Datum: RKB
TVD Reference Elevation: 3130.000 ft above MSL
Seabed / Ground Elevation: 3102.000 ft above MSL
Magnetic Declination: 6.618°
Magnetic Declination Model: 988.4456mgn (9.86655 Based)
Gravity Model: GARM
Total Magnetic Field Strength: 47107.069 nT
Magnetic Dip Angle: 59.578°
Declination Date: November 13, 2025
Magnetic Declination Model: Grid North
North Reference: Grid North
Grid Convergence Used: 0.073°
Total Corr Mag North-Grid North: 6.545°
Local Coord Referenced To: Well Head

Table with columns: Comments, MD (ft), Incl (°), Azim (°), TVD (ft), TVDSS (ft), VSEC (ft), NS (ft), EW (ft), DLS (ft/100ft), Northing (RUS), Easting (RUS), Latitude (°), Longitude (°). Rows include Surface, 10.75 in Casing, Castle (CSTL), 8.625 in Casing, Lamar (LMAR), Bell Canyon (BLCN), Cherry Canyon (CRCN), Brushy Canyon (BCN), Drop 2"/100ft, Bone Spring Lime (BSGL), Avalon Upper (AVU), Avalon Lower (AVL), Hold Vertical, First Bone Spring Upper (FBU), First Bone Spring Lower (FBL), Second Bone Spring Upper (SBU), Build 10"/100ft, FTP Cross, Second Bone Spring Lower (SBL), Landing Point, PPP2.

Comments	MD (ft)	Incl (°)	Azim (°)	TVD (ft)	TVSS (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Northing (ft)	Easting (ft)	Latitude (°)	Longitude (°)
	9,400.00	90.15	359.18	7,977.22	4,847.22	0.55	12.84	1,304.16	0.00	404,501.14	543,952.97	32.11201033	-104.19137435
	9,500.00	90.15	359.18	7,976.96	4,846.96	100.54	112.83	1,302.73	0.00	404,601.12	543,951.54	32.11228518	-104.19137854
	9,600.00	90.15	359.18	7,976.70	4,846.70	200.54	212.82	1,301.30	0.00	404,701.10	543,950.11	32.11256004	-104.19138273
	9,700.00	90.15	359.18	7,976.43	4,846.43	300.54	312.81	1,299.87	0.00	404,801.08	543,948.68	32.11283490	-104.19138692
	9,800.00	90.15	359.18	7,976.17	4,846.17	400.54	412.80	1,298.44	0.00	404,901.06	543,947.25	32.11310975	-104.19139111
	9,900.00	90.15	359.18	7,975.91	4,845.91	500.54	512.78	1,297.01	0.00	405,001.04	543,945.82	32.11338460	-104.19139530
	10,000.00	90.15	359.18	7,975.65	4,845.65	600.54	612.77	1,295.58	0.00	405,101.02	543,944.39	32.11365946	-104.19139950
	10,100.00	90.15	359.18	7,975.39	4,845.39	700.54	712.76	1,294.15	0.00	405,201.00	543,942.96	32.11393431	-104.19140370
	10,200.00	90.15	359.18	7,975.13	4,845.13	800.53	812.75	1,292.72	0.00	405,300.98	543,941.53	32.11420917	-104.19140790
	10,300.00	90.15	359.18	7,974.86	4,844.86	900.53	912.74	1,291.28	0.00	405,400.96	543,940.10	32.11448402	-104.19141210
	10,400.00	90.15	359.18	7,974.60	4,844.60	1,000.53	1,012.73	1,289.85	0.00	405,500.94	543,938.66	32.11475888	-104.19141630
	10,500.00	90.15	359.18	7,974.34	4,844.34	1,100.53	1,112.72	1,288.42	0.00	405,600.92	543,937.23	32.11503373	-104.19142051
	10,600.00	90.15	359.18	7,974.08	4,844.08	1,200.52	1,212.71	1,286.98	0.00	405,700.90	543,935.79	32.11530859	-104.19142472
	10,660.74	90.15	359.18	7,973.92	4,843.92	1,261.26	1,273.44	1,286.11	0.00	405,761.62	543,934.92	32.11547552	-104.19142727
	10,700.00	90.15	359.18	7,973.82	4,843.82	1,300.53	1,312.70	1,285.55	0.00	405,800.88	543,934.36	32.11558344	-104.19142893
	10,800.00	90.15	359.18	7,973.56	4,843.56	1,400.52	1,412.69	1,284.11	0.00	405,900.86	543,932.93	32.11585829	-104.19143314
	10,900.00	90.15	359.18	7,973.29	4,843.29	1,500.52	1,512.68	1,282.58	0.00	406,000.84	543,931.49	32.11613315	-104.19143734
	11,000.00	90.15	359.18	7,973.03	4,843.03	1,600.52	1,612.67	1,281.24	0.00	406,100.82	543,930.06	32.11640800	-104.19144155
	11,100.00	90.15	359.18	7,972.77	4,842.77	1,700.52	1,712.66	1,279.81	0.00	406,200.80	543,928.63	32.11668286	-104.19144575
	11,200.00	90.15	359.18	7,972.51	4,842.51	1,800.52	1,812.65	1,278.38	0.00	406,300.78	543,927.19	32.11695771	-104.19144995
	11,300.00	90.15	359.18	7,972.25	4,842.25	1,900.52	1,912.64	1,276.95	0.00	406,400.76	543,925.76	32.11723257	-104.19145415
	11,400.00	90.15	359.18	7,971.99	4,841.99	2,000.52	2,012.63	1,275.52	0.00	406,500.74	543,924.33	32.11750742	-104.19145834
	11,500.00	90.15	359.18	7,971.72	4,841.72	2,100.51	2,112.62	1,274.09	0.00	406,600.72	543,922.90	32.11778228	-104.19146253
	11,600.00	90.15	359.18	7,971.46	4,841.46	2,200.51	2,212.60	1,272.66	0.00	406,700.70	543,921.47	32.11805713	-104.19146672
	11,700.00	90.15	359.18	7,971.20	4,841.20	2,300.51	2,312.59	1,271.23	0.00	406,800.68	543,920.04	32.11833198	-104.19147091
	11,800.00	90.15	359.18	7,970.94	4,840.94	2,400.51	2,412.58	1,269.80	0.00	406,900.66	543,918.62	32.11860684	-104.19147510
	11,900.00	90.15	359.18	7,970.68	4,840.68	2,500.51	2,512.57	1,268.37	0.00	407,000.64	543,917.19	32.11888169	-104.19147928
	12,000.00	90.15	359.18	7,970.42	4,840.42	2,600.51	2,612.56	1,266.95	0.00	407,100.63	543,915.76	32.11915655	-104.19148346
	12,100.00	90.15	359.18	7,970.15	4,840.15	2,700.50	2,712.55	1,265.52	0.00	407,200.61	543,914.34	32.11943140	-104.19148764
	12,200.00	90.15	359.18	7,969.89	4,839.89	2,800.50	2,812.54	1,264.10	0.00	407,300.59	543,912.91	32.11970626	-104.19149182
	12,300.00	90.15	359.18	7,969.63	4,839.63	2,900.50	2,912.53	1,262.67	0.00	407,400.57	543,911.49	32.11998111	-104.19149600
	12,400.00	90.15	359.18	7,969.37	4,839.37	3,000.50	3,012.52	1,261.25	0.00	407,500.55	543,910.07	32.12025597	-104.19150017
	12,500.00	90.15	359.18	7,969.11	4,839.11	3,100.50	3,112.51	1,259.83	0.00	407,600.53	543,908.64	32.12053082	-104.19150434
	12,600.00	90.15	359.18	7,968.85	4,838.85	3,200.50	3,212.50	1,258.41	0.00	407,700.51	543,907.22	32.12080568	-104.19150851
	12,700.00	90.15	359.18	7,968.58	4,838.58	3,300.50	3,312.49	1,256.98	0.00	407,800.49	543,905.80	32.12108053	-104.19151267
	12,800.00	90.15	359.18	7,968.32	4,838.32	3,400.49	3,412.48	1,255.56	0.00	407,900.47	543,904.38	32.12135539	-104.19151684
	12,900.00	90.15	359.18	7,968.06	4,838.06	3,500.49	3,512.47	1,254.14	0.00	408,000.45	543,902.96	32.12163024	-104.19152100
	13,000.00	90.15	359.18	7,967.80	4,837.80	3,600.49	3,612.46	1,252.72	0.00	408,100.43	543,901.54	32.12190509	-104.19152516
	13,100.00	90.15	359.18	7,967.54	4,837.54	3,700.49	3,712.45	1,251.31	0.00	408,200.41	543,900.12	32.12217995	-104.19152931
	13,200.00	90.15	359.18	7,967.27	4,837.27	3,800.49	3,812.44	1,249.89	0.00	408,300.39	543,898.70	32.12245480	-104.19153347
	13,300.00	90.15	359.18	7,967.01	4,837.01	3,900.49	3,912.43	1,248.47	0.00	408,400.37	543,897.28	32.12272966	-104.19153762
	13,304.97	90.15	359.18	7,967.00	4,837.00	3,905.46	3,917.40	1,248.40	0.00	408,405.34	543,897.22	32.12274333	-104.19153783
	13,332.39	90.15	359.74	7,966.93	4,836.93	3,932.87	3,944.81	1,248.14	2.00	408,432.75	543,896.96	32.12281868	-104.19153854
	13,400.00	90.15	359.74	7,966.75	4,836.75	4,000.49	4,012.42	1,247.83	0.00	408,500.36	543,896.65	32.12300453	-104.19153926
	13,500.00	90.15	359.74	7,966.49	4,836.49	4,100.48	4,112.42	1,247.37	0.00	408,600.35	543,896.19	32.12319041	-104.19154000
	13,600.00	90.15	359.74	7,966.23	4,836.23	4,200.48	4,212.42	1,246.91	0.00	408,700.34	543,895.73	32.12337628	-104.19154073
	13,700.00	90.15	359.74	7,965.97	4,835.97	4,300.48	4,312.42	1,246.45	0.00	408,800.33	543,895.27	32.12356215	-104.19154146
	13,800.00	90.15	359.74	7,965.71	4,835.71	4,400.48	4,412.42	1,245.99	0.00	408,900.32	543,894.81	32.12374802	-104.19154219
	13,900.00	90.15	359.74	7,965.44	4,835.44	4,500.48	4,512.42	1,245.53	0.00	409,000.31	543,894.35	32.12393389	-104.19154292
	14,000.00	90.15	359.74	7,965.18	4,835.18	4,600.48	4,612.42	1,245.07	0.00	409,100.30	543,893.89	32.12411975	-104.19154365
	14,100.00	90.15	359.74	7,964.92	4,834.92	4,700.47	4,712.41	1,244.61	0.00	409,200.29	543,893.43	32.12430562	-104.19154438
	14,200.00	90.15	359.74	7,964.66	4,834.66	4,800.47	4,812.41	1,244.15	0.00	409,300.28	543,892.97	32.12449149	-104.19154511
	14,300.00	90.15	359.74	7,964.40	4,834.40	4,900.47	4,912.41	1,243.69	0.00	409,400.27	543,892.51	32.12467736	-104.19154584
	14,400.00	90.15	359.74	7,964.14	4,834.14	5,000.47	5,012.41	1,243.23	0.00	409,500.26	543,892.05	32.12486323	-104.19154657
	14,500.00	90.15	359.74	7,963.88	4,833.88	5,100.47	5,112.41	1,242.77	0.00	409,600.24	543,891.59	32.12504910	-104.19154730
	14,600.00	90.15	359.74	7,963.62	4,833.62	5,200.47	5,212.41	1,242.31	0.00	409,700.23	543,891.13	32.12523497	-104.19154803
	14,700.00	90.15	359.74	7,963.35	4,833.35	5,300.47	5,312.41	1,241.85	0.00	409,800.22	543,890.67	32.12542084	-104.19154876
	14,800.00	90.15	359.74	7,963.09	4,833.09	5,400.46	5,412.40	1,241.39	0.00	409,900.21	543,890.21	32.12560671	-104.19154949
	14,900.00	90.15	359.74	7,962.83	4,832.83	5,500.46	5,512.40	1,240.93	0.00	410,000.20	543,889.75	32.12579258	-104.19155022
	15,000.00	90.15	359.74	7,962.57	4,832.57	5,600.46	5,612.40	1,240.47	0.00	410,100.19	543,889.29	32.12597845	-104.19155095
	15,100.00	90.15	359.74	7,962.31	4,832.31	5,700.46	5,712.40	1,240.01	0.00	410,200.18	543,888.83	32.12616432	-104.19155168
	15,200.00	90.15	359.74	7,962.05	4,832.05	5,800.46	5,812.40	1,239.55	0.00	410,300.17	543,888.37	32.12635019	-104.19155241
	15,300.00	90.15	359.74	7,961.79	4,831.79	5,900.46	5,912.40	1,239.09	0.00	410,400.16	543,887.91	32.12653606	-104.19155314
	15,400.00	90.15	359.74	7,961.52	4,831.52	6,000.46	6,012.40	1,238.63	0.00	410,500.15	543,887.45	32.12672193	-104.19155387
	15,500.00	90.15	359.74	7,961.26	4,831.26	6,100.45	6,112.39	1,238.17	0.00	410,600.14	543,886.99	32.12690780	-104.19155460
	15,600.00	90.15	359.74	7,961.00	4,831.00	6,200.45	6,212.39	1,237.71	0.00	410,700.13	543,886.53	32.12709367	-104.19155533
	15,700.00	90.15	359.74	7,960.74	4,830.74	6,300.45	6,312.39	1,237.25	0.00	410,800.12	543,886.07	32.12727954	-104.19155606
	15,800.00</												

43 CFR 3171

CONFIDENTIAL -- TIGHT HOLE

Chevron

DRILLING PLAN

Weller 21 16 Federal Com 276H

PAGE: 1

Eddy County, NM

Pad Summary: HNM Pad 64

The table below lists all the wells for the given pad and their respective name and TVD's (ft) for their production target intervals:

Well Name(s)	Target TVD	Formation Desc.
Weller 21 16 Federal Com 273H	7,870	Bone Spring
Weller 21 16 Federal Com 274H	7,900	Bone Spring
Weller 21 16 Federal Com 276H	7,953	Bone Spring
Weller 21 16 Federal Com 277H	7,973	Bone Spring
Weller 21 16 Federal Com 238H	7,412	Bone Spring
Weller 21 16 Federal Com 239H	7,519	Bone Spring
Weller 21 16 Federal Com 240H	7,449	Bone Spring

1. GEOLOGICAL TOPS

Elevation: As seen in C-102

The estimated tops of important geologic markers are as follows:

FORMATION	LITHOLOGIES	TVD	MD	Producing Formation?
Salado (SLDO) <input type="checkbox"/>	Anhydrite/Salt	492	492	No
Castile (CSTL) <input type="checkbox"/>	Anhydrite/Salt	512	512	No
Lamar (LMAR) <input type="checkbox"/>	Limestone/Shale	2,119	2,180	No
Bell Canyon (BLCN) <input type="checkbox"/>	Sandstone/Limestone	2,173	2,238	No
Cherry Canyon (CRCN) <input type="checkbox"/>	Sandstone/Siltstone	2,972	3,098	No
Brushy Canyon (BCN) <input type="checkbox"/>	Sandstone/Limestone	4,050	4,259	No
Bone Spring Lime (BSGL) <input type="checkbox"/>	Shale/Siltstone	5,736	6,062	No
Avalon Upper (AVU) <input type="checkbox"/>	Shale	5,819	6,148	No
Avalon Lower (AVL) <input type="checkbox"/>	Shale	6,227	6,560	No
First Bone Spring Upper (FBU) <input type="checkbox"/>	Sandstone/Shale	6,607	6,939	No
First Bone Spring Lower (FBL) <input type="checkbox"/>	Shale	6,819	7,151	No
Second Bone Spring Upper (SBU) <input type="checkbox"/>	Sandstone/Shale	7,121	7,453	No
Second Bone Spring Lower (SBL) <input type="checkbox"/>	Sandstone/Shale	7,645	7,985	Yes: Oil & Natural Gas

WELLBORE LOCATIONS	MD	TVD
SHL	-	-
KOP	7,739	7,406
FTP	7,980	7,640
LTP	18,494	7,953
BHL	18,566	7,953

43 CFR 3171
Chevron
Weller 21 16 Federal Com 276H
Eddy County, NM

CONFIDENTIAL -- TIGHT HOLE
DRILLING PLAN
PAGE: 2

2. BOP EQUIPMENT AND TESTING

Rating Depth TVD

Equipment

Chevron will have a minimum of a 5,000 psi rig stack for drill out below surface casing

Request Variance: Yes

Variance Request(s)

Chevron respectfully request to vary from the 43 CFR 3172 where it states: "(A full BOP Test) shall be performed: when initially installed and whenever any seal subject to test pressure is broken." We propose to break test if able to finish the next hole section within 21 days of the previous full BOP test. No BOP components nor any break will ever surpass 21 days between testing. A break test will consist of a 250 psi low / ≥ 5,000 psi high for 10 min each test against the connection that was broken when skidding the rig. Upon the first nipple up of the pad a full BOP test will be performed. A full BOP test will be completed prior to drilling the production lateral sections unless the BOP connection was not broken prior to drilling that hole section (example: drilling straight from production into production liner hole section). A break test will only be performed on operations where BLM documentation states a 5M or less BOP can be utilized.

Chevron respectfully requests a variance to use a FMC Technologies UH-S Multibowl wellhead, which will be run through the rig floor on surface casing. BOPE will be nipped up and tested after cementing surface casing. Subsequent tests will be performed as needed, not to exceed 30 days. The field report from FMC Technologies and BOP test information will be provided in a subsequent report at the end of the well. Please see the attached wellhead schematic. An installation manual has been placed on file with the BLM office and remains unchanged from previous submittal. All tests performed by third party.

Chevron respectfully requests a variance from the 0.422" annular clearance requirement per 43 CFR3172 for the intermediate 1 (salt) section under the following condition:
1. Annular clearance to meet or exceed 0.422" between intermediate casing ID and production casing connection OD for the first 500' of overlap between both strings.

Testing Procedure

The stack will be tested as specified in the attached testing requirements. Batch drilling of the surface, production, and production liner will take place. A full BOP test will be performed per hole section, unless approval from BLM is received otherwise (see variance request). Flex choke hose will be used for all wells on the pad (see attached specs and variance). BOP test pressures and other documented tests may be recorded and documented via utilization of the Digital BOP Test Method in lieu of the standard test chart. In the event the digital system is unavailable, the standard test chart will be used.

3. CASING PROGRAM

a. The proposed PRIMARY casing program will be as follows:

Purpose	Top (MD)	Top (TVD)	Bot (MD)	Bot (TVD)	Hole Size	Csg Size	Weight	Grade	Thread
Surface	0'	0'	450'	450'	13.5" / 17.5"	10.75"	40.5 #	J-55	BTC/STC
Intermediate	0'	0'	2,160'	2,099'	9.875"	8.625"	32.0 #	J-55	BTC-AD/SC
Production†	0'	0'	7,739'	7,406'	7.875"	5.5"	20.0 #	P-110 ICY	W441
Production†	7,539'	7,206'	18,566'	7,953'	6.75" / 7.875"	5.5"	20.0 #	P-110 ICY	W441

† 7.875" hole size to kickoff point. Then either 7.875" or 6.75" hole size to TD. 5.5" W441 casing from surface to TD (max OD at connection is 5.852")

- b. All casing strings will be new pipe.
- c. Casing design depths subject to revision based on directional drilling and geologic conditions encountered.
- d. Chevron will keep intermediate casing fluid filled at all times and while RIH. Chevron will check casing at a minimum of every 20 jts (~840'), and never to surpass 1/3 of casing, while running intermediate casing in order to maintain collapse SF.

Casing String	Min SF Collapse	Min SF Burst	Min SF Axial (Joint)	Min SF Axial (Body)
Surface	4.56	4.34	37.06	34.78
Intermediate	1.45	1.41	8.23	7.40
Production†	1.91	4.64	3.64	4.86

43 CFR 3171
 Chevron
 Weller 21 16 Federal Com 276H
 Eddy County, NM

4. **CEMENTING PROGRAM**

Slurry	Type	Top	Bottom	Quantity	Yield	Density	%Excess	Volume	Additives
<u>Surface Casing 10-3/4"</u>									
<i>Planned single stage cement job</i>									
Lead	Class C	0'	150'	49	1.95	12.8	25	96	Extender, Antifoam, Retarder, Viscosifier
Tail	Class C	150'	450'	123	1.33	14.8	25	164	Extender, Antifoam, Retarder, Viscosifier
<u>Intermediate Casing 8-5/8"</u>									
<i>Planned single stage cement job</i>									
Lead	Class C	0'	1,160'	87	2.61	11.5	25	228	Extender, Antifoam, Retarder, Viscosifier
Tail	Class C	1,160'	2,160'	179	1.63	12.6	25	292	Extender, Antifoam, Retarder, Viscosifier
<i>Contingency: Top Job</i>									
1st Tail	Class C	0'	-840'	-185	1.33	14.8	25	-246	Extender, Antifoam, Retarder, Viscosifier
<u>Production Casing 5-1/2"</u>									
Lead	Class C	0'	7,039'	383	4.01	10.5	25	1535	Extender, Antifoam, Retarder, Viscosifier
Tail	Class H	7,039'	18,566'	1734	1.44	13.2	25	2497	Extender, Antifoam, Retarder, Viscosifier

Surface casing shall have at least one centralizer installed on each of the bottom three joints starting with the shoe joint.

43 CFR 3171
Chevron
Weller 21 16 Federal Com 276H
Eddy County, NM

5. **MUD PROGRAM**

Top	Bottom	Type	Min MW	Max MW at TD	Additional Characteristics
0'	450'	Spud Mud	8.3	10.6	
450'	2,160'	Brine	8.3	10.0	Saturated brine would be used through salt sections.
2,160'	18,566'	WBM/OBM	8.5	10.0	Due to wellbore instability in the lateral, may exceed the MW window needed to maintain overburden stresses

A weighting agent and lost circulating material (LCM) will be onsite to mitigate pressure or lost circulation as hole conditions dictate.

If an open reserve pit is not approved by OCD, a closed system will be used consisting of above ground steel tanks and all wastes accumulated during drilling operations will be contained in a portable trash cage and removed from location and deposited in an approved sanitary landfill. If an open reserve pit is in place, pit construction, operation, and closure will follow all applicable rules and regulation. Sanitary wastes will be contained in a chemical porta-toilet and then hauled to an approved sanitary landfill.

All fluids and cuttings will be disposed of in accordance with New Mexico Oil Conservation Division rules and regulations. And transporting of E&P waste will follow EPA regulations and accompanying manifests.

A mud test shall be performed every 24 hours after mudding up to determine, as applicable: density, viscosity, gel strength, filtration, and pH.

Visual mud monitoring equipment shall be in place to detect volume changes indicating loss or gain of circulating fluid volume. When abnormal pressures are anticipated -- a pit volume totalizer (PVT), stroke counter, and flow sensor will be used to detect volume changes indicating loss or gain of circulating fluid volume.

6. **TESTING, LOGGING, AND CORING**

- a. **Production tests are not planned.**
- b. Logs run include: **Gamma Ray Log, Directional Survey**
- c. **Coring Operations are not planned.**

7. **ABNORMAL PRESSURES AND HYDROGEN SULFIDE**

Anticipated BHP	4,136 psi
Anticipated BHT	139 °F
Anticipated abnormal pressures?	No
Describe abnormal pressures	N/A - Pressure ramp begins in the bottom of the Third Bone Spring formation
Contingency plan(s) description:	- Casing design accounts for pressure ramp - Mud weighting agents available on location to increase drilling fluid density - BOP, choke, and well control drills - BOP functioned and pressure tested

Hydrogen sulfide gas is not anticipated: However the H2S Contingency plan is attached with this APD in the event that H2S is encountered

8. **OTHER ITEMS**

- a. **Batch drilling** will be employed whereby the drilling rig may drill a specific hole section on all wells prior to moving to the next hole section.
- b. **Shallow rig** may be utilized to drill surface or intermediate sections. The production section will not be drilled by the shallow rig.
- c. **Wait on cement** duration for surface and intermediate string(s) will be based on time for tail slurry to develop 500 psi compressive strength and will follow rules as laid out in 43 CFR 3172
- d. **Offline cementing** will be employed on the hole sections that run a long string casing to surface. Offline cementing schematic below.

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 555581

CONDITIONS

Operator: CHEVRON U S A INC 6301 Deauville Blvd Midland, TX 79706	OGRID: 4323
	Action Number: 555581
	Action Type: [C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
ward.rikala	Any previous COA's not addressed within the updated COA's still apply.	3/6/2026