


U. S. LAND OFFICE Santa Fe
SERIAL NUMBER 077974
LEASE OR PERMIT TO PROSPECT _____

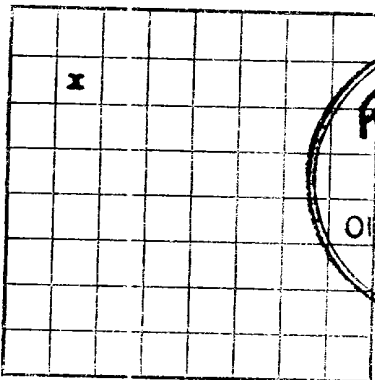

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

LOCATE WELL CORRECTLY

Company J. Glenn Turner Address Box 728 - Farmington, New Mexico
Lessor or Tract Turner-Lodewick Field Fulcher-Kutz State New Mexico
Well No. 1 Sec. 18 T. 27N R. 9W Meridian N.M.P.M. County San Juan
Location 990 ft. xx of N Line and 990 ft. xx of W Line of Sec. 18 Elevation 6,186'
(Derrick floor relative to well)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.
Farmington, New Mexico

Date May 6, 1953 Signed [Signature] Title Beeson Neal, Agent in Farmington

The summary on this page is for the condition of the well at above date.

Commenced drilling March 20, 1953, 19____ Finished drilling April 11, 1953, 19____

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 2,084' to 2,168' "G" No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
<u>8-5/8"</u>	<u>32#</u>	<u>8</u> rd.		<u>101'</u>	<u>None</u>				
<u>5-1/2"</u>	<u>14#</u>	<u>8</u> rd.	<u>J&L</u>	<u>2,084'</u>	<u>Halliburton</u>				<u>Surface</u>
<u>1"</u>	<u>1.7#</u>		<u>tubing</u>	<u>2,156'</u>	<u>None</u>				<u>Long String</u>
									<u>Production</u>

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>8-5/8"</u>	<u>10'</u>	<u>75</u>	<u>Halliburton</u>		
<u>5-1/2"</u>	<u>2,084'</u>	<u>150</u>	<u>Halliburton</u>		<u>Mostly water</u>
					<u>Mostly water</u>

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
	<u>Metal</u>	<u>Solidified</u>				
		<u>nitro-glycerin</u>	<u>195</u>	<u>4-12-53</u>	<u>2090-2168</u>	<u>2,168'</u>

TOOLS USED

Rotary tools were used from Surface feet to 2,084' feet, and from _____ feet to _____ feet
Cable tools were used from 2,084' feet to 2,168' feet, and from _____ feet to _____ feet

DATES

April 14, 1953, 19____ Put to producing Well shut in, 19____
The production for the first 24 hours was _____ barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, °Bé. _____
If gas well, cu. ft. per 24 hours 1,035 MCF - 3 hr. test. Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. 599

EMPLOYEES

J. K. Robinson, Driller E. F. Prago, Driller
C. W. Ulrich, Driller P. B. Snook, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
<u>-0-</u>	<u>1,285</u>	<u>1,285</u>	<u>Tertiary sands and shales</u>
<u>1,285</u>	<u>1,911</u>	<u>626</u>	<u>Kirtland</u>
<u>1,911</u>	<u>2,080</u>	<u>169</u>	<u>Fruitland</u>
<u>2,080</u>	<u>2,168</u>	<u>88</u> <u>x882</u>	<u>Pictured Cliffs</u>
	<u>Total depth</u>	<u>2,168'</u>	

