State of New Mexico Energy, Minerals & Natural Resources Form C-101 May 27, 2004

1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

Suppoit to appropriate District Office Oil Conservation Division ECEIV
1220 S. St. Francis Dr.

Santa Fe, NM 875050 APR 2 PM 3 37 AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE ² OGRID Number ¹Operator Name and Address 16696 OXY USA Inc. ³API Number P.O. Box 50250 Midland, TX 79710-0250 30- 059-⁴Property Code ⁵Property Name 6Well No. Bravo Dome Carbon Dioxide Gas Unit 2333 27111 9 Proposed Pool 1 10 Proposed Pool 2 Bravo Dome Carbon Dioxide Gas 640 96010 ⁷Surface Location UL or lot no. Township Lot. Idn Feet from the North/South Line Feet from the East/West line Section Range County H 23 33 E G Nonte East Union 1700 GOFI Proposed Bottom Hole Location If Different From Surface Township Lot. Idn Feet from the North/South Line Feet from the East/West line UL or lot no. Section County Additional Well Location 11 Work Type Code 12 Well Type Code 13 Cable/Rotary 14 Lease Type Code 15 Ground Level Elevation N С 16 Multiple 17 Proposed Depth 18 Formation 19 Contractor 2600' Tubb N/A No Depth to ground water Distance from nearest fresh water well Distance from nearest surface water >100' >1000 >1000 Pit Volume 4000 bbls Clay Liner: Synthetic X __ mils thick Pit: Drilling Method: Fresh Water X Diesel/Oil-based Closed-Loop System Brine ___ Gas/Air 🔲 ²¹Proposed Casing and Cement Program Setting Depth Casing weight/foot Hole Size Casing Size Sacks of Cement Estimated TOC 12-1/4" 8-5/8" 24# +/-750' 400sx Surface 5.9#FG/15.5# 7-7/8" 5-1/2" +/-2600' 550sx Surface ²² Describe the proposed program. If this application is to DEEPEN or PLUG BACK, give the data on the present productive zone and proposed new productive zone. Describe the blowout prevention program, if any. Use additional sheets if necessary. See Attachment ²³ I hereby certify that the information given above is true and complete to the best of OIL CONSERVATION DIVISION my knowledge and belief. I further certify that the drilling pit will be constructed according to NMOCD guidelines X a general permit ____, or Approved by: an (attached) alternative OCD-approved plan Printed name: David Stewart Title: Sr. Regulatory Analyst Approval Date: **Expiration Date:** E-mail Address: david stewart@oxy.com Date: Phone: Conditions of Approval: 3/28/08 432 - 685 - 5717 Attached

District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 South First, Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION 2040 South Pacheco Santa Fe, NM 87505

Form C-102 Revised October 18, 1994 Instructions on back Submit to Appropriate District Office State Lease – 4 Copies Fee Lease – 3 Copies

District IV	,,-				Santa F	e, N	M 87505				Fee L	ease – 3	Copies
District IV 2040 South Pach	eco, Santa 1	Fe, NM 87505									AMEN	DED R	EPORT
		WEI	LL LO	CATION	I AND	ACF	REAGE DEDI	CA	ΓΙΟΝ PI	_AT			
	API Numb	er		Pool Co	de				Pool Na	ıme			
30-059		9601	0		BRAVO DO	ME	CARBO	N DIO	OXIDE GAS 640				
Property						operty	Name		Well Number				
2711	1	BRAV	O DO	ME CA	ARBON	DIC	OXIDE GAS	U	NIT 23.	333 111			
OGRID	No.			Operator Name							Elevation	n	
16696				OXY USA INC.							4	954.	9
					Surf	face	Location				L		
UL or lot no.	Section	Township	Range	Lot Idn.	Feet from	the	North/South line F		Feet from the East/West		line County		
G	11	23 N	33 E		1700) '	NORTH		1700'	EAST		l un	ION
			Bott	om Ho	<u> </u>		If Different Fro	om	Surface		-		
UL or lot no.	Section	Township	Range				the North/South line		et from the	East/West line		County	
Dedicated Acre	es Joint	or Infill C	onsolidation	n Code (Drder No.		I	J	,			1	
640	N)											
	1 "		SSIGNE	TO TI	IIS COMP	LETI	ON UNTIL ALL	IN	TERESTS F	IAVE BE	EN CO	NSOLIE	OATED
		OR A	NON-ST	'ANDARD	UNIT H	AS BI	EEN APPROVED	BY	THE DIV	ISION	-		
11								1	OPER.	ATOR	CERT	IFICAT	ΓΙΟΝ
									I hereby certif				
								. [true and comp	olete to the b	est of my k	nowledge aı	nd belief.
					, 200,								
					1-								
							Signature		12				
					1	1700′			David Stewart				
									Printed Name				
					NAD27 36° 14'28.13''				Sr. Regulatory Analyst				
				Lon - 103° 23'15.94' X - 778843.03				3 28 08					
				Y - 19	08364.91	į			Date				
									SURVI	EYOR	CERT	IFICAT	ΓΙΟΝ
								Ī	I hereby certi				
	ĺ					ĺ			was plotted fr	om field no	tes of actua	l surveys m	ade by
]] []	i					į		}	me or under and correct to			it the same	is true
						i			De	centr	Pt 1.7	2007	7
						i						13%	
\parallel								\neg	Signature and	Seal of 200	fessional St	rveyor	
									Date of Surve Signature and		15079)	SUAVEYOR	
									0	(國人)		J. M.	
) Je	多多	m	LAND	
11				1		- 1		- 1	ł	NON	tarenos	いん	

Certificate Number

15079

Bravo Dome CO2 wells - 2008

CASING:

MD (ft)	Hole Size (in)	Csg Size (in)	Wt (Ib/ft)	Grd	Cplg
0 - ±750	12-1/4	8-5/8	24	J55	STC
0 - ± 2440	7-7/8	5-1/2 FG	5.9	FG	10 Rd
2440 - ± 2600	7-7/8	5-1/2 Steel	15.5	J55	LTC

CEMENT:


Surface:

			Се	ent Design						
Slurry	Weight (ppg)	TOC (feet)	BOC (feet)		Slurry Volume (Bbls)	Cement Required (sx.)	Comment			
Lead	14.8	Surface	750		96	400	TOC ±surface			
			<u> </u>	ad Slurry						
Premium Plus CaCl Poly E Flake					400 sx 2% 0.125 lb/sx					
Slurry Yield Mix Water Mix Water Source					1.35 cfs 6.3 gal/sx Freshwater					

Production:

1 Toduction.									
			Ce	men	t Design				
Slurry	Weight (ppg)	TOC (feet)	BOC (feet)			Slurry Volume (Bbls)	Cement Required (sx.)	Com	ment
Lead	11.1	0	±1830			233	400	TOC Surface	to
Tail	13.2	±1830	2600			50	150	TOC above Cimarro	±600' on
	Lead	Slurry				Tail	Slurry		
Premium Plus CaCl Poly E Flake Slurry Yield	•	400 sx 3% 0.125 lb/sx 3.28 cfs			Premium Pl CaCl Poly E Flake Slurry Yield		150 sx 3% 0.125 lb/sx 1.86 cfs		
Mix Water Mix Water So	urce	20.56 gal/sk			Mix Water Mix Water S	Source	9.99 gal/sk Freshwater		

<u>9" BOP - 3000psi</u>

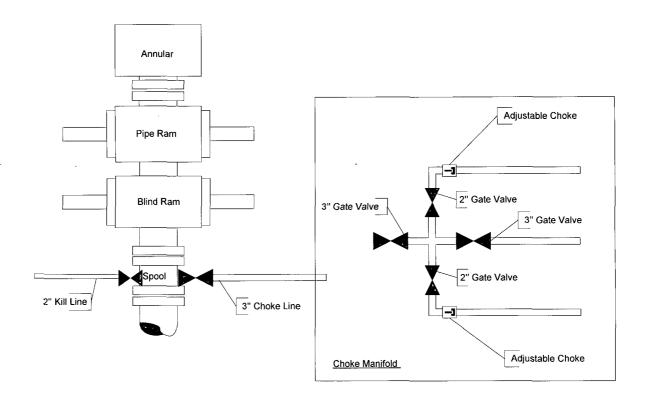

110 8 e, deep 25 120' ,0 5' deep 83 4' deep 55 120

Bravo Dome Unit Location and Pit Design Cheyenne Rig 8

Bravo Dome Unit Cellar and Sump Pit Cheyenne Rig 8

