



DEC - 7 1978

Getty Oil Company

Box 3360  
Casper, Wyoming 82602  
December 4, 1978

Santa Fe

Central Exploration and Production Division

*DHC - 268*

Energy and Minerals Department  
Oil Conservation Division  
P. O. Box 2088  
Santa Fe, New Mexico 87501

*no waiting*

Attention: Mr. Joe D. Ramey,  
Division Director

Subject: Administrative Approval  
For Commingling

Re: Order No. R 5388-A  
Dated: 11-14-78

Gentlemen:

We request administrative approval for a Pictured Cliffs and Chacra formations commingled completion of the Jicarilla "B" Well No. 5 located in Unit L of Section 32, T25N, R5W, Rio Arriba County, New Mexico.

We expect a production rate of approximately 60 MCF/D from the Pictured Cliffs and 40 MCF/D from the Chacra. Static reservoir pressures are expected to be of about equal magnitude at approximately 300 pounds per square inch. Allocation of production will be 60% credited to the Pictured Cliffs and 40% credited to the Chacra.

A schematic of the proposed completion is attached.

Very truly yours,

Harold E. Aab  
Area Superintendent

GEB/sh

Enclosure


cc: Mr. Al Kendrick, Supervisor  
1000 Rio Brazos Road  
Aztec, New Mexico 87410

*No PC Pool*

*" Chacra "*

*Let A.K. determine allocation*

Jicarilla "B" Well No. 5  
 1050' FSL, 600' FWL, Sec. 32-25N-5W  
 Rio Arriba County, New Mexico  
 Elev. 6700' KB

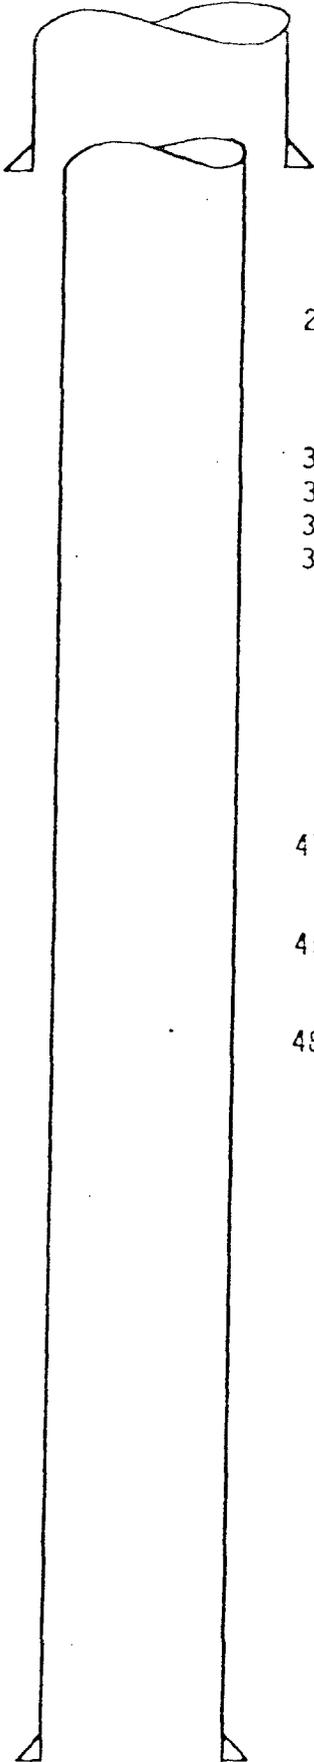


|              |                                       |
|--------------|---------------------------------------|
| 326          | 10-3/4" 32.75#                        |
| 2425         | TOP OF CEMENT                         |
| 2655-65 (10) | PROPOSED PICTURED CLIFFS PERFORATIONS |
| 3460 (1)     | PROPOSED CHACRA<br>PERFORATIONS       |
| 3525-30 (5)  |                                       |
| 3545-50 (5)  |                                       |
| 3561-65 (4)  |                                       |
| 3674         | DV TOOL w/400 sx cement               |
| 4165-75      | POSSIBLE CLIFF HOUSE INTERVAL         |
| 4580-90      | POSSIBLE MENELEE INTERVAL             |
| 4845-55      | POSSIBLE POINT LOOKOUT INTERVAL       |
| 5600         | TOP OF CEMENT                         |
| 5900         | PROPOSED CEMENT RETAINER              |
|              | <u>GALLUP TO BE ABANDONED</u>         |
| 5948         | } GALLUP ZONE PERFS                   |
| 6064         |                                       |
| 6277         | PBTD                                  |
| 6314         | 5-1/2 15-1/2# w/200 sx cement         |

OIL CONSERVATION COMMISSION  
Capitan DISTRICT

DHC  
268

OIL CONSERVATION COMMISSION  
BOX 2088  
SANTA FE, NEW MEXICO

DATE 12-14-78

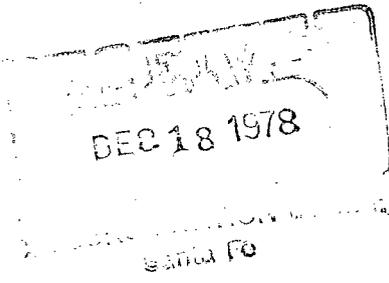

RE: Proposed MC \_\_\_\_\_  
Proposed DHC  \_\_\_\_\_  
Proposed NSL \_\_\_\_\_  
Proposed SWD \_\_\_\_\_  
Proposed WFX \_\_\_\_\_  
Proposed PMX \_\_\_\_\_

Gentlemen:

I have examined the application dated 12-4-78  
for the Getty Oil Co. Jicarilla B #5 L-32-25N-5W  
Operator Lease and Well No. Unit, S-T-R

and my recommendations are as follows:

Approve R-5388-A  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Yours very truly,

AR Kendrick