


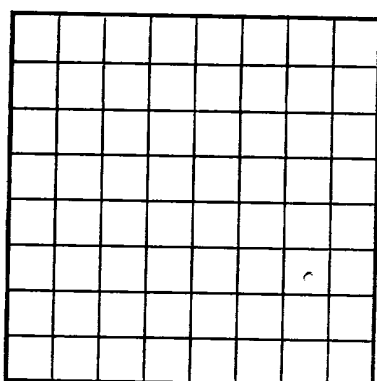

LOCATE WELL CORRECTLY

U. S. LAND OFFICE Santa Fe
SERIAL NUMBER 078935
LEASE OR PERMIT TO PROSPECT _____UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSEP 13 1951
OIL CON. COM.
DIST. 8

LOG OF OIL OR GAS WELL

Company Danube Oil Company Address 213 First National Bank Building
Amarillo, Texas
Lessor or Tract Thompson Field West Kuts Canyon State New Mexico
Well No. 3 Sec. 3 T. 27N R. 12W Meridian NMPM County San Juan
Location 1650 ft. {N} of 5 Line and 990 ft. {NE} of E Line of Sec. 3 Elevation 5908
(Denote floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Date August 11, 1951

Signed _____

Title _____

The summary on this page is for the condition of the well at above date.

Commenced drilling July 17, 1951, 19____ Finished drilling August 1, 1951, 19____OIL OR GAS SANDS OR ZONES
(Denote gas by G)

No. 1, from (G) 1561 to 1645 No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
<u>8-5/8"</u>	<u>90</u>	<u>80</u>	<u>Halliburton</u>	<u>1550</u>					
<u>5-1/2"</u>	<u>1550</u>	<u>100</u>	<u>Halliburton</u>						

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>8-5/8"</u>	<u>90</u>	<u>80</u>	<u>Halliburton</u>		
<u>5-1/2"</u>	<u>1550</u>	<u>100</u>	<u>Halliburton</u>		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
		<u>nitro glycerin</u>	<u>205 lbs</u>	<u>8/5/51</u>	<u>1561-1645</u>	<u>1645</u>

TOOLS USED

Rotary tools were used from 0 feet to 1645 feet, and from _____ feet to _____ feet
Cable tools were used from to clean out feet to _____ feet, and from _____ feet to _____ feet

DATES

7-11, 1951 Put to producing _____, 19____
The production for the first 24 hours was _____ barrels of fluid of which _____ % was oil; _____ %
emulsion; _____ % water; and _____ % sediment.
If gas well, cu. ft. per 24 hours 3780 MCF 3 hr. test Gravity, °Bé. _____
Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. 463

EMPLOYEES

Camden Drilling Company, Driller for rotary
McConnell Drilling Corp., Driller for cable tools

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
<u>0</u>	<u>90</u>	<u>90</u>	<u>surface sand</u>
<u>90</u>	<u>1451</u>	<u>1361</u>	<u>sand and shale</u>
<u>1451</u>	<u>1645</u>	<u>194</u>	<u>shale and sand</u>
			<u>Top Pictured Cliffs 1540</u>

