

Revised Copy

Form Approved.
Budget Bureau No. 42-R1424

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other ☐

2. NAME OF OPERATOR
El Paso Natural Gas Company

3. ADDRESS OF OPERATOR
Box 990 Farmington, New Mexico 87401


4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1650'S, 990'E ✓
AT TOP PROD. INTERVAL: a/a
AT TOTAL DEPTH: a/a

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☒
(other)

SUBSEQUENT REPORT OF:

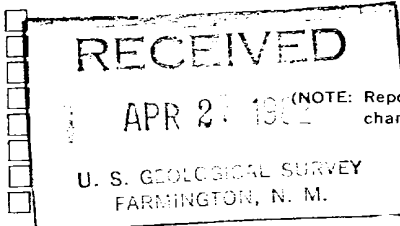

5. LEASE

SF 078935 ✓

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Thompson C

9. WELL NO.

#3 ✓

10. FIELD OR WILDCAT NAME

W. Kutz Pictured Cliffs

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Section 3, T-27-N, R-12-W ✓

12. COUNTY OR PARISH

San Juan

13. STATE

New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

5908' DF

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

- 1) Plug well. Non-productive
- 2) Use 27 sx to fill open hole (1645'-1550'), 95' 1270' 280' 50' above
- 3) Use 34 sx to fill inside 5-1/2" casing (1550'-1290') 260' from top of Fruitland to bottom of Pictured Cliffs. 5 1/2" casing. Fruitland Top 1320'.
- 4) Use 27 sx to plug inside of casing across Farmington sandstone. (920'-680') 240' 260'. Farmington Top 710'. inside + outside casing
- 5) Perf 4 holes @ 460'. Use 95 sx to set plug to within 4' of surface. (460'-4') 456'. Ojo Alamo Base 410', Top 290'.
- 6) Cut casing 4' below surface. Weld plate (dry hole marker) on casing stub.
- 7) Use 9.0 to 9.2 lb mud between plugs.
- 8) Restore location.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED James F. Sims TITLE Production Engineer DATE April 26, 1982

APPROVED BY _____ (This space for Federal or State office use)


APPROVED BY James F. Sims TITLE _____ DATE _____

CONDITIONS OF APPROVAL: APR 29 1982

AS AMENDED

JAMES F. SIMS
DISTRICT ENGINEER

NMOCC



OSVC 1994A

1994A 1994A

1994A 1994A

1994A 1994A