SUBMIT IN TRIPLICATE*

(Other instructions on reverse side)

Form approved. Budget Bureau No. 42-R1425.

UNITED STATES re

30 - 045 - 2377 (
5. LEASE DESIGNATION AND SERIAL NO.

DEPARTMENT OF THE INTERIOR						5. LEASE DESIGNATION AND SERIAL NO.		
GEOLOGICAL SURVEY					SF 077123			
APPLICATION	FOR PERMIT TO	O DRILL, D	EEPEN	N, OR P	LUG B	4CK_	6. IF INDIAN, ALLOTTEE	OR TRIBE NAME
.a. TYPE OF WORK	.L □k	DEEPEN [JG BAC		7. UNIT AGREEMENT N.	A M E
b. TYPE OF WELL OIL GAS			SING		MULTIPL ZONE	E	8. FARM OR LEASE NAM	1E
2. NAME OF OPERATOR	111 LJL 311111						Warren	<u>. </u>
	tural Gas Con	ทกลทบ					9. WELL NO.	
3. ADDRESS OF OPERATOR	turar das con	прату					3A	
	, Farmington	NM 874	0.1				10. FIELD AND POOL, O	R WILDCAT
4. LOCATION OF WELL (Re	port location clearly and	in accordance wit	h any Sta	te requireme	nts.*)		Blanco Mesa Verde	
At surface	1070'N, 1						11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA	
		030 14					Sec. 13, T-28-N, R-9-W	
At proposed prod. zone						NMPM		
Same						12. COUNTY OR PARISH	13. STATE	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE* 6 miles southeast of Blanco, NM						San Juan	NM	
		ranco, Nr	16 NO.	OF ACRES IN	LEASE	17. NO.	OF ACRES ASSIGNED	
15. DISTANCE FROM PROPO- LOCATION TO NEAREST		1070			49.88	тот	HIS WELL	/ 320.00
PROPERTY OR LEASE LI (Also to nearest drig	. unit line, if any)	1070				110 202	ARY OR CABLE TOOLS	7 320.00
18. DISTANCE FROM PROPORTO NEAREST WELL, DE	SED LOCATION*		19. PRO	POSED DEPTH		ļ	r	
OR APPLIED FOR, ON THE	S LEASE, FT.	600'		49	27 '	Rota	-	and the same of the same
21. ELEVATIONS (Show whe 5852 GL	ther DF, RT, GR, etc.)						22. APPROX. DATE WO	ORK WILL START
23	P	ROPOSED CASI	NG AND	CEMENTIN	G PROGRA	M		
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER F	00T	SETTING	DEPTH		QUANTITY OF CEME	NT
	9 5/8"	36.0)#	. 2	00'	224	cu.ft. to c	irculate
13 3/4" 8 3/4"	7"	20.0		2.5	57 '	313	cu.ft.to co	<u>ver Ojo Alam</u>
6 1/4"	4 1/2"lin				4927'		cu.ft.to ci	
•		i	1			•		

Selectively perforate and sandwater fracture the Mesa Verde formation.

A 3000 psi WP and 6000 psi test double gate preventer equipped with blind and pipe rams will be used for blow out prevention on this well.

1 2 18 30

This gas is dedicated.

The W/2 of Section 13 is dedicated to this well.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout

preventer program, if any.		
siener Leggy Gradfield	TITLEDrilling	Clerk DATE 8-13-79
(This space for Federal or State office use)		
PERMIT NO.	APPROVAL DATE	SE!
APPROVED BY	TITLE	OIL DATE
oh Frank		Bernard Commence of the Commen

*See Instructions On Reverse Side

MWOLL

STATE OF NEW MEXICO

NM-64208

1980

2310 2640

2000

1500

1000

500

OIL CONSERVATION DIVISION P. O. BOX 2088

Form C-102 MERGY AND MINERALS DEPARTMENT SANTA FE, NEW MEXICO 87501 kevised 10-1-78 All distances must be from the cuter houndaries of the Section Operator Well No. EL PASO NATURAL GAS COMPANY WARREN (SF**-**077123) Unit Letter Section County Range 13 28N 9N San Juan Actual Footage Location of Well: 1070 North 1850 feet from the feet from the West line Ground Level Elev. Producing Formation Dedicated Acreage: 5852 Mesa Verde Blanco Mesa Verde 320.00 1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below. 2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty). 3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling. etc? If answer is "yes;" type of consolidation. Yes ☐ No If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.). No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission. CERTIFICATION 10701 I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief. 18501 El Paso Natural Gas Co. SF-077123 August Date Sec. 13 I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same #3 Is true and correct to the best of my 0 knowledge and belief.

Date Surveyed

Certificate No.

3950

June 21 [1979]

Fred B. Kerr

S. KERR. IR.

and/or Land Surveyor



P. O. BOX 990 FARMINGTON, NEW MEXICO 87401

PHONE: 505-325-2841

Multi-Point Surface Use Plan

Warren #3A

- 1. Existing Road Please refer to Map No. 1 which shows the existing roads. New roads which will be required have been marked on this map. All existing and new roads will be properly maintained during the duration of this project.
- 2. Planned Access Roads Please refer to Map No. 1. The grade of the access roads will be consistent with that of the local terrain. The road surface will not exceed twenty feet (20') in width. Upon completion of the project, the access road will be adequately drained to control soil erosion. Drainage facilities may include ditches, water bars, culverts or any other measure deemed necessary by trained Company personnel to insure proper drainage. Gates and/or cattleguards will be installed if necessary.
- 3. Location of Existing Wells Please refer to Map No. 2.
- 4. Location of Tank Batteries, Production Facilities, and Production Gathering and Service Lines Please refer to Maps No. 1 and No. 2.

 Map No. 2 shows the existing gas gathering lines. Map No. 1 shows the existing roads and new proposed access roads. All known production facilities are shown on these two maps.
- 5. Location and Type of Water Supply Water for the proposed project will be obtained from Sharp Water Well.
- 6. Source of Construction Materials No additional materials will be required to build either the access road or the proposed location.
- 7. Methods of Handling Waste Materials All garbage and trash materials will be put into a burn pit shown on the attached Location Plat No. 1. When clean-up operations are begun on the proposed project, the burn pit with its refuse will be buried to a depth of at least three feet (3'). A latrine, the location of which is also shown on Plat No. 1,

7. cont'd.

will be provided for human waste. If large amounts of liquids are left in the reserve pit after completion of the project, the pit will be fenced until the liquids have had adequate time to dry. The location clean-up will not take place until such time as the reserve pit can be properly covered over to prevent run-off from carrying any of these materials into the watershed. No earthen pit will be located on natural drainages; all earthen pits will be so constructed as to prevent leakage from occurring.

- 8. Ancillary Facilities No camps or airstrips will be associated with this project.
- 9. Wellsite Layout Please refer to the attached Plat No. 1.
- 10. Plans for Restoration of the Surface After completion of the proposed project, the location will be cleaned and leveled. The location will be left in such a condition that will enable reseeding operations to be carried out. Seed mixture as designated by the responsible government agency will be used. The reseeding operation will be performed during the time period set forth by the regulatory body. The location production equipment will be painted as designated by the responsible government agency.
- 11. Other Information The terrain is rolling hills with cedar and pinon trees, sage and wolfberry growing. Deer and cattle are occasionally seen on the proposed project site.
- project site. 12. Operator's Representative - W.D. Dawson, PO Box 990, Farmington, NM
- 13. Certification -

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by El Paso Natural Gas Company and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

L. A. Aimes

Project Drilling Engineer

Operations Plan Warren #3A

I. Location: 1070'N, 1850'W, Section 13, T-28-N, R-9-W, San Juan County, NM

Field: Blanco Mesa Verde <u>Elevation:</u> 5852'GL

II. Geology:

Α.	Formation	Tops:	Surface	Nacimiento	Lewis	2357 '
			Ojo Alamo	1170'	Mesa Verde	3893'
			Kirtland	1307'	Menefee	3957'
			Fruitland	1905'	Point Lookout	4477'
			Pic.Cliffs	2216'	Total Depth	49271

- B. Logging Program: GR-Ind. and GR-Density at Total Depth.
- C. Coring Program: none
- D. Natural Gauges: 3885', 3950', 4470' and at Total Depth. Also gauge any noticeable increase in gas. Record all gauges in daily drilling report and on morning report.

III. Drilling:

A. Mud Program: mud from surface to 2557'. Gas from intermediate casing to Total Depth.

IV. Materials:

Α.	Casing Program:	Hole Size		Casing Size	Wt.&Grade
		13 3/4"	200	9 5/8"	36.0# K-55
		8 3/4"	2557 '	7"	20.0# K-55
		6 1/4"	2407-4927	4 1/2"	10.5# K-55


B. Float Equipment: 9 5/8" surface casing - B & W guide shoe
 (Prod. No. FC 06-09611-0200)


7" intermediate casing - Pathfinder guide shoe (Part #1003-1-007) and Howco self-fill insert float valve (Price Ref.36A&37), 5 Pathfinder stabilizers (Part #107-10) every other joint above shoe. Run float two joints above shoe.


- 4 1/2" liner 4 1/2" liner hanger with neoprene packoff. Larkin geyser shoe (Fig. 222) and Larkin flapper type float collar(fig. 404 M&F).
- C. Tubing: 4927' of 2 3/8", 4.7#, J-55 8rd EUE tubing with a common pump seating nipple one joint above bottom. Tubing will be open ended.
- D. Wellhead Equipment: $10" 900 \times 9 5/8"$ casing head. $10" 900 \times 6" 900 \times 10"$

V. Cementing:

- 9 5/8" surface casing use 190 sks. of Class "B" cement with 1/4# gel-flake per sack and 3% calcium chloride (224 cu.ft. of slurry, 100% excess to circulate to surface). WOC 12 hours. Test casing to 600#/30 minutes.
- 7" intermediate casing use 120 sks. of 65/35 Class "B" Poz with 6% gel and 2% calcium chloride (8.3 gallons of water per sack) followed by 100 sks. of Class "B" with 2% calcium chloride (313 cu.ft. of slurry, 50% excess to cover Ojo Alamo). Run temperature survey at 8 hours. WOC 12 hours. Test casing to 1200#/30 minutes.
- 4 1/2" liner precede cement with 20 barrels of gel water (2 sks. gel) Cement with 317 sks. of 50/50 Class "B" Poz with 2% gel, 0.6% Halad-9, 6.25# gilsonite plus 1/4# Flocele per sack (440 cu.ft. of slurry, 70% excess to circulate liner). WOC 18 hours.

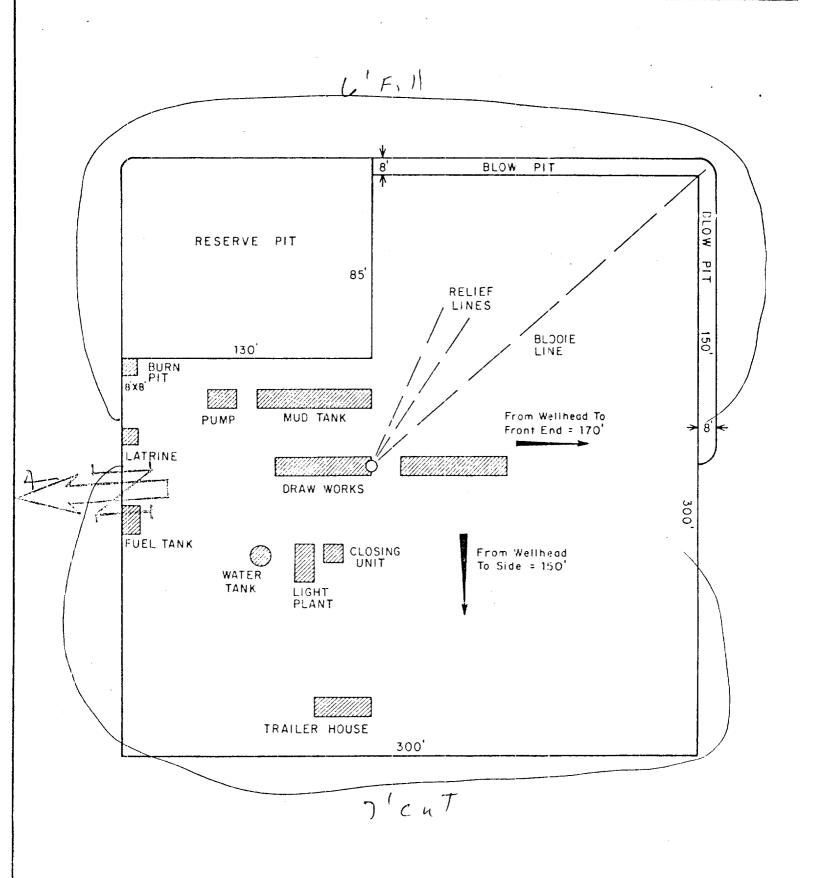


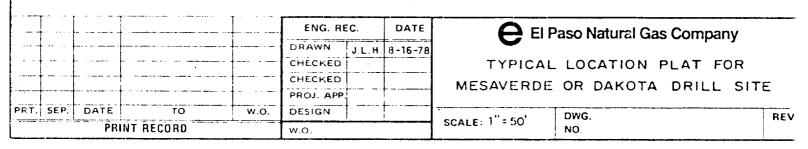


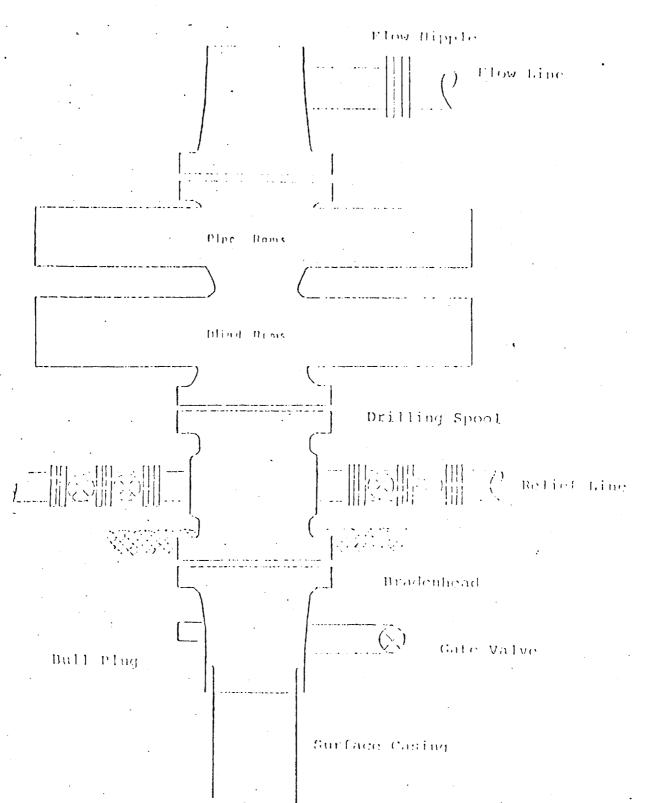

Series 900 Double Gate BOP, rated at 3000 psi Working Pressure
When gas drilling operations begin a Shaffer type 50 or equivalent rotating head is installed on top of the flow nipple and the flow line is converted into a blowie line

EL PASO NATURAL GAS COMPANY Warren #3A NW 13-28-9

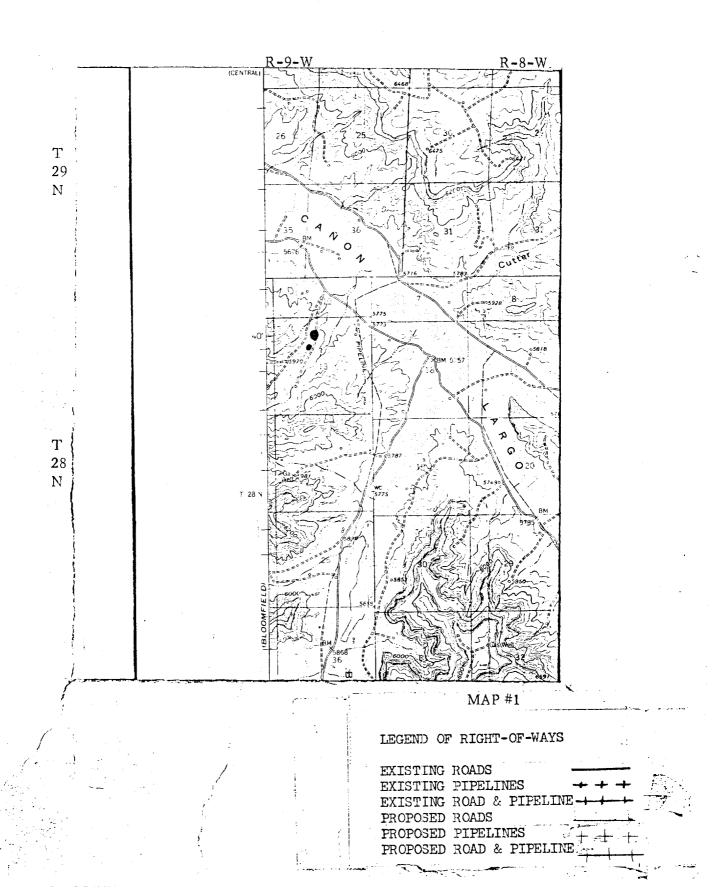

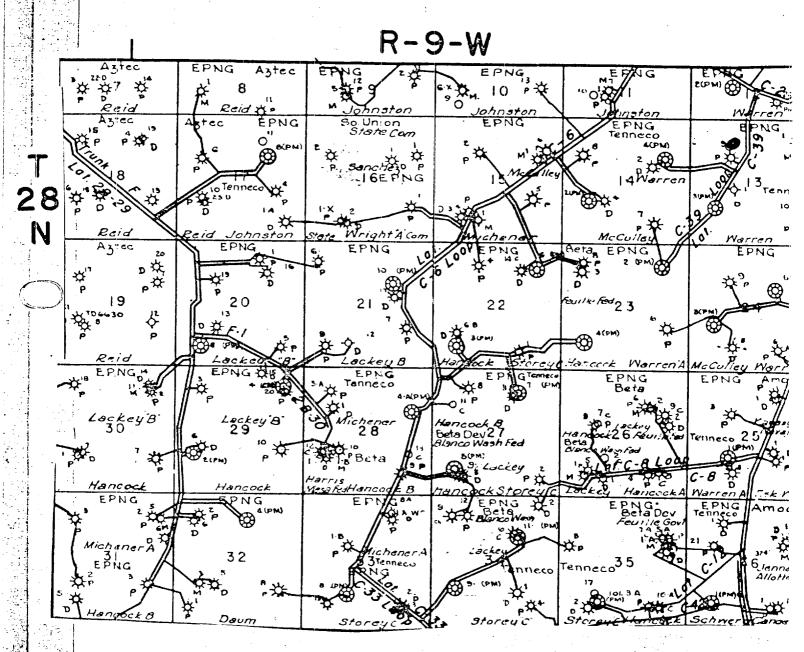

MAP #2

Proposed Location