




SINCLAIR OIL & GAS COMPANY  
 DETAIL OF LEASE AUTOMATIC CUSTODY TRANSFER SYSTEM  
 M. YATES "B" (ARC) LEASE  
 EDDY COUNTY, NEW MEXICO

*See Detail of Lease Shut In Switch*

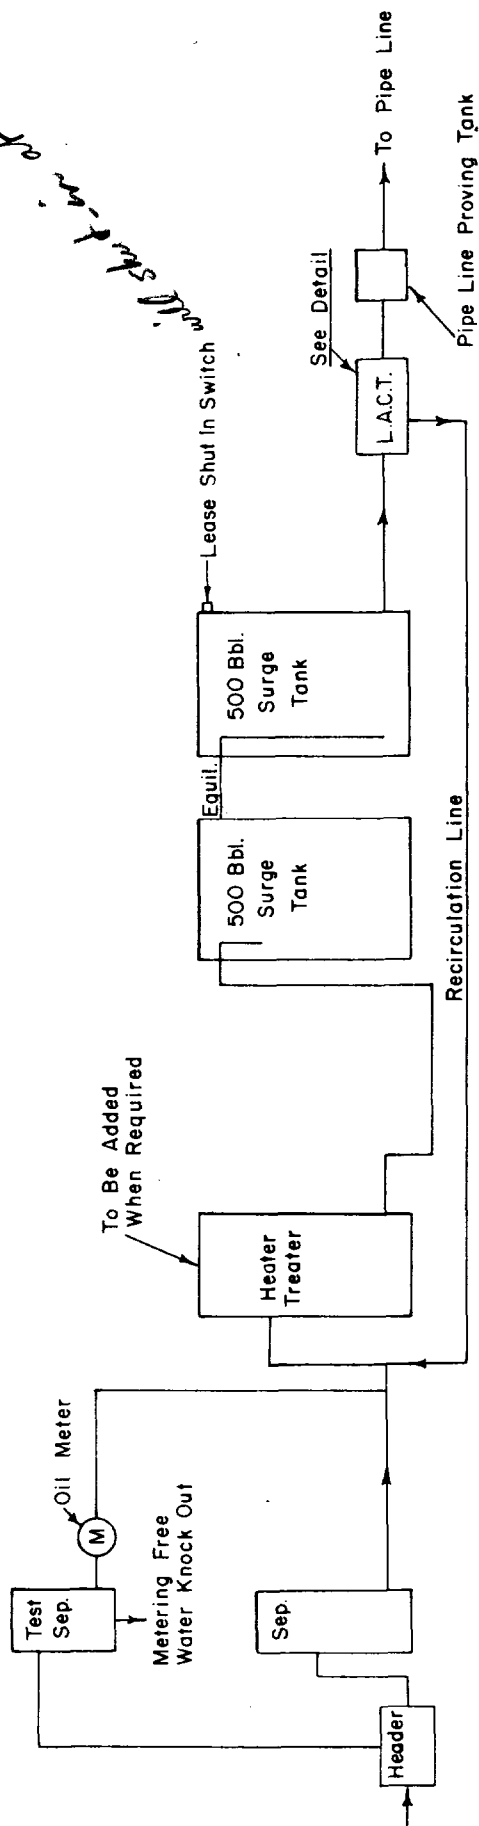

**BEFORE EXAMINER NUTTER**  
 OIL CONSERVATION COMMISSION  
 EXHIBIT NO. 2  
 CASE NO. 1959

*flow lines; presently, installed conventional  
will install plastic lined 2" bdy.*


SINCLAIR OIL & GAS COMPANY  
DETAIL OF LEASE AUTOMATIC CUSTODY CONTROL UNIT  
M. YATES "B" (ARC) LEASE  
EDDY COUNTY, NEW MEXICO

| LEGEND FOR SKID MOUNTED UNIT |                                              |
|------------------------------|----------------------------------------------|
| ITEM                         | DESCRIPTION                                  |
| 1                            | Starter                                      |
| 2                            | Beacon Light                                 |
| 3                            | Sampler                                      |
| 4                            | Monitor B.S. & W.                            |
| 5                            | Low Pressure "Stop" Switch ✓                 |
| 6                            | High Pressure "Stop" Switch                  |
| 7                            | Timer "Start" Switch                         |
| 8                            | Electric Valve, 3 way, 2 position            |
| 9                            | Back Pressure Regulator (to maintain 10 psi) |
| 10                           | Pressure Gauge                               |
| 11                           | Thermometer                                  |
| 12                           | P.D. Meters (Temperature Compensated)        |
| 13                           | Strainer                                     |
| 14                           | Centrifugal Pump with Electric Motor         |

NOTES

- T - Connection For Meter Proving By Master Meter
- TB - Temperature Bulb For Meter Externally Mounted
- L - Plug Valve with Leak Test Drain-cock Assembly For Meter Proving
- PT - Pipe Line Proving Tank

BEFORE EXAMINER NUTTER  
OIL CONSERVATION COMMISSION  
EXHIBIT NO. 3  
CASE NO. 1959

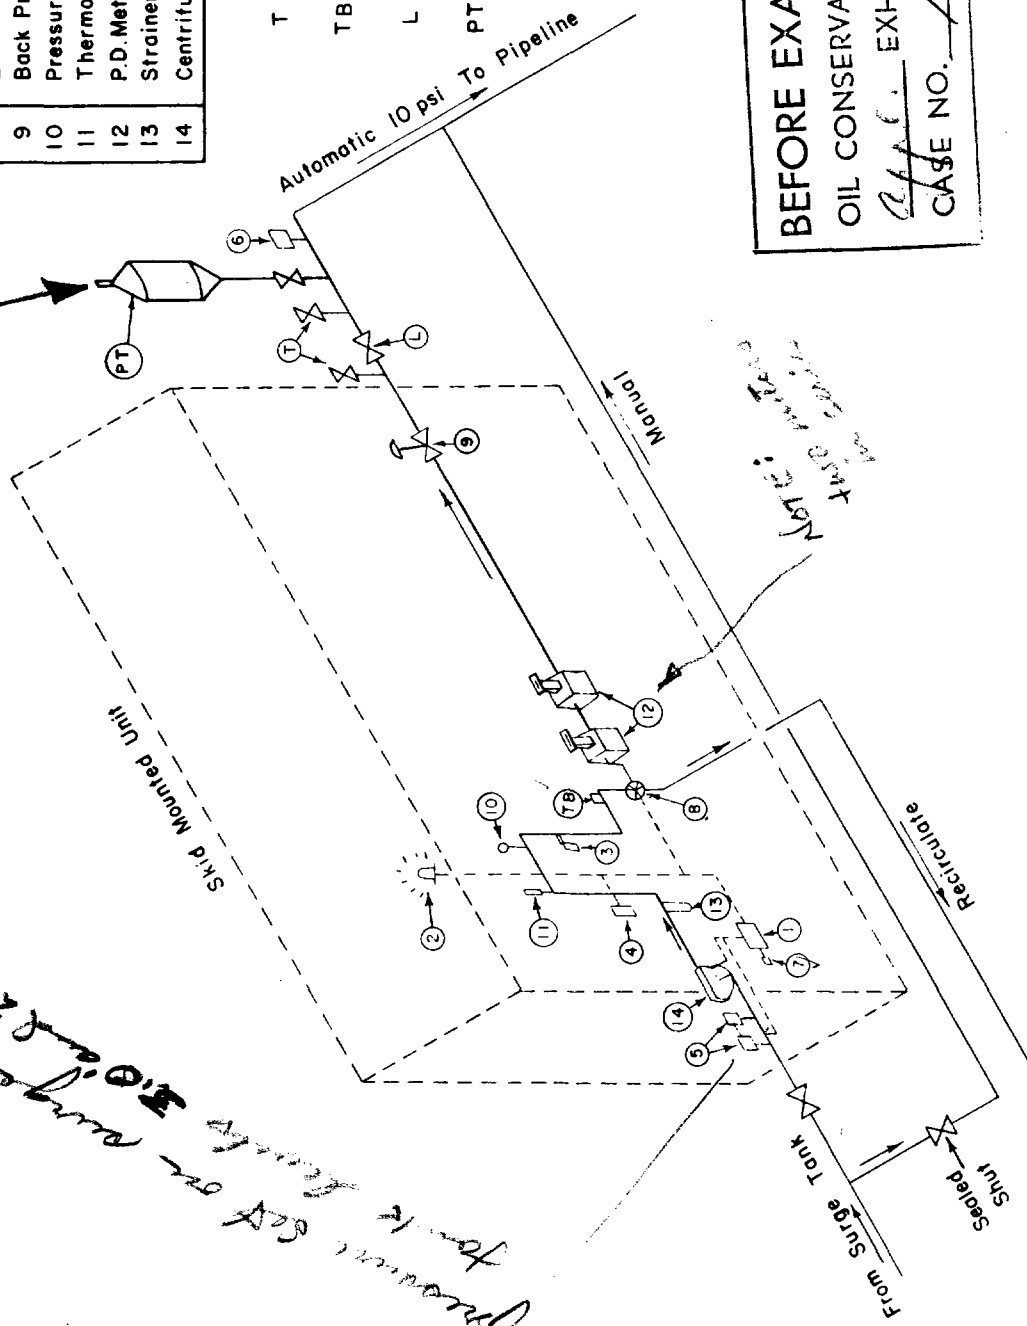

*Pressure set on pump 12.5  
for 10 psi test pressure*