

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. TYPE OF WORK
DRILL ☒ DEEPEN ☐ PLUG BACK ☐

b. TYPE OF WELL
OIL WELL ☐ GAS WELL ☒ OTHER ☐ SINGLE ZONE ☐ MULTIPLE ZONE ☐

2. NAME OF OPERATOR
Tenneco Oil Company

3. ADDRESS OF OPERATOR
720 S. Colorado Blvd., Denver, CO 80222

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*)
At surface
1550' FSL, 840' FWL
At proposed prod. zone

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*
13.6 miles S/SE of Blanco, NM

15. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drg. unit line, if any)

16. NO. OF ACRES IN LEASE
2400.96

17. NO. OF ACRES ASSIGNED TO THIS WELL
S/ 320

18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT.

19. PROPOSED DEPTH
6877

20. ROTARY OR CABLE TOOLS
Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)
6238 G.R.

22. APPROX. DATE WORK WILL START*
ASAP

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
13 3/4"	9 5/8" new	36# K-55	250'	Circulate to Surface
8 3/4"	7" new	23# K-55	3,000'	Circulate to Surface
6 1/4"	4 1/2" new	10.5#-11.6#	7,877'	Circulate through liner hanger

SEE ATTACHED

NOV 09 1979
U. S. GEOLOGICAL SURVEY
FARMINGTON, N. M.

not submitted

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED J. D. Traywick TITLE Administration Supervisor DATE October 23, 1979
(This space for Federal or State office use)

PERMIT NO. _____ APPROVAL DATE _____

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

NMOCC

ok Smith

*See Instructions On Reverse Side


All distances must be from the outer boundaries of the Section.

Operator TENNECO OIL COMPANY			Lease FLORANCE		Well No. 120
Unit Letter L	Section 21	Township 27N	Range 8W	County San Juan	
Actual Footage Location of Well: 1550 feet from the South line and 840 feet from the West line					
Ground Level Elev. 6238	Producing Formation Dakota		Pool Basin Dakota		Dedicated Acreage: 320 Acres

1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?
☐ Yes ☒ No If answer is "yes," type of consolidation _____

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) _____

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

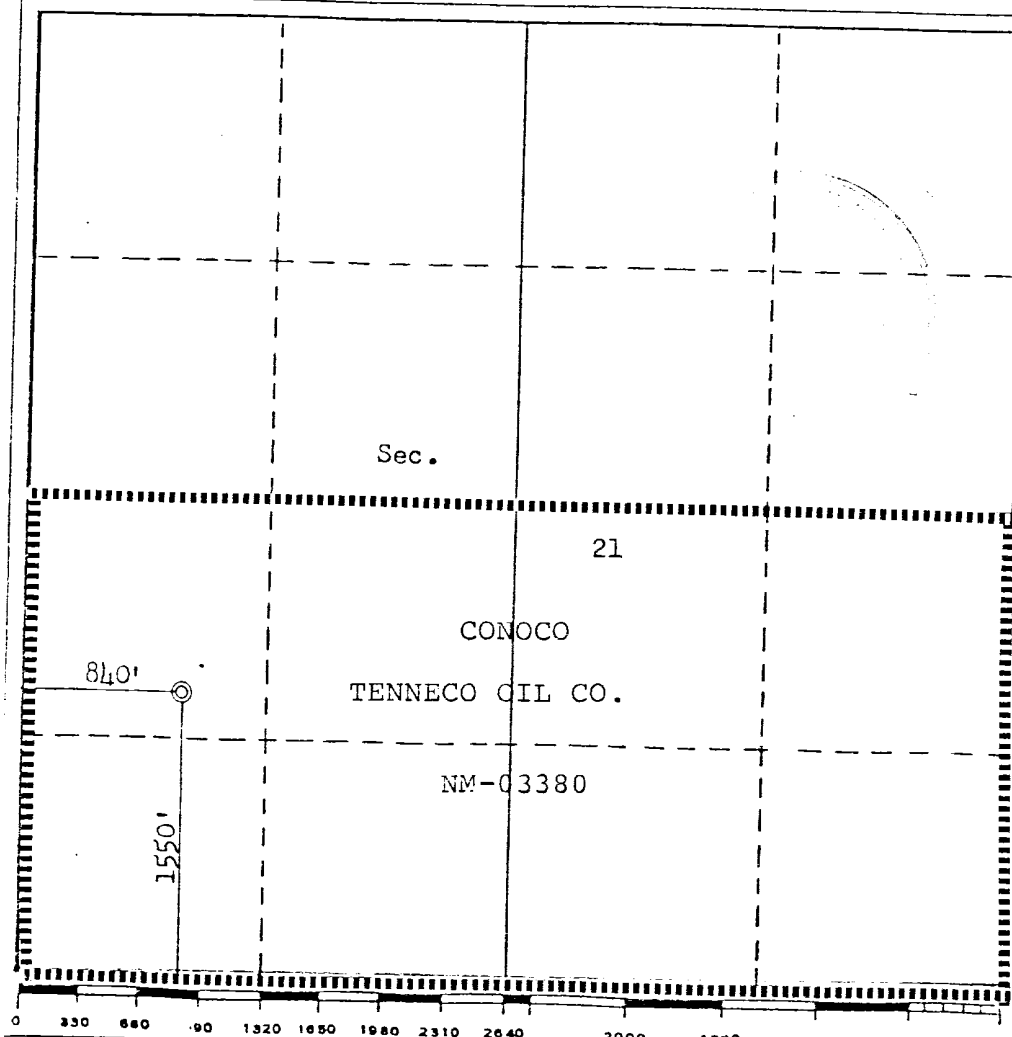

CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

J. D. Traywick
Name **J. D. Traywick**
Administration Supervisor
Position

Tenneco Oil Company
Company

October 23, 1979
Date

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed **September 25, 1979**

Registered Professional Engineer and/or Land Surveyor

Fred B. Keen
Fred B. Keen
Certificate No. **3950**

3950

PROGNOSIS TO DRILL AND COMPLETE

DIVISION: Rocky Mountain

DATE: August 6, 1979

LEASE: Florance

WELL NO.: 120

LOCATION: 1550' FSL, 840' FWL
Sec. 21, T 27N, R 8W
San Juan County, NM

FIELD: Basin Dakota

ESTIMATED ELEVATION: 6320'

ESTIMATED TOTAL DEPTH: 6877'

PROJECTED HORIZON: Dakota

DRILLING, CASING AND CEMENT PROGRAM:

- 1) MIRU Rotary Tools.
- 2) Drill 13 3/4" surface hole to \pm 250'.
- 3) Run 9 5/8", 36#, K-55 ST & C casing. Set at 250'. Cement w/sufficient volume to circulate to surface.
- 4) Nipple up well head & blow out equipment. Test prior to drilling out to 600 psi 1/2 hour.
- 5) Reduce hole to 8 3/4". Drill to 3000' - with water & Benex.
- 6) Run 7", 23#, K-55 casing. Set at 3000'. Cement w/sufficient volume to circulate to surface.
- 7) Nipple up well head & rig to drill 6 1/4" hole with air/gas to 6877' total depth.
- 8) Run 6 1/4" liner with \pm 150' overlap inside of 7", 23#, K-55 casing ST & C to T.D..
- 9) Cement with sufficient volume to liner top.
- 10) MORT

ESTIMATED FORMATION TOPS:

SURFACE - San Jose Formation

OJO Alamo	1555' (water)	Mancos	4851'
Pictured Cliffs	2302' (gas)	Gallup	5994' (oil/gas)
Cliffhouse	4067' (gas)	Greenhorn	7731'
Menefee	4087' (gas)	Dakota	6799' (gas)
Point Look Out	4689' (gas)	TD	6877'

DRILLING MUD PROGRAM:

0 - 250' Native solids. Use sufficient viscosity to clean hole and run surface casing.

250' - 3,000' Low solids. Use sufficient viscosity to clean hole and run intermediate casing.

3,000 - TD Gas or air/air mist.

CORING AND TESTING PROGRAM:

No cores or DST's are anticipated.

DEVIATION SURVEYS: 0 - 250' - 2° Max.
250' - 3,500' - 3° Max.
3,500 - TD - 5° Max.

1. Survey surface hole at 100' intervals. Maximum allowable deviation at
2. FROM SURFACE TO TOTAL DEPTH DEVIATION SURVEYS MUST BE TAKEN EVERY 500' OR EACH TRIP WHICHEVER IS FIRST. This may entail running the TOTCO on wireline. Record each survey on the AAODC Drilling Report Sheet. Maximum allowable change in deviation is 1° per 100'.

SAMPLES:

30' = 2,500' - 3,000'. Insure 300 into Lewis shale.

WELL SURVEYS:

Induction - Gamma Ray

Density - Gamma Ray - Caliper

BOP: 10" x 000 series Double Ram Preventor w/closing unit.

PREVENTORS MUST BE CHECKED FOR OPERATION EVERY 24 HOURS, AND THE CHECK MUST BE RECORDED ON THE AAODC DRILLING REPORT SHEET.

REPORTS

Drilling reports for the past 24 hours will include depth, footage, time distribution, activity breakdown, mud properties, bit record, bottom hole assembly, daily and cumulative mud costs, plus any other pertinent information; will be called into Tenneco Oil Company, Denver, Colorado between 7:30 A.M. and 8:00 A.M.

1. 303-758-7130 (office) - Don Barnes
303-758-7287 - Don Barnes private line - Monday-Friday (before 7:45 A.M.)
2. 303-936-0704 (home) - Don Barnes - weekends and holidays
3. 303-424-1269 (home) - John Owen - if Don Barnes not available

The yellow sheet of the IADC Report to be filled out completely, the original copy of the drilling time recorder, and copies of any invoices from this well signed and received for Tenneco Oil Company will be mailed daily to:

TENNECO OIL COMPANY
PENTHOUSE
720 SOUTH COLORADO BOULEVARD
DENVER, COLORADO 80222

ATTENTION: DRILLING DEPARTMENT

In case of an emergency, notify the following:

1. Mr. Don Barnes, Division Drilling Engineer - 303-936-0704.
2. Mr. John Owen, Project Drilling Engineer - 303-424-1269.
3. Mr. Mike Lacey, Division Production Manager - 303-979-0509.

FLORANCE 1201. Existing Roads

- A. Proposed Well Site Location: As surveyed, is located 1550' FSL, 840' FWL, Sec. 21, T 27N, R 8W. San Juan County, NM (See Exhibit I, Form C-102).
- B. Planned Access Route: The planned access begins at Five Mile Crossing in Largo Canyon. Continue down the South side of the canyon for 10.8 miles and turn West for 1.5 miles to flagged access.
- C. Access Road Labelled:
Color Code: Red - Improved Surface
Blue - New Access Road
- D. Not applicable - the proposed well is a development well.
- E. The proposed well is a development well. See Exhibit II for existing roads within a one mile radius.
- F. Existing Road Maintenance or Improvement Plan:
The existing roads will require minimal maintenance.

2. Planned Access Roads

800' of new road

- A. Width:
The average width of the road is twenty feet.
- B. Maximum Grades: Less than 8%.
- C. Turnouts:
There are no turnouts planned as sight distance is sufficient.
- D. Drainage Design:
The road is center crowned to allow drainage. The road is flat primarily.
- E. Culverts Use Major Cuts and Fills: No culvert will be used. There will be an approximate cut of 25' and fill of 15' to "best fit" the location.
- F. Surfacing Material:
Native soil has been wetted, bladed and compacted to make the road surface, which is existing.

2. Planned Access Roads (Cont'd)

- G. Gates, Cattleguards, Fence Cuts:
No gates, cattleguards or fences will be needed.
- H. New Roads Centerlined Flagged:
Existing Roads.

3. Location of Existing Wells

The proposed well is a development well. Exhibit shows existing wells within a one mile radius.

- A. Water Wells: None
- B. Abandoned Wells: None
- C. Temporarily Abandoned Wells: None
- D. Disposal Wells: None
- E. Drilling Wells: None
- F. Producing Wells: See Exhibit III
- G. Shut-In Wells: None
- H. Injection Wells: None
- I. Monitoring or Observation Wells: None.

4. Location of Existing and/or Proposed Facilities

- A. Existing facilities within one mile owned or controlled by Lessee/Operator:

- (1) Tank batteries - None
- (2) Production facilities - See Exhibit III
- (3) Oil Gathering Lines - None
- (4) Gas Gathering Lines - None
- (5) Injection Lines - None
- (6) Disposal Lines - None

- B. New facilities in the event of production:

- (1) New facilities will be within the
- (2) dimensions of the drill pad. (See Exhibit IV.)
- (3) Construction Materials/Methods:
Construction materials will be native to the site.
Facilities will consist of a well pad.
- (4) Protection of Wildlife/Livestock: Facilities will be fenced as needed to protect wildlife/livestock.

4. Location of Existing and/or Proposed Facilities (Cont'd)

B. New facilities in the event of production: (cont'd)

(5) New facilities will consist of a wethead, tank & production unit.

C. Rehabilitation of Disturbed Areas:

Following the completion of construction, those areas required for continued production will be graded to provide drainage and minimize erosion. Those areas unnecessary for use will be graded to blend with surrounding topography per BLM recommendations.

5. Location and Type of Water Supply

A. Location and type of water supply:

Water will be hauled from a private source.

B. Water Transportation System:

Water trucks will be used.

C. Water wells:

N/A;

6. Source of Construction Materials

A. Materials:

Construction materials will consist of soil native to the site. Any topsoil, if present, will be stripped and stockpiled as needed.

B. Land Ownership;

The planned site and access road is on federal land administered by the Bureau of Land Management.

C. Materials Foreign to the Site:

N/A.

D. Access Roads:

No additional roads will be required.

7. Methods for Handling Waste Disposal

A. Cuttings:

Cuttings will be contained in the reserve pit.

B. Drilling Fluids:

Drilling fluids will be retained in the reserve pit.

C. Produced Fluids:

Produced fluids, including produced water will be collected in the reserve pit. Any small amount of hydrocarbon that may be produced during testing will be retained in the reserve pit. Prior to clean up operations, the hydrocarbon material will be skimmed.

7. Methods for Handling Waste Disposal (Cont'd)

- D. Sewage:
Sanitary facilities for sewage disposal will consist of at least one pit toilet, during the driller operations. The pit will be backfilled immediately following completion of the drilling operation.
- E. Garbage:
There probably will not be much putrescible garbage to dispose of. However, it will be disposed of along with the refuse in a constructed burn pit, which will be fenced. The small amount of refuse will be burned and the pit will be covered with a minimum 36 inch cover upon completion.
- F. Clean-Up of Well Site:
Upon the release of the drilling rig, the surface of the drilling pad will be prepared to accommodate a completion rig, if testing indicates potential productive zones. In either case, the "mouse hole" and "rat hole" will be covered to eliminate a potential hazard to livestock. The reserve pit will be fenced to prevent entry of livestock until the pit is backfilled. Reasonable clean up will be performed prior to final restoration of the site.

8. Ancillary Facilities

None required.

9. Well Site Layout

- A. See Exhibit IV
- B. Location of pits, etc. See Exhibit IV
- C. Rig orientation etc. See Exhibit IV
- D. Lining of pits:
Pits will not be lined. They will be covered with a fine mesh netting, if necessary, for the protection of wildlife if fluids are found to be toxic.

10. Plans for Restoration of Surface

- A. Reserve pit clean up:
The pit will be fenced prior to rig release and shall be maintained until clean up. Prior to backfilling any hydrocarbon material on the pit surface will be removed. The fluids and solids contained in the pit shall be backfilled with soil excavated from the site and with soil adjacent to the reserve pit. The restored surface of the reserve pit will be contoured as needed to minimize erosion. The reserve pit area will be seeded per BLM recommendations during the appropriate season following final restoration of the site.

10. Plans for Restoration of Surface (Cont'd)

- B. Restoration Plans - Production Developed:
The reserve pit will be backfilled and restored as described under Item A. In addition, those disturbed areas not required for production will be graded to blend with the surrounding topography, and seeded, per BLM recommendations. The portion of the drill pad required for production and turning areas will be graded to minimize erosion and provide access to production facilities under inclement conditions. Following depletion and abandonment of the site, restoration procedures will be those under Item C. below.
- C. Restoration Plan - No Production Developed:
The reserve pit will be restored as described above. With no production developed, the entire surface disturbed by construction of the drilling pad will be restored. The site will be contoured to blend with the surrounding topography. The site will be seeded according to BLM recommendations. If the new access road is not required for other development plans, it will be obliterated and restored and seeded per BLM recommendations.
- D. Rehabilitation Time Table:
Upon completion of operations the initial clean up of the well site will be performed. Final restoration of the site will be performed as soon as possible according to procedural guidelines published by the USGS and BLM. Seeding of the disturbed areas which are no longer required will be performed during the appropriate season, following final restoration.

11. Other Information

- A. Surface Description: The topography at the proposed site is broken, Talus Slopes of a mesa to the North, the vegetation consists of Pinon, Juniper, Utah Serviceberry, Mountain Mahogany, Narrow Leaf Yucca & Snakeweed.
- B. Surface Use Activities:
The surface is federally owned and managed by the BLM. The predominant surface use is mineral exploration and production.
- C. Proximity of Water, Dwellings and Historical Sites:
 - 1. Water:
There are no reservoirs or streams in the immediate area.
 - 2. Occupied Dwellings:
There are no occupied dwellings or buildings in the area.
 - 3. Sites:
An archeological reconnaissance has been performed for this location and clearance has been granted.


12. Operator's Field Representative

Donald S. Barnes
Division Drilling Engineer
Tenneco Oil Company
720 South Colorado Blvd.
Penthouse
Denver, CO 80222
(303) 758-7130 Ext. 212

13. Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions as they actually exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the proposed work performed by Tenneco Oil Company and its contractors and subcontractors will conform to this plan.

Date: October 24, 1979

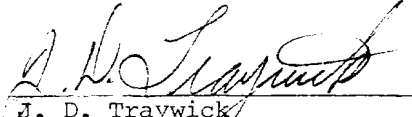

J. D. Traywick
Administration Supervisor

1000
 1100
 1200
 1300
 1400
 1500
 1600
 1700
 1800
 1900
 2000
 2100
 2200
 2300
 2400
 2500
 2600
 2700
 2800
 2900
 3000
 3100
 3200
 3300
 3400
 3500
 3600
 3700
 3800
 3900
 4000
 4100
 4200
 4300
 4400
 4500
 4600
 4700
 4800
 4900
 5000
 5100
 5200
 5300
 5400
 5500
 5600
 5700
 5800
 5900
 6000
 6100
 6200
 6300
 6400
 6500
 6600
 6700
 6800
 6900
 7000
 7100
 7200
 7300
 7400
 7500
 7600
 7700
 7800
 7900
 8000
 8100
 8200
 8300
 8400
 8500
 8600
 8700
 8800
 8900
 9000
 9100
 9200
 9300
 9400
 9500
 9600
 9700
 9800
 9900
 10000



16°30'
 107°45'
 R 9 W
 12 MI TO N MEX. B.
 Mapped, edited, and published by the Geological Survey
 Control by USGS and USC&GS
 Topography by photogrammetric methods from aerial
 photography, 1955-1956

Vicinity Map for EXHIBIT II
 TENNECO OIL COMPANY #120 FLORANCE
 1550' FSL 840' FWL Sec 21-T27N-R8W
 SAN JUAN COUNTY, NEW MEXICO



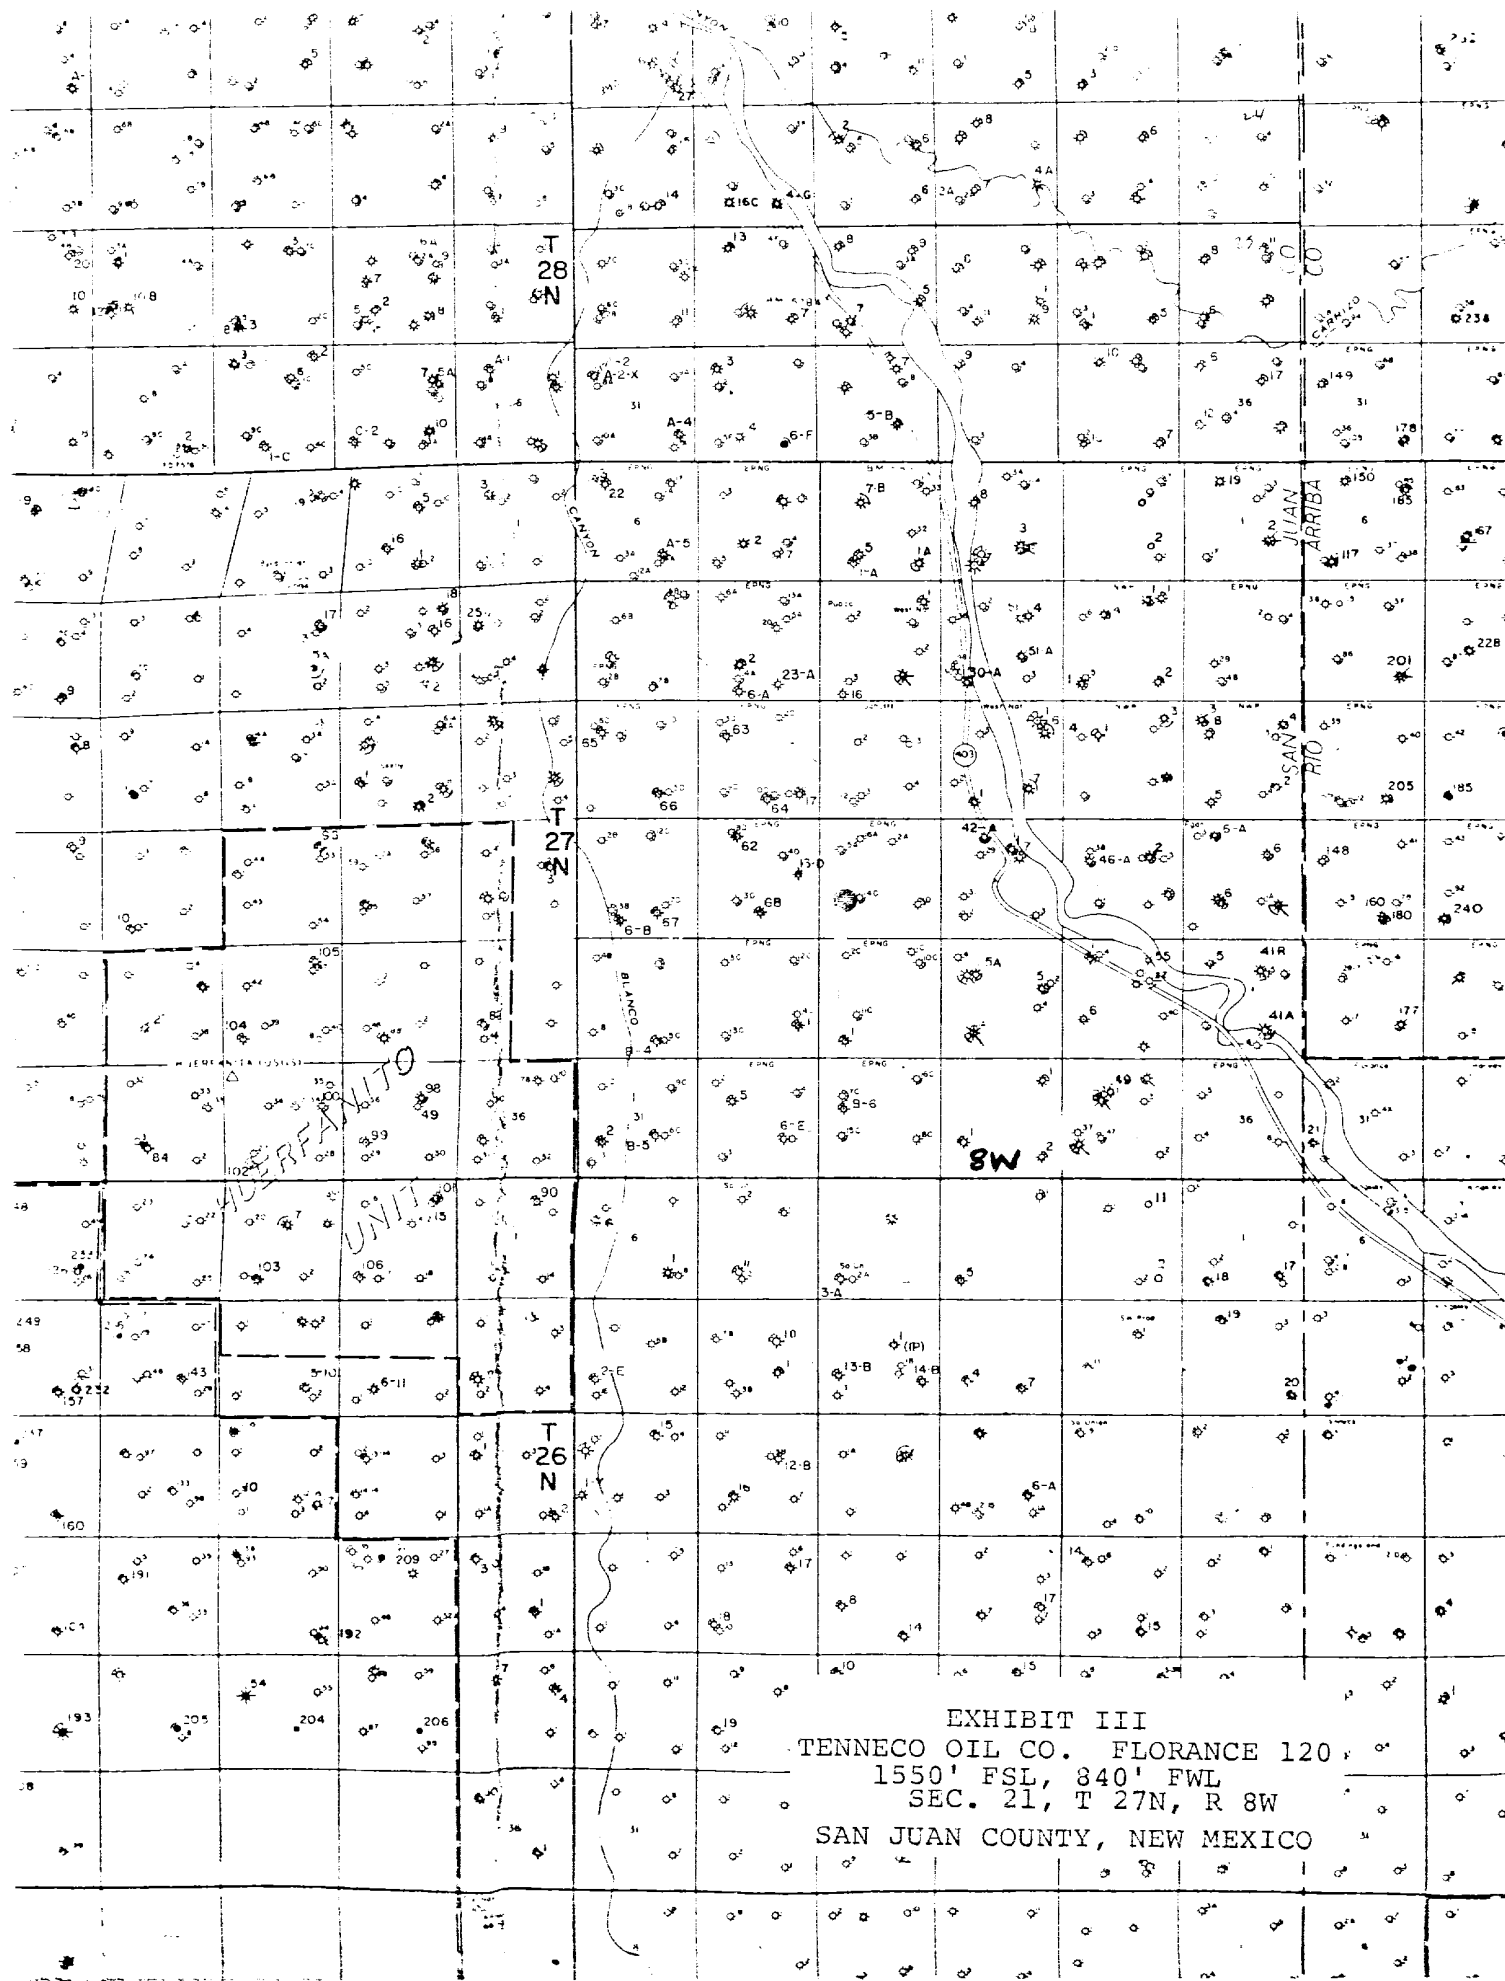



EXHIBIT III
TENNECO OIL CO. FLORANCE 120
1550' FSL, 840' FWL
SEC. 21, T 27N, R 8W
SAN JUAN COUNTY, NEW MEXICO


TENNECO OIL COMPANY

CALCULATION SHEET

EXHIBIT IV

SUBJECT	DRILLING WELL SITE LAYOUT	FLORANCE 120	
LOCATION	1550' FSL, 840' FWL, SEC. 21, T 27N, R 8W	DATE: 11-79	
SAN JUAN COUNTY, NEW MEXICO			

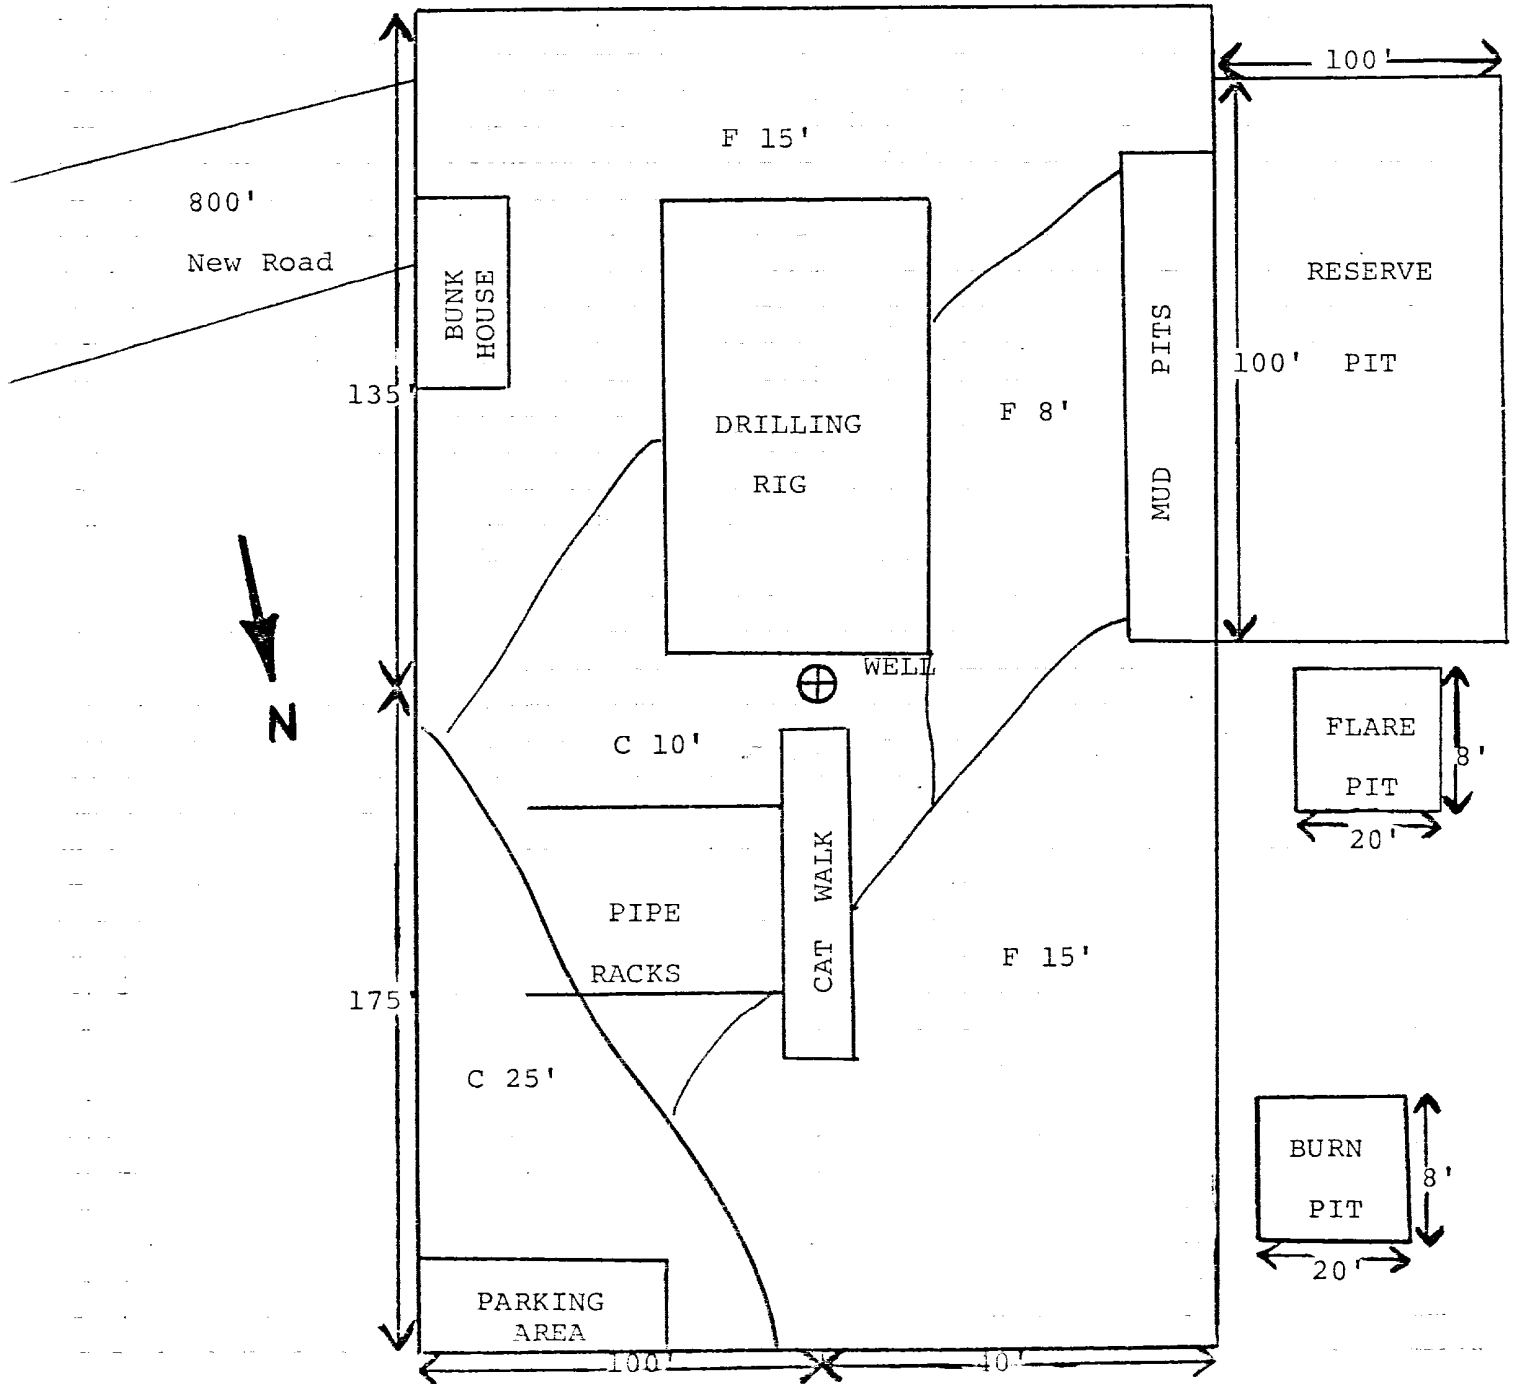

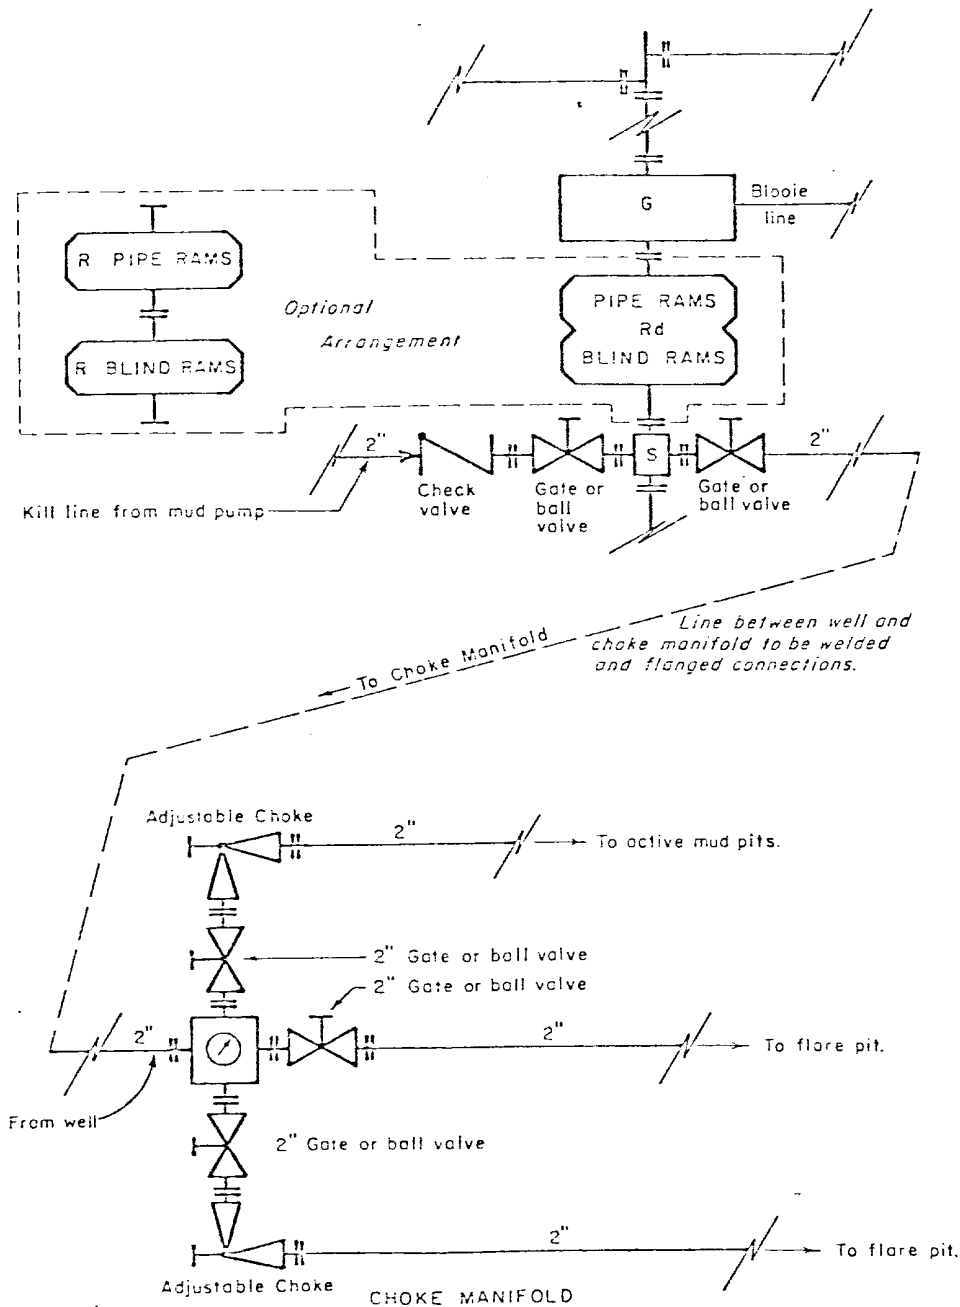

- All equipment to be 3,000 psi working pressure except as noted.
- Rd Double ram type preventer with two sets of rams.
- R Single ram type preventer with one set of rams.
- S Drilling spool with side outlet connections for choke and kill lines.
- G Rotating head 150 psi working pressure minimum

ARRANGEMENT C

TENNECO OIL COMPANY
ROCKY MOUNTAIN DIVISION

REQUIRED MINIMUM
BLOWOUT PREVENTER AND
CHOKE MANIFOLD

J. MAGILL 10-26-79 EVI