

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Form Approved
Budget Bureau No. 42-R1424

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other ☐
2. NAME OF OPERATOR
Dome Petroleum Corp.
3. ADDRESS OF OPERATOR 501 Airport Drive,
Suite 114, Farmington, NM 87401
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1850' FNL, 1850' FEL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	TEST WATER SHUT-OFF	FRACTURE TREAT	SHOOT OR ACIDIZE	REPAIR WELL	PULL OR ALTER CASING	MULTIPLE COMPLETE	CHANGE ZONES	ABANDON*	(other) Spud And Set Surface Casing
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>



SUBSEQUENT REPORT OF:

5. LEASE
N.M. 14973
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
Dome Federal 7-27-13
9. WELL NO.
3
10. FIELD OR WILDCAT NAME
WAW Fruitland-Pictured Cliff
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 7, T27N, R13W
12. COUNTY OR PARISH 13. STATE
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
6013' GR

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded 12 1/4" hole at 3:00 p.m., 7/23/80. Drilled to 128'. Ran 3 joints (116') 8 5/8", 24#, K55, ST&C Casing. Casing landed at 118' G.L. Cemented with 100 sacks Class "B" Cement with 2% CaCl. Plug down at 8:00 a.m., 7/24/80. Circulated cement.

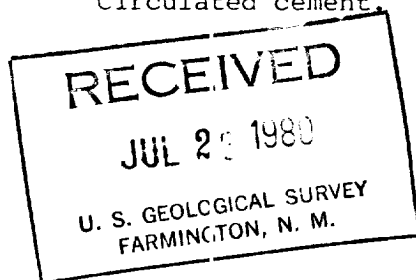

Subsurface Safety Valve: Manu. and Type

18. I hereby certify that the foregoing is true and correct

SIGNED H. D. Hollingsworth TITLE Drlg. & Prod. Foreman DATE July 25, 1980

(This space for Federal or State office use)

ACCEPTED FOR RECORD
AUG 1 1980
FEB 9 1980

FARMINGTON DISTRICT
BY BH

*See Instructions on Reverse Side

NMOCC