Form 3160-3 (August 1999) UNITED STATES OCD-ARTESIA

DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

5. Lease Senal No. NMLC028793A

ŀ	
6.	If Indian, Allottee or Tribe Name

1a. Type of Work: ☑ DRILL ☐ REENTER		7. If Unit or CA Agreement, NMNM88525X	Name and No.
14049		8. Lease Name and Well No.	77/
1b. Type of Well: ☑ Oil Well ☐ Gas Well ☐ Oth	er 🙀 Single Zone 🔲 Multiple Zone	BURCH KEELY UNIT 8	11
-	DIANA CANNON	9. API Well No.	
MARBOB ENERGY CORPORATION	E-Mail: production@marbob.com	30-015-28	090
3a. Address	3b. Phone No. (include area code)	10. Field and Pool, or Explor	RIDITY
3a. Address P O BOX 227 ARTESIA, NM 88211-0227 4. Location of Well (Report location clearly and in accordate At surface SESW Lot N 1310FSL 254 At proposed prod. zone SESW Lot N 1310FSL 254	Fx: 505.746.2523	ONDO BAONOON OF	
4. Location of Well (Report location clearly and in accorded	ince with any State requirements \$56789	11. Sec., T., R., M., or Blk. a	- -
At surface SESW Lot N 1310FSL 254	5FWL O	Sec 18 T17S R30E N	ler NMP
At proposed prod. zone SESW Lot N 1310FSL 254	5FWL (5) 1003 (5)		
14. Distance in miles and direction from nearest town or post	office* (6) WAY 2003	12. County of Failish	13. State
SEE SURFACE USE PLAN	IN DECEIVED	EDDY	NM
15. Distance from proposed location to nearest property or	16. No. of Acres in Lease OCD - ARTESIA 5	Spacing Unit dedicated t	o this well
lease line, ft. (Also to nearest drig. unit line, if any)	629.70	40.00	
1310	029.10	10.00	
18. Distance from proposed location to nearest well, drilling,	19. Proposed Depth	20. BLM/BIA Bond No. on	file
completed, applied for, on this lease, ft.	4800 MD		
	4000 IVID		
21. Elevations (Show whether DF, KB, RT, GL, etc. 3635 GL	22. Approximate date work will start 04/25/2003	23. Estimated duration 21 DAYS	-
	24. Attachments		
The following, completed in accordance with the requirements of	of Onshore Oil and Gas Order No. 1, shall be attached to	this form:	
1. Well plat certified by a registered surveyor.	4. Bond to cover the operation	ons unless covered by an existir	ng bond on file (see
2. A Drilling Plan.	Item 20 above).	·	
 A Surface Use Plan (if the location is on National Forest Sys SUPO shall be filed with the appropriate Forest Service Of 	tem Lands, the 5. Operator certification fice). 6. Such other site specific in	formation and/or plans as may	be required by the
DOY O SUMMO THE MET AFFECT OF THE PROPERTY OF	authorized officer.		
25. Signature	Name (Printed/Typed)		Date
(Electronic Submission)	DIANA CANNON		03/21/2003
AUTHORIZED REPRESENTATIVE			
Approved by (Signature)	Name (Printed/Typed)		Date
/s/ LESLIE A. THEISS	/s/ LESLIE A. THEIS	S	MAY 0 6 20
FIELD MANAGER	Office		
Application approval does not warrant or certify the applicant h	CARLSBAD FIELD (JECE lease which would entitle the a	pplicant to conduct
operations thereon.			
Conditions of approval, if any, are attached.	APF	PROVAL FOR 1	YEAR
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212,	make it a crime for any person knowingly and willfully		
States any false, fictitious or fraudulent statements or represents	tions as to any matter within its jurisdiction.	·	

Additional Operator Remarks (see next page)

Electronic Submission #19833 verified by the BLM Well Information System
For MARBOB ENERGY CORPORATION, sent to the Carlsbad
APPROVAL SUBJECT Teammitted to AFMSS for processing by Armando Lopez on 03/21/2003 (03AL0193AE)
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS
ATTACHED

Additional Operator Remarks:

12 1/4" HOLE - 8 5/8" 24# J55 CSG SET @ 350' - CMT W/ 300 SX 7 7/8" HOLE - 5 1/2" 17# J55 CSG SET @ 4800'- CMT SUFFICIENT TO COVER 200' ABOVE ALL KNOWN OIL & GAS HORIZONS.

PRESSURE CONTROL EQUIPMENT: WE WILL BE USING A 2M SYSTEM. (SEE EXHIBIT #1)

PAY ZONE WILL BE SELECTIVELY PERFORATED AND STIMULATED AS NEEDED FOR OPTIMUM PRODUCTION.

MASTER SURFACE USE PLAN ON FILE AT BLM ROSWELL.

INCLUDED IN THE ATTACHMENT ARE:

- FORM C-102 WELL LOCATION & ACREAGE DEDICATION PLAT
 DRILLING PROGRAM

- 3. SURFACE USE AND OPERATING PLAN
 3. ADDITIONAL REQUIRED SUPPLEMENTAL DRILLING DATA EXHIBITS #1 (4 PGS) #4

DISTRICT I P.O. Rox 1886, Robbs, NM 88241-1980

F.O. Brawer DD, Artesia, NM 88211-0719

State of New Mexico Energy, Minerals and Natural Resources Department

MAR 0 4 2003

Form C-102 Revised Pebruary 10, 1994 Submit to Appropriate District Office

State Lease - 4 Copies Per Lease - 3 Copies

OIL CONSERVATION DIVISION

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

DISTRICT IV

DISTRICT III

DISTRICT II

P.G. BOX 2088, SANTA PE, N.M. 67594-2088

1000 Rio Brazos Rd., Aztec, NM 87410

WELL LOCATION AND ACREAGE DEDICATION PLAT

☐ AMENDED REPORT

API Number	Pool Code	Pool Name		
30-015	28509	GRBG JACKSON SR Q	GRBG SA	
Property Code	Property	Well Number		
6497	BURCH KEELY UNIT 811			
OGRID No.	Operator Name Elevation			
14049	MARBOR ENERGY CORPORATION 3635'			

Surface Location


UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	18	17-S	30-E		1310	SOUTH	2545	WEST	EDDY

Bottom Hole Location If Different From Surface


UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Ac	res Joint o	r Infill Co	notifabilos	ode Ore	icz No.				
40									

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION


	OR A NON-STANDARD UNIT	HAS BEEN APPROVE	D BY THE DIVISION
LOT :			OPERATOR CERTIFICATION I hereby partify the the information contained herein is true and complete to the libest of my knowledge and belief.
			Duri Carron
37.37 AC.			DIANA J. CANNON Printed Name
The state of the s			PRODUCTION ANALYST Title MARCH 21, 2003 Date
37.39 AC.			SURVEYOR CERTIFICATION
EOT 3			I hereby certify that the well location shown on this plat was plotted from field notes of author sweet made by me or under my supervison and that the same is true aux correct to the best of my belief.
	3637.9'3638.0'	1	FEBRUARY 20, 2003 Date Surveyed LA
37.43 AC.	3635.2' 3637.7'		Signature & Seal of Professional Surveyor Early J. Endown 2/28/03 83.11.0218
37,43 AC.			Certificate No. RONALD I EDSON 3239 GARY RIBSON 1264

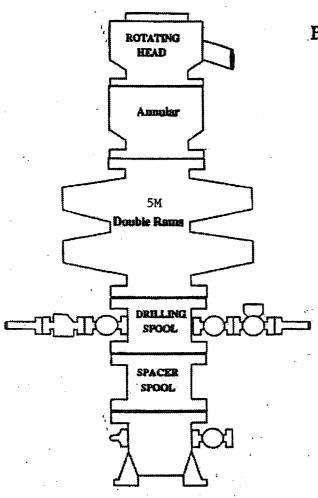

ONSHORE OIL AND GAS ORDER NO. 2

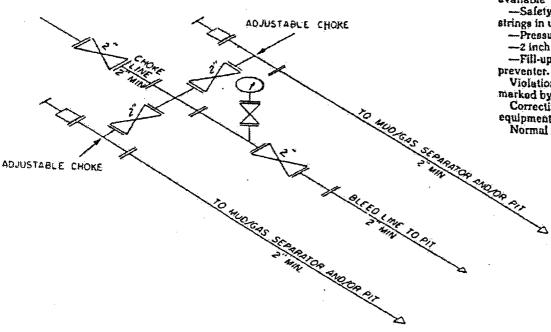

BOPE SCHEMATIC

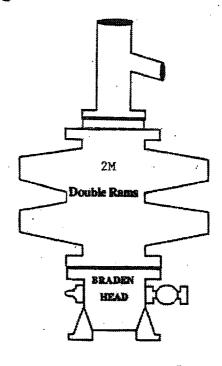

2M system:

-Annular preventer, or, double ram, or two rams with one being blind and one being a pipe ram *

-Kill line (2 inch minimum)

-1 kill line valve (2 inch minimum)

-1 choke line valve

-2 chokes (refer to diogram in

Attachment 1)

-Upper kelly cock valve with handle evailable

-Safety valve and subs to fit all drill strings in use

-Pressure gauge on choke manifold

-2 inch minimum choke line -Fill-up line above the uppermost

Violation: Minor (all items unless marked by asterisk).

Corrective Action: Install the

equipment as specified.

Normal Abatement Period: 24 hours.

CHERATOR'S COPY

JUN 21 1999 **UNITED STATES** Form 3160-5 FORM APPROVED Budget Bureau No. 1004-0135 (June 1990) DEPARTMENT OF THE INTERIOR Expires: March 31, 1993 BUREAU OF LAND MANAGEMENT 5. Lease Designation and Serial No. SUNDRY NOTICES AND REPORTS ON WELLS 6. If Indian, Allottee or Tribe Name Do not use this form for proposals to drill or to deepen or reentry to a different reservoir. Use "APPLICATION FOR PERMIT-" for such proposals 7. If Unit or CA, Agreement Designation SUBMIT IN TRIPLICATE 1. Type of Well ⊠ Well Gas 8. Well Name and No. Well Other 2. Name of Operator MARBOB ENERGY CORPORATION 9. API Well No. 3. Address and Telephone No. P.O. BOX 227, ARTESIA, NM 88210 505-748-3303 10. Field and Pool, or Exploratory Area 4. Location of Well (Footage, Sec., T., R., M., or Survey Description) T17S-R30E T17S-R31E 11. County or Parish, State EDDY CO., NM CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA 12. TYPE OF ACTION TYPE OF SUBMISSION Abandonment Change of Plans Notice of Intent New Construction Recompletion Subsequent Report Plugging Back Non-Routine Fracturing Water Shut-Off Casing Repair Final Abandonment Notice Conversion to Injection **Altering Casing** Other TEST BOPS Dispose Water (Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.) 13. Describe Proposed or Completed Operations (Clearly state all pertinet details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markders and zones pertinent to this work.)* DUE TO THE LOW BOTTOM HOLE PRESSURE OF FORMATIONS ABOVE 6000', WE ARE REQUESTING BLANKET APPROVAL FOR WELLS IN THE ABOVE LOCATIONS TO TEST BOPS ON SURFACE CASING TO 1000# THIS SUNDRY IS APPROVED FOR MARBOB TO HAVE A BLANKET APPROVAL FOR TESTING BOPS. HOWEVER, THE OPERATOR WILL STATE ON EACH APD THIS APPLIES TO IN ORDER TO REVIEWING THE APD REMIND AND/OR BRING NOTICE TO THE BLM OFFICE AND ENGINEER THAT THE WELL'S BOPE TESTING IS COVERED BY A BLANKET APPROVAL FOR THESE LOCATIONS 14. I hereby certify that the foregoing is true and correct PRODUCTION ANALYST 05/25/99 Title (This space for Federal or State of <u> PETROLEUM ENGINEER</u> JUN 16 1999 Approved by Conditions of approval, if any: Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, lictitious or fraudulent statements or representations as to any matter within its jurisdiction.



IN REPLY REFER TO: NMNM-88525X 3180 (06200)

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Roswell Field Office 2909 West Second St. Roswell, New Mexico 88201 www.nm.blm.gov



Marbob Energy Corporation Attention: Johnny Gray P. O. Box 227 Artesia, NM 88210

SEP 07 1999

Gentlemen:

With regard to our telephone conversation of September 2, 1999, a review of our records has found discrepancies in the casing requirements section of the conditions of approval for your APD's. As per our meeting on July 7, 1999, our office had agreed with your recommended casing procedures for shallow wells of 6000 ft. or less in T. 17 S, Rgs. 29, 30 and 31 E., NMPM. In order to correct the discrepancies, this letter states the language to be used for the conditions of approval casing requirements for all your existing APD's

Conditions of Approval-Drilling amended as follows:

- II. Casing requirements in T. 17 S., Rgs. 29, 30 and 31 E. for shallow wells less than 6,000 ft.
- 1. 8-5/8 inch surface casing should be set at approximately _____ ft. in the Rustler Anhydrite or in the case the salt occurs at a shallower depth above the top of the salt. The surface casing shoe shall be set in the anhydrite to ensure adequate sealing. The operator is required to use an excess of 100% cement volume to fill annulus. If cement does not circulate to surface the operator may then use ready mix cement to fill the remaining annulus.
- 2. The minimum required fill of cement behind the 5½ inch production casing is to place the top of the cement 200 ft. above the top of the uppermost hydrocarbon bearing interval or to the base of the salt.

These requirements supercede those issued in your existing, approved APD's for the shallow wells located in T. 17 S., Rgs. 29, 30 and 31 E., NMPM. If you have any question regarding this matter please call John S. Simitz at (505) 627-0288 or Armando A. Lopez at (505) 627-0248.


Sincerely,

Larry D. Bray

Acting Assistant Field Office Manager,

Lands and Minerals

Lamy D. Bray

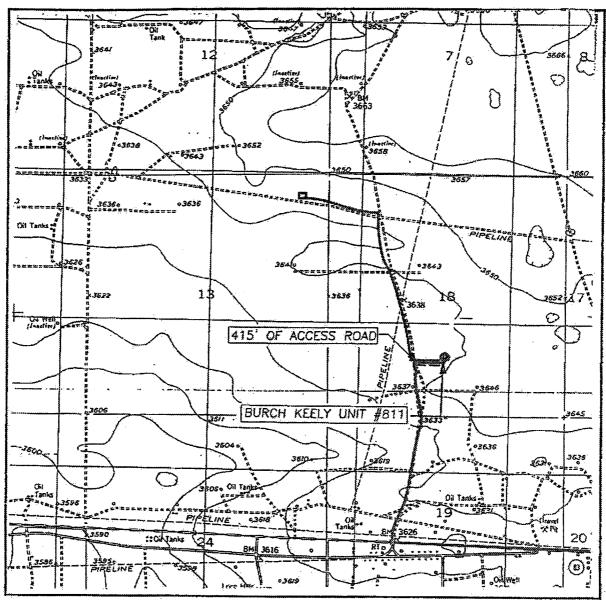

SCALE: 1" = 2000'

CONTOUR INTERVAL: 1. RED LAKE SE, N.M.

SEC. <u>18</u>	TWP. <u>17-S</u> RGE. <u>30-E</u>
SURVEY	N.M.P.M.
COUNTY	EDDY
DESCRIPTION	N 1310' FSL & 2545' FW

EXHIBIT TWO