


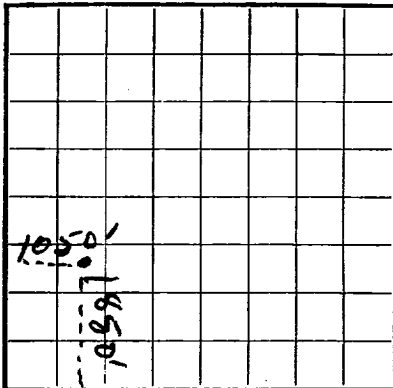

U. S. LAND OFFICE  
SERIAL NUMBER  
LEASE OR PERMIT TO PROSPECT

LOCATE WELL CORRECTLY

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

## LOG OF OIL OR GAS WELL

Company McMillan & White Address Box 1227 El Paso.  
Lessor or Tract Oliver Field Fulcher & Kutz State New Mexico.  
Well No. 9 Sec. 36 T. 28n R. 10w Meridian County San Juan.  
Location 1850 ft. {N.} of S. Line and 1050 ft. {E.} of W. Line of Sec. 36 Elevation 5910.  
(Denote floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed B. E. Jackson  
Title Survey representative

Date December, 27 54

The summary on this page is for the condition of the well at above date.

Commenced drilling December, 17, 1954 Finished drilling December, 24, 1954

## OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 1908 to 1945 No. 4, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 5, from \_\_\_\_\_ to \_\_\_\_\_  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

## IMPORTANT WATER SANDS

No. 1, from \_\_\_\_\_ to \_\_\_\_\_ No. 3, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 4, from \_\_\_\_\_ to \_\_\_\_\_

## CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
<u>9-5/8</u>	<u>32</u>	<u>8</u>	<u>CE&amp;T</u>	<u>100</u>	<u>None</u>				
<u>5-1/2</u>	<u>20</u>	<u>8</u>	<u>CE&amp;T</u>	<u>1908</u>	<u>Full depth</u>				

## MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity
<u>9-5/8</u>	<u>100</u>	<u>75</u>	<u>H.O.W.Co.</u>	
<u>5-1/2</u>	<u>1908</u>	<u>300</u>	<u>H.O.W.Co.</u>	

## PLUGS AND ADAPTERS

Heaving plug—Material \_\_\_\_\_ Length \_\_\_\_\_ Depth set \_\_\_\_\_  
Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

## SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
<u>2 1/2</u>	<u>2 1/2</u>	<u>2 1/2</u>	<u>2</u>	<u>1908</u>	<u>2 1/2</u>	<u>2 1/2</u>
<u>2 1/2</u>	<u>2 1/2</u>	<u>2 1/2</u>	<u>2</u>	<u>1908</u>	<u>2 1/2</u>	<u>2 1/2</u>

## TOOLS USED

Rotary tools were used from 100 feet to 1908 feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet  
Cable tools were used from 0 feet to 100 feet, and from 1908 feet to 1945 feet

## DATES

December, 22, 1954 Put to producing \_\_\_\_\_, 19\_\_\_\_

The production for the first 24 hours was \_\_\_\_\_ barrels of fluid of which \_\_\_\_\_% was oil; \_\_\_\_\_% emulsion; \_\_\_\_\_% water; and \_\_\_\_\_% sediment. Gravity, °Bé. \_\_\_\_\_

If gas well, cu. ft. per 24 hours 1406M.F.C. Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_

Rock pressure, lbs. per sq. in. 572

## EMPLOYEES

\_\_\_\_\_, Driller \_\_\_\_\_, Driller  
\_\_\_\_\_, Driller \_\_\_\_\_, Driller

## FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
<u>1908</u>	<u>1945</u>	<u>37</u>	<u>Pictured Cliffs</u>
			<u>Top P.C. - 1903'</u>