Form 3160-5 (April 2004)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

SHMDRV	NOTICES	ΔND	REPORTS	ON	WELLS

OCD Artesia	FORM APPROVED OM B No. 1004-0137 Expires: March 31, 200
-------------	---


5.	Lease	Serial	No.
----	-------	--------	-----

01111	83	73
ILII//	175	ω_{2}

SUNDRY NOTICES AND REPORTS ON WELLS			MMIBSOS		
Do not use this form for proposals to abandoned well. Use Form 3160 - 3 (A			6. If Indian, A	dottee or Tribe Name	
SUBMIT IN TRIPLICATE- Other instructions on reverse side.			7. If Unit or CA/Agreement, Name and/or No.		
1. Type of Well Gas Well Other			8. Well Name	and No	
2. Name of Operator OXY USA WTP LP		192463		you 4 Federal #7	
3a. Address	3b. Phone No. (include area code)		30-015-32293		
P.O. Box 50250 Midland, TX 79710	432-685-5717	·	10. Field and P	ool, or Exploratory Area	
4. Location of Well (Footage, Sec., T., R., M., or Survey Description)	- 11 Tan	5 2005	Indian b	esin Up. Penn (Assoc)	
5-1750 FWL 990 FEL SENE (H) S	SECT IND	> Kalte	-	1 WM	
B. 711 FWL 684 FEL WENE (A)					
12. CHECK APPROPRIATE BOX(ES) TO			EPORT, OR C	OTHER DATA	
TYPE OF SUBMISSION	T	YPE OF ACTION			
Notice of Intent Acidize Alter Casing	Deepen	Production (Sta	· .	Water Shut-Off	
Subsequent Report Casing Repair	Fracture Treat New Construction		<u> </u>	₩ell Integrity Other	
Change Plans	Plug and Abandon	- A	oandon –		
Final Abandonment Notice Convert to Injection	Plug Back	Water Disposal			
If the proposal is to deepen directionally or recomplete horizontall Attach the Bond under which the work will be performed or provi following completion of the involved operations. If the operation testing has been completed. Final Abandonment Notices shall be determined that the site is ready for final inspection.) Jones Canyon 4 Federal #7 – 30-015-32293	de the Bond No. on fil results in a multiple co	e with BLM/BIA. Requirempletion or recompletion	ed subsequent rep n a new interval, a	orts shall be filed within 30 days a Form 3160-4 shall be filed once completed, and the operator has	
TD-8871'M 8669'V PBTD-8768'M Perfs-8198-				DEC 06 2011	
OXY USA WTP LP respectfully requests to tempora	rily abandon th	nis well. It is curre	ently being e	NMOCD ARTESIA	
future recompletion with the coil tubing-acid simu					
success of this project, this well would be a future		, ,	,	, ,	
		, SEE AT	TACHEI	O FOR	
1. POOH w/ prod equipment, RIH & set CIBP @ +,				F APPROVAL	
2. Notify BLM/NMOCD of casing integrity test 24h					
3. RU pump truck, circulate well with treated wat	er, pressure tes	st casing to 500# 1			
14. I hereby certify that the foregoing is true and correct Name (Printed/Typed)	·		AC	cepted for record	
David Stewart	Title	Regulatory Advisor		NMOCD, of	
Signature Un Man	Date	ulaalu		707/8/21	
THIS SPACE FOR	FEDERAL OR	STATE OFFICE	USE		
Approved by /s/ JD Whitlock Jr		Title LPET	Da	te /2/5/11	
Conditions of approval, if any, are attached. Approval of this notice certify that the applicant holds legal or equitable title to those rights i which would entitle the applicant to conduct operations thereon.		Office (Fo			

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

OXY USA WTP LP Jones Canyon 4 Federal #7 API No. 30-015-32293

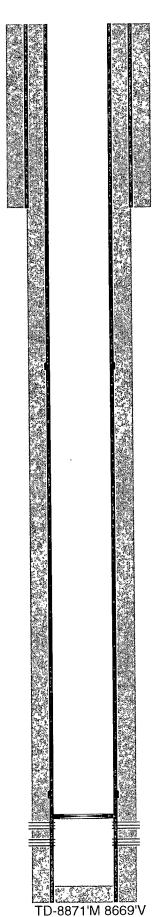

12-1/4" hole @ 1815' 9-5/8" csg @ 1815' w/ 1175sx-TOC-Surf-Circ

8-3/4" hole @ 8871' 7" csg @ 8859' DVT @ 7957'-3508' w/ 1575sx-TOC-Surf-Circ

Perfs @ 8198-8325'

CIBP @ +/- 8150'

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Temporary Abandonment of Wells on Federal Lands Conditions of Approval

A temporarily abandoned well is defined as a completion that is not capable of production in paying quantities but which may have value as a service well. Pursuant to 43 CFR 3162.3-4 (c), no well may be temporarily abandoned for more than 30 days without the prior approval of the authorized officer.

Temporary Abandonment (TA) status approval requires a successful mechanical or casing integrity test as follows:

- 1. A Notice of Intent (NOI) Sundry Notice (Form 3160-5) requesting approval to run a mechanical integrity test (MIT) or casing integrity test (CIT).
- 2. A description of the temporary abandonment procedure.
 - a. A bridge plug or packer must be installed as close to 50 feet above any open perforations or open hole as possible. If a cement plug is used, the top of the cement must be verified by tagging.
 - b. The wellbore must be filled with corrosion inhibited fluid and pressure tested to 500 psi. The casing shall be capable of holding this pressure for at least 30 minutes. Any leak-off will be evaluated.
 - c. All downhole production/injection equipment (tubing, rods, etc.) shall be removed from the casing if they are not isolated by a packer.
 - d. A bradenhead test must be conducted. If the test indicates a problem exists, a remedial plan and time frame for remediation shall be submitted within ninety (90) days of the test.
 - e. Contact the appropriate BLM office at least 24 hours prior to the scheduled Casing Integrity Test. For wells in Eddy County, 575-361-2822; Lea County 575-393-3612.
- 3. Provides justification why the well should be temporarily abandoned rather than permanently plugged and abandoned and an estimated date that the well will be returned to beneficial use or plugged and abandoned.

Wells that successfully pass the casing integrity test may be approved for Temporary Abandonment (TA) status provided that the operator:

- Submits a subsequent Sundry Notice (Form 3160-5) requesting TA approval with well bore diagram with all perforations and CIBP's and tops of cement on CIBP's.
- 2. Describes the temporary abandonment procedure.
- 3. Attaches a clear copy or the original of the pressure test chart.
- 4. Give justification to allow well to be place in TA status and plan for future use of well with time frame that well will be place back on line or plans to P&A well will be submitted.

If the well does not pass the casing integrity test, then the operator shall within 30 days submit to BLM for approval one of the following:

- 1. A procedure to repair the casing so that a TA approval can be granted.
- 2. A procedure to plug and abandon the well.

Jones Canyon 4 Federal #7

- 1. Well may be approved to be TA/SI for a period of 12 months or until 12/01/2012 after successful MIT and subsequent report with well bore diagram is submitted.
- 2. This will be the only TA approval for this well.
- 3. Well must be returned to production or plans to P&A must be submitted by Dec. 1, 2012.
- 4. Notify BLM to witness setting of CIBP.