Form 3160-5 (April 2004)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

OCD Artesia

FORM APPROVED OM B No. 1004-0137 Expires: March 31, 2007

5. Lease Serial No. BHL LC 068905

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE- Other instructions on reverse side.		7. If Unit or CA/Agreement, Name and/or No. Poker Lake Unit NMNM 71016X		
1. Type of Well Gas Well Other		8. Well Name and No.		
2. Name of Operator BOPCO, L. P.		Poker Lake Unit 318H 9. API Well No.		
3a Address P. O. Box 2760 Midland, TX 79702	3b. Phone No. (include area code) 432-683-2277	30-015-39731 10. Field and Pool, or Exploratory Area		
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) SENE,UL H, 2175' FNL & 305' FEL, Sec 4, T24S-R30E, Lat:N32.247958, Long:W103.878064 2540' FNL, 85' FEL, Sec 10, T24S-R30E		Poker Lake Delaware NW 11. County or Parish, State Eddy, NM		
12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA				
TYPE OF SUBMISSION	TYPE OF ACTION			
	Fracture Treat Reclamat New Construction Recomple	ete Other		

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

BOPCO L.P. respectfully request to ammend point four of the 8pt drilling program from the original APD that was approved on 11/21/2011. Point four of the drilling program will now read as stated in the attached page. The subsequent diagrams are also attached.

RECEIVED

NOV 2 0 2012

NMOCD ARTESIA

SEE ATTACHED FOR CONDITIONS OF APPROVAL

Accepted for record NMOCD (187) VIDER

	10 111			
I hereby certify that the foregoing is true and correct Name (Printed/Typed)				
Jeremy Braden	Title Engineering Assistant	·		
Signature Alemny Broke	Date 10-26-12 APPRO	VED		
THIS SPACE FOR FEDERAL OR STATE OFFICE USE				
Approved by	Title Dale NOV 19	2012		
Conditions of approval, if any, are attached. Approval of this notice does not warrant certify that the applicant holds legal or equitable title to those rights in the subject leas which would entitle the applicant to conduct operations thereon.	office / Is/ Chris	MANAGEMENT		
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any parties any false fictitions or fraudulent, statements or representations as to any matter.	person knowingly and willfully to make to any department of agency	of the United		

POINT 4: PRESSURE CONTROL EQUIPMENT (SEE ATTACHED DIAGRAM 2)

After running the 13-3/8" surface casing, a 13-5/8" BOP/BOPE system with a minimum rating of 3M will be installed, used, maintained and tested as per Onshore Order 2. In addition to the high pressure test, a low pressure (250-300 psig) test will be performed.

After running the 9-5/8" intermediate casing, a 13-5/8" or 11" BOP/BOPE system with a minimum rating of 3M will be installed on the 9-5/8" intermediate casing spool (8-3/4" open hole), used, maintained and tested as per Onshore Order 2. In addition to the high pressure test, a low pressure (250-300 psig) test will be performed.

After running the 7" intermediate casing, a 13-5/8" or 11" BOP/BOPE system with a minimum rating of 3M will be installed on the 9-5/8" intermediate casing spool (8-3/4" open hole), used, maintained and tested as per Onshore Order 2. In addition to the high pressure test, a low pressure (250-300 psig) test will be performed.

H2S contingency


H2S monitors shall be installed prior to drilling out the surface shoe. If H2S is encountered in quantities greater than 10 PPM, the well will be shut in and H2S equipment will be installed, including a flare line that will be extended pursuant to onshore oil and gas order #6.


These tests will be performed:

- a) Upon installation
- b) After any component changes
- c) Thirty days after a previous test
- d) As required by well conditions

A function test to insure that the preventers are operating correctly will be performed on each trip.

BOPCO, L.P. would like to request a variance to use an armored, 3", 5000 psi WP flex hose for the choke line in the drilling of the well if the rig is equip with hose. (See specification for hose that might be used, attached with APD exhibits). This is rig equipment and will help quicken nipple up time thus saving money without a safety problem. The hose itself is rated to 5000 psi ,and has 5000 psi flanges on each end. This well is to be drilled to 15,370 MD (7,722' TVD) and max surface pressure should be +/- 1915 psi as prescribed in onshore order #2 shown as max BHP minus 0.22 psi/ft. Thus, 3000 psi BOPE is all that is needed for this well. Please refer to diagram 2 for choke manifold and closed loop system layout. If an armored flex hose is utilized, the company man will have all of the proper certified paper work for that hose available on location.

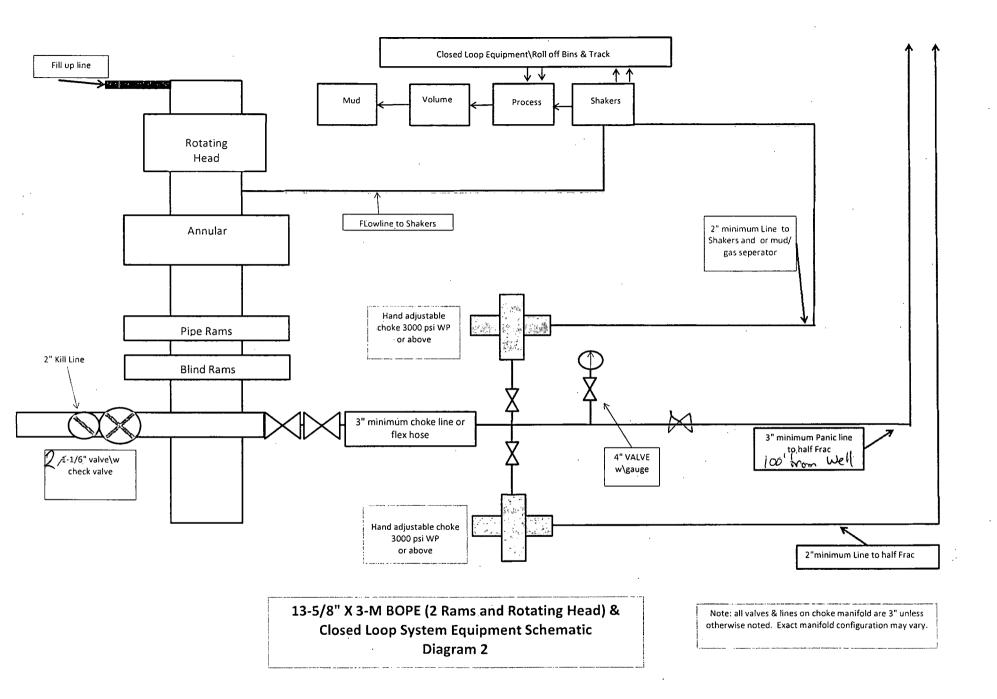

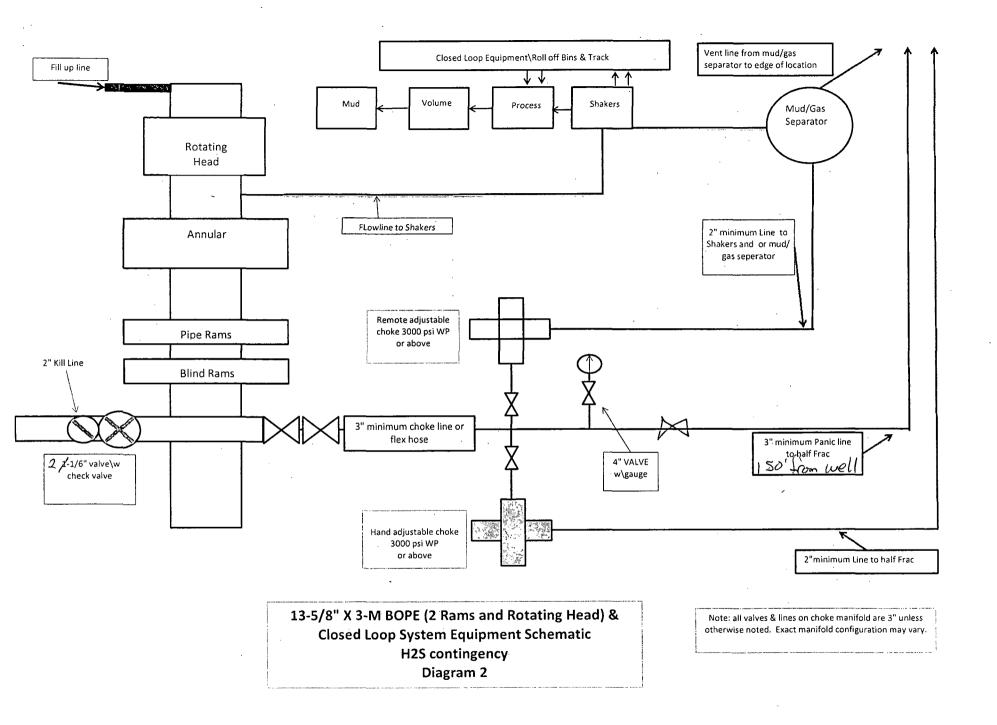

Co-Flex line Conditions of Approval

Variance approved to use flex line from BOP to choke manifold. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. If the BLM inspector questions the straightness of the hose, a BLM engineer will be contacted and will review in the field or via picture supplied by inspector to determine if changes are required (operator shall expect delays if this occurs).