

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.

Use "APPLICATION FOR PERMIT - " for such proposals

6. Lease Designation and Serial No.

NMSF-047039B

8. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

J. F. Day B #2

9. API Well No.

3004523773

10. Field and Pool, or Exploratory Area

Fulcher Kutz/Pictured Cliffs

11. County or Parish, State

San Juan New Mexico

1. Type of Well
☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Amoco Production Company

Attention:

Gail M. Jefferson, Rm 1942

3. Address and Telephone No.

P.O. Box 800, Denver, Colorado 80201

(303) 830-6157

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1025FSL 1610FEL Sec. 7 T 28N R 10W Unit S

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

- ☒ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Amoco Production Company request permission to plug and abandon the above referenced well per the attached procedures.

If you have any technical questions please contact Mike Kutas at (303) 830-5159 or myself for any administrative concerns.

SEE ATTACHED FOR
CONDITIONS OF APPROVAL

RECEIVED
MAY - 9 1995
OIL CON. DIV.
DIST. 3

14. I hereby certify that the foregoing is true and correct

Signed

Gail M. Jefferson

Title

Sr. Admin. Staff Asst.

05-01-1995

(This space for Federal or State office use)

APPROVED

Approved by

Title

Conditions of approval, if any:

MAY 14 1995

DISTRICT MANAGER

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent representations as to any matter within its jurisdiction.

* See Instructions on Reverse Side

NMOCD

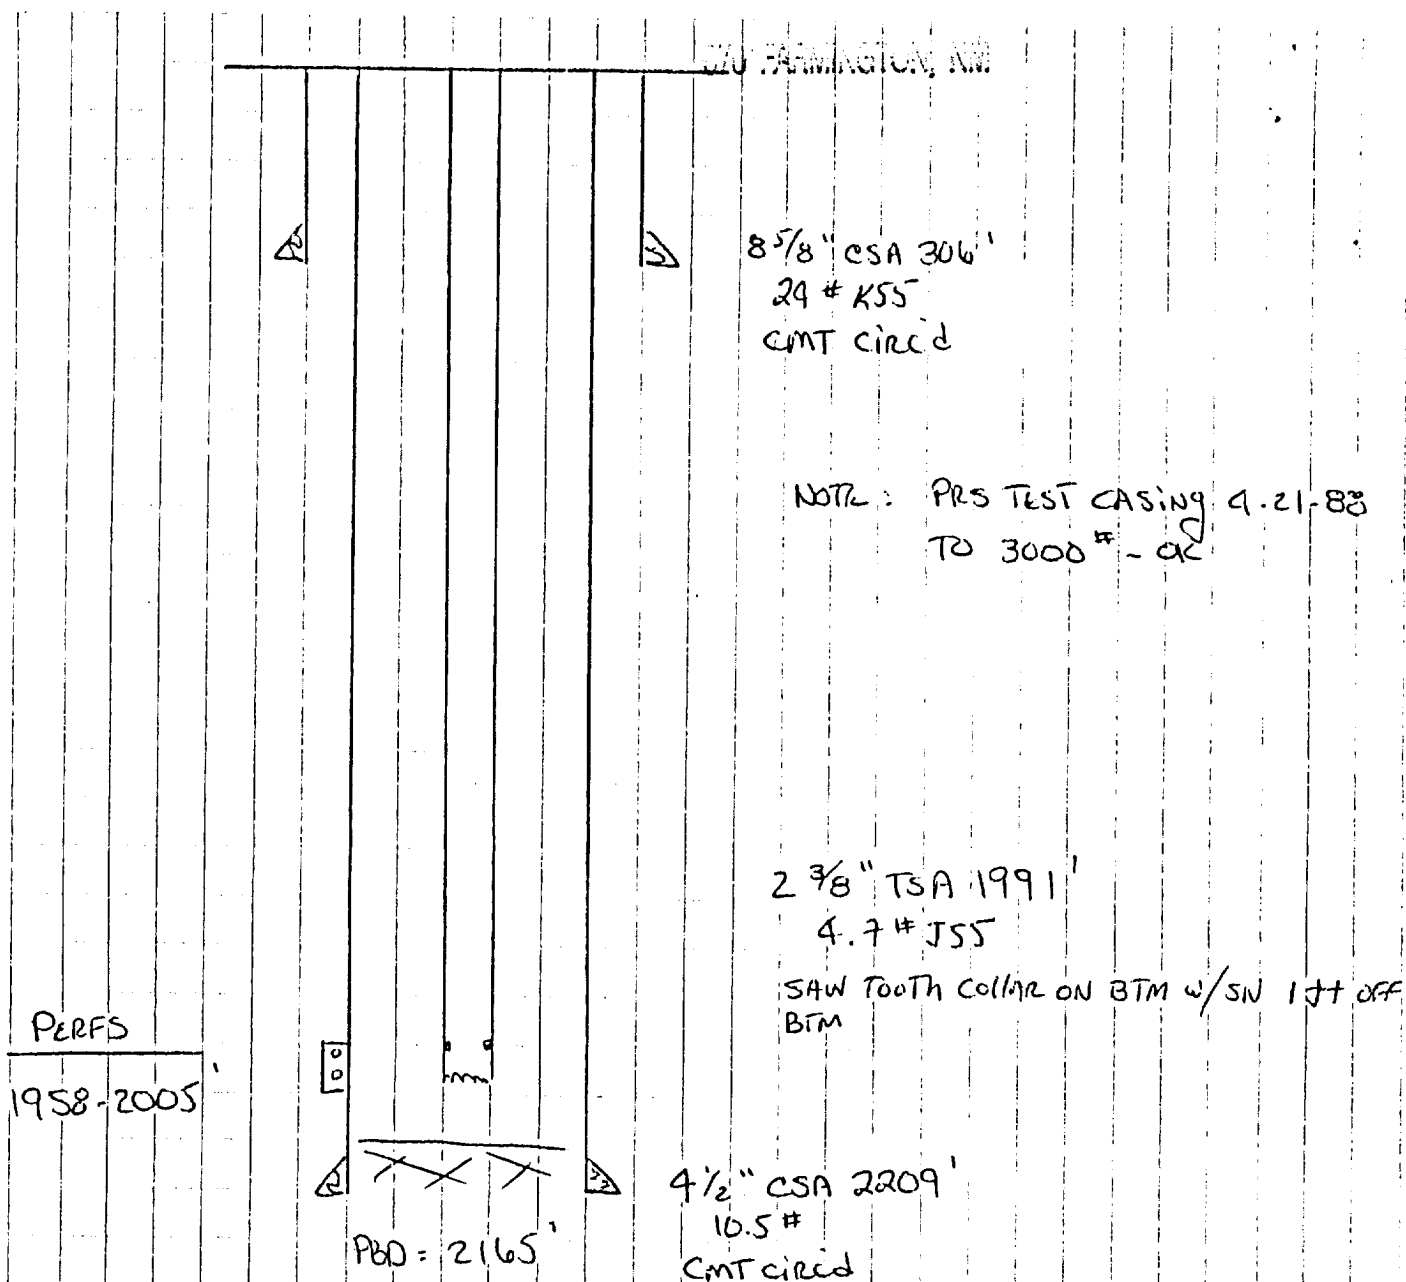
J. F. Day B #2

Orig. Comp.12/79

TD= 2210', PBTD = 2165'

Page 2 of 2

1. Check location for anchors. Install if necessary. Test anchors.
2. MIRUSU. Blow down well. Kill if necessary with fresh water. NDWH. NUBOP.
3. POOH with 2 3/8" tbg. RIH with tbg and cement retainer. Set retainer at 1900'. Test casing integrity to 500#. Squeeze perms at 1958' to 2005' with 46 cuft of cement. Pull out of retainer and spot cement plug to 1625' with 29 cuft cement.
4. Pull out of hole and spot cement plug from 800' to surface with 76 cuft cement.
5. NDBOP. Cut off casing and wellhead. Install PXA marker according to BLM or State requirements.
6. Turn over to John Schwartz for reclamation.
7. Rehabilitate location according to BLM or State requirements.

Subject J.F. Day B 2

UNITED STATES DEPARTMENT OF THE INTERIOR

**BUREAU OF LAND MANAGEMENT
FARMINGTON DISTRICT OFFICE**

1235 La Plata Highway
Farmington, New Mexico 87401

**Attachment to Notice of
Intention to Abandon**

Re: Permanent Abandonment

Well: 2 J. F. Day B

CONDITIONS OF APPROVAL

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Leases."
2. **Mike Flaniken** with the Farmington Office is to be notified at least 24 hours before the plugging operations commence (505) 599-8907.
3. The following modifications to your plugging program are to be made (when applicable):
 - 1.) Extend cement plug from 994' to the surface inside the casing. (Bottom of Ojo Alamo or top of Kirtland @ 944')