

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS


(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other ☐
2. NAME OF OPERATOR
Southland Royalty Company
3. ADDRESS OF OPERATOR
P.O. Drawer 570, Farmington, New Mexico 87401
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: *910' FSL & 1650' FEL*
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

- TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) *Casing Report*

SUBSEQUENT REPORT OF

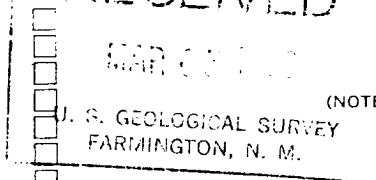

(NOTE) Report results of multiple completion or zone change on Form 9-330.)

5. LEASE
SF-079634
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
McClanahan
9. WELL NO.
15-E
10. FIELD OR WILDCAT NAME
Basin Dakota/Blanco Mesa Verde
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Section 14-T28N-R10W
12. COUNTY OR PARISH *San Juan* 13. STATE *New Mexico*
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
5737' GR

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

2-27-80 Ran 155 joints (6468') of 5-1/2", 15.5#, K-55 casing set at 6480'. Stage Tools set at 2069' and 4543'. Cemented 1st STAGE with 155 sacks of 50/50 Poz with 6% gel, 1/4# gel flake per sack followed by 50 sacks of neat with 2% CaCl2. Plug down @ 12:00 Noon 2-27-80. Cemented 2nd STAGE with 195 sacks of 50/50 Poz with 6% gel followed by 50 sacks of neat with 2% CaCl2. Plug down at 3:30 P.M. 2-27-80. Cemented 3rd STAGE with 160 sacks of 50/50 Poz with 6% gel. Plug down at 4:30 P.M. 2-27-80. Rel rig @ 7:00 P.M. 2-27-80. Top of Cement @ 1400'.

Subsurface Safety Valve: Manu. and Type

18. I hereby certify that the foregoing is true and correct

SIGNED *[Signature]* TITLE *Dist. Prod. Mgr.* DATE *February 28, 1980*

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

MMCCO

ACCEPTED FOR RECORD

MAR 5 1980

*See Instructions on Reverse Side

FARMINGTON DISTRICT
BY *M. L. Kuchera*