SUBMIT IN TRIPLICATE.

(Other instructions on reverse side) UNITED STATES DEPARTMENT OF THE INTERIOR

Form approved, Budget Bureau No. 42-R1425 30-045-24111

	DEIMITHEN			MON			5. LEANE DESIGNATION	AND SERIAL NO.	
GEOLOGICAL SURVEY							SF 077085		
APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK						G. IF INDIAN, ALLOTTEE OR TRIBE NAME			
	LL 🛛	DEEPEN		PL	UG BA	ск 🗆	7. UNIT AGREEMENT N	AME	
oir 🗀 c	S OTHER			INCLE	MULTIP	LE	S. FARM OR LEASE NA	M E	
2. NAME OF OPERATOR	<u> </u>			0.1E	ZONE		Omler "A"		
Tenneco Oil (Company						9. WELL NO.		
							2-E		
720 S. Colora	ido Boulevard, l	Denver, Col	orad	o 80222			10. FIELD AND POOL, OR WILDCAT		
At surface		90 FWL	ш шпу .	state reguirem	leuts.")		Basin Dakota 11. SEC., T., R., M., OR BLK.		
At proposed prod. zon		JO TWL				-	AND SURVEY OR AREA		
14. DISTANCE IN MILES	IND DIRECTION FROM NEAR	REST TOWN OR POS	T OFFIC	r.			Sec. 35, T28N, RIOW 12. COUNTY OF PARISH 13. STATE		
	ith SE of Blanco			_			San Juan	N.M.	
15. DISTANCE FROM PROPULOCATION TO NEAREST	SED.	,		D. OF ACRES IN	N LEASE		. NO. OF ACRES ASSIGNED		
PROPERTY OR LEASE L (Also to nearest drig	INE, FT.		22	40.00		TO THIS WELL (320.00			
18. DISTANCE FROM PROPORTION NEAREST WELL, DE	SED LOCATIONS		•	OPOSED DEPTH	1	20. ROTARY OR CABLE TOOLS			
OR APPLIED FOR, ON THE			Ь	540 		Rota	ary		
21. ELEVATIONS (Show whe	ther DF, RT, GR, etc.)						22. APPROS. DATE WO	RK WILL START*	
5879 GR							ASAP		
		PROPOSED CASI	NG ANI	CEMENTIN	G PROGRA	·M			
SIZE OF HOLE	8 5/8" New	WEIGHT PER F				QUANTITY OF CEMENT			
12±" 7 7/8"	4½" New	24# K-55 10.5# K-55		300' ±		l	culate to surface culate to surface in 2 sta		
The gas is de		-	111	er geolog RATIFICATIO	gic haza	ards ar	e expected.	2010/07640 2010 2010	
E SPACE DESCRIBE PROPOSE	DEC 1 2 1979 U. S. GEOLOGICAL SUR FARMINGTON, N. N. D. PBOORAM: If proposal	is to deepen or pl	ug back	, give data on	present pr	oductive zor	JEO 19 1979 L COLH COM. () DIGI. 3	oductive	
er proposal is to drill older program, if any. ED M. Lee Freen is space for Federal or Sta	Securnary, give	pertinent data or	ı subsur	face locations	and measu	red and true	e vertical depths. Give	blowout	
MIT NO.			APPBOVA	L DATE	·				
PROVED BY									

DRILLING OPERATIONS AUTHORIZED ARE SUBJECT TO COMPLIANCE WITH ATTACHED "GENERAL REQUIREMENTS":

*See Instructions On Reverse Side

OIL CONSERVATION DIVISION

STATE OF NEW MEXICO LINERGY AND MINERALS DEFARTMENT

P. O. BOX 2088 SANTA FE, NEW MEXICO 87501

Form C-102 Revised 10-1-78

All distances must be from the cuter boundaries of the Section.

Operator			Lea	5e		Well No.	
TENNECO OIL COMPANY			1	ÆER "A"		2-E	
Unit Letter Section Township		.	Range	County	_		
D	35	28N		10W	San	Juan	
Actual Footage Loc				<i>₹</i>	·	,	
890 feet from the North line and 890 feet from the West line							
Ground Level Elev.	Producing For		Poo.			Dedicated Acreage:	
58 7 9	Dakota			asin Dakota		320.00 Acres	
 Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty). If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling. etc? Yes No If answer is "yes," type of consolidation If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of 							
this form i	f necessary.)	·			 		
No allowal	ble will be assign					d (by communitization, unitization, , has been approved by the Commis-	
J1414111111111111111111111111111111111		*************		***************	111111111	CERTIFICATION	
890' ©	USA SF- TOC-½ Conoco- 320.00	- 1 2				I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief. Name Staff Production Analyst Position Tenneco Oil Company Company 12-7-79 Date	
	RECEIV.	979 CAL SURVEY ON. M.	5			I hereby certify that the well location shown on this plat was plotted from field nates of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief. Date Street Protessional angureer and at Land Street Certificate 1.5	
0 330 660	90 1820 1650 19	10 2310 2640	2000	1800 1000	500 0	3950	

TENNECO OIL COMPANY

PROGNOSIS TO DRILL AND COMPLETE

DIVISION: Rocky Mountain DATE: September 13, 1979

LEASE: Omler "A" WELL NO.: 2-E

LOCATION: 890' FNL, 890' FWL FIELD: Basin Dakota

Sec. 35, T 28N, R 10W

San Juan County, New Mexico

ESTIMATED ELEVATION: 5910' GR

ESTIMATED TOTAL DEPTH: 6540'

PROJECTED HORIZON: Dakota

DRILLING, CASING AND CEMENT PROGRAM:

(1) MIRURT.

6. 1 %

- (2) Drill 12 1/4" hole to \pm 300'. Run 8 5/8" O.D. 24 \pm K-55 STSC casing to 300'. Cement with sufficient volume to circulate cement to surface.
- (3) WOC minimum of 12 hours. Nipple up BOE. Test BOP, blind and pipe rams, casing and manifold to 600 psi prior to drilling out for 1/2 hour.
- (4) Drill 7 7/8" hole to T.D.
- (5) Run open hole logs as required.
- (6) Run 4 1/2", 10.5#, K-55 ST&C casing. Cement in 2 stages with stage collar + 4650'.
- (7) Cement first stage with sufficient volume to raise cement to stage tool. Circulate and WCC 4 hours between stages. Cement 2nd stage with sufficient volume to circulate to surface.
- (8) Set casing slips, cut off 4 1/2" casing. Nipple up well head.
- (9) RD. MORT.

ESTIMATED	FORMATION	TOPS:	Surface	Nacimiento		

OJO	1020'	Water			
Pictured Cliffs	1910'	Gas	Mancos	4560'	
Lewis	1980'		Gallup	5420 '	Oil/Gas
Cliffhouse	3 4 30	Gas	Greenhorn	6210'	
Manefee	3550'	Gas	Dakota	6310'	Gas
Point Lookout	4260'	Gas	TD	6540 '	

DRILLING MUD PROGRAM:

0 - 250' Native Solids. V/C WL. Use sufficient Viscosity to clean hole

250' - TD Low Solids. 15 cc WL. Use sufficient viscosity to clean hole. Log and run casing.

CORING AND TESTING PROGRAM:

NONE

DEVIATION SURVEYS:

- 1. Survey surface hole at 100' intervals. Maximum allowable deviation at
- 2. FROM SURFACE TO TOTAL DEPTH DEVIATION SURVEYS MUST BE TAKEN EVERY 500' OR EACH TRIP WHICHEVER IS FIRST. This may entail running the TOTCO on wireline. Record each survey on the AAODC Drilling Report Sheet. Maximum allowable change in deviation is 1° per 100'.

SAMPLES:

Surface to 6150' 30' samples 6150' to T.D. 10' samples

WELL SURVEYS:

Majority of logs will be cased hole. GR-Neutron, or TDT. A few will be open hole GR-Induction.

BOP: 10" 900 Series Hydraulic operated with complete shut off and pipe rams.

PREVENTORS MUST BE CHECKED FOR OPERATION EVERY 24 HOURS, AND THE CHECK MUST BE RE-CORDED ON THE AAODC DRILLING REPORT SHEET.

REPORTS

Drilling reports for the past 24 hours will include depth, footage, time distribution, activity breakdown, mud properties, bit record, bottom hole assembly, daily and cumulative mud costs, plus any other pertinent information; will be called into Tenneco Oil Company, Denver, Colorado between 7:30 A.M. and 8:00 A.M.

- 303-758-7130 (office) Don Barnes
 303-758-7287 Don Barnes private line Monday-Friday (before 7:45 A.M.)
- 2. 303-936-0704 (home) Don Barnes weekends and holidays
- 3. 303-795-0221 (home) John Owen if Don Barnes not available


The yellow sheet of the IADC Report to be filled out completely, the original copy of the drilling time recorder, and copies of any invoices from this well signed and received for Tenneco Oil Company will be mailed daily to:

TENNECO OIL COMPANY
PENTHOUSE
720 SOUTH COLORADO BOULEVARD
DENVER, COLORADO 80222

ATTENTION: DRILLING DEPARTMENT

In case of an emergency, notify the following:

- 1. Mr. Don Barnes, Division Drilling Engineer 303-936-0704.
- 2. Mr. John Owen, Project Drilling Engineer 303-795-0221
- 3. Mr. Mike Lacey, Division Production Manager 303-979-0509.

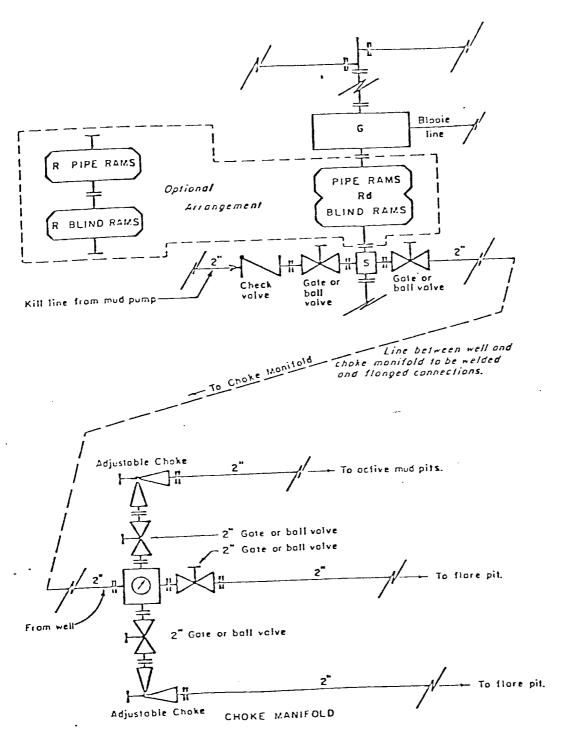

All equipment to be 3,000 psi working pressure except as noted.

- Double ram type preventer with two sets of rams. Rd
- Single rom type preventer with one set of rams.
- Drilling spool with side outlet connections for choke and kill lines.
- Rotating head 150 psi working pressure minimum G

ARRANGEMENT C

TENNECO OIL COMPANY ROCKY MOUNTAIN DIVISION REQUIRED MINIMUM BLOWOUT PREVENTER AN CHOKE MANIFOLD J. MAGILL 10-26-78

- 1. Existing Road Please refer to Map No. 1 which shows the existing roads. New roads which will be required have been marked on this map. All existing and new roads will be properly maintained during the duration of this project.
- 2. Planned Access Roads Please refer to Map No. 1. The grade of the access roads will be consistent with that of the local terrain. The road surface will not exceed twenty feet (20') in width. Upon completion of the project, the access road will be adequately drained to control soil erosion. Drainage facilities may include ditches, water bars, culverts or any other measure deemed necessary by trained Company personnel to insure proper drainage. Gates and/or cattleguards will be installed if necessary.
- 3. Location of Existing Wells Please refer to Map No. 2.
- 4. Location of Tank Batteries, Production Facilities, and Production Gathering and Service Lines Please refer to Maps No. 1 and No. 2. Map No. 2 shows the existing roads and new proposed access roads. All known production facilities are shown on these two maps.
- 5. Location and Type of Water Supply Water for the proposed project will be obtained from a private source.
- 6. Source of Construction Materials No additional materials will be required to build either the access road or the proposed location.
- 7. Methods of Handling Waste Materials All garbage and trash materials will be put into a burn pit shown on the attached Location Plat No. 1. When clean-up operations are begun on the proposed project, the burn pit with its refuse will be buried to a depth of at lease three feet (3'). A latrine, the location of which is also shown on Plat No. 1. will be provided for human waste. If large amounts of liquids are I left in the reserve pit after completion of the project, the pit will be fenced until the liquids have had adequate time to dry. The location clean-up will not take place until such time as the reserve pit can be properly covered over to prevent run-off from carrying any of these materials into the watershed. No earthen pit will be located on natural drainage; all earthen pits will be so constructed as to prevent leakage from occurring.

- 8. Ancillary Facilities No camps or airstrips will be associated with this project.
- 9. Wellsite Layout Please refer to the attached Plat No. 1.
- 10. Plans for Restoration of the Surface After completion of the proposed project the location will be cleaned and leveled. The location will be left in such a condition that will enable reseeding operations to be carried out. Seed mixture as designated by the responsible government agency will be used. The reseeding operation will be performed during the time period set forth by the regulatory body. The location production equipment will be painted as designated by the responsible government agency.
- 11. Other Information The proposed site is located in an existing road and North of an existing location. The soil os sandy loam. The principal vegetation is sparce Juniper and native grasses.
- 12. Operator's Representative See drilling prognosis.
- 13. Certification -

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements mad in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by

Tenneco Oil Company and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

L. Freeman

Staff Production Analyst

LF/gh

TENNECO OIL COMPANY

CALCULATION SHEET

