

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY


SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ well gas ☒ well other ☐
2. NAME OF OPERATOR
Union Texas Petroleum Corp.
3. ADDRESS OF OPERATOR
P. O. Box 808, Farmington, N.M. 87499
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1680 ft./S; 850 ft./E line
AT TOP PROD. INTERVAL: Same as above
AT TOTAL DEPTH: Same as above
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:
TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) Ran 9-5/8" Casing ☒

SUBSEQUENT REPORT ☐

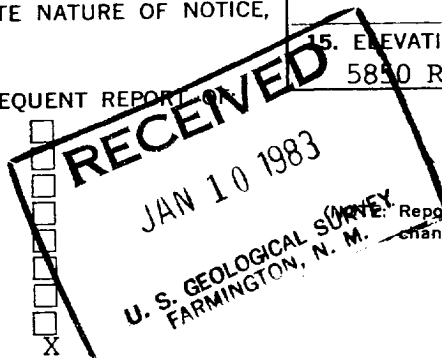

5. LEASE
SF 047017 B
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
Angel Peak "B"
9. WELL NO.
24-E
10. FIELD OR WILDCAT NAME
Basin Dakota; Wildcat Gallup
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 13, T28N, R11W, N.M.P.M.
12. COUNTY OR PARISH
San Juan
13. STATE
New Mexico
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
5850 R.K.B.

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*
1. Drilled 12-1/4" hole with mud to intermediate total depth of 5396 ft. R.K.B.
 2. Ran 125 joints of 9-5/8", 40.00#, K-55 casing and set at 5390 ft. R.K.B. with stage tool at 2077 ft. R.K.B.
 3. Cemented first stage with 1675 cu. ft. of 65-35 Poz with 6% gel, 12-1/2 lb. of gilsonite per sack, 1/4 lb. of Cello flakes per sack and 118 cu. ft. of class "B" with 2% Calcium chloride. Plug down at 10:35 A.M. 12/30/82. Cemented second stage with 920 cu. ft. of 65-35 Poz with 12% gel, 1/4 lb. of Cello flakes per sack, 12-1/2 lb. of gilsonite per sack, and 118 cu. ft. of class "B" with 2% CaCl₂. Plug down at 2:20 P.M. 12/30/82. Cement circulated to the surface.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Kenneth E. Roddy TITLE Area Prod. Supt. DATE 1/6/83
Kenneth E. Roddy
(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

ACCEPTED FOR RECORD

*See Instructions on Reverse Side

JAN 24 1983

FARMINGTON DISTRICT

94