

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER**

| | | |
|---|---|---|
| 1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER 1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other 1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone | | 5. Lease Serial No. NMNM021640 6. If Indian, Allottee or Tribe Name 7. If Unit or CA Agreement, Name and No. 8. Lease Name and Well No. PRECIOUS 30-18 FEDERAL COM 11H 326187 |
| 2. Name of Operator OXY USA INCORPORATED | | 9. API Well No. 30-015-46376 |
| 3a. Address 5 Greenway Plaza, Suite 110 Houston TX 77046 | 3b. Phone No. (include area code) (713)366-5716 | 10. Field and Pool, or Exploratory WILDCAT BONE SPRING / BONE SPRING <i>Trigle Wells</i> |
| 4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NENW / 130 FNL / 1935 FWL / LAT 32.26782 / LONG -103.81938 At proposed prod. zone LOT 3 / 2621 FSL / 940 FWL / LAT 32.30442 / LONG -103.822587 | | 11. Sec., T. R. M. or Blk. and Survey or Area SEC 31 / T23S / R31E / NMP 33740 |
| 14. Distance in miles and direction from nearest town or post office* 8 miles | | 12. County or Parish EDDY |
| 13. State NM | | |
| 15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 20 feet | 16. No of acres in lease 323.59 | 17. Spacing Unit dedicated to this well 800 |
| 18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 35 feet | 19. Proposed Depth 8987 feet / 22585 feet | 20. BLM/BIA Bond No. in file FED: ESB000226 |
| 21. Elevations (Show whether DF, KDB, RT, GL., etc.) 3344 feet | 22. Approximate date work will start* 09/01/2020 | 23. Estimated duration 15 days |
| 24. Attachments | | |

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor. 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 5. Operator certification. 6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

| | | |
|--|---|--------------------|
| 25. Signature (Electronic Submission) | Name (Printed/Typed) David Stewart / Ph: (575)631-2442 | Date 03/11/2019 |
| Title Sr. Regulatory Advisor | | |
| Approved by (Signature) (Electronic Submission) | Name (Printed/Typed) Christopher Walls / Ph: (575)234-2234 | Date 10/08/2019 |
| Title Petroleum Engineer | | |
| Office CARLSBAD | | |

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



for 10-15-19

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM 1: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

ITEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to allow evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

- I. SHL: NENW / 130 FNL / 1935 FWL / TWSP: 23S / RANGE: 31E / SECTION: 31 / LAT: 32.26782 / LONG: -103.81938 (TVD: 0 feet, MD: 0 feet)
- PPP: LOT 4 / 100 FSL / 940 FWL / TWSP: 23S / RANGE: 31E / SECTION: 30 / LAT: 32.26845 / LONG: -103.822599 (TVD: 9019 feet, MD: 9498 feet)
- PPP: LOT 2 / 2641 FSL / 940 FWL / TWSP: 23S / RANGE: 31E / SECTION: 30 / LAT: 32.275431 / LONG: -103.822597 (TVD: 9013 feet, MD: 11956 feet)
- PPP: LOT 3 / 1322 FSL / 941 FWL / TWSP: 23S / RANGE: 31E / SECTION: 19 / LAT: 32.286327 / LONG: -103.822593 (TVD: 9003 feet, MD: 16004 feet)
- PPP: LOT 3 / 1325 FSL / 941 FWL / TWSP: 23S / RANGE: 31E / SECTION: 18 / LAT: 32.300857 / LONG: -103.822588 (TVD: 8991 feet, MD: 21284 feet)
- BHL: LOT 3 / 2621 FSL / 940 FWL / TWSP: 23S / RANGE: 31E / SECTION: 18 / LAT: 32.30442 / LONG: -103.822587 (TVD: 8987 feet, MD: 22585 feet)

BLM Point of Contact

Name: Deborah Ham
Title: Legal Landlaw Examiner
Phone: 5752345965
Email: dham@blm.gov

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

| | |
|------------------------------|------------------------------------|
| OPERATOR'S NAME: | Oxy USA Incorporated |
| LEASE NO.: | NMNM021640 |
| WELL NAME & NO.: | Precious 30-18 Federal Com 11H |
| SURFACE HOLE FOOTAGE: | 130'/N & 1935'/W |
| BOTTOM HOLE FOOTAGE: | 2621'/S & 940'/W |
| LOCATION: | Section 31, T.23 S., R.31 E., NMPM |
| COUNTY: | Eddy County, New Mexico |

COA

| | | | |
|----------------------|--|--|--|
| H2S | <input type="radio"/> Yes | <input type="radio"/> No | |
| Potash | <input type="radio"/> None | <input type="radio"/> Secretary | <input checked="" type="radio"/> R-111-P |
| Cave/Karst Potential | <input checked="" type="radio"/> Low | <input type="radio"/> Medium | <input type="radio"/> High |
| Variance | <input type="radio"/> None | <input checked="" type="radio"/> Flex Hose | <input type="radio"/> Other |
| Wellhead | <input type="radio"/> Conventional | <input type="radio"/> Multibowl | <input checked="" type="radio"/> Both |
| Other | <input type="checkbox"/> 4 String Area | <input type="checkbox"/> Capitan Reef | <input type="checkbox"/> WIPP |
| Other | <input checked="" type="checkbox"/> Fluid Filled | <input checked="" type="checkbox"/> Cement Squeeze | <input type="checkbox"/> Pilot Hole |
| Special Requirements | <input type="checkbox"/> Water Disposal | <input checked="" type="checkbox"/> COM | <input type="checkbox"/> Unit |

| | | |
|---------------|---------------------------|-------------------------------------|
| Break Testing | <input type="radio"/> Yes | <input checked="" type="radio"/> No |
|---------------|---------------------------|-------------------------------------|

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H2S) monitors shall be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

Primary Casing Design:

1. The 13-3/8 inch surface casing shall be set at approximately 405 feet (a minimum of 70 feet (Eddy County) into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of

six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **24 hours in the Potash Area** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

2. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.**

Option 2:

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- b. Second stage above DV tool:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.**

3. The minimum required fill of cement behind the 5-1/2 inch production casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate, contact the appropriate BLM office.

Option 2:

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- b. Second stage above DV tool:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office.

Operator has proposed to pump down 9-5/8" X 5-1/2" annulus. Operator must run a CBL from TD of the 5-1/2" casing to surface. Submit results to BLM. Excess calculates to 6% - additional cement might be required.

Alternate Casing Design:

2nd Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

3. The minimum required fill of cement behind the 7-5/8 inch 2nd intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

Option 2:

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- c. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- d. Second stage above DV tool:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

Operator has proposed to pump down 9-5/8" X 7-5/8" annulus. Operator must run a CBL from TD of the 7-5/8" casing to surface. Submit results to BLM. Excess calculates to 9% - additional cement might be required.

4. The minimum required fill of cement behind the 5-1/2 inch production casing is:
 - Cement should tie-back **500 feet** into the previous casing. Operator shall provide method of verification. **Excess calculates to 20% - additional cement might be required.**

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
- 2.

Option 1:

- a. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **3000 (3M) psi**.
- b. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the intermediate casing shoe shall be **3000 (3M) psi**.

Option 2:

1. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **3000 (3M) psi**.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.

- e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Carlsbad Field Office, 620 E Greene St. Carlsbad, New Mexico 88220, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

Offline Cementing

Contact the BLM prior to the commencement of any offline cementing procedure.

BOP Break Testing Variance

- BOP break testing is not permitted on this well pending submission of break testing sundry.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including

lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

NMK1072019

**PECOS DISTRICT
SURFACE USE
CONDITIONS OF APPROVAL**

| | |
|-----------------------|------------------------------------|
| OPERATOR'S NAME: | Oxy USA Incorporated |
| WELL NAME & NO.: | Precious 30-18 Federal Com 11H |
| SURFACE HOLE FOOTAGE: | 130'/N & 1935'/W |
| BOTTOM HOLE FOOTAGE: | 2621'/S & 940'/W |
| LOCATION: | Section 31, T.23 S., R.31 E., NMPM |
| COUNTY: | Eddy County, New Mexico |

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- General Provisions**
- Permit Expiration**
- Archaeology, Paleontology, and Historical Sites**
- Noxious Weeds**
- Special Requirements**
 - Lesser Prairie-Chicken Timing Stipulations
 - Ground-level Abandoned Well Marker
 - Range
 - Potash Minerals
 - Lesser Prairie Chicken exemption
- Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- Road Section Diagram**
- Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
 - Electric Lines
 - Oil and Gas related sites
- Interim Reclamation**
- Final Abandonment & Reclamation**

Approval Date: 10/08/2019

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Timing Limitation Stipulation / Condition of Approval for lesser prairie-chicken:

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 feet from the source of the noise.

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well. For more installation details, contact the Carlsbad Field Office at 575-234-5972.

This authorization is subject to your Certificate of Participation and/or Certificate of Inclusion under the New Mexico Candidate Conservation Agreement. Because it involves surface disturbing activities covered under your Certificate, your Habitat Conservation Fund Account with the Center of Excellence for Hazardous Materials Management (CEHMM) will be debited according to Exhibit B Part 2 of the Certificate of Participation.

Timing Limitation Exceptions:

The Carlsbad Field Office will publish an annual map of where the LPC timing and noise stipulations and conditions of approval (Limitations) will apply for the identified year (between March 1 and June 15) based on the latest survey information. The LPC Timing Area map will identify areas which are Habitat Areas (HA), Isolated Population Area (IPA), and Primary Population Area (PPA). The LPC Timing Area map will also have an area in red crosshatch. The red crosshatch area is the only area where an operator is required to submit a request for exception to the LPC Limitations. If an operator is operating outside the red crosshatch area, the LPC Limitations do not apply for that year and an exception to LPC Limitations is not required.

Cattleguards

Where a permanent cattlegaurd is approved, an appropriately sized cattleguard(s) sufficient to carry out the project shall be installed and maintained at fence crossing(s). Any existing cattleguard(s) on the access road shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguard(s) that are in place and are utilized during lease operations. A gate shall be constructed on one side of the cattleguard and fastened securely to H-braces.

Fence Requirement

Where entry is granted across a fence line, the fence must be braced and tied off on both sides of the passageway prior to cutting. Once the work is completed, the fence will be restored to its prior condition, or better. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fence(s).

Livestock Watering Requirement

Structures that provide water to livestock, such as windmills, pipelines, drinking troughs, and earthen reservoirs, will be avoided by moving the proposed action

Potash Minerals

Measures to minimize impacts to potash mineral reserves have been considered during the BLM's planning process by establishment of the Twin Wells Drill Island. No additional special mitigation or requirements have been identified by the BLM.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS**Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill out-sloping and in-sloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

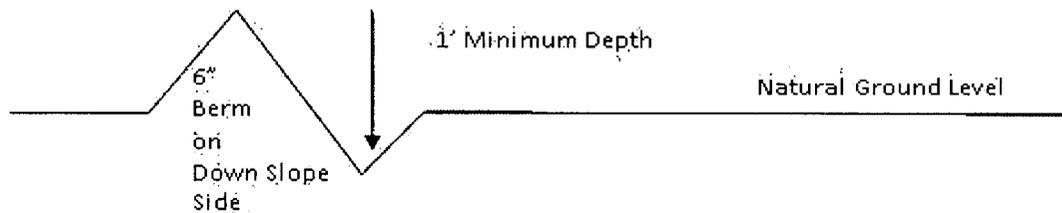

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

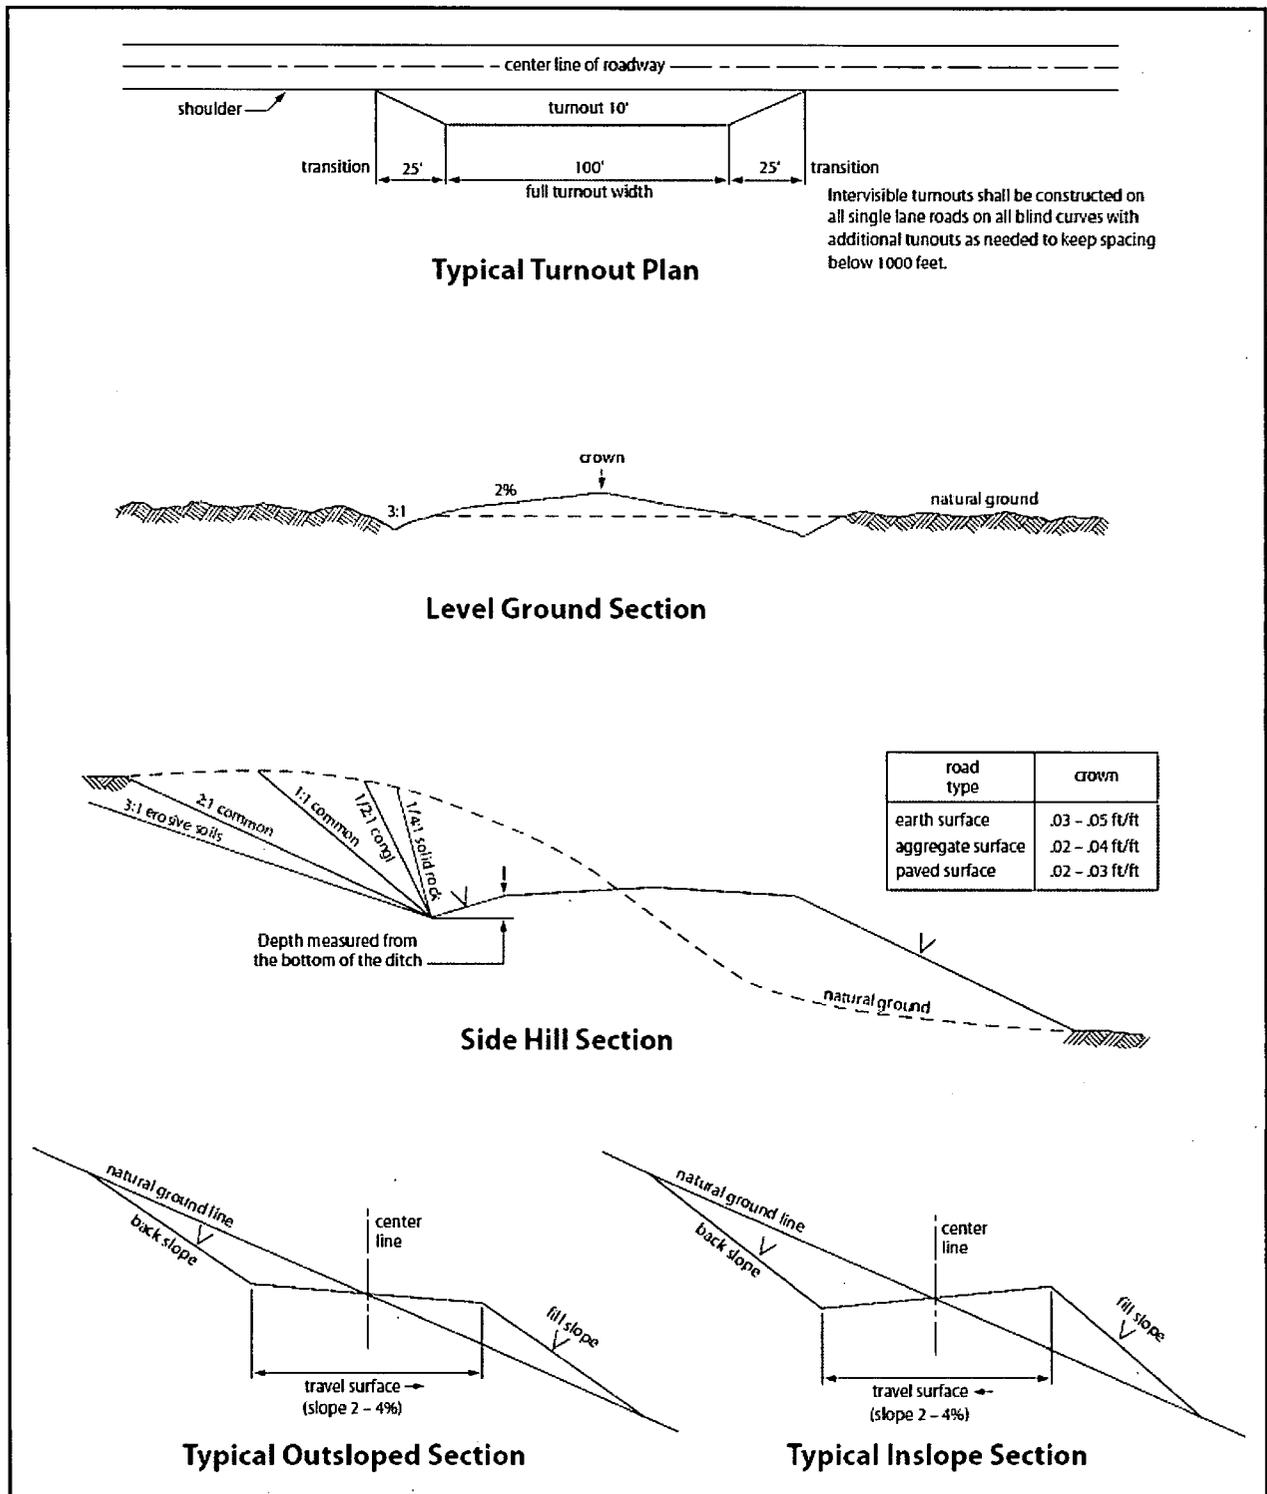


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

B. PIPELINES

BURIED PIPELINE STIPULATIONS

A copy of the application (Grant, APD, or Sundry Notice) and attachments, including conditions of approval, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 *et seq.* (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, *et seq.* or the Resource Conservation and Recovery Act, 42 U.S.C.6901, *et seq.*) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil or other pollutant, wherever found, shall be the responsibility of holder, regardless of fault. Upon failure of holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve holder of any responsibility as provided herein.

5. All construction and maintenance activity will be confined to the authorized right-of-way.

6. The pipeline will be buried with a minimum cover of 36 inches between the top of the pipe and ground level.

7. The maximum allowable disturbance for construction in this right-of-way will be 30 feet:

- Blading of vegetation within the right-of-way will be allowed: maximum width of blading operations will not exceed 20 feet. The trench is included in this area. (*Blading is defined as the complete removal of brush and ground vegetation.*)
- Clearing of brush species within the right-of-way will be allowed: maximum width of clearing operations will not exceed 30 feet. The trench and bladed area are included in this area. (*Clearing is defined as the removal of brush while leaving ground vegetation (grasses, weeds, etc.) intact. Clearing is best accomplished by holding the blade 4 to 6 inches above the ground surface.*)
- The remaining area of the right-of-way (if any) shall only be disturbed by compressing the vegetation. (*Compressing can be caused by vehicle tires, placement of equipment, etc.*)

8. The holder shall stockpile an adequate amount of topsoil where blading is allowed. The topsoil to be stripped is approximately 6 inches in depth. The topsoil will be segregated from other spoil piles from trench construction. The topsoil will be evenly distributed over the bladed area for the preparation of seeding.

9. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

10. Vegetation, soil, and rocks left as a result of construction or maintenance activity will be randomly scattered on this right-of-way and will not be left in rows, piles, or berms, unless otherwise approved by the Authorized Officer. The entire right-of-way shall be recontoured to match the surrounding landscape. The backfilled soil shall be compacted and a 6 inch berm will be left over the ditch line to allow for settling back to grade.

11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. The holder will reseed all disturbed areas. Seeding will be done according to the attached seeding requirements, using the following seed mix.

- | | |
|--|--|
| <input type="checkbox"/> seed mixture 1 | <input type="checkbox"/> seed mixture 3 |
| <input type="checkbox"/> seed mixture 2 | <input type="checkbox"/> seed mixture 4 |
| <input checked="" type="checkbox"/> seed mixture 2/LPC | <input type="checkbox"/> Aplomado Falcon Mixture |

13. All above-ground structures not subject to safety requirements shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2.

14. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. All signs and information thereon will be posted in a permanent, conspicuous manner, and will be maintained in a legible condition for the life of the pipeline.

15. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder before maintenance begins. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway. As determined necessary during the life of the pipeline, the Authorized Officer may ask the holder to construct temporary deterrence structures.

16. Any cultural and/or paleontological resources (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

17. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes associated roads, pipeline corridor and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

18. Escape Ramps - The operator will construct and maintain pipeline/utility trenches that are not otherwise fenced, screened, or netted to prevent livestock, wildlife, and humans from becoming entrapped. At a minimum, the operator will construct and maintain escape ramps, ladders, or other methods of avian and terrestrial wildlife escape in the trenches according to the following criteria:

- a. Any trench left open for eight (8) hours or less is not required to have escape ramps; however, before the trench is backfilled, the contractor/operator shall inspect the trench for wildlife, remove all trapped wildlife, and release them at least 100 yards from the trench.
- b. For trenches left open for eight (8) hours or more, earthen escape ramps (built at no more than a 30 degree slope and spaced no more than 500 feet apart) shall be placed in the trench.

19. Special Stipulations:

Lesser Prairie-Chicken

Oil and gas activities will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

Timing Limitation Exceptions:

The Carlsbad Field Office will publish an annual map of where the LPC timing and noise stipulations and conditions of approval (Limitations) will apply for the identified year (between March 1 and June 15) based on the latest survey information. The LPC Timing Area map will identify areas which are Habitat Areas (HA), Isolated Population Area (IPA), and Primary Population Area (PPA). The LPC Timing Area map will also have an area in red crosshatch. The red crosshatch area is the only area where an operator is required to submit a request for exception to the LPC Limitations. If an operator is operating outside the red crosshatch area, the LPC Limitations do not apply for that year and an exception to LPC Limitations is not required.

STANDARD STIPULATIONS FOR SURFACE INSTALLED PIPELINES

A copy of the application (Grant, Sundry Notice, APD) and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM

personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to activity of the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.
4. The holder shall be liable for damage or injury to the United States to the extent provided by 43 CFR Sec. 2883.1-4. The holder shall be held to a standard of strict liability for damage or injury to the United States resulting from pipe rupture, fire, or spills caused or substantially aggravated by any of the following within the right-of-way or permit area:
 - a. Activities of the holder including, but not limited to construction, operation, maintenance, and termination of the facility.
 - b. Activities of other parties including, but not limited to:
 - (1) Land clearing.
 - (2) Earth-disturbing and earth-moving work.
 - (3) Blasting.
 - (4) Vandalism and sabotage.
 - c. Acts of God.

The maximum limitation for such strict liability damages shall not exceed one million dollars (\$1,000,000) for any one event, and any liability in excess of such amount shall be determined by the ordinary rules of negligence of the jurisdiction in which the damage or injury occurred.

This section shall not impose strict liability for damage or injury resulting primarily from an act of war or from the negligent acts or omissions of the United States.

5. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil, salt water, or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil, salt water, or other pollutant, wherever found, shall be the responsibility of the holder, regardless of fault. Upon failure of the holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve the holder of any responsibility as provided herein.

6. All construction and maintenance activity will be confined to the authorized right-of-way width of 20 feet. If the pipeline route follows an existing road or buried pipeline right-of-way, the surface pipeline must be installed no farther than 10 feet from the edge of the road or buried pipeline right-of-way. If existing surface pipelines prevent this distance, the proposed surface pipeline must be installed immediately adjacent to the outer surface pipeline. All construction and maintenance activity will be confined to existing roads or right-of-ways.

7. No blading or clearing of any vegetation will be allowed unless approved in writing by the Authorized Officer.

8. The holder shall install the pipeline on the surface in such a manner that will minimize suspension of the pipeline across low areas in the terrain. In hummocky or dune areas, the pipeline will be "snaked" around hummocks and dunes rather than suspended across these features.

9. The pipeline shall be buried with a minimum of 24 inches under all roads, "two-tracks," and trails. Burial of the pipe will continue for 20 feet on each side of each crossing. The condition of the road, upon completion of construction, shall be returned to at least its former state with no bumps or dips remaining in the road surface.

10. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When

necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.
12. Excluding the pipe, all above-ground structures not subject to safety requirement shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be a color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2; designated by the Rocky Mountain Five State Interagency Committee.
13. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. Signs will be maintained in a legible condition for the life of the pipeline.
14. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway.
15. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the authorized officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the authorized officer. An evaluation of the discovery will be made by the authorized officer to determine appropriate cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the authorized officer after consulting with the holder.
16. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, powerline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.
17. Surface pipelines must be less than or equal to 4 inches and a working pressure below 125 psi.
18. Special Stipulations:

a. **Lesser Prairie-Chicken:** Oil and gas activities will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Normal vehicle use on existing roads will not be restricted.

b. **Timing Limitation Exceptions:**

The Carlsbad Field Office will publish an annual map of where the LPC timing and noise stipulations and conditions of approval (Limitations) will apply for the identified year (between March 1 and June 15) based on the latest survey information. The LPC Timing Area map will identify areas which are Habitat Areas (HA), Isolated Population Area (IPA), and Primary Population Area (PPA). The LPC Timing Area map will also have an area in red crosshatch. The red crosshatch area is the only area where an operator is required to submit a request for exception to the LPC Limitations. If an operator is operating outside the red crosshatch area, the LPC Limitations do not apply for that year and an exception to LPC Limitations is not required.

C. **ELECTRIC LINES**

STANDARD STIPULATIONS FOR OVERHEAD ELECTRIC DISTRIBUTION LINES

A copy of the grant and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 *et seq.* (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as

a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.

3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. There will be no clearing or blading of the right-of-way unless otherwise agreed to in writing by the Authorized Officer.

5. Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006 . The holder shall assume the burden and expense of proving that pole designs not shown in the above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all powerline structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. Such modifications and/or additions shall be made by the holder without liability or expense to the United States.

Raptor deterrence will consist of but not limited to the following: triangle perch discouragers shall be placed on each side of the cross arms and a nonconductive perching deterrence shall be placed on all vertical poles that extend past the cross arms.

6. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

7. The BLM serial number assigned to this authorization shall be posted in a permanent, conspicuous manner where the power line crosses roads and at all serviced facilities. Numbers will be at least two inches high and will be affixed to the pole nearest the road crossing and at the facilities served.

8. Upon cancellation, relinquishment, or expiration of this grant, the holder shall comply with those abandonment procedures as prescribed by the Authorized Officer.

9. All surface structures (poles, lines, transformers, etc.) shall be removed within 180 days of abandonment, relinquishment, or termination of use of the serviced facility or facilities or within 180 days of abandonment, relinquishment, cancellation, or expiration of this grant, whichever comes first. This will not apply where the power line extends service to an active, adjoining facility or facilities.

10. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

11. Special Stipulations:

- For reclamation remove poles, lines, transformer, etc. and dispose of properly.
- Fill in any holes from the poles removed.

Timing Limitation Stipulation/Condition of Approval for Lesser Prairie-Chicken:

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

Timing Limitation Exceptions:

The Carlsbad Field Office will publish an annual map of where the LPC timing and noise stipulations and conditions of approval (Limitations) will apply for the identified year (between March 1 and June 15) based on the latest survey information. The LPC Timing Area map will identify areas which are Habitat Areas (HA), Isolated Population Area (IPA), and Primary Population Area (PPA). The LPC Timing Area map will also have an area in red crosshatch. The red crosshatch area is the only area where an operator is required to submit a request for exception to the LPC Limitations. If an operator is operating outside the red crosshatch area, the LPC Limitations do not apply for that year and an exception to LPC Limitations is not required.

D. OIL AND GAS RELATED SITES

STANDARD STIPULATIONS FOR OIL AND GAS RELATED SITES

A copy of the application (Grant/Sundry Notice) and attachments, including stipulations and map, will be on location during construction. BLM personnel may request to view a copy of your permit during construction to ensure compliance with all stipulations.

The holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer, BLM.

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant and for all response costs, penalties, damages, claims, and other costs arising from the provisions of the Resource Conservation and Recovery Act (RCRA), 42 U.S.C. Chap. 82, Section 6901 et. seq., from the Comprehensive Environmental Response, Compensation and Liability Act (CERCLA), 42 U.S.C. Chap. 109, Section 9601 et. seq., and from other applicable environmental statutes.

2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976, as amended (15 U.S.C. 2601, et. seq.) with regard to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized by this grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation and Liability Act, Section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the Authorized Officer concurrent with the filing of the reports to the involved Federal agency or State government.

3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et. seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et. seq.) on the right-of-way (unless the release or threatened release is wholly unrelated to the right-of-way holder's activity on the right-of-way). This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. If, during any phase of the construction, operation, maintenance, or termination of the site or related pipeline(s), any oil or other pollutant should be discharged from site facilities, the pipeline(s) or from containers or vehicles impacting Federal lands, the control and total removal, disposal, and cleanup of such oil or other pollutant, wherever found, shall be the responsibility of the holder, regardless of fault. Upon failure of the

holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages to Federal lands resulting therefrom, the Authorized Officer may take such measures as deemed necessary to control and cleanup the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve the holder of any liability or responsibility.

5. Sites shall be maintained in an orderly, sanitary condition at all times. Waste materials, both liquid and solid, shall be disposed of promptly at an appropriate, authorized waste disposal facility in accordance with all applicable State and Federal laws. "Waste" means all discarded matter including, but not limited to, human waste, trash, garbage, refuse, petroleum products, brines, chemicals, oil drums, ashes, and equipment.
6. The operator will notify the Bureau of Land Management (BLM) authorized officer and nearest Fish and Wildlife Service (FWS) Law Enforcement office within 24 hours, if the operator discovers a dead or injured federally protected species (i.e., migratory bird species, bald or golden eagle, or species listed by the FWS as threatened or endangered) in or adjacent to a pit, trench, tank, exhaust stack, or fence. (If the operator is unable to contact the FWS Law Enforcement office, the operator must contact the nearest FWS Ecological Services office.)
7. All above-ground structures not subject to safety requirements shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be a color which simulates "Standard Environmental Colors" designated by the Rocky Mountain Five-State Interagency Committee. The color selected for this project is **Shale Green**, Munsell Soil Color Chart Number 5Y 4/2.
8. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on the holder's behalf, on public or Federal land shall be immediately reported to the Authorized Officer. The holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to the proper mitigation measures will be made by the Authorized Officer after consulting with the holder.
9. A sales contract for removal of mineral material (caliche, sand, gravel, fill dirt) from an authorized pit, site, or on location must be obtained from the BLM prior to commencing construction. There are several options available for purchasing mineral material: contact the BLM office (575-234-5972).
10. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where

noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

11. Once the site is no longer in service or use, the site must undergo final abandonment. At final abandonment, the site and access roads must undergo "final" reclamation so that the character and productivity of the land are restored. Earthwork for final reclamation must be completed within six (6) months of the abandonment of the site. All pads and facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact. After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

12. The holder shall stockpile an adequate amount of topsoil where blading occurs. The topsoil to be stripped is approximately 6 inches in depth. The topsoil will be segregated from other spoil piles. The topsoil will be used for final reclamation.

13. The holder will reseed all disturbed areas. Seeding will be done according to the attached seeding requirements, using the following seed mix.

- | | |
|--|--|
| <input type="checkbox"/> seed mixture 1 | <input type="checkbox"/> seed mixture 3 |
| <input type="checkbox"/> seed mixture 2 | <input type="checkbox"/> seed mixture 4 |
| <input checked="" type="checkbox"/> seed mixture 2/LPC | <input type="checkbox"/> Aplomado Falcon Mixture |

14. In those areas where erosion control structures are required to stabilize soil conditions, the holder shall install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound management practices. Any earth work will require prior approval by the Authorized Officer.

15. Open-topped Tanks - The operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the

location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps

16. The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an

impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock enclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

17. Open-Vent Exhaust Stack Enclosures – The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (Recommended enclosure structures on open-vent exhaust stacks are in the shape of a cone.) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

18. Containment Structures - Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

19. Special Stipulations:

- The entire well pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad. Topsoil shall not be used to construct the berm. No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad. The berm shall be maintained through the life of the well and after interim reclamation has been completed.
- Any water erosion that may occur due to the construction of the well pad during the life of the well will be corrected within two weeks and proper measures will be taken to prevent future erosion.

Lesser Prairie-Chicken

Oil and gas activities will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or

involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Normal vehicle use on existing roads will not be restricted. Exhaust noise from permanent engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

Timing Limitation Exceptions:

The Carlsbad Field Office will publish an annual map of where the LPC timing and noise stipulations and conditions of approval (Limitations) will apply for the identified year (between March 1 and June 15) based on the latest survey information. The LPC Timing Area map will identify areas which are Habitat Areas (HA), Isolated Population Area (IPA), and Primary Population Area (PPA). The LPC Timing Area map will also have an area in red crosshatch. The red crosshatch area is the only area where an operator is required to submit a request for exception to the LPC Limitations. If an operator is operating outside the red crosshatch area, the LPC Limitations do not apply for that year and an exception to LPC Limitations is not required.

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well.

Seed Mixture for LPC Sand/Shinnery Sites

Holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed shall be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed shall be either certified or registered seed. The seed container shall be tagged in accordance with State law(s) and available for inspection by the Authorized Officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). Holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. Seeding shall be repeated until a satisfactory stand is established as determined by the Authorized Officer. Evaluation of growth may not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

| <u>Species</u> | <u>lb/acre</u> |
|---------------------|----------------|
| Plains Bristlegrass | 5lbs/A |
| Sand Bluestem | 5lbs/A |
| Little Bluestem | 3lbs/A |
| Big Bluestem | 6lbs/A |
| Plains Coreopsis | 2lbs/A |
| Sand Dropseed | 1lbs/A |

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Operator Certification Data Report

10/09/2019

Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: David Stewart

Signed on: 03/11/2019

Title: Sr. Regulatory Advisor

Street Address: P.O. Box 50250

City: Midland

State: TX

Zip: 79710

Phone: (575)631-2442

Email address: jim_wilson@oxy.com

Field Representative

Representative Name: Jim Wilson

Street Address: 6001 Deauville

City: Midland

State: TX

Zip: 79706

Phone: (575)631-2442

Email address: jim_wilson@oxy.com



| | | |
|--|------------------------------------|--|
| APD ID: 10400039845 | Submission Date: 03/11/2019 | Highlighted data reflects the most recent changes Show Final Text |
| Operator Name: OXY USA INCORPORATED | | |
| Well Name: PRECIOUS 30-18 FEDERAL COM | Well Number: 11H | |
| Well Type: OIL WELL | Well Work Type: Drill | |

Section 1 - General

| | | |
|---|--|--------------------------------------|
| APD ID: 10400039845 | Tie to previous NOS? N | Submission Date: 03/11/2019 |
| BLM Office: CARLSBAD | User: David Stewart | Title: Sr. Regulatory Advisor |
| Federal/Indian APD: FED | Is the first lease penetrated for production Federal or Indian? FED | |
| Lease number: NMNM021640 | Lease Acres: 323.59 | |
| Surface access agreement in place? | Allotted? | Reservation: |
| Agreement in place? NO | Federal or Indian agreement: | |
| Agreement number: | | |
| Agreement name: | | |
| Keep application confidential? NO | | |
| Permitting Agent? NO | APD Operator: OXY USA INCORPORATED | |
| Operator letter of designation: | | |

Operator Info

Operator Organization Name: OXY USA INCORPORATED
Operator Address: 5 Greenway Plaza, Suite 110
Operator PO Box: Zip: 77046
Operator City: Houston **State:** TX
Operator Phone: (713)366-5716
Operator Internet Address:

Section 2 - Well Information

| | | |
|---|--|-------------------------------|
| Well in Master Development Plan? NO | Master Development Plan name: | |
| Well in Master SUPO? NO | Master SUPO name: | |
| Well in Master Drilling Plan? NO | Master Drilling Plan name: | |
| Well Name: PRECIOUS 30-18 FEDERAL COM | Well Number: 11H | Well API Number: |
| Field/Pool or Exploratory? Field and Pool | Field Name: WILDCAT BONE SPRING | Pool Name: BONE SPRING |
| Is the proposed well in an area containing other mineral resources? POTASH | | |

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

Is the proposed well in an area containing other mineral resources? POTASH

Is the proposed well in a Helium production area? N Use Existing Well Pad? NO New surface disturbance?

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name: ARKENSTONE 31 FEDERAL

Number: 3H

Well Class: HORIZONTAL

Number of Legs:

Well Work Type: Drill

Well Type: OIL WELL

Describe Well Type:

Well sub-Type: INFILL

Describe sub-type:

Distance to town: 8 Miles

Distance to nearest well: 35 FT

Distance to lease line: 20 FT

Reservoir well spacing assigned acres Measurement: 800 Acres

Well plat: Precious30_18FdCom11H_C102_20190311112921.pdf

Precious30_18FdCom11H_SitePlan_20190311112935.pdf

Well work start Date: 09/01/2020

Duration: 15 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number:

Reference Datum:

| | NS-Foot | NS Indicator | EW-Foot | EW Indicator | Twsp | Range | Section | Aliquot/Lot/Tract | Latitude | Longitude | County | State | Meridian | Lease Type | Lease Number | Elevation | MD | TVD |
|------------|---------|--------------|----------|--------------|------|-------|---------|-------------------|---------------|---------------------|----------|-------------------|-------------------|------------|----------------------|---------------|----------|----------|
| SHL Leg #1 | 130 | FNL | 193 5 | FWL | 23S | 31E | 31 | Aliquot NENW | 32.26782 | - 103.8193 8 | EDD Y | NEW MEXI CO | NEW MEXI CO | F | NMNM 054673 2A | 334 4 | 0 | 0 |
| KOP Leg #1 | 50 | FSL | 940 | FWL | 23S | 31E | 30 | Lot 4 | 32.26831 2 | - 103.8225 99 | EDD Y | NEW MEXI CO | NEW MEXI CO | F | NMNM 021640 | - 526 0 | 875 6 | 860 4 |
| PPP Leg #1 | 100 | FSL | 940 | FWL | 23S | 31E | 30 | Lot 4 | 32.26845 | - 103.8225 99 | EDD Y | NEW MEXI CO | NEW MEXI CO | F | NMNM 021640 | - 567 5 | 949 8 | 901 9 |

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

| | NS-Foot | NS Indicator | EW-Foot | EW Indicator | Twsp | Range | Section | Aliquot/Lot/Tract | Latitude | Longitude | County | State | Meridian | Lease Type | Lease Number | Elevation | MD | TVD |
|-------------------|----------|--------------|---------|--------------|------|-------|---------|-------------------|---------------|---------------------|----------|-------------------|-------------------|------------|---------------------|---------------|-----------|----------|
| PPP Leg #1 | 264 1 | FSL | 940 | FWL | 23S | 31E | 30 | Lot 2 | 32.27543 1 | - 103.8225 97 | EDD Y | NEW MEXI CO | NEW MEXI CO | F | NMNM 053317 7 | - 566 9 | 119 56 | 901 3 |
| PPP Leg #1 | 132 5 | FSL | 941 | FWL | 23S | 31E | 18 | Lot 3 | 32.30085 7 | - 103.8225 88 | EDD Y | NEW MEXI CO | NEW MEXI CO | F | NMNM 054673 2 | - 564 7 | 212 84 | 899 1 |
| PPP Leg #1 | 132 2 | FSL | 941 | FWL | 23S | 31E | 19 | Lot 3 | 32.28632 7 | - 103.8225 93 | EDD Y | NEW MEXI CO | NEW MEXI CO | F | NMNM 021639 | - 565 9 | 160 04 | 900 3 |
| EXIT Leg #1 | 254 1 | FSL | 940 | FWL | 23S | 31E | 18 | Lot 3 | 32.3042 | - 103.8225 87 | EDD Y | NEW MEXI CO | NEW MEXI CO | F | NMNM 054673 2 | - 564 4 | 225 05 | 898 8 |
| BHL Leg #1 | 262 1 | FSL | 940 | FWL | 23S | 31E | 18 | Lot 3 | 32.30442 | - 103.8225 87 | EDD Y | NEW MEXI CO | NEW MEXI CO | F | NMNM 054673 2 | - 564 3 | 225 85 | 898 7 |

OXY USA INC.

PRECIOUS 30-18 FEDERAL COM #11H

SITE PLAN


PRECIOUS 30-18
FEDERAL COM #11H

FAA PERMIT: NO

NAD 83 NME
LAT. = 32.267820° N
LONG. = 103.819380° W
ELEV - 3344.1'

N/4 COR.
SEC. 31
GLO B.C.
"1916"

SECTION 30
SECTION 31

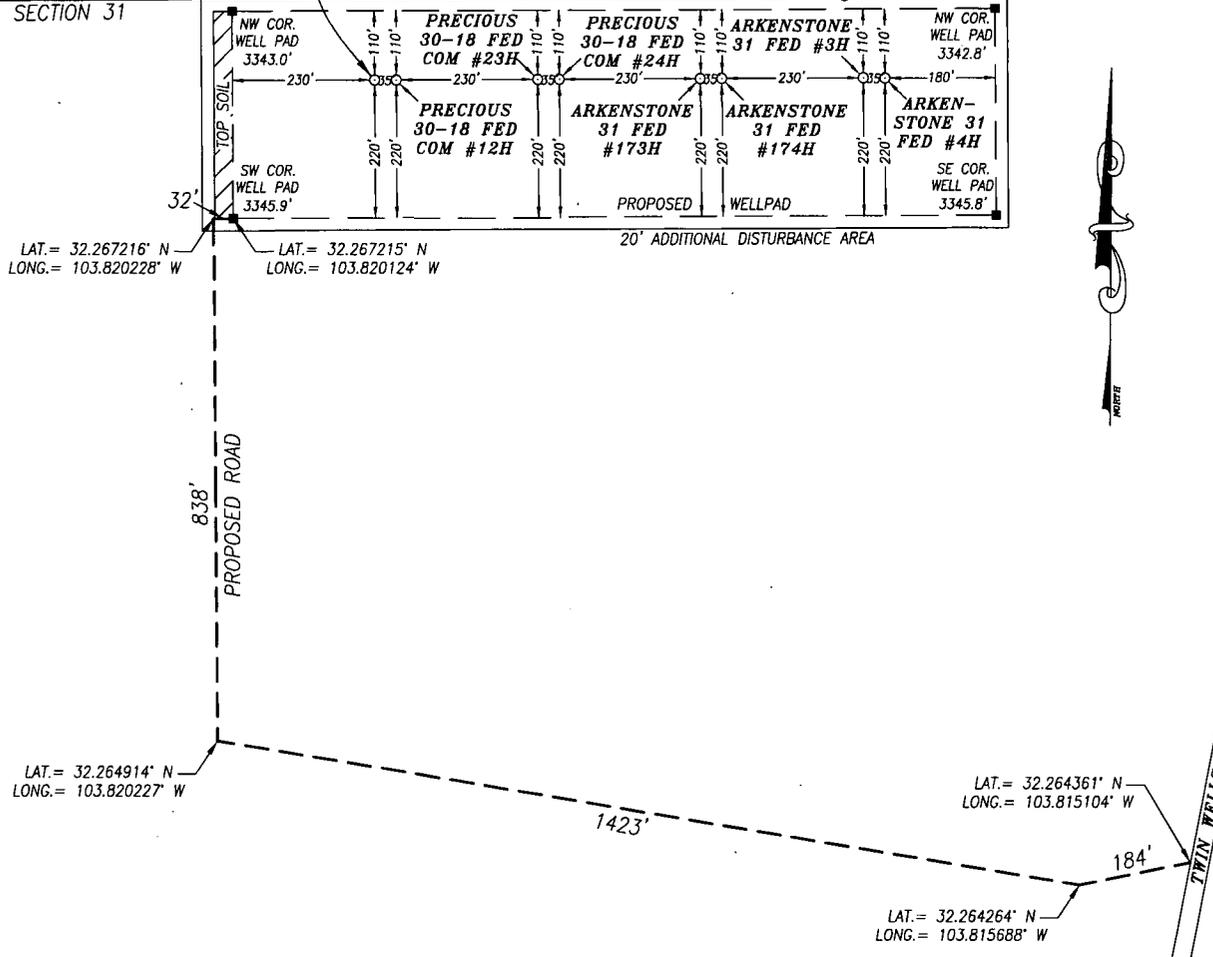


NOTES:

- 1) LATs & LONGs SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983.
- 2) DISTANCES ARE GRID VALUES.
- 3) ALL FEATURES ARE EXISTING UNLESS OTHERWISE NOTED

CERTIFICATION


I, CHAD HARCROW, A NEW MEXICO REGISTERED PROFESSIONAL SURVEYOR CERTIFY THAT I DIRECTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

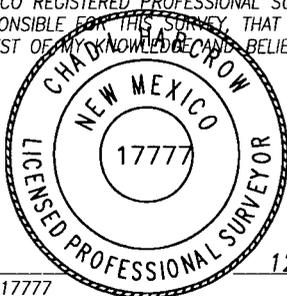

Chad Harcrow
CHAD HARCROW N.M.P.S. NO. 17777

12/31/18
DATE

HARCROW SURVEYING, LLC
2314 W. MAIN ST, ARTESIA, N.M. 88210
PH: (575) 746-2158
c.harcrow@harcrowsurveying.com



| | |
|--|--------------|
| OXY USA INC. | |
| PRECIOUS 30-18 FEDERAL COM #11H LOCATED 130 FEET FROM THE NORTH LINE AND 1935 FEET FROM THE WEST LINE OF SECTION 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO | |
| SURVEY DATE: SEPTEMBER 18, 2018 | SITE PLAN |
| DRAFTING DATE: DECEMBER 27, 2018 | PAGE: 1 OF 1 |
| APPROVED BY: CH | DRAWN BY: SP |
| FILE: 18-1631 | |



APD ID: 10400039845

Submission Date: 03/11/2019

Highlighted data reflects the most recent changes

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

| Formation ID | Formation Name | Elevation | True Vertical Depth | Measured Depth | Lithologies | Mineral Resources | Producing Formation |
|--------------|-----------------|-----------|---------------------|----------------|------------------------------------|--|---------------------|
| 1 | RUSTLER | 3344 | 344 | 344 | ANHYDRITE, SHALE, DOLOMITE | USEABLE WATER | N |
| 2 | SALADO | 2683 | 661 | 661 | HALITE, ANHYDRITE, SHALE, DOLOMITE | OTHER : SALT | N |
| 3 | CASTILE | 755 | 2589 | 2589 | ANHYDRITE | OTHER : salt | N |
| 4 | LAMAR | -675 | 4019 | 4020 | LIMESTONE, SILTSTONE, SANDSTONE | OTHER, NATURAL GAS, OIL : BRINE | N |
| 5 | BELL CANYON | -706 | 4050 | 4052 | SILTSTONE, SANDSTONE | USEABLE WATER, OTHER, NATURAL GAS, OIL : BRINE | N |
| 6 | CHERRY CANYON | -1608 | 4952 | 4985 | SILTSTONE, SANDSTONE | OTHER, NATURAL GAS, OIL : BRINE | N |
| 7 | BRUSHY CANYON | -2900 | 6244 | 6327 | LIMESTONE, SILTSTONE, SANDSTONE | OTHER, NATURAL GAS, OIL : BRINE | N |
| 8 | BONE SPRING | -4579 | 7923 | 8062 | LIMESTONE, SILTSTONE, SANDSTONE | NATURAL GAS, OIL | N |
| 9 | BONE SPRING 1ST | -5610 | 8954 | 9210 | LIMESTONE, SILTSTONE, SANDSTONE | NATURAL GAS, OIL | Y |

Section 2 - Blowout Prevention

Pressure Rating (PSI): 5M

Rating Depth: 9018

Equipment: 13-5/8" 5M/10M Annular, Blind Ram, Double Ram

Requesting Variance? YES

Variance request: Request for the use of a flexible choke line from the BOP to Choke Manifold.

Testing Procedure: Oxy will utilize a 5M annular with a 10M BOPE stack. BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. A multibowl wellhead or a unionized multibowl wellhead system will be employed. The wellhead and connection to the BOPE will meet all API 6A requirements. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system will be tested. We will test the flange connection of the wellhead with a test port that is directly in the flange. Due to the contingency of a four string design, Oxy plans to employ a 13-3/8" 5M MNDS sacrificial wellhead that will be employed to

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

drill the 12.25" Intermediate Hole. Upon completion of drilling and cementing operations on the 12.25" Intermediate Hole section (along with proper WOC time), the wellhead will be cut off and salvaged. At this point, a standard 13-5/8 MNDS 5x10 Slips (13.375 x 9.625 x 7.625 x 5.5) wellhead will be welded onto the 9-5/8" casing for the remainder of drilling operations on the pad. BOP Break Testing Request - As per the agreement reached in the OXY/BLM meeting on Feb 22, 2018, OXY requests permission to allow BOP Break Testing under the following conditions: 1. After a full BOP test is conducted on the first well on the pad. 2. When skidding to drill an intermediate section that the casing point is either shallower than the 3rd Bone Spring or 10000' TVD. 3. Full BOP test will be required prior to drilling any production section.

Choke Diagram Attachment:

Precious30_18FdCom11H_ChkManifold_20190311115601.pdf

BOP Diagram Attachment:

Precious30_18FdCom11H_FlexHoseCert_20190311115628.pdf

Precious30_18FdCom11H_BOP2_20190723083237.pdf

Section 3 - Casing

| Casing ID | String Type | Hole Size | Csg Size | Condition | Standard | Tapered String | Top Set MD | Bottom Set MD | Top Set TVD | Bottom Set TVD | Top Set MSL | Bottom Set MSL | Calculated casing length MD | Grade | Weight | Joint Type | Collapse SF | Burst SF | Joint SF Type | Joint SF | Body SF Type | Body SF |
|-----------|--------------|-----------|----------|-----------|----------|----------------|------------|---------------|-------------|----------------|-------------|----------------|-----------------------------|--------|--------|------------------------------|-------------|----------|---------------|----------|--------------|---------|
| 1 | SURFACE | 17.5 | 13.375 | NEW | API | N | 0 | 400 | 0 | 400 | | | 400 | J-55 | 54.5 | BUTT | 1.125 | 1.2 | BUOY | 1.4 | BUOY | 1.4 |
| 2 | INTERMEDIATE | 12.25 | 9.625 | NEW | API | N | 0 | 4069 | 0 | 4069 | | | 4069 | L-80 | 43.5 | BUTT | 1.125 | 1.2 | BUOY | 1.4 | BUOY | 1.4 |
| 3 | INTERMEDIATE | 8.5 | 7.625 | NEW | API | N | 0 | 8656 | 0 | 8508 | | | 8656 | HCL-80 | 26.4 | OTHER - SF/FJ | 1.125 | 1.2 | BUOY | 1.4 | BUOY | 1.4 |
| 4 | PRODUCTION | 6.75 | 5.5 | NEW | API | N | 0 | 22585 | 0 | 8988 | | | 22585 | P-110 | 20 | OTHER - DQX/SFTO RQ/DQWTO RQ | 1.125 | 1.2 | BUOY | 1.4 | BUOY | 1.4 |

Casing Attachments

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

Casing Attachments

Casing ID: 1 **String Type:** SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Precious30_18FdCom11H_CsgCriteria_20190311142612.pdf

Casing ID: 2 **String Type:** INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Precious30_18FdCom11H_CsgCriteria_20190311142702.pdf

Casing ID: 3 **String Type:** INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Precious30_18FdCom11H_CsgCriteria_20190311142740.pdf

Precious30_18FdCom11H_7.625_26.4_HCL80_TMKUPFJ_20190311142755.pdf

Precious30_18FdCom11H_7.625_26.4_HCL80_TMKUPSF_20190311142806.pdf

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

Casing Attachments

Casing ID: 4 **String Type:** PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Precious30_18FdCom11H_CsgCriteria_20190311142849.pdf

Precious30_18FdCom11H_5.5_20_P110_DQX_20190311142907.pdf

Precious30_18FdCom11H_5.5_20_P110HC_TMKUPSFTORQ_20190311142921.pdf

Precious30_18FdCom11H_5.5_20_P110CY_TMKUPDQWTORQ_20190618152327.pdf

Section 4 - Cement

| String Type | Lead/Tail | Stage Tool Depth | Top MD | Bottom MD | Quantity(sx) | Yield | Density | Cu Ft | Excess% | Cement type | Additives |
|-------------|-----------|------------------|--------|-----------|--------------|-------|---------|-------|---------|-------------|-------------|
| SURFACE | Lead | | 0 | 400 | 429 | 1.33 | 14.8 | 571 | 100 | CI C | Accelerator |

| | | | | | | | | | | | |
|--------------|------|--|------|-----------|------|------|------|------|----|------------|----------------------------|
| INTERMEDIATE | Lead | | 0 | 3569 | 870 | 1.88 | 12.9 | 1636 | 50 | Pozzolan/C | Retarder |
| INTERMEDIATE | Tail | | 3569 | 4069 | 155 | 1.33 | 14.8 | 206 | 20 | CI C | Accelerator |
| INTERMEDIATE | Lead | | 0 | 6494 | 358 | 1.92 | 12.9 | 687 | 25 | CI C | Accelerator |
| INTERMEDIATE | Tail | | 6494 | 8656 | 107 | 1.65 | 13.2 | 172 | 5 | CI H | Retarder, Dispersant, Salt |
| PRODUCTION | Lead | | 8156 | 2258 5 | 1056 | 1.38 | 13.2 | 1457 | 20 | CI H | Retarder, Dispersant, Salt |

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CaCl₂.

Describe the mud monitoring system utilized: PVT/MD Totco/Visual Monitoring

Circulating Medium Table

| Top Depth | Bottom Depth | Mud Type | Min Weight (lbs/gal) | Max Weight (lbs/gal) | Density (lbs/cu ft) | Gel Strength (lbs/100 sqft) | PH | Viscosity (CP) | Salinity (ppm) | Filtration (cc) | Additional Characteristics |
|-----------|--------------|--|----------------------|----------------------|---------------------|-----------------------------|----|----------------|----------------|-----------------|----------------------------|
| 400 | 4069 | OTHER : Saturated Brine Based Mud | 9.8 | 10 | | | | | | | |
| 4069 | 2258 5 | OTHER : Water-Based and/or Oil-Based Mud | 8 | 9.6 | | | | | | | |
| 0 | 400 | WATER-BASED MUD | 8.6 | 8.8 | | | | | | | |

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

GR from TD to surface (horizontal well – vertical portion of hole). Mud Log from intermediate shoe to TD.

List of open and cased hole logs run in the well:

GR, MUDLOG

Coring operation description for the well:

No coring is planned at this time.

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 4502

Anticipated Surface Pressure: 2517.81

Anticipated Bottom Hole Temperature(F): 153

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

Precious30_18FdCom11H_H2S1_20190311115855.pdf

Precious30_18FdCom11H_H2S2_20190311115906.pdf

Precious30_18FdCom11H_EmergencyContactList_20190311152322.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

Precious30_18FdCom11H_DirectPlan_20190311115936.pdf

Precious30_18FdCom11H_DirectPlot_20190311115948.pdf

Other proposed operations facets description:

OXY requests the option to set casing shallower yet still below the salts if losses or hole conditions require this. Cement volumes may be adjusted if casing is set shallower and a DV tool will be run in case a contingency second stage is required for cement to reach surface. If cement circulated to surface during first stage we will drop a cancellation cone and not pump the second stage.

OXY requests the option to run the 7.625" Intermediate II as a contingency string to be run only if severe hole conditions dictate an additional casing string necessary.

OXY respectfully requests a variance to cement the 9-5/8" and/or 7-5/8" intermediate casing strings offline, see attached for additional information.

OXY requests the option to run production casing with DQX, SF TORQ, and/or DQW TORQ connections to accommodate hole conditions or drilling operations.

OXY requests to pump a two stage cement job on the intermediate II casing string with the first stage being pumped conventionally with the calculated TOC @ the Bone Spring and the second stage performed as a bradenhead squeeze with planned cement from the Bone Spring to surface.

Annular Clearance Variance Request - As per the agreement reached in the OXY/BLM meeting on Feb 22, 2018, Oxy requests permission to allow deviation from the 0.422" annular clearance requirement from Onshore Order #2 under the following conditions:

1. Annular clearance to meet or exceed 0.422" between intermediate casing ID and production casing coupling only on the first 500' overlap between both casings.
2. Annular clearance less than 0.422" is acceptable for the curve and lateral portions of the production open hole section.

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

Well will be drilled with a walking/skidding operation. Plan to drill the multiple well pad in batch by section: all surface sections, intermediate sections and production sections. The wellhead will be secured with a night cap whenever the rig is not over the well.

OXY requests the option to contract a Surface Rig to drill, set surface casing, and cement for this well. If the timing between rigs is such that OXY would not be able to preset surface, the Primary Rig will MIRU and drill the well in its entirety per the APD. Please see the attached document for information on the spudder rig.

Other proposed operations facets attachment:

Precious30_18FdCom11H_GasCapPlan_20190311120040.pdf

Precious30_18FdCom11H_SpudRigData_20190311120053.pdf

Precious30_18FdCom11H_DrillPlan3_20190723082926.pdf


Other Variance attachment:

Precious30_18FdCom11H_OfflineCmtgDetail_20190618152442.pdf

5M Choke Panel

Green
Indicates Open

Red Indicates
Closed

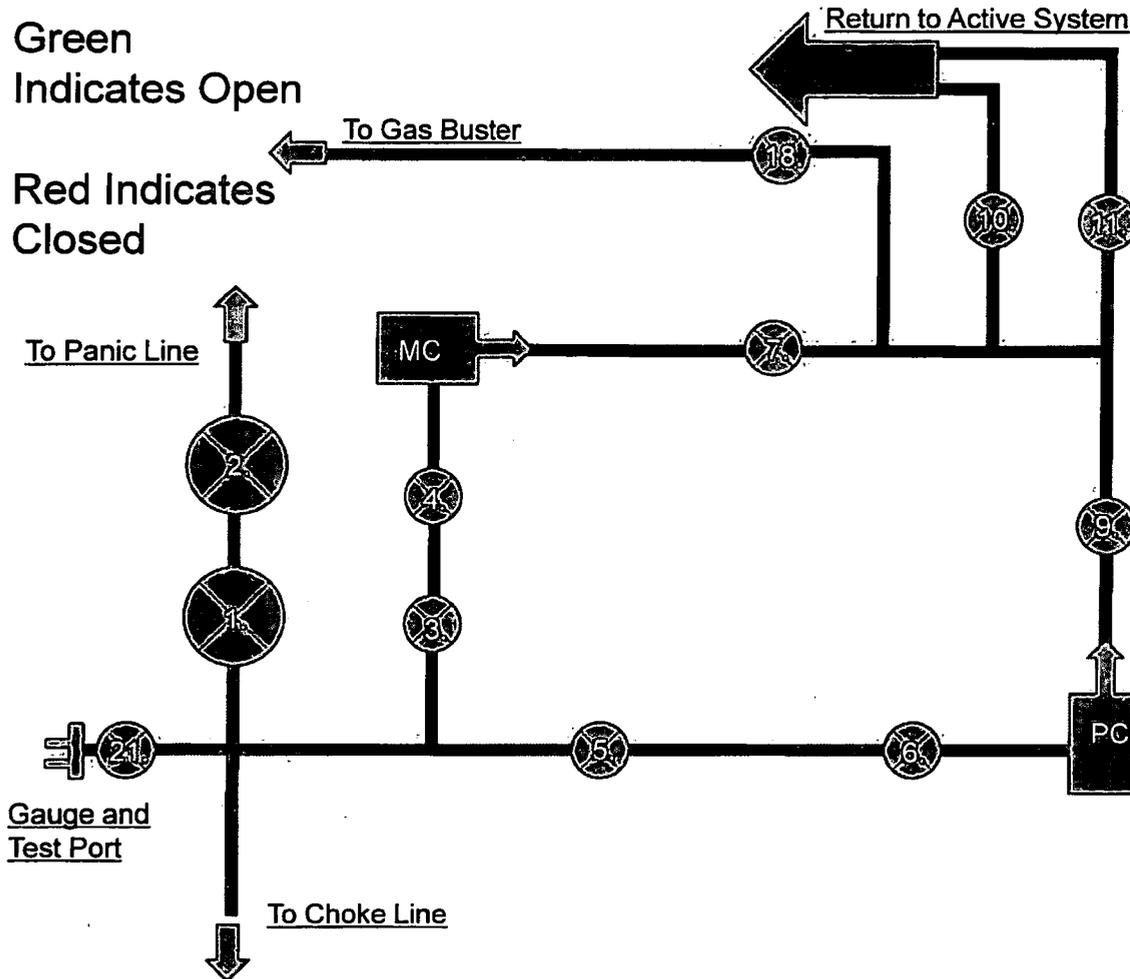


- 1. 4" Choke Manifold Valve
- 2. 4" Choke Manifold Valve
- 3. 3" Choke Manifold Valve
- 4. 3" Choke Manifold Valve
- 5. 3" Choke Manifold Valve
- 6. 3" Choke Manifold Valve
- 7. 3" Choke Manifold Valve
- 8. PC – Power Choke
- 9. 3" Choke Manifold Valve
- 10. 3" Choke Manifold Valve
- 11. Choke Manifold Valve
- 12. MC – Manual Choke
- 18. Choke Manifold Valve

21. Vertical Choke Manifold Valve


***All Valves 3" minimum**




**10M REMOTE
KILL LINE SCHEMATIC**

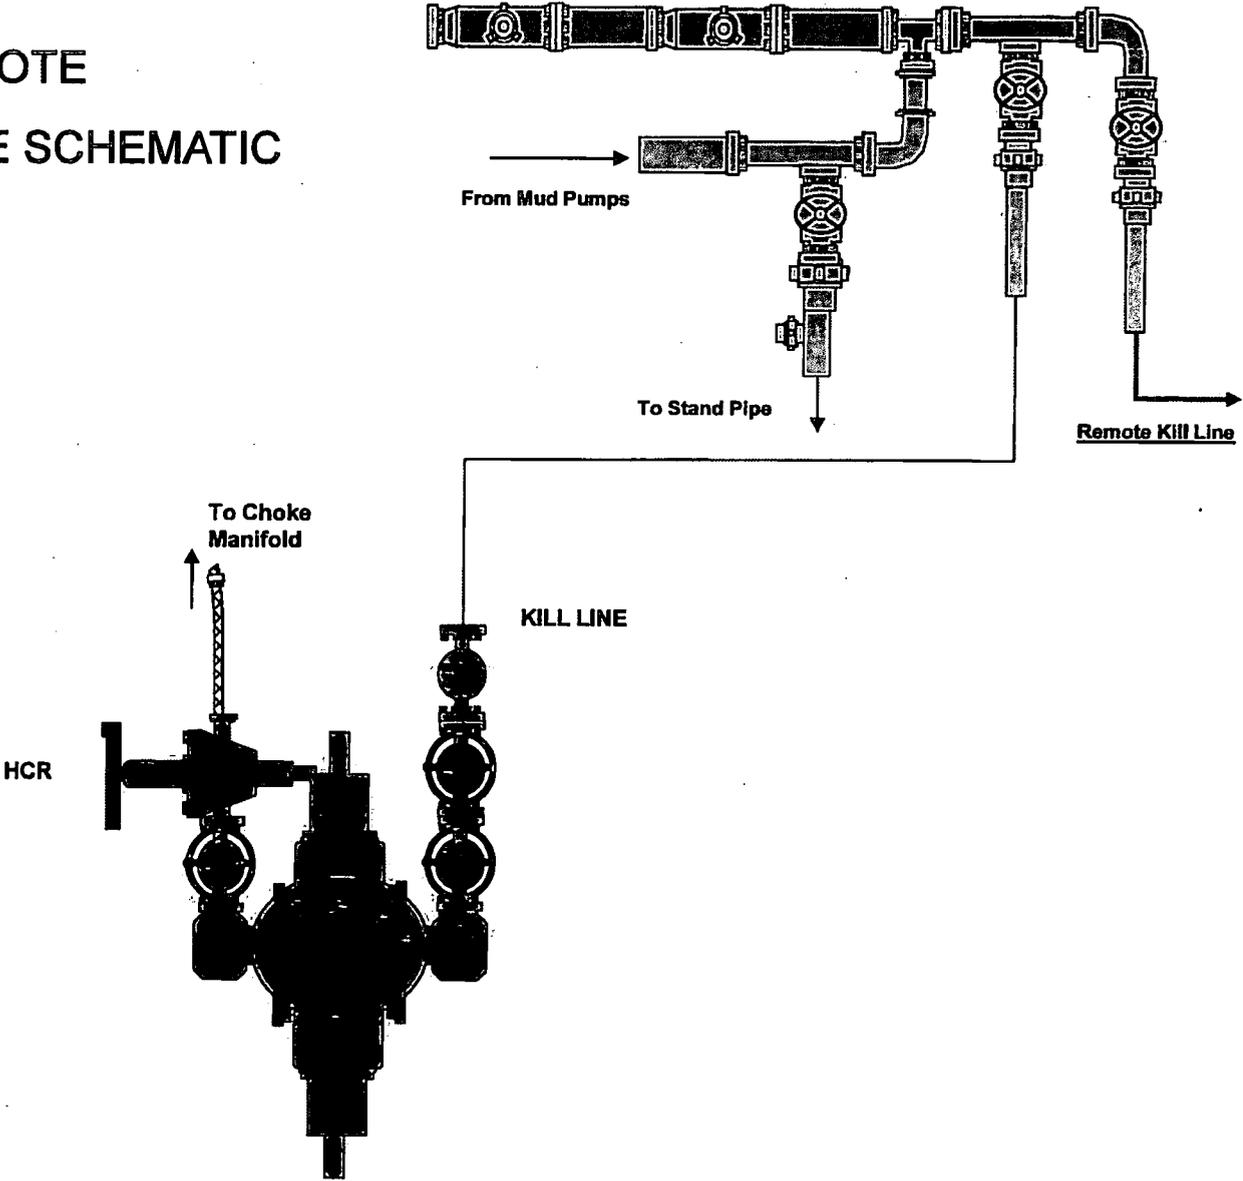


Gas Separator Routing Flex III Rigs

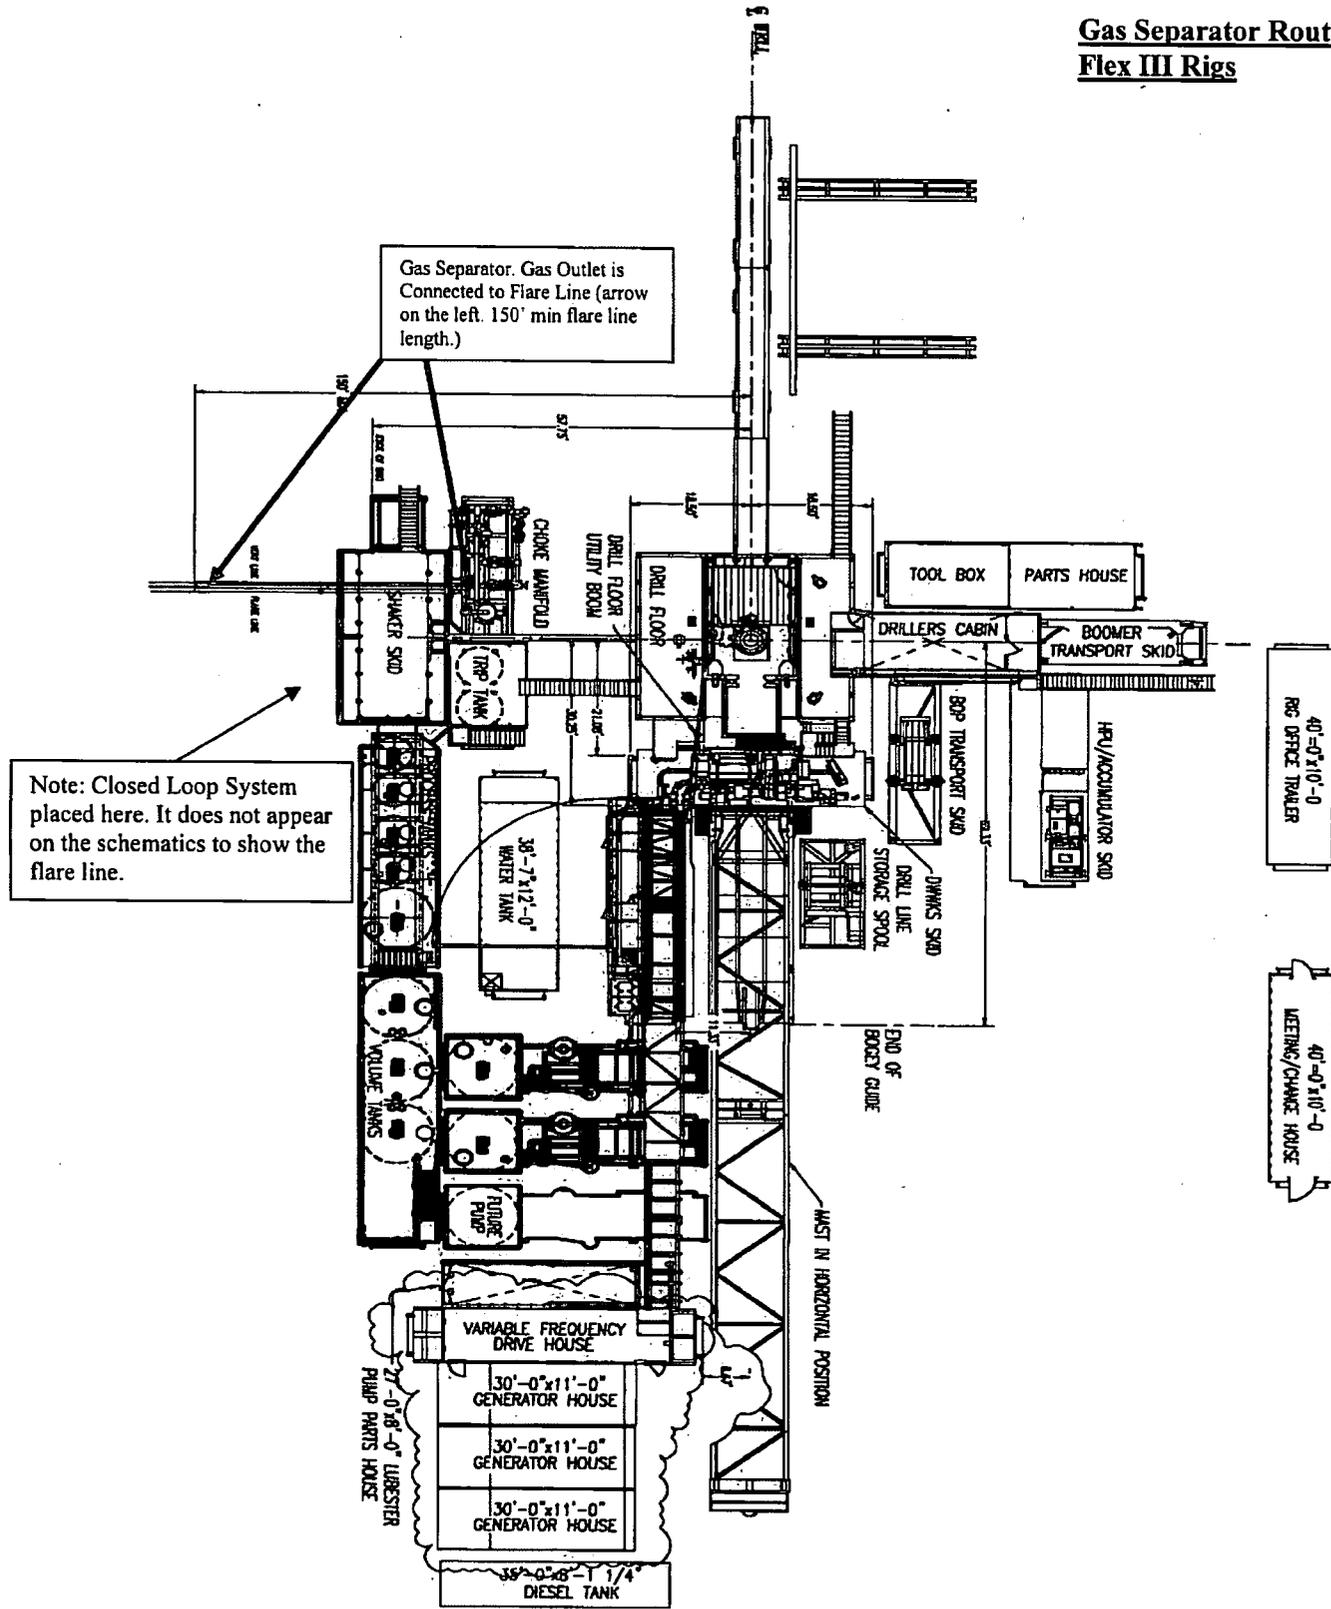

Choke Manifold – Gas Separator (Top View)

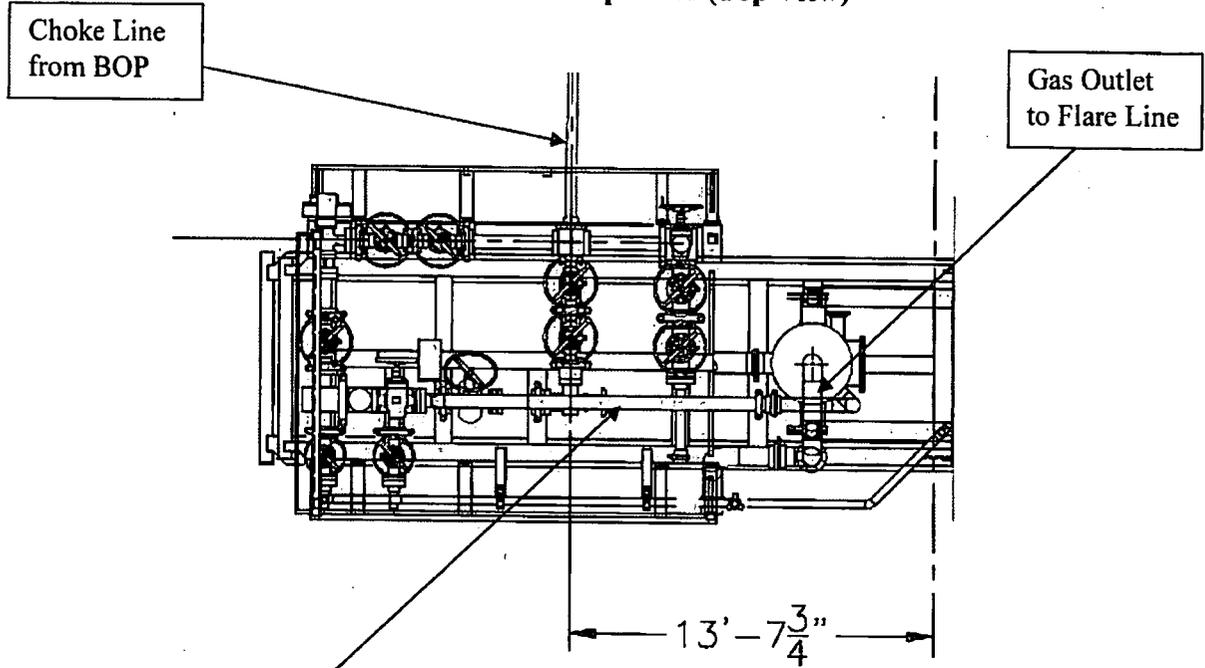

Choke Manifold – Gas Separator (Side View)

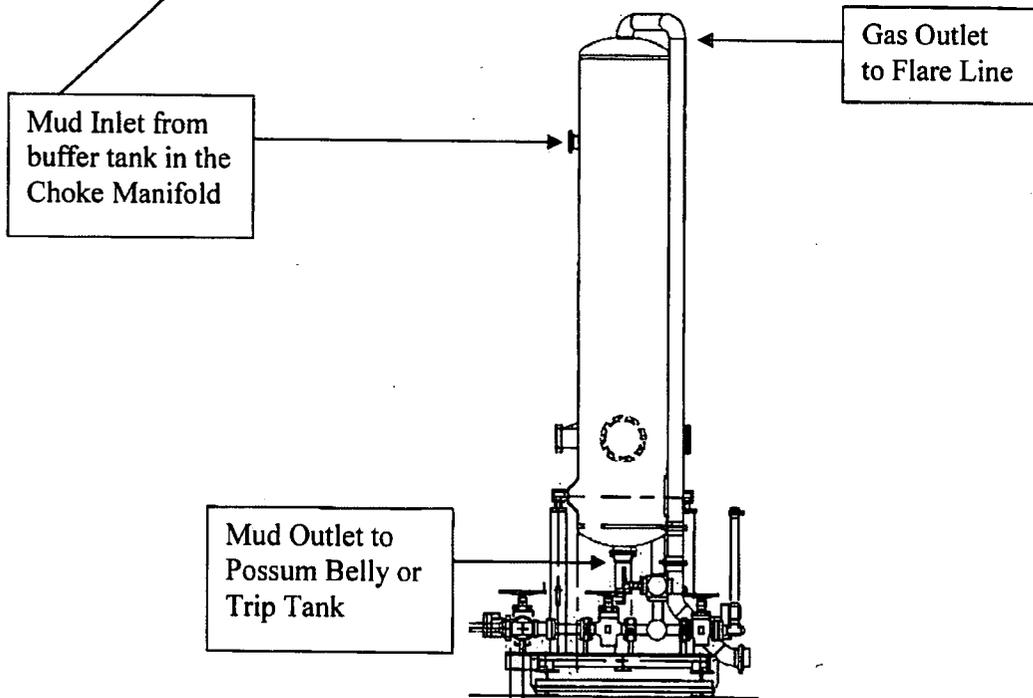

Coflex Hose Certification



Fluid Technology
Quality Document

| QUALITY CONTROL INSPECTION AND TEST CERTIFICATE | | | | CERT. N°: 746 | |
|---|-----------|--------------------------------------|---|--|--|
| PURCHASER: Phoenix Beattle Co. | | | P.O. N°: 002491 | | |
| CONTITECH ORDER N°: 412638 | | HOSE TYPE: 3" ID Choke and Kill Hose | | | |
| HOSE SERIAL N°: 52777 | | NOMINAL / ACTUAL LENGTH: 10,67 m | | | |
| W.P. 68,96 MPa 10000 psi | | T.P. 103,4 MPa 15000 psi | | Duration: 60 ~ min. | |
| Pressure test with water at ambient temperature <p align="center">See attachment. (1 page)</p> | | | | | |
| ↑ 10 mm = 10 Min. → 10 mm = 25 MPa | | | | | |
| COUPLINGS | | | | | |
| Type | Serial N° | | Quality | Heat N° | |
| 3" coupling with 4 1/16" Flange end | 917 | 913 | AISI 4130 | T7998A | |
| | | | AISI 4130 | 26984 | |
| INFOCHIP INSTALLED | | | | API Spec 16 C Temperature rate: "B" | |
| All metal parts are flawless | | | | | |
| WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT. | | | | | |
| Date: | Inspector | | Quality Control | | |
| 04. April. 2008 | | | Contitech Rubber Industrial Kft. Quality Control Dept. (1) | | |

Coflex Hose Certification

Coflex Rubber
Industrial Kft.
Quality Control Dept.
(2)

Coflex Hose Certification

Form No 100/12



Phoenix Beattie Corp

11536 Brittonmore Park Drive
Houston, TX 77041
Tel: (832) 327-0141
Fax: (832) 327-0148
E-mail: mail@phoenixbeattie.com
www.phoenixbeattie.com

Delivery Note

| | | | | | |
|--|-------------|-----------------------------|---|-------------|---|
| Customer Order Number | 370-369-001 | Delivery Note Number | 003078 | Page | 1 |
| Customer / Invoice Address HELMERICH & PAYNE INT'L DRILLING CO 1437 SOUTH BOULDER TULSA, OK 74119 | | | Delivery / Address HELMERICH & PAYNE IDC ATTN: JOE STEPHENSON - RIG 370 13609 INDUSTRIAL ROAD HOUSTON, TX 77015 | | |

| | | | |
|------------------------|---|----------------------------------|-------------|
| Customer Acc No | Phoenix Beattie Contract Manager | Phoenix Beattie Reference | Date |
| H01 | JJL | 006330 | 05/23/2008 |

| Item No | Beattie Part Number / Description | Qty Ordered | Qty Sent | Qty To Follow |
|---------|--|-------------|----------|---------------|
| 1 | HP10CK3A-35-4F1 3" 10K 16C C&K HOSE x 35ft OAL CW 4.1/16" API SPEC FLANGE E/ End 1: 4.1/16" 10Kpsi API Spec 6A Type 68X Flange End 2: 4.1/16" 10Kpsi API Spec 6A Type 68X Flange c/w BX155 Standard ring groove at each end Suitable for H2S Service Working pressure: 10,000psi Test pressure: 15,000psi Standard: API 16C Full specification Armor Guarding: Included Fire Rating: Not Included Temperature rating: -20 Deg C to +100 Deg C | 1 | 1 | 0 |
| 2 | SECK3-HPF3 LIFTING & SAFETY EQUIPMENT TO SUIT HP10CK3-35-F1 2 x 160mm ID Safety Clamps 2 x 244mm ID Lifting Collars & element C's 2 x 7ft Stainless Steel wire rope 3/4" OD 4 x 7.75t Shackles | 1 | 1 | 0 |
| 3 | SC725-200CS SAFETY CLAMP 200MM 7.25T C/S GALVANISED | 1 | 1 | 0 |

Continued...

All goods remain the property of Phoenix Beattie until paid for in full. Any damage or shortage on this delivery must be advised within 5 days. Returns may be subject to a handling charge.

Coflex Hose Certification

Form No 100/12



Phoenix Beattie Corp

11535 Britton Park Drive
Houston, TX 77041
Tel: (832) 327-0141
Fax: (832) 327-0149
E-mail: sa1@phoenixbeattie.com
www.phoenixbeattie.com

Delivery Note

| | | | | | |
|--|-------------|---|--------|-------------|---|
| Customer Order Number | 370-369-001 | Delivery Note Number | 003078 | Page | 2 |
| Customer / Invoice Address HELMERICH & PAYNE INT'L DRILLING CO 1437 SOUTH BOULDER TULSA, OK 74119 | | Delivery / Address HELMERICH & PAYNE IDC ATTN: JOE STEPHENSON - RIG 370 13609 INDUSTRIAL ROAD HOUSTON, TX 77015 | | | |

| | | | |
|------------------------|---|----------------------------------|-------------|
| Customer Acc No | Phoenix Beattie Contract Manager | Phoenix Beattie Reference | Date |
| H01 | JJL | 006330 | 05/23/2008 |

| Item No | Beattie Part Number / Description | Qty Ordered | Qty Sent | Qty To Follow |
|---------|---|-------------|----------|---------------|
| 4 | SC725-132CS SAFETY CLAMP 132MM 7.25T C/S GALVANIZED C/W BOLTS | 1 | 1 | 0 |
| 5 | 00CERT-HYDRO HYDROSTATIC PRESSURE TEST CERTIFICATE | 1 | 1 | 0 |
| 6 | 00CERT-LOAD LOAD TEST CERTIFICATES | 1 | 1 | 0 |
| 7 | 00FREIGHT INBOUND / OUTBOUND FREIGHT PRE-PAY & ADD TO FINAL INVOICE NOTE: MATERIAL MUST BE ACCOMPANIED BY PAPERWORK INCLUDING THE PURCHASE ORDER, RIG NUMBER TO ENSURE PROPER PAYMENT | 1 | 1 | 0 |

Phoenix Beattie Inspection Signature : _____

Received In Good Condition : Signature _____

Print Name _____

Date _____

All goods remain the property of Phoenix Beattie until paid for in full. Any damage or shortage on this delivery must be advised within 5 days. Returns may be subject to a handling charge.

CERTIFICATE OF CONFORMITY

Supplier : CONTITECH RUBBER INDUSTRIAL KFT.
Equipment : 6 pcs. Choke and Kill Hose with installed couplings
Type : 3" x 10,67 m WP: 10000 psi
Supplier File Number : 412638
Date of Shipment : April. 2008
Customer : Phoenix Beattie Co.
Customer P.o. : 002491
Referenced Standards
/Codes / Specifications : API Spec 16 C
Serial No.: 52754,52755,52776,52777,52778,52782

STATEMENT OF CONFORMITY

We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.

COUNTRY OF ORIGIN HUNGARY/EU

Signed :



Position: Q.C. Manager

ContiTech Rubber
Industrial KFT.
Quality Control Dept.
(1)


Date: 04. April. 2008

5/10M BOP Stack

Mud Cross Valves:

5. 10M Check Valve
6. Outside 10M Kill Line Valve
7. Inside 10M Kill Line Valve
8. Outside 10M Kill Line Valve
9. 10M HCR Valve


*Minimum ID = 2-1/16" on Kill Line side and 3" minimum ID on choke line side

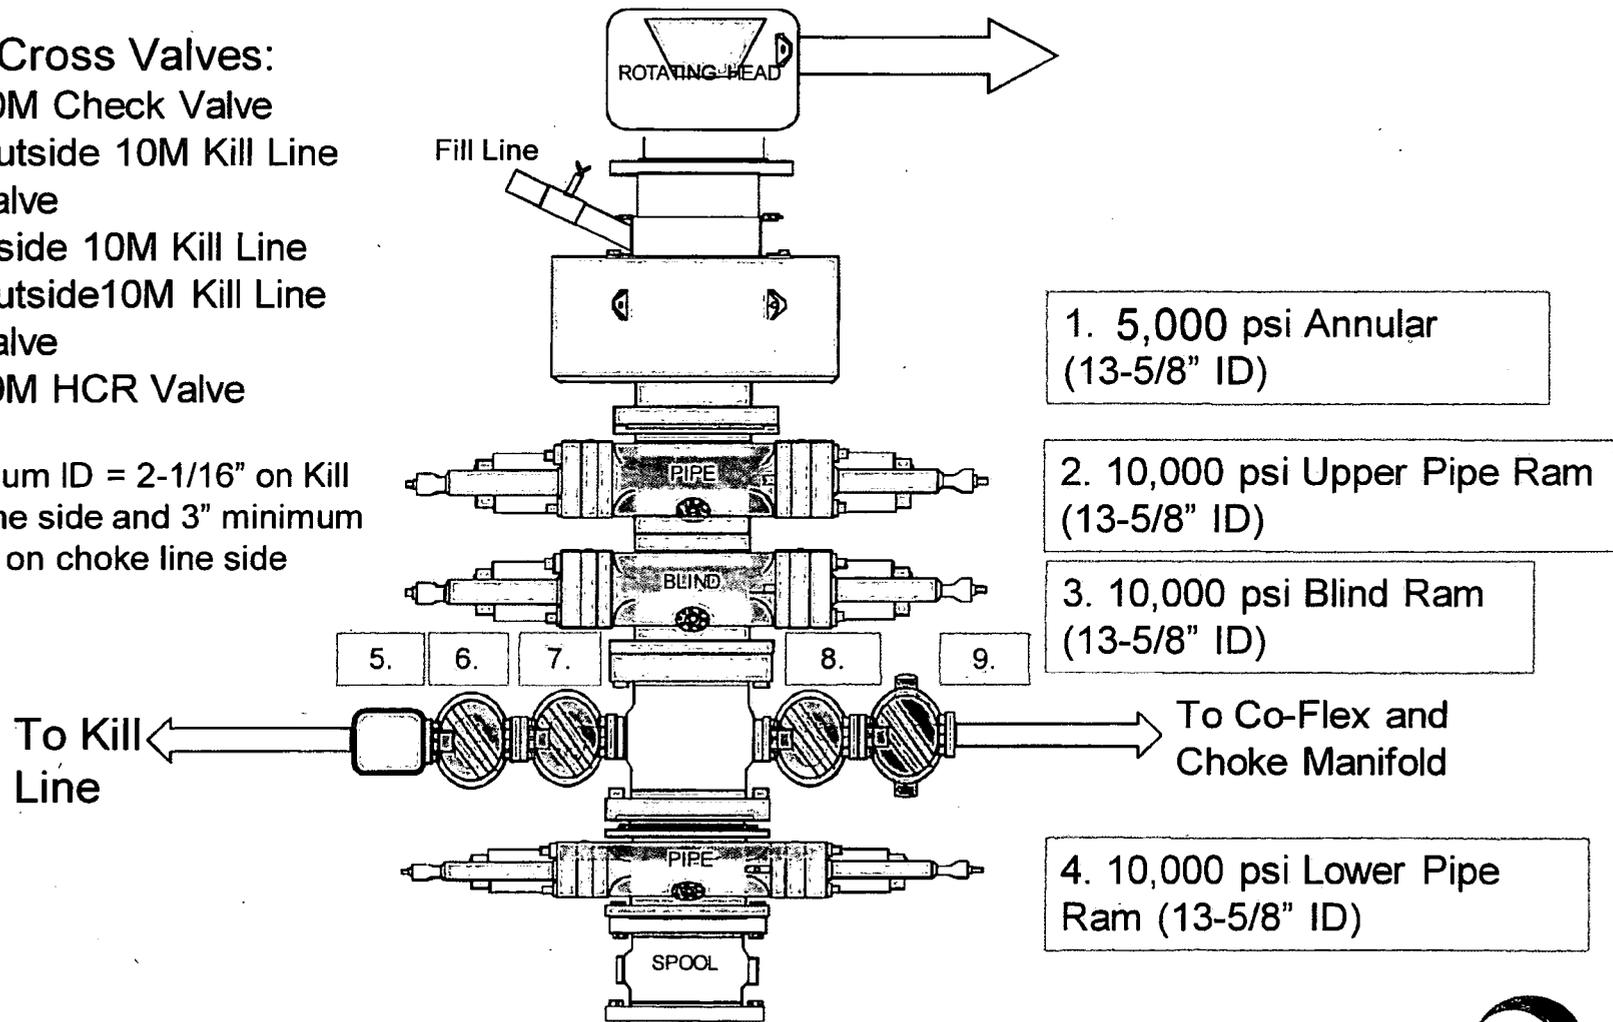

CAMERON

A Schlumberger Company

13-5/8" 5M MN-DS Wellhead System Slips

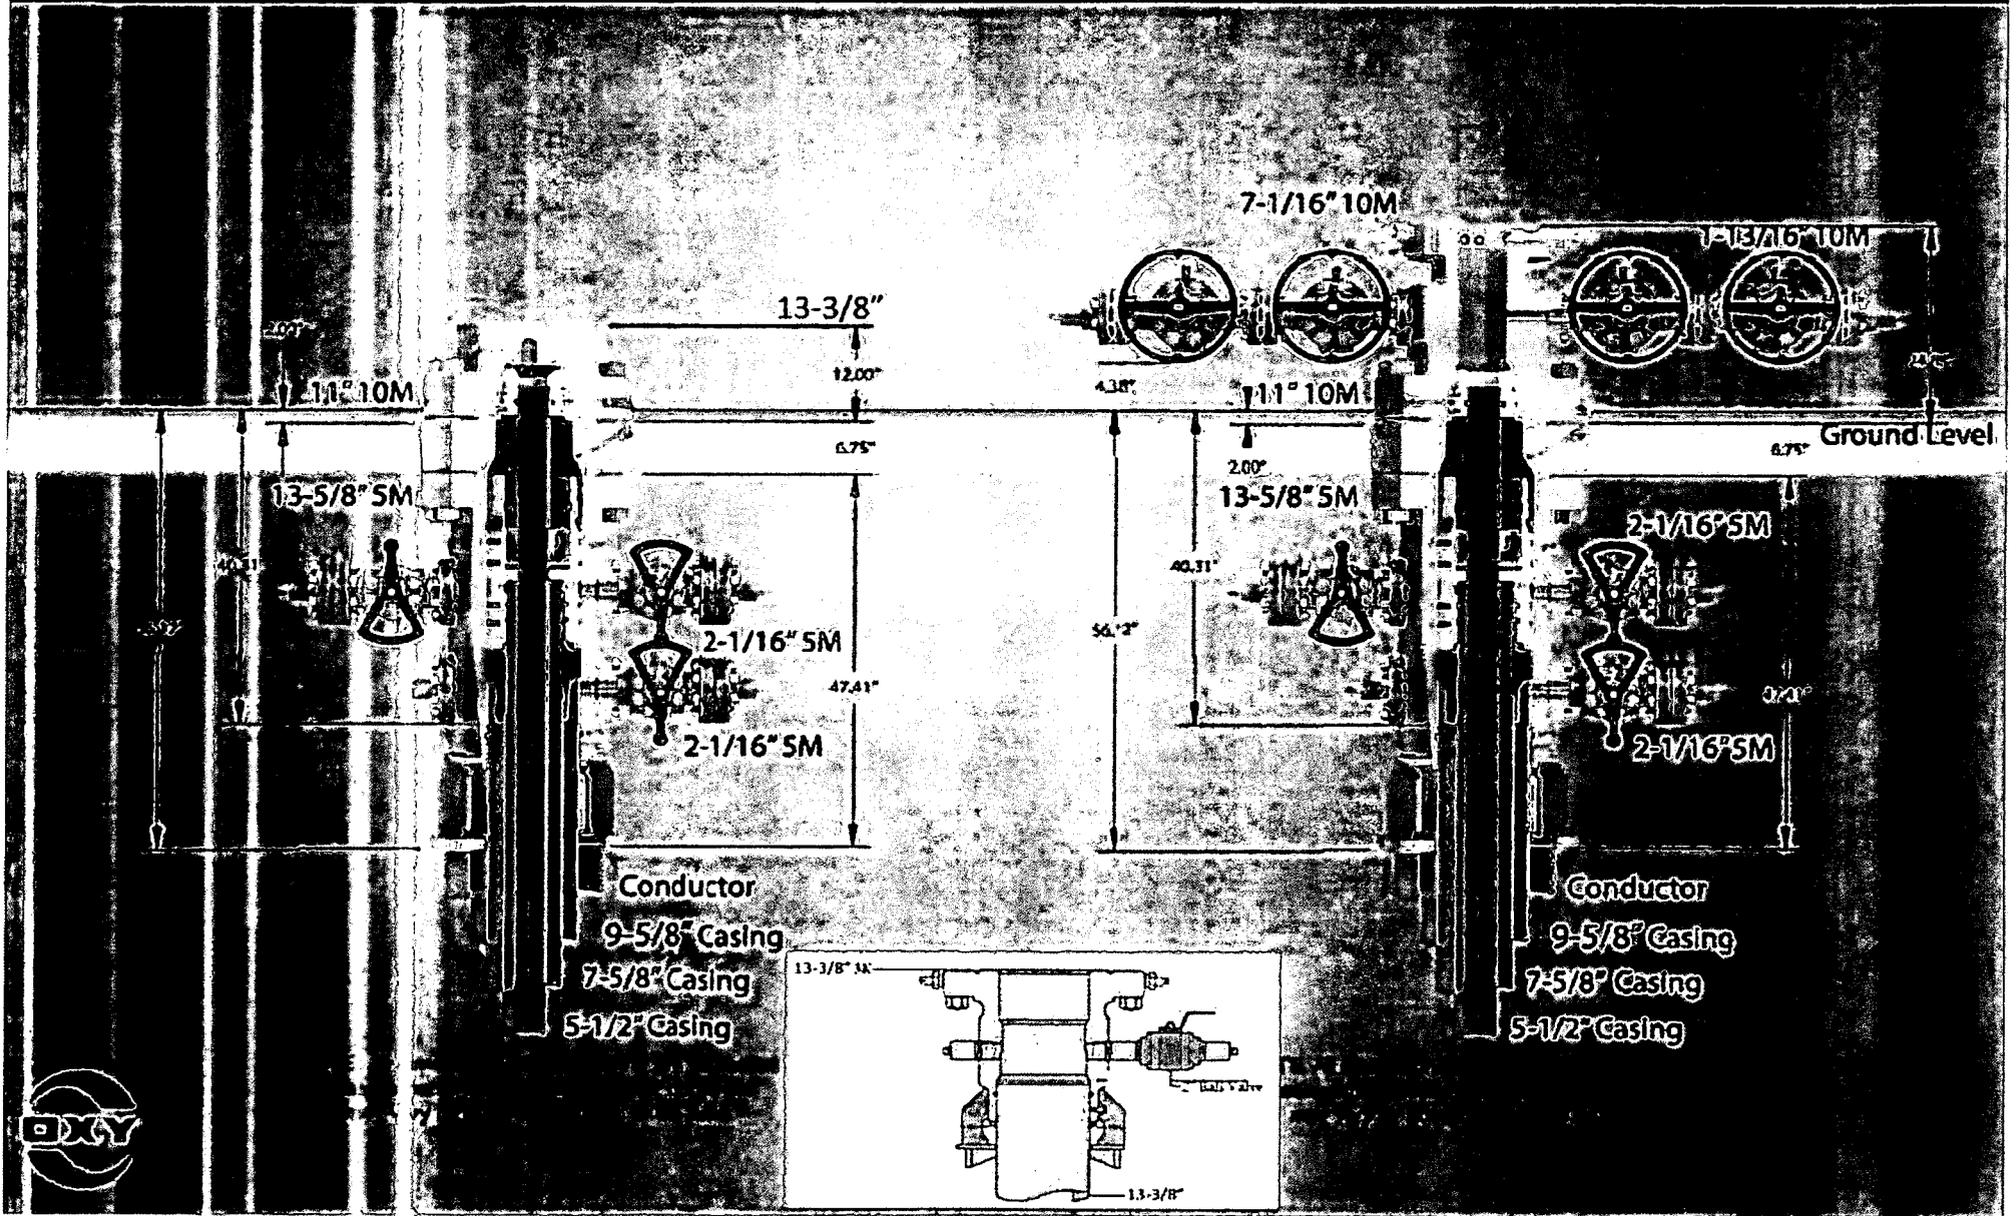

OXY's Minimum Design Criteria

Burst, Collapse, and Tensile SF are calculated using Landmark's Stress Check (Casing Design) software. A sundry will be requested if any lesser grade or different size casing is substituted.

1) Casing Design Assumptions

a) Burst Loads

CSG Test (Surface)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both Onshore Oil and Gas Order No. 2 and 19.15.16 of the OCD Rules.
- External: Pore pressure in open hole.

CSG Test (Intermediate)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both Onshore Oil and Gas Order No. 2 and 19.15.16 of the OCD Rules.
- External: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

CSG Test (Production)

- Internal:
 - For Drilling: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both Onshore Oil and Gas Order No. 2 and 19.15.16 of the OCD Rules.
 - For Production: The design pressure test should be the greater of (1) the planned test pressure prior to stimulation down the casing. (2) the regulatory test pressure, and (3) the expected gas lift system pressure. The design test fluid should be the fluid associated with pressure test having the greatest pressure.
- External:
 - For Drilling: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.
 - For Production: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Gas Column (Surface)

- Internal: Assumes a full column of gas in the casing with a Gas/Oil Gradient of 0.1 psi/ft in the absence of better information. It is limited to the controlling pressure based on the fracture pressure at the shoe or the maximum expected pore pressure within the next drilling interval, whichever results in a lower surface pressure.
- External: Fluid gradient below TOC, pore pressure from the TOC to the Intermediate CSG shoe (if applicable), and MW of the drilling mud that was in the hole when the CSG was run from Intermediate CSG shoe to surface.

Bullheading (Surface / Intermediate)

- Internal: The string must be designed to withstand a pressure profile based on the fracture pressure at the casing shoe with a column of water above the shoe plus an additional surface pressure (in psi) of $0.02 \times MD$ of the shoe to account for pumping friction pressure.
- External: Mud weight to TOC; cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Gas Kick (Intermediate)

- The string must be designed to at least a gas kick load case unless the rig is unable to detect a kick. For the gas kick load case, the internal pressure profile must be based on a minimum volume of 50 bbl or the minimum kick detection capability of the rig, whichever is greater, and a kick intensity of 2.0 ppg for Class 1, 1.0 ppg of Class 2, and 0.5 ppg for Class 3 and 4 wells.
- Internal: Influx depth of the maximum pore pressure of 0.55 "gas kick gravity" of gas to surface while drilling the next hole section.
- External: Mud weight to the TOC, cement mix water gradient below TOC, and pore pressure in open hole.

Tubing Leak Near Surface While Producing (Production)

- Internal: SITP plus a packer fluid gradient to the shoe or top of packer.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Tubing Leak Near Surface While Stimulating (Production)

- Internal: Surface pressure or pressure-relief system pressure, whichever is lower plus packer fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Injection / Stimulation Down Casing (Production)

- Internal: Surface pressure plus injection fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

b) Collapse Loads

Lost Circulation (Surface / Intermediate)

- Internal: Lost circulation at the TD of the next hole section, and the fluid level falls to a depth where the hydrostatic of the mud equals pore pressure at the depth of the lost circulation zone.
- External: MW of the drilling mud that was in the hole when the casing was run.

Cementing (Surface / Intermediate / Production)

- Internal: Displacement fluid density.
- External: Mud weight from TOC to surface and cement slurry weight from TOC to casing shoe.

Full Evacuation (Production)

- Internal: Full void pipe.
- External: MW of drilling mud in the hole when the casing was run.

c) Tension Loads

Running Casing (Surface / Intermediate / Production)

- Axial: Buoyant weight of the string plus the lesser of 100,000 lb or the string weight in air.

Green Cement (Surface / Intermediate / Production)

- Axial: Buoyant weight of the string plus cement plug bump pressure load.

TECHNICAL DATA SHEET TMK UP FJ 7.625 X 26.4 L80 HC

TUBULAR PARAMETERS

| | |
|------------------------|----------|
| Nominal OD, (inch) | 7.625 |
| Wall Thickness, (inch) | 0.328 |
| Pipe Grade | L80 HC |
| Drift | Standard |

PIPE BODY PROPERTIES



| | |
|-------------------------------------|-------|
| PE Weight, (lbs/ft) | 25.56 |
| Nominal Weight, (lbs/ft) | 26.40 |
| Nominal ID, (inch) | 6.969 |
| Drift Diameter, (inch) | 6.844 |
| Nominal Pipe Body Area, (sq inch) | 7.519 |
| Yield Strength in Tension, (klbs) | 601 |
| Min. Internal Yield Pressure, (psi) | 6 020 |
| Collapse Pressure, (psi) | 3 910 |

CONNECTION PARAMETERS

| | |
|---------------------------------------|-------|
| Connection OD (inch) | 7.63 |
| Connection ID, (inch) | 6.975 |
| Make-Up Loss, (inch) | 4.165 |
| Connection Critical Area, (sq inch) | 2.520 |
| Yield Strength in Tension, (klbs) | 347 |
| Yield Strength in Compression, (klbs) | 347 |
| Tension Efficiency | 58% |
| Compression Efficiency | 58% |
| Min. Internal Yield Pressure, (psi) | 6 020 |
| Collapse Pressure, (psi) | 3 910 |
| Uniaxial Bending (deg/100ft) | 28.0 |

MAKE-UP TORQUES

| | |
|---------------------------------|--------|
| Yield Torque, (ft-lb) | 22 200 |
| Minimum Make-Up Torque, (ft-lb) | 12 500 |
| Optimum Make-Up Torque, (ft-lb) | 13 900 |
| Maximum Make-Up Torque, (ft-lb) | 15 300 |

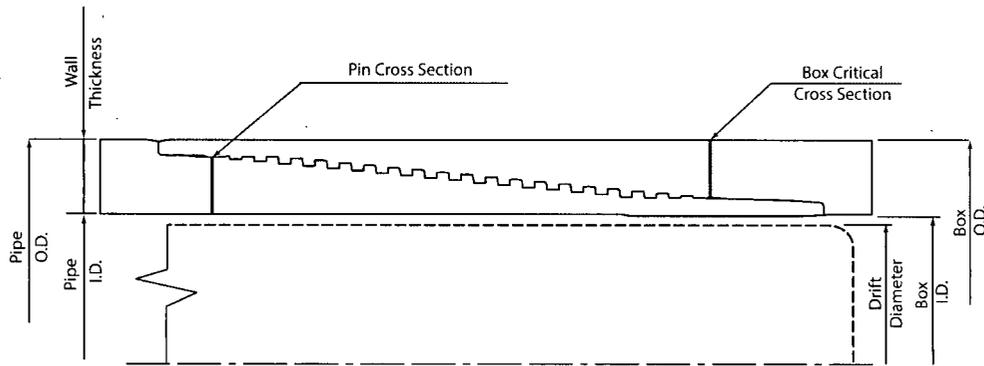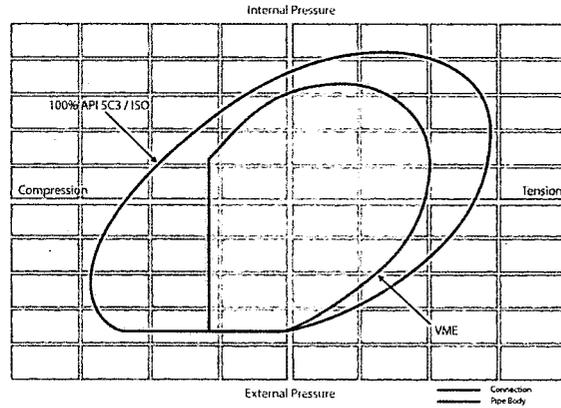

NOTE: The content of this Technical Data Sheet is for general information only and does not guarantee performance or imply fitness for a particular purpose, which only a competent drilling professional can determine considering the specific installation and operation parameters. This information supersedes all prior versions for this connection. Information that is printed or downloaded is no longer controlled by TMK and might not be the latest information. Anyone using the information herein does so at their own risk. To verify that you have the latest technical information, please contact PAO 'TMK' Technical Sales in Russia (Tel: +7 (495) 775-76-00, Email: techsales@tmk-group.com) and TMK IPSCO in North America (Tel: +1 (281)949-1044, Email: techsales@tmk-ipSCO.com).

Print date: 07/10/2018 20:11

TECHNICAL DATA SHEET TMK UP SF 7.625 X 26.4 L80 HC

TUBULAR PARAMETERS

| | |
|------------------------|----------|
| Nominal OD, (inch) | 7.625 |
| Wall Thickness, (inch) | 0.328 |
| Pipe Grade | L80 HC |
| Drift | Standard |

PIPE BODY PROPERTIES



| | |
|-------------------------------------|-------|
| PE Weight, (lbs/ft) | 25.56 |
| Nominal Weight, (lbs/ft) | 26.40 |
| Nominal ID, (inch) | 6.969 |
| Drift Diameter, (inch) | 6.844 |
| Nominal Pipe Body Area, (sq inch) | 7.519 |
| Yield Strength in Tension, (klbs) | 601 |
| Min. Internal Yield Pressure, (psi) | 6 020 |
| Collapse Pressure, (psi) | 3 910 |

CONNECTION PARAMETERS

| | |
|---------------------------------------|-------|
| Connection OD (inch) | 7.79 |
| Connection ID, (inch) | 6.938 |
| Make-Up Loss, (inch) | 6.029 |
| Connection Critical Area, (sq inch) | 5.948 |
| Yield Strength in Tension, (klbs) | 533 |
| Yield Strength in Compression, (klbs) | 533 |
| Tension Efficiency | 89% |
| Compression Efficiency | 89% |
| Min. Internal Yield Pressure, (psi) | 6 020 |
| Collapse Pressure, (psi) | 3 910 |
| Uniaxial Bending (deg/100ft) | 42.7 |

MAKE-UP TORQUES

| | |
|---------------------------------|--------|
| Yield Torque, (ft-lb) | 22 600 |
| Minimum Make-Up Torque, (ft-lb) | 15 000 |
| Optimum Make-Up Torque, (ft-lb) | 16 500 |
| Maximum Make-Up Torque, (ft-lb) | 18 200 |

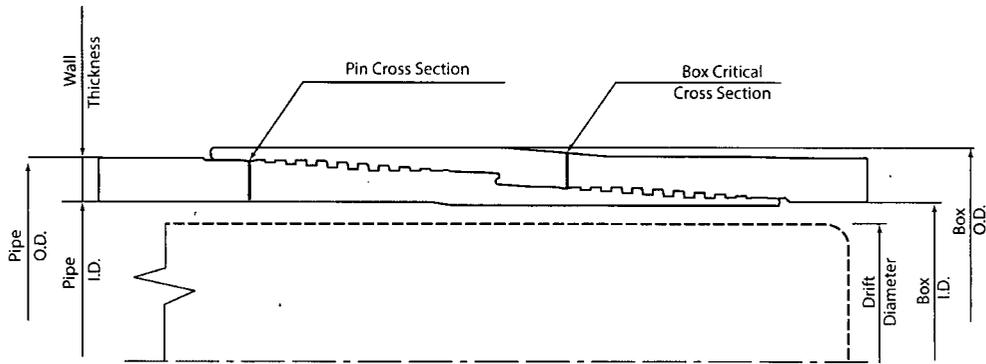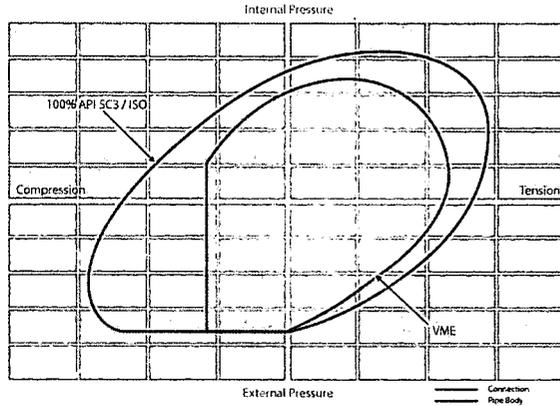

NOTE: The content of this Technical Data Sheet is for general information only and does not guarantee performance or imply fitness for a particular purpose, which only a competent drilling professional can determine considering the specific installation and operation parameters. This information supersedes all prior versions for this connection. Information that is printed or downloaded is no longer controlled by TMK and might not be the latest information. Anyone using the information herein does so at their own risk. To verify that you have the latest technical information, please contact PAO "TMK" Technical Sales in Russia (Tel: +7 (495) 775-76-00, Email: techsales@tmk-group.com) and TMK IPSCO in North America (Tel: +1 (281)949-1044, Email: techsales@tmk-ipSCO.com).

OXY's Minimum Design Criteria

Burst, Collapse, and Tensile SF are calculated using Landmark's Stress Check (Casing Design) software. A sundry will be requested if any lesser grade or different size casing is substituted.

1) Casing Design Assumptions

a) Burst Loads

CSG Test (Surface)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both Onshore Oil and Gas Order No. 2 and 19.15.16 of the OCD Rules.
- External: Pore pressure in open hole.

CSG Test (Intermediate)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both Onshore Oil and Gas Order No. 2 and 19.15.16 of the OCD Rules.
- External: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

CSG Test (Production)

- Internal:
 - For Drilling: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both Onshore Oil and Gas Order No. 2 and 19.15.16 of the OCD Rules.
 - For Production: The design pressure test should be the greater of (1) the planned test pressure prior to stimulation down the casing. (2) the regulatory test pressure, and (3) the expected gas lift system pressure. The design test fluid should be the fluid associated with pressure test having the greatest pressure.
- External:
 - For Drilling: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.
 - For Production: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Gas Column (Surface)

- Internal: Assumes a full column of gas in the casing with a Gas/Oil Gradient of 0.1 psi/ft in the absence of better information. It is limited to the controlling pressure based on the fracture pressure at the shoe or the maximum expected pore pressure within the next drilling interval, whichever results in a lower surface pressure.
- External: Fluid gradient below TOC, pore pressure from the TOC to the Intermediate CSG shoe (if applicable), and MW of the drilling mud that was in the hole when the CSG was run from Intermediate CSG shoe to surface.

Bullheading (Surface / Intermediate)

- Internal: The string must be designed to withstand a pressure profile based on the fracture pressure at the casing shoe with a column of water above the shoe plus an additional surface pressure (in psi) of $0.02 \times MD$ of the shoe to account for pumping friction pressure.
- External: Mud weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Gas Kick (Intermediate)

- The string must be designed to at least a gas kick load case unless the rig is unable to detect a kick. For the gas kick load case, the internal pressure profile must be based on a minimum volume of 50 bbl or the minimum kick detection capability of the rig, whichever is greater, and a kick intensity of 2.0 ppg for Class 1, 1.0 ppg of Class 2, and 0.5 ppg for Class 3 and 4 wells.
- Internal: Influx depth of the maximum pore pressure of 0.55 "gas kick gravity" of gas to surface while drilling the next hole section.
- External: Mud weight to the TOC, cement mix water gradient below TOC, and pore pressure in open hole.

Tubing Leak Near Surface While Producing (Production)

- Internal: SITP plus a packer fluid gradient to the shoe or top of packer.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Tubing Leak Near Surface While Stimulating (Production)

- Internal: Surface pressure or pressure-relief system pressure, whichever is lower plus packer fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Injection / Stimulation Down Casing (Production)

- Internal: Surface pressure plus injection fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

b) Collapse Loads

Lost Circulation (Surface / Intermediate)

- Internal: Lost circulation at the TD of the next hole section, and the fluid level falls to a depth where the hydrostatic of the mud equals pore pressure at the depth of the lost circulation zone.
- External: MW of the drilling mud that was in the hole when the casing was run.

Cementing (Surface / Intermediate / Production)

- Internal: Displacement fluid density.
- External: Mud weight from TOC to surface and cement slurry weight from TOC to casing shoe.

Full Evacuation (Production)

- Internal: Full void pipe.
- External: MW of drilling mud in the hole when the casing was run.

c) Tension Loads

Running Casing (Surface / Intermediate / Production)

- Axial: Buoyant weight of the string plus the lesser of 100,000 lb or the string weight in air.

Green Cement (Surface / Intermediate / Production)

- Axial: Buoyant weight of the string plus cement plug bump pressure load.

OXY's Minimum Design Criteria

Burst, Collapse, and Tensile SF are calculated using Landmark's Stress Check (Casing Design) software. A sundry will be requested if any lesser grade or different size casing is substituted.

1) Casing Design Assumptions

a) Burst Loads

CSG Test (Surface)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both Onshore Oil and Gas Order No. 2 and 19.15.16 of the OCD Rules.
- External: Pore pressure in open hole.

CSG Test (Intermediate)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both Onshore Oil and Gas Order No. 2 and 19.15.16 of the OCD Rules.
- External: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

CSG Test (Production)

- Internal:
 - For Drilling: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both Onshore Oil and Gas Order No. 2 and 19.15.16 of the OCD Rules.
 - For Production: The design pressure test should be the greater of (1) the planned test pressure prior to stimulation down the casing. (2) the regulatory test pressure, and (3) the expected gas lift system pressure. The design test fluid should be the fluid associated with pressure test having the greatest pressure.
- External:
 - For Drilling: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.
 - For Production: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Gas Column (Surface)

- Internal: Assumes a full column of gas in the casing with a Gas/Oil Gradient of 0.1 psi/ft in the absence of better information. It is limited to the controlling pressure based on the fracture pressure at the shoe or the maximum expected pore pressure within the next drilling interval, whichever results in a lower surface pressure.
- External: Fluid gradient below TOC, pore pressure from the TOC to the Intermediate CSG shoe (if applicable), and MW of the drilling mud that was in the hole when the CSG was run from Intermediate CSG shoe to surface.

Bullheading (Surface / Intermediate)

- Internal: The string must be designed to withstand a pressure profile based on the fracture pressure at the casing shoe with a column of water above the shoe plus an additional surface pressure (in psi) of $0.02 \times MD$ of the shoe to account for pumping friction pressure.
- External: Mud weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Gas Kick (Intermediate)

- The string must be designed to at least a gas kick load case unless the rig is unable to detect a kick. For the gas kick load case, the internal pressure profile must be based on a minimum volume of 50 bbl or the minimum kick detection capability of the rig, whichever is greater, and a kick intensity of 2.0 ppg for Class 1, 1.0 ppg of Class 2, and 0.5 ppg for Class 3 and 4 wells.
- Internal: Influx depth of the maximum pore pressure of 0.55 "gas kick gravity" of gas to surface while drilling the next hole section.
- External: Mud weight to the TOC, cement mix water gradient below TOC, and pore pressure in open hole.

Tubing Leak Near Surface While Producing (Production)

- Internal: SITP plus a packer fluid gradient to the shoe or top of packer.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Tubing Leak Near Surface While Stimulating (Production)

- Internal: Surface pressure or pressure-relief system pressure, whichever is lower plus packer fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Injection / Stimulation Down Casing (Production)

- Internal: Surface pressure plus injection fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

b) Collapse Loads

Lost Circulation (Surface / Intermediate)

- Internal: Lost circulation at the TD of the next hole section, and the fluid level falls to a depth where the hydrostatic of the mud equals pore pressure at the depth of the lost circulation zone.
- External: MW of the drilling mud that was in the hole when the casing was run.

Cementing (Surface / Intermediate / Production)

- Internal: Displacement fluid density.
- External: Mud weight from TOC to surface and cement slurry weight from TOC to casing shoe.

Full Evacuation (Production)

- Internal: Full void pipe.
- External: MW of drilling mud in the hole when the casing was run.

c) Tension Loads

Running Casing (Surface / Intermediate / Production)

- Axial: Buoyant weight of the string plus the lesser of 100,000 lb or the string weight in air.

Green Cement (Surface / Intermediate / Production)

- Axial: Buoyant weight of the string plus cement plug bump pressure load.

OXY's Minimum Design Criteria

Burst, Collapse, and Tensile SF are calculated using Landmark's Stress Check (Casing Design) software. A sundry will be requested if any lesser grade or different size casing is substituted.

1) Casing Design Assumptions

a) Burst Loads

CSG Test (Surface)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both Onshore Oil and Gas Order No. 2 and 19.15.16 of the OCD Rules.
- External: Pore pressure in open hole.

CSG Test (Intermediate)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both Onshore Oil and Gas Order No. 2 and 19.15.16 of the OCD Rules.
- External: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

CSG Test (Production)

- Internal:
 - For Drilling: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both Onshore Oil and Gas Order No. 2 and 19.15.16 of the OCD Rules.
 - For Production: The design pressure test should be the greater of (1) the planned test pressure prior to stimulation down the casing. (2) the regulatory test pressure, and (3) the expected gas lift system pressure. The design test fluid should be the fluid associated with pressure test having the greatest pressure.
- External:
 - For Drilling: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.
 - For Production: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Gas Column (Surface)

- Internal: Assumes a full column of gas in the casing with a Gas/Oil Gradient of 0.1 psi/ft in the absence of better information. It is limited to the controlling pressure based on the fracture pressure at the shoe or the maximum expected pore pressure within the next drilling interval, whichever results in a lower surface pressure.
- External: Fluid gradient below TOC, pore pressure from the TOC to the Intermediate CSG shoe (if applicable), and MW of the drilling mud that was in the hole when the CSG was run from Intermediate CSG shoe to surface.

Bullheading (Surface / Intermediate)

- Internal: The string must be designed to withstand a pressure profile based on the fracture pressure at the casing shoe with a column of water above the shoe plus an additional surface pressure (in psi) of $0.02 \times MD$ of the shoe to account for pumping friction pressure.
- External: Mud weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Gas Kick (Intermediate)

- The string must be designed to at least a gas kick load case unless the rig is unable to detect a kick. For the gas kick load case, the internal pressure profile must be based on a minimum volume of 50 bbl or the minimum kick detection capability of the rig, whichever is greater, and a kick intensity of 2.0 ppg for Class 1, 1.0 ppg of Class 2, and 0.5 ppg for Class 3 and 4 wells.
- Internal: Influx depth of the maximum pore pressure of 0.55 "gas kick gravity" of gas to surface while drilling the next hole section.
- External: Mud weight to the TOC, cement mix water gradient below TOC, and pore pressure in open hole.

Tubing Leak Near Surface While Producing (Production)

- Internal: SITP plus a packer fluid gradient to the shoe or top of packer.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Tubing Leak Near Surface While Stimulating (Production)

- Internal: Surface pressure or pressure-relief system pressure, whichever is lower plus packer fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Injection / Stimulation Down Casing (Production)

- Internal: Surface pressure plus injection fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

b) Collapse Loads

Lost Circulation (Surface / Intermediate)

- Internal: Lost circulation at the TD of the next hole section, and the fluid level falls to a depth where the hydrostatic of the mud equals pore pressure at the depth of the lost circulation zone.
- External: MW of the drilling mud that was in the hole when the casing was run.

Cementing (Surface / Intermediate / Production)

- Internal: Displacement fluid density.
- External: Mud weight from TOC to surface and cement slurry weight from TOC to casing shoe.

Full Evacuation (Production)

- Internal: Full void pipe.
- External: MW of drilling mud in the hole when the casing was run.

c) Tension Loads

Running Casing (Surface / Intermediate / Production)

- Axial: Buoyant weight of the string plus the lesser of 100,000 lb or the string weight in air.

Green Cement (Surface / Intermediate / Production)

- Axial: Buoyant weight of the string plus cement plug bump pressure load.

PERFORMANCE DATA

TMK UP DQX
Technical Data Sheet

5.500 in

20.00 lbs/ft

P-110

Tubular Parameters


| | | | | | |
|---------------------|-------|-----------------|------------------------------|---------|-----|
| Size | 5.500 | in | Minimum Yield | 110,000 | psi |
| Nominal Weight | 20.00 | lbs/ft | Minimum Tensile | 125,000 | psi |
| Grade | P-110 | | Yield Load | 641,000 | lbs |
| PE Weight | 19.81 | lbs/ft | Tensile Load | 729,000 | lbs |
| Wall Thickness | 0.361 | in | Min. Internal Yield Pressure | 12,600 | psi |
| Nominal ID | 4.778 | in | Collapse Pressure | 11,100 | psi |
| Drift Diameter | 4.653 | in | | | |
| Nom. Pipe Body Area | 5.828 | in ² | | | |

Connection Parameters

| | | |
|------------------------------|---------|-----------------|
| Connection OD | 6.050 | in |
| Connection ID | 4.778 | in |
| Make-Up Loss | 4.122 | in |
| Critical Section Area | 5.828 | in ² |
| Tension Efficiency | 100.0 | % |
| Compression Efficiency | 100.0 | % |
| Yield Load In Tension | 641,000 | lbs |
| Min. Internal Yield Pressure | 12,600 | psi |
| Collapse Pressure | 11,100 | psi |

Make-Up Torques

| | | |
|---------------------|--------|--------|
| Min. Make-Up Torque | 11,600 | ft-lbs |
| Opt. Make-Up Torque | 12,900 | ft-lbs |
| Max. Make-Up Torque | 14,100 | ft-lbs |
| Yield Torque | 20,600 | ft-lbs |

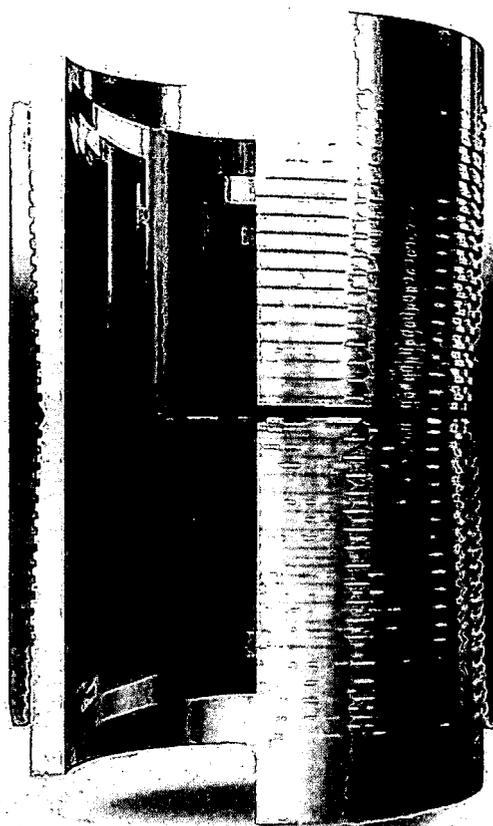

Printed on: July-29-2014

NOTE:

The content of this Technical Data Sheet is for general information only and does not guarantee performance or imply fitness for a particular purpose, which only a competent drilling professional can determine considering the specific installation and operation parameters. Information that is printed or downloaded is no longer controlled by TMK IPSCO and might not be the latest information. Anyone using the information herein does so at their own risk. To verify that you have the latest TMK IPSCO technical information, please contact TMK IPSCO Technical Sales toll-free at 1-888-258-2000.



TECHNICAL DATA SHEET TMK UP DQX 5.5 X 20 P110

TUBULAR PARAMETERS

| | |
|------------------------|----------|
| Nominal OD, (inch) | 5.500 |
| Wall Thickness, (inch) | 0.361 |
| Pipe Grade | P110 |
| Coupling | Regular |
| Coupling Grade | P110 |
| Drift | Standard |

PIPE BODY PROPERTIES



| | |
|-------------------------------------|--------|
| PE Weight, (lbs/ft) | 19.81 |
| Nominal Weight, (lbs/ft) | 20.00 |
| Nominal ID, (inch) | 4.778 |
| Drift Diameter, (inch) | 4.653 |
| Nominal Pipe Body Area, (sq inch) | 5.828 |
| Yield Strength In Tension, (klbs) | 641 |
| Min. Internal Yield Pressure, (psi) | 12 640 |
| Collapse Pressure, (psi) | 11 110 |

CONNECTION PARAMETERS

| | |
|---------------------------------------|--------|
| Connection OD (inch) | 6.05 |
| Connection ID, (inch) | 4.778 |
| Make-Up Loss, (inch) | 4.122 |
| Connection Critical Area, (sq inch) | 5.828 |
| Yield Strength In Tension, (klbs) | 641 |
| Yield Strength in Compression, (klbs) | 641 |
| Tension Efficiency | 100% |
| Compression Efficiency | 100% |
| Min. Internal Yield Pressure, (psi) | 12 640 |
| Collapse Pressure, (psi) | 11 110 |
| Uniaxial Bending (deg/100ft) | 91.7 |

MAKE-UP TORQUES

| | |
|---------------------------------|--------|
| Yield Torque, (ft-lb) | 20 600 |
| Minimum Make-Up Torque, (ft-lb) | 11 600 |
| Optimum Make-Up Torque, (ft-lb) | 12 900 |
| Maximum Make-Up Torque, (ft-lb) | 14 100 |

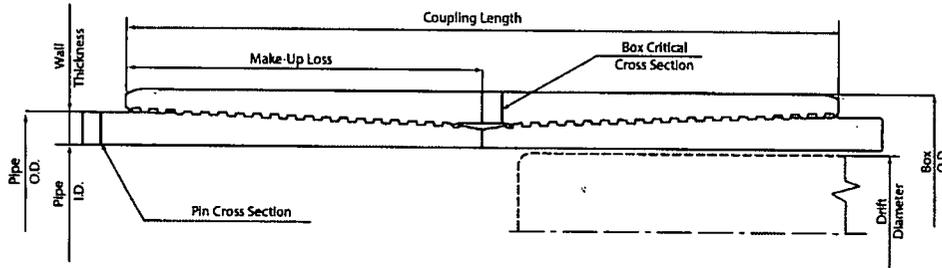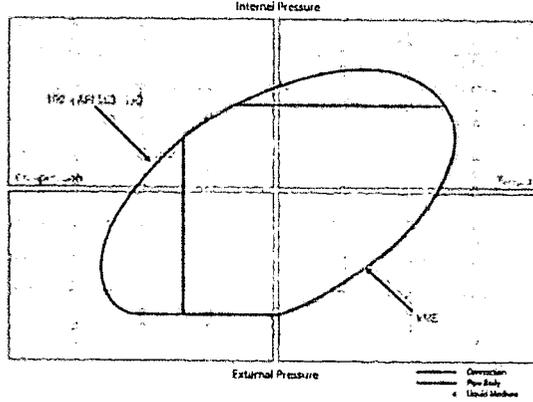

NOTE: The content of this Technical Data Sheet is for general information only and does not guarantee performance or imply fitness for a particular purpose, which only a competent drilling professional can determine considering the specific installation and operation parameters. This information supersedes all prior versions for this connection. Information that is printed or downloaded is no longer controlled by TMK and might not be the latest information. Anyone using the information herein does so at their own risk. To verify that you have the latest technical information, please contact PAO "TMK" Technical Sales in Russia (Tel: +7 (495) 775 76 00, Email: techsales@tmk-group.com) and TMK IPSCD in North America (Tel: +1 (281) 949-1044, Email: techsales@tmk-ipscd.com)

PERFORMANCE DATA

TMK UP SF TORQ™
Technical Data Sheet

5.500 in

20.00 lbs/ft

P110 HC

Tubular Parameters

| | | | | | |
|---------------------|---------|-----------------|------------------------------|---------|-----|
| Size | 5.500 | in | Minimum Yield | 110,000 | psi |
| Nominal Weight | 20.00 | lbs/ft | Minimum Tensile | 125,000 | psi |
| Grade | P110 HC | | Yield Load | 641,000 | lbs |
| PE Weight | 19.81 | lbs/ft | Tensile Load | 728,000 | lbs |
| Wall Thickness | 0.361 | in | Min. Internal Yield Pressure | 12,640 | psi |
| Nominal ID | 4.778 | in | Collapse Pressure | 12,780 | psi |
| Drift Diameter | 4.653 | in | | | |
| Nom. Pipe Body Area | 5.828 | in ² | | | |

Connection Parameters

| | | |
|------------------------------|---------|-----------------|
| Connection OD | 5.777 | in |
| Connection ID | 4.734 | in |
| Make-Up Loss | 5.823 | in |
| Critical Section Area | 5.875 | in ² |
| Tension Efficiency | 90.0 | % |
| Compression Efficiency | 90.0 | % |
| Yield Load In Tension | 576,000 | lbs |
| Min. Internal Yield Pressure | 12,640 | psi |
| Collapse Pressure | 12,780 | psi |
| Uniaxial Bending | 83 | °/ 100 ft |


Make-Up Torques

| | | |
|---------------------|--------|--------|
| Min. Make-Up Torque | 15,700 | ft-lbs |
| Opt. Make-Up Torque | 19,600 | ft-lbs |
| Max. Make-Up Torque | 21,600 | ft-lbs |
| Operating Torque | 29,000 | ft-lbs |
| Yield Torque | 36,000 | ft-lbs |

Printed on: February-22-2018

NOTE:

The content of this Technical Data Sheet is for general information only and does not guarantee performance or imply fitness for a particular purpose, which only a competent drilling professional can determine considering the specific installation and operation parameters. Information that is printed or downloaded is no longer controlled by TMK IPSCO and might not be the latest information. Anyone using the information herein does so at their own risk. To verify that you have the latest TMK IPSCO technical information, please contact TMK IPSCO Technical Sales toll-free at 1-888-258-2000.

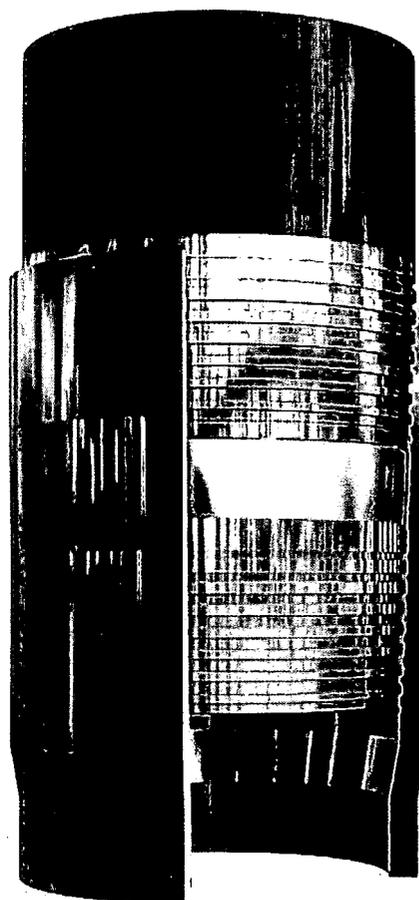

PERFORMANCE DATA

TMK UP TORQ™ DQW
Technical Data Sheet

5.500 in

20.00 lbs/ft

P110 CY

Tubular Parameters


| | | | | | |
|---------------------|---------|-----------------|------------------------------|---------|-----|
| Size | 5.500 | in | Minimum Yield | 110,000 | psi |
| Nominal Weight | 20.00 | lbs/ft | Minimum Tensile | 125,000 | psi |
| Grade | P110 CY | | Yield Load | 641,000 | lbs |
| PE Weight | 19.81 | lbs/ft | Tensile Load | 729,000 | lbs |
| Wall Thickness | 0.361 | in | Min. Internal Yield Pressure | 12,640 | psi |
| Nominal ID | 4.778 | in | Collapse Pressure | 11,110 | psi |
| Drift Diameter | 4.653 | in | | | |
| Nom. Pipe Body Area | 5.828 | in ² | | | |

Connection Parameters

| | | |
|------------------------------|---------|-----------------|
| Connection OD | 6.050 | in |
| Connection ID | 4.778 | in |
| Make-Up Loss | 4.324 | in |
| Critical Section Area | 5.828 | in ² |
| Tension Efficiency | 100.0 | % |
| Compression Efficiency | 100.0 | % |
| Yield Load In Tension | 641,000 | lbs |
| Min. Internal Yield Pressure | 12,640 | psi |
| Collapse Pressure | 11,110 | psi |
| Uniaxial Bending | 92 | °/ 100 ft |

Make-Up Torques

| | | |
|---------------------|--------|--------|
| Min. Make-Up Torque | 14,000 | ft-lbs |
| Opt. Make-Up Torque | 16,000 | ft-lbs |
| Max. Make-Up Torque | 18,000 | ft-lbs |
| Operating Torque | 36,800 | ft-lbs |
| Yield Torque | 46,000 | ft-lbs |

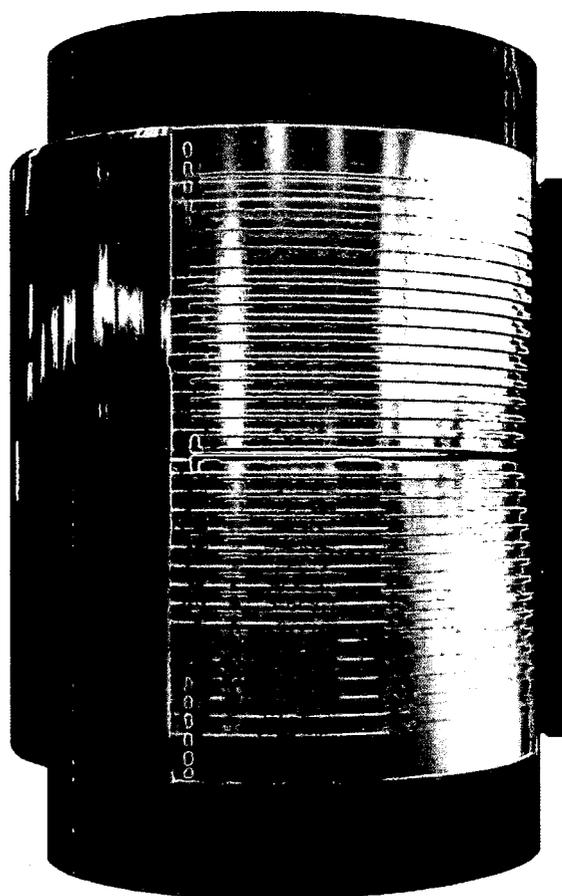

Printed on: March-05-2019

NOTE:

The content of this Technical Data Sheet is for general information only and does not guarantee performance or imply fitness for a particular purpose, which only a competent drilling professional can determine considering the specific installation and operation parameters. Information that is printed or downloaded is no longer controlled by TMK IPSCO and might not be the latest information. Anyone using the information herein does so at their own risk. To verify that you have the latest TMK IPSCO technical information, please contact TMK IPSCO Technical Sales toll-free at 1-888-258-2000.





**Permian Drilling
Hydrogen Sulfide Drilling Operations Plan
Precious 30-18 Federal Com 11H**

Open drill site. No homes or buildings are near the proposed location.

1. Escape

Personnel shall escape upwind of wellbore in the event of an emergency gas release. Escape can take place through the lease road on the Southeast side of the location. Personnel need to move to a safe distance and block the entrance to location. If the primary route is not an option due to the wind direction, then a secondary egress route should be taken.

▲ H2S Detectors. At least three detectors will be installed: bell nipple, rig floor and Shakers.

● Briefing Areas. At least two briefing areas will be placed, 90 deg off.


■ Wind direction indicators. Visible from rig floor and from the mud pits area.

A gas buster is connected to both the choke manifold and flowline outlets.

Secondary Briefing Area

Secondary Egress

Primary Briefing Area

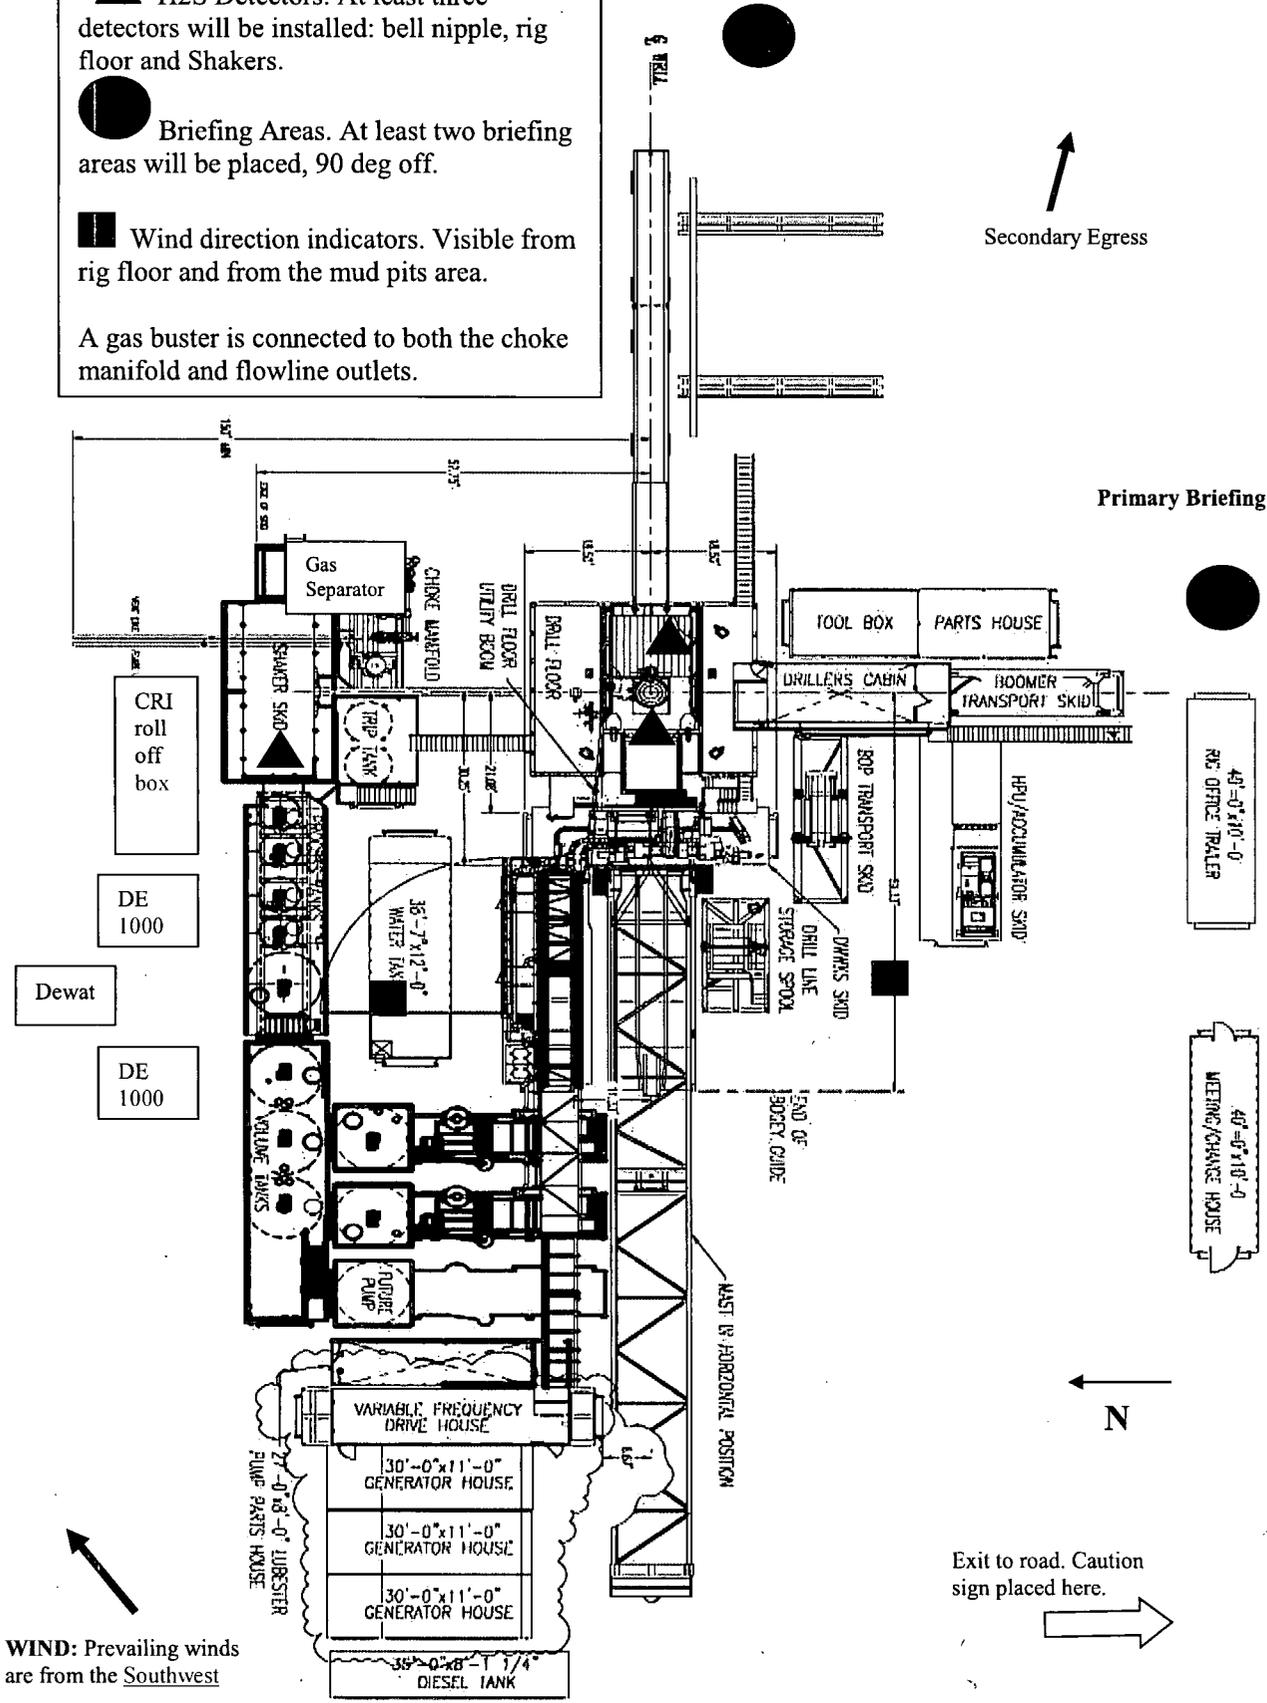

WIND: Prevailing winds are from the Southwest

Exit to road. Caution sign placed here.



Permian Drilling Hydrogen Sulfide Drilling Operations Plan New Mexico

Scope

This contingency plan establishes guidelines for the public, all company employees, and contract employees who's work activities may involve exposure to hydrogen sulfide (H₂S) gas.

While drilling this well, it is possible to encounter H₂S bearing formations. At all times, the first barrier to control H₂S emissions will be the drilling fluid, which will have a density high enough to control influx.

Objective

1. Provide an immediate and predetermined response plan to any condition when H₂S is detected. All H₂S detections in excess of 10 parts per million (ppm) concentration are considered an Emergency.
2. Prevent any and all accidents, and prevent the uncontrolled release of hydrogen sulfide into the atmosphere.
3. Provide proper evacuation procedures to cope with emergencies.
4. Provide immediate and adequate medical attention should an injury occur.

Discussion

| | |
|--------------------------------|---|
| Implementation: | This plan with all details is to be fully implemented before drilling to <u>commence</u> . |
| Emergency response Procedure: | This section outlines the conditions and denotes steps to be taken in the event of an emergency. |
| Emergency equipment Procedure: | This section outlines the safety and emergency equipment that will be required for the drilling of this well. |
| Training provisions: | This section outlines the training provisions that must be adhered to prior to drilling. |
| Drilling emergency call lists: | Included are the telephone numbers of all persons to be contacted should an emergency exist. |
| Briefing: | This section deals with the briefing of all people involved in the drilling operation. |
| Public safety: | Public safety personnel will be made aware of any potential evacuation and any additional support needed. |
| Check lists: | Status check lists and procedural check lists have been included to insure adherence to the plan. |
| General information: | A general information section has been included to supply support information. |

Hydrogen Sulfide Training

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on the well:

1. The hazards and characteristics of H₂S.
2. Proper use and maintenance of personal protective equipment and life support systems.
3. H₂S detection.
4. Proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures and prevailing winds.
5. Proper techniques for first aid and rescue procedures.
6. Physical effects of hydrogen sulfide on the human body.
7. Toxicity of hydrogen sulfide and sulfur dioxide.
8. Use of SCBA and supplied air equipment.
9. First aid and artificial respiration.
10. Emergency rescue.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H₂S on metal components. If high tensile strength tubular is to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling a well, blowout prevention and well control procedures.
3. The contents and requirements of the H₂S Drilling Operations Plan.

H₂S training refresher must have been taken within one year prior to drilling the well. Specifics on the well to be drilled will be discussed during the pre-spud meeting. H₂S and well control (choke) drills will be performed while drilling the well, at least on a weekly basis. This plan shall be available in the well site. All personnel will be required to carry the documentation proving that the H₂S training has been taken.

Service company and visiting personnel

- A. Each service company that will be on this well will be notified if the zone contains H₂S.
- B. Each service company must provide for the training and equipment of their employees before they arrive at the well site.
- C. Each service company will be expected to attend a well site briefing

Emergency Equipment Requirements

1. Well control equipment

The well shall have hydraulic BOP equipment for the anticipated pressures. Equipment is to be tested on installation and follow Oxy Well Control standard, as well as BLM Onshore Order #2.

Special control equipment:

- A. Hydraulic BOP equipment with remote control on ground. Remotely operated choke.
- B. Rotating head
- C. Gas buster equipment shall be installed before drilling out of surface pipe.

2. Protective equipment for personnel

- A. Four (4) 30-minute positive pressure air packs (2 at each briefing area) on location.
- B. Adequate fire extinguishers shall be located at strategic locations.
- C. Radio / cell telephone communication will be available at the rig.
 - Rig floor and trailers.
 - Vehicle.

3. Hydrogen sulfide sensors and alarms

- A. H₂S sensor with alarms will be located on the rig floor, at the bell nipple, and at the flow line. These monitors will be set to alarm at 10 ppm with strobe light, and audible alarm.
- B. Hand operated detectors with tubes.
- C. H₂S monitor tester (to be provided by contract Safety Company.)
- D. There shall be one combustible gas detector on location at all times.

4. Visual Warning Systems

- A. One sign located at each location entrance with the following language:

**Caution – potential poison gas
Hydrogen sulfide
No admittance without authorization**

Wind sock – wind streamers:

- A. One 36” (in length) wind sock located at protection center, at height visible from rig floor.
- B. One 36” (in length) wind sock located at height visible from pit areas.

Condition flags

- A. One each condition flag to be displayed to denote conditions.

green – normal conditions
yellow – potential danger
red – danger, H2S present

- B. Condition flag shall be posted at each location sign entrance.

5. Mud Program

The mud program is designed to minimize the risk of having H2S and other formation fluids at surface. Proper mud weight and safe drilling practices will be applied. H2S scavengers will be used to minimize the hazards while drilling. Below is a summary of the drilling program.

Mud inspection devices:

Garrett gas train or hatch tester for inspection of sulfide concentration in mud system.

6. Metallurgy

- A. Drill string, casing, tubing, wellhead, blowout preventers, drilling spools or adapters, kill lines, choke manifold, lines and valves shall be suitable for the H2S service.
- B. All the elastomers, packing, seals and ring gaskets shall be suitable for H2S service.

7. Well Testing

No drill stem test will be performed on this well.

8. Evacuation plan

Evacuation routes should be established prior to well spud for each well and discussed with all rig personnel.

9. Designated area

- A. Parking and visitor area: all vehicles are to be parked at a predetermined safe distance from the wellhead.
- B. There will be a designated smoking area.
- C. Two briefing areas on either side of the location at the maximum allowable distance from the well bore so they offset prevailing winds perpendicularly, or at a 45-degree angle if wind direction tends to shift in the area.

Emergency procedures

- A. In the event of any evidence of H₂S level above 10 ppm, take the following steps:
 - 1. The Driller will pick up off bottom, shut down the pumps, slow down the pipe rotation.
 - 2. Secure and don escape breathing equipment, report to the upwind designated safe briefing / muster area.
 - 3. All personnel on location will be accounted for and emergency search should begin for any missing, the Buddy System will be implemented.
 - 4. Order non-essential personnel to leave the well site, order all essential personnel out of the danger zone and upwind to the nearest designated safe briefing / muster area.
 - 5. Entrance to the location will be secured to a higher level than our usual "Meet and Greet" requirement, and the proper condition flag will be displayed at the entrance to the location.
 - 6. Take steps to determine if the H₂S level can be corrected or suppressed and, if so, proceed as required.
- B. If uncontrollable conditions occur:
 - 1. Take steps to protect and/or remove any public in the down-wind area from the rig – partial evacuation and isolation. Notify necessary public safety personnel and appropriate regulatory entities (i.e. BLM) of the situation.

2. Remove all personnel to the nearest upwind designated safe briefing / muster area or off location.
3. Notify public safety personnel of safe briefing / muster area.
4. An assigned crew member will blockade the entrance to the location. No unauthorized personnel will be allowed entry to the location.
5. Proceed with best plan (at the time) to regain control of the well. Maintain tight security and safety procedures.

C. Responsibility:

1. Designated personnel.
 - a. Shall be responsible for the total implementation of this plan.
 - b. Shall be in complete command during any emergency.
 - c. Shall designate a back-up.

- All personnel:
1. On alarm, don escape unit and report to the nearest upwind designated safe briefing / muster area upw
 2. Check status of personnel (buddy system).
 3. Secure breathing equipment.
 4. Await orders from supervisor.

- Drill site manager:
1. Don escape unit if necessary and report to nearest upwind designated safe briefing / muster area.
 2. Coordinate preparations of individuals to return to point of release with tool pusher and driller (using the buddy system).
 3. Determine H2S concentrations.
 4. Assess situation and take control measures.

- Tool pusher:
1. Don escape unit Report to up nearest upwind designated safe briefing / muster area.
 2. Coordinate preparation of individuals to return to point of release with tool pusher drill site manager (using the buddy system).
 3. Determine H2S concentration.
 4. Assess situation and take control measures.

- Driller:
1. Don escape unit, shut down pumps, continue

rotating DP.

2. Check monitor for point of release.
3. Report to nearest upwind designated safe briefing / muster area.
4. Check status of personnel (in an attempt to rescue, use the buddy system).
5. Assigns least essential person to notify Drill Site Manager and tool pusher by quickest means in case of their absence.
6. Assumes the responsibilities of the Drill Site Manager and tool pusher until they arrive should they be absent.

Derrick man
Floor man #1
Floor man #2

1. Will remain in briefing / muster area until instructed by supervisor.

Mud engineer:

1. Report to nearest upwind designated safe briefing / muster area.
2. When instructed, begin check of mud for ph and H2S level. (Garett gas train.)

Safety personnel:

1. Mask up and check status of all personnel and secure operations as instructed by drill site manager.

Taking a kick

When taking a kick during an H2S emergency, all personnel will follow standard Well control procedures after reporting to briefing area and masking up.

Open-hole logging

All unnecessary personnel off floor. Drill Site Manager and safety personnel should monitor condition, advise status and determine need for use of air equipment.

Running casing or plugging

Following the same “tripping” procedure as above. Drill Site Manager and safety personnel should determine if all personnel have access to protective equipment.

Ignition procedures

The decision to ignite the well is the responsibility of the operator (Oxy Drilling Management). The decision should be made only as a last resort and in a situation where it is clear that:

1. Human life and property are endangered.
2. There is no hope controlling the blowout under the prevailing conditions at the well.

Instructions for igniting the well

1. Two people are required for the actual igniting operation. They must wear self-contained breathing units and have a safety rope attached. One man (tool pusher or safety engineer) will check the atmosphere for explosive gases with the gas monitor. The other man is responsible for igniting the well.
2. Primary method to ignite: 25 mm flare gun with range of approximately 500 feet.
3. Ignite upwind and do not approach any closer than is warranted.
4. Select the ignition site best for protection, and which offers an easy escape route.
5. Before firing, check for presence of combustible gas.
6. After lighting, continue emergency action and procedure as before.
7. All unassigned personnel will remain in briefing area until instructed by supervisor or directed by the Drill Site Manager.

Remember: After well is ignited, burning hydrogen sulfide will convert to sulfur dioxide, which is also highly toxic. **Do not assume the area is safe after the well is ignited.**

Status check list

Note: All items on this list must be completed before drilling to production casing point.

1. H2S sign at location entrance.
2. Two (2) wind socks located as required.
3. Four (4) 30-minute positive pressure air packs (2 at each Briefing area) on location for all rig personnel and mud loggers.
4. Air packs inspected and ready for use.
5. Cascade system and hose line hook-up as needed.
6. Cascade system for refilling air bottles as needed.
7. Condition flag on location and ready for use.
8. H2S detection system hooked up and tested.
9. H2S alarm system hooked up and tested.
10. Hand operated H2S detector with tubes on location.
11. 1 – 100' length of nylon rope on location.
12. All rig crew and supervisors trained as required.
13. All outside service contractors advised of potential H2S hazard on well.
14. No smoking sign posted and a designated smoking area identified.
15. Calibration of all H2S equipment shall be noted on the IADC report.

Checked by: _____ Date: _____

Procedural check list during H2S events

Perform each tour:

1. Check fire extinguishers to see that they have the proper charge.
2. Check breathing equipment to ensure that it is in proper working order.
3. Make sure all the H2S detection system is operative.

Perform each week:

1. Check each piece of breathing equipment to make sure that demand or forced air regulator is working. This requires that the bottle be opened and the mask assembly be put on tight enough so that when you inhale, you receive air or feel air flow.
2. BOP skills (well control drills).
3. Check supply pressure on BOP accumulator stand by source.
4. Check breathing equipment mask assembly to see that straps are loosened and turned back, ready to put on.
5. Check pressure on breathing equipment air bottles to make sure they are charged to full volume. (Air quality checked for proper air grade "D" before bringing to location)
6. Confirm pressure on all supply air bottles.
7. Perform breathing equipment drills with on-site personnel.
8. Check the following supplies for availability.
 - A. Emergency telephone list.
 - B. Hand operated H2S detectors and tubes.

General evacuation plan

1. When the company approved supervisor (Drill Site Manager, consultant, rig pusher, or driller) determines the H₂S gas cannot be limited to the well location and the public will be involved, he will activate the evacuation plan.
2. Drill Site Manager or designee will notify local government agency that a hazardous condition exists and evacuation needs to be implemented.
3. Company or contractor safety personnel that have been trained in the use of H₂S detection equipment and self-contained breathing equipment will monitor H₂S concentrations, wind directions, and area of exposure. They will delineate the outer perimeter of the hazardous gas area. Extension to the evacuation area will be determined from information gathered.
4. Law enforcement personnel (state police, police dept., fire dept., and sheriff's dept.) Will be called to aid in setting up and maintaining road blocks. Also, they will aid in evacuation of the public if necessary.
5. After the discharge of gas has been controlled, company safety personnel will determine when the area is safe for re-entry.

Important: Law enforcement personnel will not be asked to come into a contaminated area. Their assistance will be limited to uncontaminated areas. Constant radio contact will be maintained with them.

Emergency actions

Well blowout – if emergency

1. Evacuate all personnel to “Safe Briefing / Muster Areas” or off location if needed.
2. If sour gas – evacuate rig personnel.
3. If sour gas – evacuate public within 3000 ft radius of exposure.
4. Don SCBA and shut well in if possible using the buddy system.
5. Notify Drilling Superintendent and call 911 for emergency help (fire dept and ambulance) if needed.
6. Implement the Blowout Contingency Plan, and Drilling Emergency Action Plan.
6. Give first aid as needed.

Person down location/facility

1. If immediately possible, contact 911. Give location and wait for confirmation.
2. Don SCBA and perform rescue operation using buddy system.

Toxic effects of hydrogen sulfide

Hydrogen sulfide is extremely toxic. The acceptable ceiling concentration for eight-hour exposure is 10 ppm, which is .001% by volume. Hydrogen sulfide is heavier than air (specific gravity – 1.192) and colorless. It forms an explosive mixture with air between 4.3 and 46.0 percent by volume. Hydrogen sulfide is almost as toxic as hydrogen cyanide and is between five and six times more toxic than carbon monoxide. Toxicity data for hydrogen sulfide and various other gases are compared in table i. Physical effects at various hydrogen sulfide exposure levels are shown in table ii.

Table i
Toxicity of various gases

| Common name | Chemical formula | Specific gravity (sc=1) | Threshold limit (1) | Hazardous limit (2) | Lethal concentration (3) |
|------------------|------------------|-------------------------|---------------------|-----------------------------|--------------------------|
| Hydrogen Cyanide | Hcn | 0.94 | 10 ppm | 150 ppm/hr | 300 ppm |
| Hydrogen Sulfide | H2S | 1.18 | 10 ppm | 250 ppm/hr | 600 ppm |
| Sulfur Dioxide | So2 | 2.21 | 5 ppm | - | 1000 ppm |
| Chlorine | Cl2 | 2.45 | 1 ppm | 4 ppm/hr | 1000 ppm |
| Carbon Monoxide | Co | 0.97 | 50 ppm | 400 ppm/hr | 1000 ppm |
| Carbon Dioxide | Co2 | 1.52 | 5000 ppm | 5% | 10% |
| Methane | Ch4 | 0.55 | 90,000 ppm | Combustible above 5% in air | |

- 1) threshold limit – concentration at which it is believed that all workers may be repeatedly exposed day after day without adverse effects.
- 2) hazardous limit – concentration that will cause death with short-term exposure.
- 3) lethal concentration – concentration that will cause death with short-term exposure.

Toxic effects of hydrogen sulfide

Table ii
Physical effects of hydrogen sulfide

| <u>Percent (%)</u> | <u>Ppm</u> | <u>Concentration</u> <u>Grains</u> <u>100 std. Ft3*</u> | <u>Physical effects</u> |
|--------------------|------------|---|------------------------------|
| 0.001 | <10 | 00.65 | Obvious and unpleasant odor. |

| | | | |
|-------|------|-------|--|
| 0.002 | 10 | 01.30 | Safe for 8 hours of exposure. |
| 0.010 | 100 | 06.48 | Kill smell in 3 – 15 minutes. May sting eyes and throat. |
| 0.020 | 200 | 12.96 | Kills smell shortly; stings eyes and throat. |
| 0.050 | 500 | 32.96 | Dizziness; breathing ceases in a few minutes; needs prompt artificial respiration. |
| 0.070 | 700 | 45.36 | Unconscious quickly; death will result if not rescued promptly. |
| 0.100 | 1000 | 64.30 | Unconscious at once; followed by death within minutes. |

*at 15.00 psia and 60'f.

Use of self-contained breathing equipment (SCBA)

1. Written procedures shall be prepared covering safe use of SCBA's in dangerous atmosphere, which might be encountered in normal operations or in emergencies. Personnel shall be familiar with these procedures and the available SCBA.
2. SCBA's shall be inspected frequently at random to insure that they are properly used, cleaned, and maintained.
3. Anyone who may use the SCBA's shall be trained in how to insure proper face-piece to face seal. They shall wear SCBA's in normal air and then wear them in a test atmosphere. (note: such items as facial hair {beard or sideburns} and eyeglasses will not allow proper seal.) Anyone that may be reasonably expected to wear SCBA's should have these items removed before entering a toxic atmosphere. A special mask must be obtained for anyone who must wear eyeglasses or contact lenses.
4. Maintenance and care of SCBA's:
 - a. A program for maintenance and care of SCBA's shall include the following:
 1. Inspection for defects, including leak checks.
 2. Cleaning and disinfecting.
 3. Repair.
 4. Storage.
 - b. Inspection, self-contained breathing apparatus for emergency use shall be inspected monthly.
 1. Fully charged cylinders.
 2. Regulator and warning device operation.
 3. Condition of face piece and connections.
 4. Rubber parts shall be maintained to keep them pliable and prevent deterioration.
 - c. Routinely used SCBA's shall be collected, cleaned and disinfected as frequently as necessary to insure proper protection is provided.
5. Persons assigned tasks that requires use of self-contained breathing equipment shall be certified physically fit (medically cleared) for breathing equipment usage at least annually.
6. SCBA's should be worn when:
 - A. Any employee works near the top or on top of any tank unless test reveals less than 10 ppm of H₂S.

- B. When breaking out any line where H2S can reasonably be expected.
- C. When sampling air in areas to determine if toxic concentrations of H2S exists.
- D. When working in areas where over 10 ppm H2S has been detected.
- E. At any time there is a doubt as to the H2S level in the area to be entered.

Rescue
First aid for H2S poisoning

Do not panic!

Remain calm – think!

1. Don SCBA breathing equipment.
2. Remove victim(s) utilizing buddy system to fresh air as quickly as possible. (go up-wind from source or at right angle to the wind. Not down wind.)
3. Briefly apply chest pressure – arm lift method of artificial respiration to clean the victim's lungs and to avoid inhaling any toxic gas directly from the victim's lungs.
4. Provide for prompt transportation to the hospital, and continue giving artificial respiration if needed.
5. Hospital(s) or medical facilities need to be informed, before-hand, of the possibility of H2S gas poisoning – no matter how remote the possibility is.
6. Notify emergency room personnel that the victim(s) has been exposed to H2S gas.

Besides basic first aid, everyone on location should have a good working knowledge of artificial respiration.

Revised CM 6/27/2012

OXY Permian Delaware NM Basin Drilling & Completions Incident Reporting
OXY Permian Crisis Team Hotline Notification

| Person | Location | Office Phone | Cell/Mobile Phone |
|--------|----------|--------------|-------------------|
|--------|----------|--------------|-------------------|

| Drilling & Completions Department | | | |
|--|----------|----------------|----------------|
| Drilling & Completions Manager: John Willis | Houston | (713) 366-5556 | (713) 259-1417 |
| Drilling Superintendent: Simon Benavides | Houston | (713) 215-7403 | (832) 528-3547 |
| Completions Superintendent: Chris Winter | Houston | (713) 366-5212 | (806) 239-8774 |
| Drilling Eng. Supervisor: Diego Tellez | Houston | (713) 350-4602 | (713) 303-4932 |
| Drilling Eng. Supervisor: Randy Neel | Houston | (713) 215-7987 | (713) 517-5544 |
| Completions Eng. Supervisor: Evan Hinkel | Houston | (713) 366-5436 | (281) 236-6153 |
| Drilling & Completions HES Lead. Ryan Green | Houston | 713-336-5753 | 281-520-5216 |
| Drilling & Completions HES Advisor:Kenny Williams | Carlsbad | (432) 686-1434 | (337) 208-0911 |
| Drilling & Completions HES Advisor:Kyle Holden | Carlsbad | (432) 686-1435 | (661) 369-5328 |
| Drilling & Completions HES Advisor Sr:Dave Schmidt | Carlsbad | | (559) 310-8572 |
| Drilling & Completions HES Advisor. :Seth Doyle | Carlsbad | | (337) 499-0756 |

| HES / Enviromental & Regulatory Department | Location | Office | Cell Phone |
|--|----------|--------|------------|
|--|----------|--------|------------|

| | | | |
|---|---------|-------------------|-------------------|
| Jon Hamil-HES Manager | Houston | (713) 497-2494 | (832) 537-9885 |
| Mark Birk-HES Manager | Houston | (713) 350-4615 | (949) 413-3127 |
| Austin Tramell | Midland | (432) 699-4208 | (575) 499-4919 |
| Rico Munoz | Midland | (432) 699-8366 | (432) 803-4116 |
| Amber DuckWorth | Midland | | (832) 966-1879 |
| Kelley Montgomery- Regulatory Manager | Houston | (713) 366-5716 | (832) 454-8137 |
| Sandra Musallam -Regulatory Lead | Houston | +1 (713) 366-5106 | +1 (713) 504-8577 |
| Bishop, Steve-DOT Pipeline Coordinator | Midland | 432-685-5614 | |
| Wilson, Dusty-Safety Advisor | Midland | 432-685-5771 | (432) 254-2336 |
| John W Dittrich Eniromental Advisor | Midland | | (575) 390-2828 |
| William (Jack) Calhoun-Environmental Lead | Houston | +713 (350) 4906 | (281) 917-8571 |
| Robert Barrow-Risk Engineer Manager | Houston | (713) 366-5611 | (832) 867-5336 |
| Sarah Holmes-HSE Cordinator | Midland | 432-685-5758 | |

| Administrative | Location | Office | |
|----------------|----------|--------|--|
|----------------|----------|--------|--|

| | | | |
|-------------------|---------|----------------|----------------|
| Sarah Holmes | Midland | 432-685-5830 | |
| Robertson, Debbie | Midland | 432-685-5812 | |
| Laci Hollaway | Midland | (432) 685-5716 | (432) 631-6341 |

| Administrative | Location | Office | |
|----------------|----------|--------|--|
|----------------|----------|--------|--|

| | | | |
|--------------------|---------|--------------|--|
| Rosalinda Escajeda | Midland | 432-685-5831 | |
|--------------------|---------|--------------|--|

| Person | Location | Office Phone | Cell/Mobile Phone |
|---|------------------------|----------------------------------|----------------------------|
| Moreno, Leslie (contract) | Hobbs | 575-397-8247 | |
| Sehon, Angela (contractor) | Levelland | 806-894-8347 | |
| Vasquez, Claudia (contractor) | North Cowden | 432-385-3120 | |
| XstremeMD | Location | Office | |
| Medical Case Management | Orla, TX | (337) 205-9314 | |
| Axiom Medical Consulting | Location | Office | |
| Medical Case Management | | (877) 502-9466 | |
| | | | |
| Regulatory Agencies | | | |
| Bureau of Land Management | Carlsbad, NM | (505) 887-6544 | |
| Bureau of Land Management | Hobbs, NM | (505) 393-3612 | |
| Bureau of Land Management | Roswell, NM | (505) 393-3612 | |
| Bureau of Land Management | Santa Fe, NM | (505) 988-6030 | |
| DOT Juidisdictional Pipelines-Incident Reporting New Mexico Public Regulaion Commission | Santa Fe, NM | (505) 827-3549 (505) 490-2375 | |
| DOT Juidisdictional Pipelines-Incident Reporting Texas Railroad Commission | Austin, TX | (512) 463-6788 | |
| EPA Hot Line | Dallas, Texas | (214) 665-6444 | |
| Federal OSHA, Area Office | Lubbock, Texas | (806) 472-7681 | |
| National Response Center | Washington, D. C. | (800) 424-8802 | |
| National Infrastructure Coordinator Center | | (202) 282-9201 | |
| New Mexico Air Quality Bureau | Santa Fe, NM | (505) 827-1494 | |
| New Mexico Oil Conservation Division | Artesia, NM | (505) 748-1283 | After Hours (505) 370-7545 |
| New Mexico Oil Conservation Division | Hobbs, NM | (505) 393-6161 | |
| New Mexico Oil Conservation Division | Santa Fe, NM | (505) 471-1068 | |
| New Mexico OCD Environmental Bureau | Santa Fe, NM | (505) 476-3470 | |
| New Mexico Environmental Department | Hobbs, NM | (505) 827-9329 | |
| NM State Emergency Response Center | Santa Fe, NM | (505) 827-9222 | |
| Railroad Commission of TX | District 1 San Antonio | (210) 227-1313 | |
| Railroad Commission of TX | District 7C San Angelo | (325) 657-7450 | |
| Railroad Commission of TX | District 8, 8A Midland | (432) 684-5581 | |
| Texas Emergency Response Center | Austin, TX | (512) 463-7727 | |
| TCEQ Air | Region 2 Lubbock, TX | (806) 796-3494 | |
| TCEQ Water/Waste/Air | Region 3 Abilene, TX | (325) 698-9674 | |
| TCEQ Water/Waste/Air | Region 7 Midland, TX | (432) 570-1359 | |
| TCEQ Water/Waste/Air | Region 9 San Antonio | (512) 734-7981 | |
| TCEQ Water/Waste/Air | Region 8 San Angelo | (325) 655-9479 | |
| | | | |
| Medical Facilities | | | |
| Abernathy Medical Clinic | Abernathy, TX | (806) 298-2524 | |
| Alliance Hospital | Odessa, TX | (432) 550-1000 | |
| Artesia General Hospital | Artesia, NM | (505) 748-3333 | |
| Brownfield Regional Medical Center | Brownfield, TX | (806) 637-3551 | |

| Person | Location | Office Phone | Cell/Mobile Phone |
|--|-----------------------|---------------------|--------------------------|
| Cogdell Memorial Hospital | Snyder, TX | (325) 573-6374 | |
| Covenant Hospital Levelland | Levelland, TX | (806) 894-4963 | |
| Covenant Medical Center | Lubbock, TX | (806) 725-1011 | |
| Covenant Medical Center Lakeside | Lubbock, TX | (806) 725-6000 | |
| Covenant Family Health | Snyder, TX | (325) 573-1300 | |
| Crockett County Hospital | Ozona, TX | (325) 392-2671 | |
| Guadalupe Medical Center | Carlsbad, NM | (505) 887-6633 | |
| Lea Regional Hospital | Hobbs, NM | (505) 492-5000 | |
| McCamey Hospital | McCamey, TX | (432) 652-8626 | |
| Medical Arts Hospital | Lamesa, TX | (806) 872-2183 | |
| Medical Center Hospital | Odessa, TX | (432) 640-4000 | |
| Medi Center Hospital | San Angelo, TX | (325) 653-6741 | |
| Memorial Hospital | Ft. Stockton | (432) 336-2241 | |
| Memorial Hospital | Seminole, TX | (432) 758-5811 | |
| Midland Memorial Hospital | Midland, TX | (432) 685-1111 | |
| Nor-Lea General Hospital | Lovington, NM | (505) 396-6611 | |
| Odessa Regional Hospital | Odessa, TX | (432) 334-8200 | |
| Permian General Hospital | Andrews, TX | (432) 523-2200 | |
| Reagan County Hospital | Big Lake, TX | (325) 884-2561 | |
| Reeves County Hospital | Pecos, TX | (432) 447-3551 | |
| Shannon Medical Center | San Angelo, TX | (325) 653-6741 | |
| Union County General Hospital | Clayton, NM | (505) 374-2585 | |
| University Medical Center | Lubbock, TX | (806) 725-8200 | |
| Val Verde Regional Medical Center | Del Rio, TX | (830) 775-8566 | |
| Ward Memorial Hospital | Monahans, TX | (432) 943-2511 | |
| Yoakum County Hospital | Denver City, TX | (806) 592-5484 | |
| | | | |
| | | | |
| Law Enforcement - Sheriff | | | |
| Andrews Cty Sheriff's Department | Andrews County(Andr | (432) 523-5545 | |
| Crane Cty Sheriff's Department | Crane, County (Crane) | (432) 558-3571 | |
| Crockett Cty Sheriff's Department | Crockett County (Ozor | (325) 392-2661 | |
| Dawson Cty Sheriff's Department | Dawson County (Lame | (806) 872-7560 | |
| Ector Cty Sheriff's Department | Ector County (Odessa) | (432) 335-3050 | |
| Eddy Cty Sheriff's Department | Eddy County (Artesia) | (505) 746-2704 | |
| Eddy Cty Sheriff's Department | Eddy County (Carlsbad | (505) 887-7551 | |
| Gaines Cty Sheriff's Department | Gaines County (Semin | (432) 758-9871 | |
| Hockley Cty Sheriff's Department | Hockley County(Level | (806) 894-3126 | |
| Kent Cty (Jayton City Sheriff's Dept.) | Kent County(Jayton) | (806) 237-3801 | |
| Lea Cty Sheriff's Department | Lea County (Eunice) | (505) 384-2020 | |
| Lea Cty Sheriff's Department | Lea County (Hobbs) | (505) 393-2515 | |
| Lea Cty Sheriff's Department | Lea County (Lovington | (505) 396-3611 | |
| Lubbock Cty Sheriff's Department | Lubbock Cty (Abernath | (806) 296-2724 | |
| Midland Cty Sheriff's Department | Midland County (Midl | (432) 688-1277 | |

| Person | Location | Office Phone | Cell/Mobile Phone |
|----------------------------------|------------------------|---------------------|-------------------|
| Pecos Cty Sheriff's Department | Pecos County (Iraan) | (432) 639-2251 | |
| Reeves Cty Sheriff's Department | Reeves County (Pecos) | (432) 445-4901 | |
| Scurry Cty Sheriff's Department | Scurry County (Snyder) | (325) 573-3551 | |
| Terry Cty Sheriff's Department | Terry County (Brownf) | (806) 637-2212 | |
| Union Cty Sheriff's Department | Union County (Clayton) | (505) 374-2583 | |
| Upton Cty Sheriff's Department | Upton County (Rankin) | (432) 693-2422 | |
| Ward Cty Sheriff's Department | Ward County (Monaha) | (432) 943-3254 | |
| Yoakum City Sheriff's Department | Yoakum Co. (Denever) | (806) 456-2377 | |
| Law Enforcement - Police | | | |
| Abernathy City Police | Abernathy, TX | (806) 298-2545 | |
| Andrews City Police | Andrews, TX | (432) 523-5675 | |
| Artesia City Police | Artesia, NM | (505) 746-2704 | |
| Brownfield City Police | Brownfield, TX | (806) 637-2544 | |
| Carlsbad City Police | Carlsbad, NM | (505) 885-2111 | |
| Clayton City Police | Clayton, NM | (505) 374-2504 | |
| Denver City Police | Denver City, TX | (806) 592-3516 | |
| Eunice City Police | Eunice, NM | (505) 394-2112 | |
| Hobbs City Police | Hobbs, NM | 393-2677 | |
| Jal City Police | Jal, NM | (505) 395-2501 | |
| Jayton City Police | Jayton, TX | (806) 237-3801 | |
| Lamesa City Police | Lamesa, TX | (806) 872-2121 | |
| Levelland City Police | Levelland, TX | (806) 894-6164 | |
| Lovington City Police | Lovington, NM | (505) 396-2811 | |
| Midland City Police | Midland, TX | (432) 685-7113 | |
| Monahans City Police | Monahans, TX | (432) 943-3254 | |
| Odessa City Police | Odessa, TX | (432) 335-3378 | |
| Seminole City Police | Seminole, TX | (432) 758-9871 | |
| Snyder City Police | Snyder, TX | (325) 573-2611 | |
| Sundown City Police | Sundown, TX | (806) 229-8241 | |
| Law Enforcement - FBI | | | |
| FBI | Albuquerque, NM | (505) 224-2000 | |
| FBI | Midland, TX | (432) 570-0255 | |
| Law Enforcement - DPS | | | |
| NM State Police | Artesia, NM | (505) 746-2704 | |
| NM State Police | Carlsbad, NM | (505) 885-3137 | |
| NM State Police | Eunice, NM | (505) 392-5588 | |
| NM State Police | Hobbs, NM | (505) 392-5588 | |
| NM State Police | Clayton, NM | (505) 374-2473; 911 | |
| TX Dept of Public Safety | Andrews, TX | (432) 524-1443 | |
| TX Dept of Public Safety | Big Lake, TX | (325) 884-2301 | |

| Person | Location | Office Phone | Cell/Mobile Phone |
|---|---------------------|---------------------|--------------------------|
| TX Dept of Public Safety | Brownfield, TX | (806) 637-2312 | |
| TX Dept of Public Safety | Iraan, TX | (432) 639-3232 | |
| TX Dept of Public Safety | Lamesa, TX | (806) 872-8675 | |
| TX Dept of Public Safety | Levelland, TX | (806) 894-4385 | |
| TX Dept of Public Safety | Lubbock, TX | (806) 747-4491 | |
| TX Dept of Public Safety | Midland, TX | (432) 697-2211 | |
| TX Dept of Public Safety | Monahans, TX | (432) 943-5857 | |
| TX Dept of Public Safety | Odessa, TX | (432) 332-6100 | |
| TX Dept of Public Safety | Ozona, TX | (325) 392-2621 | |
| TX Dept of Public Safety | Pecos, TX | (432) 447-3533 | |
| TX Dept of Public Safety | Seminole, TX | (432) 758-4041 | |
| TX Dept of Public Safety | Snyder, TX | (325) 573-0113 | |
| TX Dept of Public Safety | Terry County TX | (806) 637-8913 | |
| TX Dept of Public Safety | Yoakum County TX | (806) 456-2377 | |
| | | | |
| Firefighting & Rescue | | | |
| Abernathy | Abernathy, TX | (806) 298-2022 | |
| Amistad/Rosebud | Amistad/Rosebud, NM | (505) 633-9113 | |
| Andrews | Andrews, TX | 523-3111 | |
| Artesia | Artesia, NM | (505) 746-5051 | |
| Big Lake | Big Lake, TX | (325) 884-3650 | |
| Brownfield-Administrative & other calls | Brownfield, TX | (816) 637-4547 | |
| Brownfield emergency only | Brownfield, TX | -911 | |
| Carlsbad | Carlsbad, NM | (505) 885-3125 | |
| Clayton | Clayton, NM | (505) 374-2435 | |
| Cotton Center | Cotton Center, TX | (806) 879-2157 | |
| Crane | Crane, TX | (432) 558-2361 | |
| Del Rio | Del Rio, TX | (830) 774-8650 | |
| Denver City | Denver City, TX | (806) 592-3516 | |
| Eldorado | Eldorado, TX | (325) 853-2691 | |
| Eunice | Eunice, NM | (505) 394-2111 | |
| Garden City | Garden City, TX | (432) 354-2404 | |
| Goldsmith | Goldsmith, TX | (432) 827-3445 | |
| Hale Center | Hale Center, TX | (806) 839-2411 | |
| Halfway | Halfway, TX | | |
| Hobbs | Hobbs, NM | (505) 397-9308 | |
| Jal | Jal, NM | (505) 395-2221 | |
| Jayton | Jayton, TX | (806) 237-3801 | |
| Kermit | Kermit, TX | (432) 586-3468 | |
| Lamesa | Lamesa, TX | (806) 872-4352 | |
| Levelland | Levelland, TX | (806) 894-3154 | |
| Lovington | Lovington, NM | (505) 396-2359 | |
| Maljamar | Maljamar, NM | (505) 676-4100 | |

| Person | Location | Office Phone | Cell/Mobile Phone |
|-----------------------|---------------------|---------------------|--------------------------|
| McCamey | McCamey, TX | (432) 652-8232 | |
| Midland | Midland, TX | (432) 685-7346 | |
| Monahans | Monahans, TX | (432) 943-4343 | |
| Nara Visa | Nara Visa, NM | (505) 461-3300 | |
| Notrees | Notress, TX | (432) 827-3445 | |
| Odessa | Odessa, TX | (432) 335-4659 | |
| Ozona | Ozona, TX | (325) 392-2626 | |
| Pecos | Pecos, TX | (432) 445-2421 | |
| Petersburg | Petersburg, TX | (806) 667-3461 | |
| Plains | Plains, TX | (806) 456-8067 | |
| Plainview | Plainview, TX | (806) 296-1170 | |
| Rankin | Rankin, TX | (432) 693-2252 | |
| San Angelo | San Angelo, TX | (325) 657-4355 | |
| Sanderson | Sanderson, TX | (432) 345-2525 | |
| Seminole | Seminole, TX | 758-9871 | |
| Smyer | Smyer, TX | (806) 234-3861 | |
| Snyder | Snyder, TX | (325) 573-6215 | |
| Sundown | Sundown, TX | 911 | |
| Tucumcari | Tucumcari, NM | 911 | |
| West Odessa | Odessa, TX | (432) 381-3033 | |
| | | | |
| Ambulance | | | |
| Abernathy Ambulance | Abernathy, TX | (806) 298-2241 | |
| Amistad/Rosebud | Amistad/Rosebud, NM | (505) 633-9113 | |
| Andrews Ambulance | Andrews, TX | (432) 523-5675 | |
| Artesia Ambulance | Artesia, NM | (505) 746-2701 | |
| Big Lake Ambulance | Big Lake, TX | (325) 884-2423 | |
| Big Spring Ambulance | Big Spring, TX | (432) 264-2550 | |
| Brownfield Ambulance | Brownfield, TX | (806) 637-2511 | |
| Carlsbad Ambulance | Carlsbad, NM | (505) 885-2111; 911 | |
| Clayton, NM | Clayton, NM | (505) 374-2501 | |
| Denver City Ambulance | Denver City, TX | (806) 592-3516 | |
| Eldorado Ambulance | Eldorado, TX | (325) 853-3456 | |
| Eunice Ambulance | Eunice, NM | (505) 394-3258 | |
| Goldsmith Ambulance | Goldsmith, TX | (432) 827-3445 | |
| Hobbs, NM | Hobbs, NM | (505) 397-9308 | |
| Jal, NM | Jal, NM | (505) 395-2501 | |
| Jayton Ambulance | Jayton, TX | (806) 237-3801 | |
| Lamesa Ambulance | Lamesa, TX | (806) 872-3464 | |
| Levelland Ambulance | Levelland, TX | (806) 894-8855 | |
| Lovington Ambulance | Lovington, NM | (505) 396-2811 | |
| McCamey Hospital | McCamey, TX | (432) 652-8626 | |
| Midland Ambulance | Midland, TX | (432) 685-7499 | |

| Person | Location | Office Phone | Cell/Mobile Phone |
|--------------------------------------|-----------------|---------------------|--------------------------|
| Monahans Ambulance | Monahans, TX | 3731 | |
| Nara Visa, NM | Nara Visa, NM | (505) 461-3300 | |
| Odessa Ambulance | Odessa, TX | (432) 335-3378 | |
| Ozona Ambulance | Ozona, TX | (325) 392-2671 | |
| Pecos Ambulance | Pecos, TX | (432) 445-4444 | |
| Rankin Ambulance | Rankin, TX | (432) 693-2443 | |
| San Angelo Ambulance | San Angelo, TX | (325) 657-4357 | |
| Seminole Ambulance | Seminole, TX | 758-9871 | |
| Snyder Ambulance | Snyder, TX | (325) 573-1911 | |
| Stanton Ambulance | Stanton, TX | (432) 756-2211 | |
| Sundown Ambulance | Sundown, TX | 911 | |
| Tucumcari, NM | Tucumcari, NM | 911 | |
| | | | |
| Medical Air Ambulance Service | | | |
| AEROCARE - Methodist Hospital | Lubbock, TX | (800) 627-2376 | |
| San Angelo Med-Vac Air Ambulance | San Angelo, TX | (800) 277-4354 | |
| Southwest Air Ambulance Service | Stanford, TX | (800) 242-6199 | |
| Southwest MediVac | Snyder, TX | (800) 242-6199 | |
| Southwest MediVac | Hobbs, NM | (800) 242-6199 | |
| Odessa Care Star | Odessa, TX | (888) 624-3571 | |
| NWTH Medivac | Amarillo, TX | (800) 692-1331 | |

OXY

PRD NM DIRECTIONAL PLANS (NAD 1983)

PRECIOUS 30_18 FED COM

PRECIOUS 30_18 FED COM 11H

Wellbore #1

Plan: Permitting Plan

Standard Planning Report

16 November, 2018

Oxy

Planning Report

| | | | |
|------------------|-------------------------------------|-------------------------------------|---------------------------------|
| Database: | HOPSPP | Local Co-ordinate Reference: | Well PRECIOUS 30_18 FED COM 11H |
| Company: | ENGINEERING DESIGNS | TVD Reference: | RKB=26.5' @ 3370.60ft |
| Project: | PRD NM DIRECTIONAL PLANS (NAD 1983) | MD Reference: | RKB=26.5' @ 3370.60ft |
| Site: | PRECIOUS 30_18 FED COM | North Reference: | Grid |
| Well: | PRECIOUS 30_18 FED COM 11H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Permitting Plan | | |

| | | | |
|--------------------|-------------------------------------|----------------------|-----------------------------|
| Project | PRD NM DIRECTIONAL PLANS (NAD 1983) | | |
| Map System: | US State Plane 1983 | System Datum: | Mean Sea Level |
| Geo Datum: | North American Datum 1983 | | |
| Map Zone: | New Mexico Eastern Zone | | Using geodetic scale factor |

| | | | |
|------------------------------|------------------------|-------------------------------|--|
| Site | PRECIOUS 30_18 FED COM | | |
| Site Position: | Northing: | 461,098.38 usft | Latitude: 32° 15' 59.784416 N |
| From: Map | Easting: | 698,809.83 usft | Longitude: 103° 49' 25.902124 W |
| Position Uncertainty: | 0.00 ft | Slot Radius: 13.200 in | Grid Convergence: 0.27 ° |

| | | | |
|-----------------------------|----------------------------|----------------------------|---------------------------------------|
| Well | PRECIOUS 30_18 FED COM 11H | | |
| Well Position | +N/-S | 447.93 ft | Northing: 461,546.28 usft |
| | +E/-W | 1,383.10 ft | Easting: 700,192.84 usft |
| | | | Latitude: 32° 16' 4.151401 N |
| | | | Longitude: 103° 49' 9.769623 W |
| Position Uncertainty | 0.00 ft | Wellhead Elevation: | 0.00 ft |
| | | | Ground Level: 3,344.10 ft |

| | | | | | |
|------------------|-------------------|--------------------|------------------------|----------------------|----------------------------|
| Wellbore | Wellbore #1 | | | | |
| Magnetics | Model Name | Sample Date | Declination (°) | Dip Angle (°) | Field Strength (nT) |
| | HDGM | 11/15/2018 | 6.88 | 60.00 | 48,012 |

| | | | | |
|--------------------------|------------------------------|-------------------|----------------------|----------------------|
| Design | Permitting Plan | | | |
| Audit Notes: | | | | |
| Version: | Phase: | PROTOTYPE | Tie On Depth: | 0.00 |
| Vertical Section: | Depth From (TVD) (ft) | +N/-S (ft) | +E/-W (ft) | Direction (°) |
| | 0.00 | 0.00 | 0.00 | 355.47 |

| Plan Sections | | | | | | | | | | |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|----------------------|---------------------|---------|-----------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) | TFO (°) | Target |
| 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 3,625.00 | 0.00 | 0.00 | 3,625.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 4,424.79 | 16.00 | 242.37 | 4,414.45 | -51.44 | -98.27 | 2.00 | 2.00 | 0.00 | 242.37 | |
| 7,394.55 | 16.00 | 242.37 | 7,269.22 | -430.98 | -823.31 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 8,756.43 | 16.00 | 359.74 | 8,603.57 | -328.37 | -993.61 | 2.00 | 0.00 | 8.62 | 147.67 | |
| 9,497.78 | 90.14 | 359.74 | 9,018.60 | 223.74 | -996.07 | 10.00 | 10.00 | 0.00 | 0.00 | FTP (Precious) |
| 22,585.07 | 90.14 | 359.74 | 8,987.60 | 13,310.86 | -1,054.41 | 0.00 | 0.00 | 0.00 | 0.00 | PBHL (Precious) |

Oxy Planning Report

| | | | |
|------------------|-------------------------------------|-------------------------------------|---------------------------------|
| Database: | HOPSPP | Local Co-ordinate Reference: | Well PRECIOUS 30_18 FED COM 11H |
| Company: | ENGINEERING DESIGNS | TVD Reference: | RKB=26.5' @ 3370.60ft |
| Project: | PRD NM DIRECTIONAL PLANS (NAD 1983) | MD Reference: | RKB=26.5' @ 3370.60ft |
| Site: | PRECIOUS 30_18 FED COM | North Reference: | Grid |
| Well: | PRECIOUS 30_18 FED COM 11H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Permitting Plan | | |

Planned Survey

| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 100.00 | 0.00 | 0.00 | 100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 200.00 | 0.00 | 0.00 | 200.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 300.00 | 0.00 | 0.00 | 300.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 400.00 | 0.00 | 0.00 | 400.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 500.00 | 0.00 | 0.00 | 500.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 600.00 | 0.00 | 0.00 | 600.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 700.00 | 0.00 | 0.00 | 700.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 800.00 | 0.00 | 0.00 | 800.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 900.00 | 0.00 | 0.00 | 900.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,000.00 | 0.00 | 0.00 | 1,000.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,100.00 | 0.00 | 0.00 | 1,100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,200.00 | 0.00 | 0.00 | 1,200.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,300.00 | 0.00 | 0.00 | 1,300.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,400.00 | 0.00 | 0.00 | 1,400.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,500.00 | 0.00 | 0.00 | 1,500.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,600.00 | 0.00 | 0.00 | 1,600.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,700.00 | 0.00 | 0.00 | 1,700.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,800.00 | 0.00 | 0.00 | 1,800.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,900.00 | 0.00 | 0.00 | 1,900.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,000.00 | 0.00 | 0.00 | 2,000.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,100.00 | 0.00 | 0.00 | 2,100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,200.00 | 0.00 | 0.00 | 2,200.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,300.00 | 0.00 | 0.00 | 2,300.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,400.00 | 0.00 | 0.00 | 2,400.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,500.00 | 0.00 | 0.00 | 2,500.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,600.00 | 0.00 | 0.00 | 2,600.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,700.00 | 0.00 | 0.00 | 2,700.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,800.00 | 0.00 | 0.00 | 2,800.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,900.00 | 0.00 | 0.00 | 2,900.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3,000.00 | 0.00 | 0.00 | 3,000.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3,100.00 | 0.00 | 0.00 | 3,100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3,200.00 | 0.00 | 0.00 | 3,200.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3,300.00 | 0.00 | 0.00 | 3,300.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3,400.00 | 0.00 | 0.00 | 3,400.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3,500.00 | 0.00 | 0.00 | 3,500.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3,600.00 | 0.00 | 0.00 | 3,600.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3,625.00 | 0.00 | 0.00 | 3,625.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3,700.00 | 1.50 | 242.37 | 3,699.99 | -0.46 | -0.87 | -0.39 | 2.00 | 2.00 | 0.00 |
| 3,800.00 | 3.50 | 242.37 | 3,799.89 | -2.48 | -4.73 | -2.10 | 2.00 | 2.00 | 0.00 |
| 3,900.00 | 5.50 | 242.37 | 3,899.58 | -6.12 | -11.68 | -5.17 | 2.00 | 2.00 | 0.00 |
| 4,000.00 | 7.50 | 242.37 | 3,998.93 | -11.37 | -21.71 | -9.62 | 2.00 | 2.00 | 0.00 |
| 4,100.00 | 9.50 | 242.37 | 4,097.83 | -18.22 | -34.81 | -15.42 | 2.00 | 2.00 | 0.00 |
| 4,200.00 | 11.50 | 242.37 | 4,196.15 | -26.67 | -50.95 | -22.57 | 2.00 | 2.00 | 0.00 |
| 4,300.00 | 13.50 | 242.37 | 4,293.77 | -36.71 | -70.13 | -31.06 | 2.00 | 2.00 | 0.00 |
| 4,400.00 | 15.50 | 242.37 | 4,390.58 | -48.32 | -92.31 | -40.88 | 2.00 | 2.00 | 0.00 |
| 4,424.79 | 16.00 | 242.37 | 4,414.45 | -51.44 | -98.27 | -43.52 | 2.00 | 2.00 | 0.00 |
| 4,500.00 | 16.00 | 242.37 | 4,486.74 | -61.05 | -116.63 | -51.65 | 0.00 | 0.00 | 0.00 |
| 4,600.00 | 16.00 | 242.37 | 4,582.87 | -73.83 | -141.05 | -62.46 | 0.00 | 0.00 | 0.00 |
| 4,700.00 | 16.00 | 242.37 | 4,679.00 | -86.61 | -165.46 | -73.28 | 0.00 | 0.00 | 0.00 |
| 4,800.00 | 16.00 | 242.37 | 4,775.12 | -99.39 | -189.87 | -84.09 | 0.00 | 0.00 | 0.00 |
| 4,900.00 | 16.00 | 242.37 | 4,871.25 | -112.17 | -214.29 | -94.90 | 0.00 | 0.00 | 0.00 |
| 5,000.00 | 16.00 | 242.37 | 4,967.38 | -124.95 | -238.70 | -105.71 | 0.00 | 0.00 | 0.00 |
| 5,100.00 | 16.00 | 242.37 | 5,063.51 | -137.73 | -263.12 | -116.52 | 0.00 | 0.00 | 0.00 |

Oxy Planning Report

| | | | |
|-----------|-------------------------------------|------------------------------|---------------------------------|
| Database: | HOPSP | Local Co-ordinate Reference: | Well PRECIOUS 30_18 FED COM 11H |
| Company: | ENGINEERING DESIGNS | TVD Reference: | RKB=26.5' @ 3370.60ft |
| Project: | PRD NM DIRECTIONAL PLANS (NAD 1983) | MD Reference: | RKB=26.5' @ 3370.60ft |
| Site: | PRECIOUS 30_18 FED COM | North Reference: | Grid |
| Well: | PRECIOUS 30_18 FED COM 11H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Permitting Plan | | |

| Planned Survey | | | | | | | | | |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| 5,200.00 | 16.00 | 242.37 | 5,159.64 | -150.51 | -287.53 | -127.34 | 0.00 | 0.00 | 0.00 |
| 5,300.00 | 16.00 | 242.37 | 5,255.76 | -163.29 | -311.94 | -138.15 | 0.00 | 0.00 | 0.00 |
| 5,400.00 | 16.00 | 242.37 | 5,351.89 | -176.07 | -336.36 | -148.96 | 0.00 | 0.00 | 0.00 |
| 5,500.00 | 16.00 | 242.37 | 5,448.02 | -188.85 | -360.77 | -159.77 | 0.00 | 0.00 | 0.00 |
| 5,600.00 | 16.00 | 242.37 | 5,544.15 | -201.63 | -385.19 | -170.59 | 0.00 | 0.00 | 0.00 |
| 5,700.00 | 16.00 | 242.37 | 5,640.28 | -214.41 | -409.60 | -181.40 | 0.00 | 0.00 | 0.00 |
| 5,800.00 | 16.00 | 242.37 | 5,736.40 | -227.19 | -434.02 | -192.21 | 0.00 | 0.00 | 0.00 |
| 5,900.00 | 16.00 | 242.37 | 5,832.53 | -239.97 | -458.43 | -203.02 | 0.00 | 0.00 | 0.00 |
| 6,000.00 | 16.00 | 242.37 | 5,928.66 | -252.75 | -482.84 | -213.83 | 0.00 | 0.00 | 0.00 |
| 6,100.00 | 16.00 | 242.37 | 6,024.79 | -265.53 | -507.26 | -224.65 | 0.00 | 0.00 | 0.00 |
| 6,200.00 | 16.00 | 242.37 | 6,120.92 | -278.31 | -531.67 | -235.46 | 0.00 | 0.00 | 0.00 |
| 6,300.00 | 16.00 | 242.37 | 6,217.05 | -291.09 | -556.09 | -246.27 | 0.00 | 0.00 | 0.00 |
| 6,400.00 | 16.00 | 242.37 | 6,313.17 | -303.87 | -580.50 | -257.08 | 0.00 | 0.00 | 0.00 |
| 6,500.00 | 16.00 | 242.37 | 6,409.30 | -316.65 | -604.91 | -267.90 | 0.00 | 0.00 | 0.00 |
| 6,600.00 | 16.00 | 242.37 | 6,505.43 | -329.43 | -629.33 | -278.71 | 0.00 | 0.00 | 0.00 |
| 6,700.00 | 16.00 | 242.37 | 6,601.56 | -342.21 | -653.74 | -289.52 | 0.00 | 0.00 | 0.00 |
| 6,800.00 | 16.00 | 242.37 | 6,697.69 | -354.99 | -678.16 | -300.33 | 0.00 | 0.00 | 0.00 |
| 6,900.00 | 16.00 | 242.37 | 6,793.81 | -367.77 | -702.57 | -311.14 | 0.00 | 0.00 | 0.00 |
| 7,000.00 | 16.00 | 242.37 | 6,889.94 | -380.55 | -726.99 | -321.96 | 0.00 | 0.00 | 0.00 |
| 7,100.00 | 16.00 | 242.37 | 6,986.07 | -393.33 | -751.40 | -332.77 | 0.00 | 0.00 | 0.00 |
| 7,200.00 | 16.00 | 242.37 | 7,082.20 | -406.11 | -775.81 | -343.58 | 0.00 | 0.00 | 0.00 |
| 7,300.00 | 16.00 | 242.37 | 7,178.33 | -418.89 | -800.23 | -354.39 | 0.00 | 0.00 | 0.00 |
| 7,394.55 | 16.00 | 242.37 | 7,269.22 | -430.98 | -823.31 | -364.62 | 0.00 | 0.00 | 0.00 |
| 7,400.00 | 15.90 | 242.58 | 7,274.46 | -431.67 | -824.64 | -365.20 | 2.00 | -1.69 | 3.90 |
| 7,500.00 | 14.26 | 246.95 | 7,371.01 | -442.80 | -848.14 | -374.44 | 2.00 | -1.65 | 4.37 |
| 7,600.00 | 12.71 | 252.40 | 7,468.26 | -450.95 | -869.95 | -380.84 | 2.00 | -1.55 | 5.45 |
| 7,700.00 | 11.30 | 259.25 | 7,566.07 | -456.10 | -890.07 | -384.39 | 2.00 | -1.41 | 6.85 |
| 7,800.00 | 10.10 | 267.86 | 7,664.34 | -458.26 | -908.46 | -385.09 | 2.00 | -1.21 | 8.61 |
| 7,900.00 | 9.17 | 278.47 | 7,762.93 | -457.41 | -925.10 | -382.93 | 2.00 | -0.93 | 10.61 |
| 8,000.00 | 8.61 | 290.93 | 7,861.74 | -453.56 | -939.97 | -377.92 | 2.00 | -0.56 | 12.46 |
| 8,100.00 | 8.49 | 304.39 | 7,960.64 | -446.72 | -953.05 | -370.07 | 2.00 | -0.12 | 13.46 |
| 8,200.00 | 8.83 | 317.51 | 8,059.51 | -436.89 | -964.33 | -359.38 | 2.00 | 0.34 | 13.12 |
| 8,300.00 | 9.58 | 329.12 | 8,158.23 | -424.09 | -973.79 | -345.86 | 2.00 | 0.75 | 11.61 |
| 8,400.00 | 10.66 | 338.73 | 8,256.68 | -408.32 | -981.42 | -329.54 | 2.00 | 1.08 | 9.61 |
| 8,500.00 | 11.98 | 346.43 | 8,354.74 | -389.61 | -987.21 | -310.44 | 2.00 | 1.31 | 7.70 |
| 8,600.00 | 13.46 | 352.54 | 8,452.29 | -367.99 | -991.15 | -288.57 | 2.00 | 1.48 | 6.11 |
| 8,700.00 | 15.06 | 357.42 | 8,549.21 | -343.47 | -993.25 | -263.96 | 2.00 | 1.60 | 4.88 |
| 8,756.43 | 16.00 | 359.74 | 8,603.57 | -328.37 | -993.61 | -248.88 | 2.00 | 1.67 | 4.12 |
| 8,800.00 | 20.36 | 359.74 | 8,644.96 | -314.78 | -993.67 | -235.33 | 10.00 | 10.00 | 0.00 |
| 8,900.00 | 30.36 | 359.74 | 8,735.21 | -272.01 | -993.86 | -192.68 | 10.00 | 10.00 | 0.00 |
| 9,000.00 | 40.36 | 359.74 | 8,816.67 | -214.21 | -994.12 | -135.04 | 10.00 | 10.00 | 0.00 |
| 9,100.00 | 50.36 | 359.74 | 8,886.84 | -143.15 | -994.44 | -64.18 | 10.00 | 10.00 | 0.00 |
| 9,200.00 | 60.36 | 359.74 | 8,943.62 | -60.99 | -994.80 | 17.76 | 10.00 | 10.00 | 0.00 |
| 9,300.00 | 70.36 | 359.74 | 8,985.26 | 29.79 | -995.21 | 108.28 | 10.00 | 10.00 | 0.00 |
| 9,400.00 | 80.36 | 359.74 | 9,010.51 | 126.42 | -995.64 | 204.65 | 10.00 | 10.00 | 0.00 |
| 9,497.78 | 90.14 | 359.74 | 9,018.60 | 223.74 | -996.07 | 301.70 | 10.00 | 10.00 | 0.00 |
| 9,500.00 | 90.14 | 359.74 | 9,018.59 | 225.96 | -996.08 | 303.91 | 0.00 | 0.00 | 0.00 |
| 9,600.00 | 90.14 | 359.74 | 9,018.36 | 325.96 | -996.53 | 403.64 | 0.00 | 0.00 | 0.00 |
| 9,700.00 | 90.14 | 359.74 | 9,018.12 | 425.96 | -996.98 | 503.36 | 0.00 | 0.00 | 0.00 |
| 9,800.00 | 90.14 | 359.74 | 9,017.88 | 525.96 | -997.42 | 603.08 | 0.00 | 0.00 | 0.00 |
| 9,900.00 | 90.14 | 359.74 | 9,017.65 | 625.96 | -997.87 | 702.80 | 0.00 | 0.00 | 0.00 |
| 10,000.00 | 90.14 | 359.74 | 9,017.41 | 725.96 | -998.31 | 802.52 | 0.00 | 0.00 | 0.00 |
| 10,100.00 | 90.14 | 359.74 | 9,017.17 | 825.95 | -998.76 | 902.24 | 0.00 | 0.00 | 0.00 |
| 10,200.00 | 90.14 | 359.74 | 9,016.94 | 925.95 | -999.20 | 1,001.97 | 0.00 | 0.00 | 0.00 |

Oxy Planning Report

| | | | |
|------------------|-------------------------------------|-------------------------------------|---------------------------------|
| Database: | HOPSPP | Local Co-ordinate Reference: | Well PRECIOUS 30_18 FED COM 11H |
| Company: | ENGINEERING DESIGNS | TVD Reference: | RKB=26.5' @ 3370.60ft |
| Project: | PRD NM DIRECTIONAL PLANS (NAD 1983) | MD Reference: | RKB=26.5' @ 3370.60ft |
| Site: | PRECIOUS 30_18 FED COM | North Reference: | Grid |
| Well: | PRECIOUS 30_18 FED COM 11H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Permitting Plan | | |

Planned Survey

| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| 10,300.00 | 90.14 | 359.74 | 9,016.70 | 1,025.95 | -999.65 | 1,101.69 | 0.00 | 0.00 | 0.00 |
| 10,400.00 | 90.14 | 359.74 | 9,016.46 | 1,125.95 | -1,000.10 | 1,201.41 | 0.00 | 0.00 | 0.00 |
| 10,500.00 | 90.14 | 359.74 | 9,016.23 | 1,225.95 | -1,000.54 | 1,301.13 | 0.00 | 0.00 | 0.00 |
| 10,600.00 | 90.14 | 359.74 | 9,015.99 | 1,325.95 | -1,000.99 | 1,400.85 | 0.00 | 0.00 | 0.00 |
| 10,700.00 | 90.14 | 359.74 | 9,015.75 | 1,425.95 | -1,001.43 | 1,500.57 | 0.00 | 0.00 | 0.00 |
| 10,800.00 | 90.14 | 359.74 | 9,015.52 | 1,525.95 | -1,001.88 | 1,600.30 | 0.00 | 0.00 | 0.00 |
| 10,900.00 | 90.14 | 359.74 | 9,015.28 | 1,625.94 | -1,002.32 | 1,700.02 | 0.00 | 0.00 | 0.00 |
| 11,000.00 | 90.14 | 359.74 | 9,015.04 | 1,725.94 | -1,002.77 | 1,799.74 | 0.00 | 0.00 | 0.00 |
| 11,100.00 | 90.14 | 359.74 | 9,014.81 | 1,825.94 | -1,003.22 | 1,899.46 | 0.00 | 0.00 | 0.00 |
| 11,200.00 | 90.14 | 359.74 | 9,014.57 | 1,925.94 | -1,003.66 | 1,999.18 | 0.00 | 0.00 | 0.00 |
| 11,300.00 | 90.14 | 359.74 | 9,014.33 | 2,025.94 | -1,004.11 | 2,098.90 | 0.00 | 0.00 | 0.00 |
| 11,400.00 | 90.14 | 359.74 | 9,014.09 | 2,125.94 | -1,004.55 | 2,198.63 | 0.00 | 0.00 | 0.00 |
| 11,500.00 | 90.14 | 359.74 | 9,013.86 | 2,225.94 | -1,005.00 | 2,298.35 | 0.00 | 0.00 | 0.00 |
| 11,600.00 | 90.14 | 359.74 | 9,013.62 | 2,325.94 | -1,005.44 | 2,398.07 | 0.00 | 0.00 | 0.00 |
| 11,700.00 | 90.14 | 359.74 | 9,013.38 | 2,425.93 | -1,005.89 | 2,497.79 | 0.00 | 0.00 | 0.00 |
| 11,800.00 | 90.14 | 359.74 | 9,013.15 | 2,525.93 | -1,006.34 | 2,597.51 | 0.00 | 0.00 | 0.00 |
| 11,900.00 | 90.14 | 359.74 | 9,012.91 | 2,625.93 | -1,006.78 | 2,697.23 | 0.00 | 0.00 | 0.00 |
| 12,000.00 | 90.14 | 359.74 | 9,012.67 | 2,725.93 | -1,007.23 | 2,796.96 | 0.00 | 0.00 | 0.00 |
| 12,100.00 | 90.14 | 359.74 | 9,012.44 | 2,825.93 | -1,007.67 | 2,896.68 | 0.00 | 0.00 | 0.00 |
| 12,200.00 | 90.14 | 359.74 | 9,012.20 | 2,925.93 | -1,008.12 | 2,996.40 | 0.00 | 0.00 | 0.00 |
| 12,300.00 | 90.14 | 359.74 | 9,011.96 | 3,025.93 | -1,008.56 | 3,096.12 | 0.00 | 0.00 | 0.00 |
| 12,400.00 | 90.14 | 359.74 | 9,011.73 | 3,125.93 | -1,009.01 | 3,195.84 | 0.00 | 0.00 | 0.00 |
| 12,500.00 | 90.14 | 359.74 | 9,011.49 | 3,225.92 | -1,009.46 | 3,295.56 | 0.00 | 0.00 | 0.00 |
| 12,600.00 | 90.14 | 359.74 | 9,011.25 | 3,325.92 | -1,009.90 | 3,395.29 | 0.00 | 0.00 | 0.00 |
| 12,700.00 | 90.14 | 359.74 | 9,011.02 | 3,425.92 | -1,010.35 | 3,495.01 | 0.00 | 0.00 | 0.00 |
| 12,800.00 | 90.14 | 359.74 | 9,010.78 | 3,525.92 | -1,010.79 | 3,594.73 | 0.00 | 0.00 | 0.00 |
| 12,900.00 | 90.14 | 359.74 | 9,010.54 | 3,625.92 | -1,011.24 | 3,694.45 | 0.00 | 0.00 | 0.00 |
| 13,000.00 | 90.14 | 359.74 | 9,010.30 | 3,725.92 | -1,011.68 | 3,794.17 | 0.00 | 0.00 | 0.00 |
| 13,100.00 | 90.14 | 359.74 | 9,010.07 | 3,825.92 | -1,012.13 | 3,893.89 | 0.00 | 0.00 | 0.00 |
| 13,200.00 | 90.14 | 359.74 | 9,009.83 | 3,925.92 | -1,012.58 | 3,993.62 | 0.00 | 0.00 | 0.00 |
| 13,300.00 | 90.14 | 359.74 | 9,009.59 | 4,025.91 | -1,013.02 | 4,093.34 | 0.00 | 0.00 | 0.00 |
| 13,400.00 | 90.14 | 359.74 | 9,009.36 | 4,125.91 | -1,013.47 | 4,193.06 | 0.00 | 0.00 | 0.00 |
| 13,500.00 | 90.14 | 359.74 | 9,009.12 | 4,225.91 | -1,013.91 | 4,292.78 | 0.00 | 0.00 | 0.00 |
| 13,600.00 | 90.14 | 359.74 | 9,008.88 | 4,325.91 | -1,014.36 | 4,392.50 | 0.00 | 0.00 | 0.00 |
| 13,700.00 | 90.14 | 359.74 | 9,008.65 | 4,425.91 | -1,014.80 | 4,492.22 | 0.00 | 0.00 | 0.00 |
| 13,800.00 | 90.14 | 359.74 | 9,008.41 | 4,525.91 | -1,015.25 | 4,591.95 | 0.00 | 0.00 | 0.00 |
| 13,900.00 | 90.14 | 359.74 | 9,008.17 | 4,625.91 | -1,015.70 | 4,691.67 | 0.00 | 0.00 | 0.00 |
| 14,000.00 | 90.14 | 359.74 | 9,007.94 | 4,725.90 | -1,016.14 | 4,791.39 | 0.00 | 0.00 | 0.00 |
| 14,100.00 | 90.14 | 359.74 | 9,007.70 | 4,825.90 | -1,016.59 | 4,891.11 | 0.00 | 0.00 | 0.00 |
| 14,200.00 | 90.14 | 359.74 | 9,007.46 | 4,925.90 | -1,017.03 | 4,990.83 | 0.00 | 0.00 | 0.00 |
| 14,300.00 | 90.14 | 359.74 | 9,007.23 | 5,025.90 | -1,017.48 | 5,090.55 | 0.00 | 0.00 | 0.00 |
| 14,400.00 | 90.14 | 359.74 | 9,006.99 | 5,125.90 | -1,017.92 | 5,190.28 | 0.00 | 0.00 | 0.00 |
| 14,500.00 | 90.14 | 359.74 | 9,006.75 | 5,225.90 | -1,018.37 | 5,290.00 | 0.00 | 0.00 | 0.00 |
| 14,600.00 | 90.14 | 359.74 | 9,006.51 | 5,325.90 | -1,018.82 | 5,389.72 | 0.00 | 0.00 | 0.00 |
| 14,700.00 | 90.14 | 359.74 | 9,006.28 | 5,425.90 | -1,019.26 | 5,489.44 | 0.00 | 0.00 | 0.00 |
| 14,800.00 | 90.14 | 359.74 | 9,006.04 | 5,525.89 | -1,019.71 | 5,589.16 | 0.00 | 0.00 | 0.00 |
| 14,900.00 | 90.14 | 359.74 | 9,005.80 | 5,625.89 | -1,020.15 | 5,688.88 | 0.00 | 0.00 | 0.00 |
| 15,000.00 | 90.14 | 359.74 | 9,005.57 | 5,725.89 | -1,020.60 | 5,788.60 | 0.00 | 0.00 | 0.00 |
| 15,100.00 | 90.14 | 359.74 | 9,005.33 | 5,825.89 | -1,021.04 | 5,888.33 | 0.00 | 0.00 | 0.00 |
| 15,200.00 | 90.14 | 359.74 | 9,005.09 | 5,925.89 | -1,021.49 | 5,988.05 | 0.00 | 0.00 | 0.00 |
| 15,300.00 | 90.14 | 359.74 | 9,004.86 | 6,025.89 | -1,021.94 | 6,087.77 | 0.00 | 0.00 | 0.00 |
| 15,400.00 | 90.14 | 359.74 | 9,004.62 | 6,125.89 | -1,022.38 | 6,187.49 | 0.00 | 0.00 | 0.00 |
| 15,500.00 | 90.14 | 359.74 | 9,004.38 | 6,225.89 | -1,022.83 | 6,287.21 | 0.00 | 0.00 | 0.00 |
| 15,600.00 | 90.14 | 359.74 | 9,004.15 | 6,325.88 | -1,023.27 | 6,386.93 | 0.00 | 0.00 | 0.00 |

Oxy Planning Report

| | | | |
|------------------|-------------------------------------|-------------------------------------|---------------------------------|
| Database: | HOPSP | Local Co-ordinate Reference: | Well PRECIOUS 30_18 FED COM 11H |
| Company: | ENGINEERING DESIGNS | TVD Reference: | RKB=26.5' @ 3370.60ft |
| Project: | PRD NM DIRECTIONAL PLANS (NAD 1983) | MD Reference: | RKB=26.5' @ 3370.60ft |
| Site: | PRECIOUS 30_18 FED COM | North Reference: | Grid |
| Well: | PRECIOUS 30_18 FED COM 11H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Permitting Plan | | |

Planned Survey

| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| 15,700.00 | 90.14 | 359.74 | 9,003.91 | 6,425.88 | -1,023.72 | 6,486.66 | 0.00 | 0.00 | 0.00 |
| 15,800.00 | 90.14 | 359.74 | 9,003.67 | 6,525.88 | -1,024.16 | 6,586.38 | 0.00 | 0.00 | 0.00 |
| 15,900.00 | 90.14 | 359.74 | 9,003.44 | 6,625.88 | -1,024.61 | 6,686.10 | 0.00 | 0.00 | 0.00 |
| 16,000.00 | 90.14 | 359.74 | 9,003.20 | 6,725.88 | -1,025.06 | 6,785.82 | 0.00 | 0.00 | 0.00 |
| 16,100.00 | 90.14 | 359.74 | 9,002.96 | 6,825.88 | -1,025.50 | 6,885.54 | 0.00 | 0.00 | 0.00 |
| 16,200.00 | 90.14 | 359.74 | 9,002.72 | 6,925.88 | -1,025.95 | 6,985.26 | 0.00 | 0.00 | 0.00 |
| 16,300.00 | 90.14 | 359.74 | 9,002.49 | 7,025.88 | -1,026.39 | 7,084.99 | 0.00 | 0.00 | 0.00 |
| 16,400.00 | 90.14 | 359.74 | 9,002.25 | 7,125.87 | -1,026.84 | 7,184.71 | 0.00 | 0.00 | 0.00 |
| 16,500.00 | 90.14 | 359.74 | 9,002.01 | 7,225.87 | -1,027.28 | 7,284.43 | 0.00 | 0.00 | 0.00 |
| 16,600.00 | 90.14 | 359.74 | 9,001.78 | 7,325.87 | -1,027.73 | 7,384.15 | 0.00 | 0.00 | 0.00 |
| 16,700.00 | 90.14 | 359.74 | 9,001.54 | 7,425.87 | -1,028.18 | 7,483.87 | 0.00 | 0.00 | 0.00 |
| 16,800.00 | 90.14 | 359.74 | 9,001.30 | 7,525.87 | -1,028.62 | 7,583.59 | 0.00 | 0.00 | 0.00 |
| 16,900.00 | 90.14 | 359.74 | 9,001.07 | 7,625.87 | -1,029.07 | 7,683.32 | 0.00 | 0.00 | 0.00 |
| 17,000.00 | 90.14 | 359.74 | 9,000.83 | 7,725.87 | -1,029.51 | 7,783.04 | 0.00 | 0.00 | 0.00 |
| 17,100.00 | 90.14 | 359.74 | 9,000.59 | 7,825.87 | -1,029.96 | 7,882.76 | 0.00 | 0.00 | 0.00 |
| 17,200.00 | 90.14 | 359.74 | 9,000.36 | 7,925.86 | -1,030.40 | 7,982.48 | 0.00 | 0.00 | 0.00 |
| 17,300.00 | 90.14 | 359.74 | 9,000.12 | 8,025.86 | -1,030.85 | 8,082.20 | 0.00 | 0.00 | 0.00 |
| 17,400.00 | 90.14 | 359.74 | 8,999.88 | 8,125.86 | -1,031.30 | 8,181.92 | 0.00 | 0.00 | 0.00 |
| 17,500.00 | 90.14 | 359.74 | 8,999.65 | 8,225.86 | -1,031.74 | 8,281.65 | 0.00 | 0.00 | 0.00 |
| 17,600.00 | 90.14 | 359.74 | 8,999.41 | 8,325.86 | -1,032.19 | 8,381.37 | 0.00 | 0.00 | 0.00 |
| 17,700.00 | 90.14 | 359.74 | 8,999.17 | 8,425.86 | -1,032.63 | 8,481.09 | 0.00 | 0.00 | 0.00 |
| 17,800.00 | 90.14 | 359.74 | 8,998.93 | 8,525.86 | -1,033.08 | 8,580.81 | 0.00 | 0.00 | 0.00 |
| 17,900.00 | 90.14 | 359.74 | 8,998.70 | 8,625.86 | -1,033.52 | 8,680.53 | 0.00 | 0.00 | 0.00 |
| 18,000.00 | 90.14 | 359.74 | 8,998.46 | 8,725.85 | -1,033.97 | 8,780.25 | 0.00 | 0.00 | 0.00 |
| 18,100.00 | 90.14 | 359.74 | 8,998.22 | 8,825.85 | -1,034.42 | 8,879.98 | 0.00 | 0.00 | 0.00 |
| 18,200.00 | 90.14 | 359.74 | 8,997.99 | 8,925.85 | -1,034.86 | 8,979.70 | 0.00 | 0.00 | 0.00 |
| 18,300.00 | 90.14 | 359.74 | 8,997.75 | 9,025.85 | -1,035.31 | 9,079.42 | 0.00 | 0.00 | 0.00 |
| 18,400.00 | 90.14 | 359.74 | 8,997.51 | 9,125.85 | -1,035.75 | 9,179.14 | 0.00 | 0.00 | 0.00 |
| 18,500.00 | 90.14 | 359.74 | 8,997.28 | 9,225.85 | -1,036.20 | 9,278.86 | 0.00 | 0.00 | 0.00 |
| 18,600.00 | 90.14 | 359.74 | 8,997.04 | 9,325.85 | -1,036.64 | 9,378.58 | 0.00 | 0.00 | 0.00 |
| 18,700.00 | 90.14 | 359.74 | 8,996.80 | 9,425.85 | -1,037.09 | 9,478.31 | 0.00 | 0.00 | 0.00 |
| 18,800.00 | 90.14 | 359.74 | 8,996.57 | 9,525.84 | -1,037.54 | 9,578.03 | 0.00 | 0.00 | 0.00 |
| 18,900.00 | 90.14 | 359.74 | 8,996.33 | 9,625.84 | -1,037.98 | 9,677.75 | 0.00 | 0.00 | 0.00 |
| 19,000.00 | 90.14 | 359.74 | 8,996.09 | 9,725.84 | -1,038.43 | 9,777.47 | 0.00 | 0.00 | 0.00 |
| 19,100.00 | 90.14 | 359.74 | 8,995.86 | 9,825.84 | -1,038.87 | 9,877.19 | 0.00 | 0.00 | 0.00 |
| 19,200.00 | 90.14 | 359.74 | 8,995.62 | 9,925.84 | -1,039.32 | 9,976.91 | 0.00 | 0.00 | 0.00 |
| 19,300.00 | 90.14 | 359.74 | 8,995.38 | 10,025.84 | -1,039.77 | 10,076.64 | 0.00 | 0.00 | 0.00 |
| 19,400.00 | 90.14 | 359.74 | 8,995.14 | 10,125.84 | -1,040.21 | 10,176.36 | 0.00 | 0.00 | 0.00 |
| 19,500.00 | 90.14 | 359.74 | 8,994.91 | 10,225.83 | -1,040.66 | 10,276.08 | 0.00 | 0.00 | 0.00 |
| 19,600.00 | 90.14 | 359.74 | 8,994.67 | 10,325.83 | -1,041.10 | 10,375.80 | 0.00 | 0.00 | 0.00 |
| 19,700.00 | 90.14 | 359.74 | 8,994.43 | 10,425.83 | -1,041.55 | 10,475.52 | 0.00 | 0.00 | 0.00 |
| 19,800.00 | 90.14 | 359.74 | 8,994.20 | 10,525.83 | -1,041.99 | 10,575.24 | 0.00 | 0.00 | 0.00 |
| 19,900.00 | 90.14 | 359.74 | 8,993.96 | 10,625.83 | -1,042.44 | 10,674.97 | 0.00 | 0.00 | 0.00 |
| 20,000.00 | 90.14 | 359.74 | 8,993.72 | 10,725.83 | -1,042.89 | 10,774.69 | 0.00 | 0.00 | 0.00 |
| 20,100.00 | 90.14 | 359.74 | 8,993.49 | 10,825.83 | -1,043.33 | 10,874.41 | 0.00 | 0.00 | 0.00 |
| 20,200.00 | 90.14 | 359.74 | 8,993.25 | 10,925.83 | -1,043.78 | 10,974.13 | 0.00 | 0.00 | 0.00 |
| 20,300.00 | 90.14 | 359.74 | 8,993.01 | 11,025.82 | -1,044.22 | 11,073.85 | 0.00 | 0.00 | 0.00 |
| 20,400.00 | 90.14 | 359.74 | 8,992.78 | 11,125.82 | -1,044.67 | 11,173.57 | 0.00 | 0.00 | 0.00 |
| 20,500.00 | 90.14 | 359.74 | 8,992.54 | 11,225.82 | -1,045.11 | 11,273.30 | 0.00 | 0.00 | 0.00 |
| 20,600.00 | 90.14 | 359.74 | 8,992.30 | 11,325.82 | -1,045.56 | 11,373.02 | 0.00 | 0.00 | 0.00 |
| 20,700.00 | 90.14 | 359.74 | 8,992.07 | 11,425.82 | -1,046.01 | 11,472.74 | 0.00 | 0.00 | 0.00 |
| 20,800.00 | 90.14 | 359.74 | 8,991.83 | 11,525.82 | -1,046.45 | 11,572.46 | 0.00 | 0.00 | 0.00 |
| 20,900.00 | 90.14 | 359.74 | 8,991.59 | 11,625.82 | -1,046.90 | 11,672.18 | 0.00 | 0.00 | 0.00 |
| 21,000.00 | 90.14 | 359.74 | 8,991.35 | 11,725.82 | -1,047.34 | 11,771.90 | 0.00 | 0.00 | 0.00 |

Oxy Planning Report

| | | | |
|------------------|-------------------------------------|-------------------------------------|---------------------------------|
| Database: | HOPSP | Local Co-ordinate Reference: | Well PRECIOUS 30_18 FED COM 11H |
| Company: | ENGINEERING DESIGNS | TVD Reference: | RKB=26.5' @ 3370.60ft |
| Project: | PRD NM DIRECTIONAL PLANS (NAD 1983) | MD Reference: | RKB=26.5' @ 3370.60ft |
| Site: | PRECIOUS 30_18 FED COM | North Reference: | Grid |
| Well: | PRECIOUS 30_18 FED COM 11H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Permitting Plan | | |

| Planned Survey | | | | | | | | | |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| 21,100.00 | 90.14 | 359.74 | 8,991.12 | 11,825.81 | -1,047.79 | 11,871.63 | 0.00 | 0.00 | 0.00 |
| 21,200.00 | 90.14 | 359.74 | 8,990.88 | 11,925.81 | -1,048.23 | 11,971.35 | 0.00 | 0.00 | 0.00 |
| 21,300.00 | 90.14 | 359.74 | 8,990.64 | 12,025.81 | -1,048.68 | 12,071.07 | 0.00 | 0.00 | 0.00 |
| 21,400.00 | 90.14 | 359.74 | 8,990.41 | 12,125.81 | -1,049.13 | 12,170.79 | 0.00 | 0.00 | 0.00 |
| 21,500.00 | 90.14 | 359.74 | 8,990.17 | 12,225.81 | -1,049.57 | 12,270.51 | 0.00 | 0.00 | 0.00 |
| 21,600.00 | 90.14 | 359.74 | 8,989.93 | 12,325.81 | -1,050.02 | 12,370.23 | 0.00 | 0.00 | 0.00 |
| 21,700.00 | 90.14 | 359.74 | 8,989.70 | 12,425.81 | -1,050.46 | 12,469.96 | 0.00 | 0.00 | 0.00 |
| 21,800.00 | 90.14 | 359.74 | 8,989.46 | 12,525.81 | -1,050.91 | 12,569.68 | 0.00 | 0.00 | 0.00 |
| 21,900.00 | 90.14 | 359.74 | 8,989.22 | 12,625.80 | -1,051.35 | 12,669.40 | 0.00 | 0.00 | 0.00 |
| 22,000.00 | 90.14 | 359.74 | 8,988.99 | 12,725.80 | -1,051.80 | 12,769.12 | 0.00 | 0.00 | 0.00 |
| 22,100.00 | 90.14 | 359.74 | 8,988.75 | 12,825.80 | -1,052.25 | 12,868.84 | 0.00 | 0.00 | 0.00 |
| 22,200.00 | 90.14 | 359.74 | 8,988.51 | 12,925.80 | -1,052.69 | 12,968.56 | 0.00 | 0.00 | 0.00 |
| 22,300.00 | 90.14 | 359.74 | 8,988.28 | 13,025.80 | -1,053.14 | 13,068.29 | 0.00 | 0.00 | 0.00 |
| 22,400.00 | 90.14 | 359.74 | 8,988.04 | 13,125.80 | -1,053.58 | 13,168.01 | 0.00 | 0.00 | 0.00 |
| 22,500.00 | 90.14 | 359.74 | 8,987.80 | 13,225.80 | -1,054.03 | 13,267.73 | 0.00 | 0.00 | 0.00 |
| 22,585.07 | 90.14 | 359.74 | 8,987.60 | 13,310.86 | -1,054.41 | 13,352.56 | 0.00 | 0.00 | 0.00 |

| Design Targets | | | | | | | | | |
|--|---------------|--------------|----------|------------|------------|-----------------|----------------|---------------------|--------------------|
| Target Name | Dip Angle (°) | Dip Dir. (°) | TVD (ft) | +N/-S (ft) | +E/-W (ft) | Northing (usft) | Easting (usft) | Latitude | Longitude |
| PBHL (Precious 30_18 - plan hits target center - Point | 0.00 | 0.01 | 8,987.60 | 13,310.86 | -1,054.41 | 474,856.29 | 699,138.50 | 32° 18' 15.911381 N | 103° 49' 21.311233 |
| FTP (Precious 30_18 - plan hits target center - Point | 0.00 | 0.00 | 9,018.60 | 223.74 | -996.07 | 461,770.01 | 699,196.83 | 32° 16' 6.412398 N | 103° 49' 21.357618 |


| Plan Annotations | | | | |
|---------------------|---------------------|-------------------|------------|---------------------|
| Measured Depth (ft) | Vertical Depth (ft) | Local Coordinates | | Comment |
| | | +N/-S (ft) | +E/-W (ft) | |
| 3,625.00 | 3,625.00 | 0.00 | 0.00 | Build 2.00°/100' |
| 4,424.79 | 4,414.44 | -51.44 | -98.27 | Hold 16.00° Tangent |
| 7,394.55 | 7,269.22 | -430.98 | -823.31 | Turn 2.00°/100' |
| 8,756.43 | 8,603.58 | -328.37 | -993.61 | Build 10.00°/100' |
| 9,497.78 | 9,018.60 | 223.74 | -996.07 | Landing Point |
| 22,585.07 | 8,987.60 | 13,310.86 | -1,054.41 | TD at 22585.07' MD |



Project: PRD NM DIRECTIONAL PLANS (NAD 1983)
 Site: PRECIOUS 30_18 FED COM
 Well: PRECIOUS 30_18 FED COM 11H
 Wellbore: Wellbore #1
 Design: Permitting Plan

PROJECT DETAILS: NM DIRECTIONAL PLANS (NAD 1983)

Geodetic System: US State Plane 1983
 Datum: North American Datum 1983
 Ellipsoid: GRS 1980
 Zone: New Mexico Eastern Zone
 System Datum: Mean Sea Level


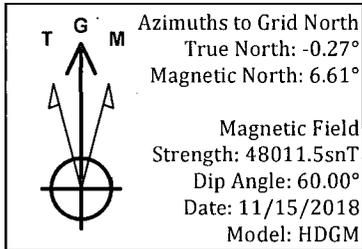


WELL DETAILS: PRECIOUS 30_18 FED COM 11H

| | | | | | |
|-------|-------|---------------|-----------|---------------------------|----------------------------|
| | | Ground Level: | | 3344.10 | |
| +N/-S | +E/-W | Northing | Easting | Latitude | Longitude |
| 0.00 | 0.00 | 461546.28 | 700192.84 | $32^\circ 16' 4.151401$ N | $103^\circ 49' 9.769623$ W |

SECTION DETAILS

| MD | Inc | Azi | TVD | +N/-S | +E/-W | Dleg | TFace | Vsect | Annotation |
|----------|-------|--------|---------|----------|----------|-------|--------|----------|----------------------------|
| 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 3625.00 | 0.00 | 0.00 | 3625.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | Build $2.00^\circ/100'$ |
| 4424.79 | 16.00 | 242.37 | 4414.45 | -51.44 | -98.27 | 2.00 | 242.37 | -43.52 | Hold 16.00° Tangent |
| 7394.55 | 16.00 | 242.37 | 7269.22 | -430.98 | -823.31 | 0.00 | 0.00 | -364.62 | Turn $2.00^\circ/100'$ |
| 8756.43 | 16.00 | 359.74 | 8603.57 | -328.37 | -993.61 | 2.00 | 147.67 | -248.88 | Build $10.00^\circ/100'$ |
| 9497.78 | 90.14 | 359.74 | 9018.60 | 223.74 | -996.07 | 10.00 | 0.00 | 301.70 | Landing Point |
| 22585.07 | 90.14 | 359.74 | 8987.60 | 13310.86 | -1054.41 | 0.00 | 0.00 | 13352.56 | TD at 22585.07 MD |

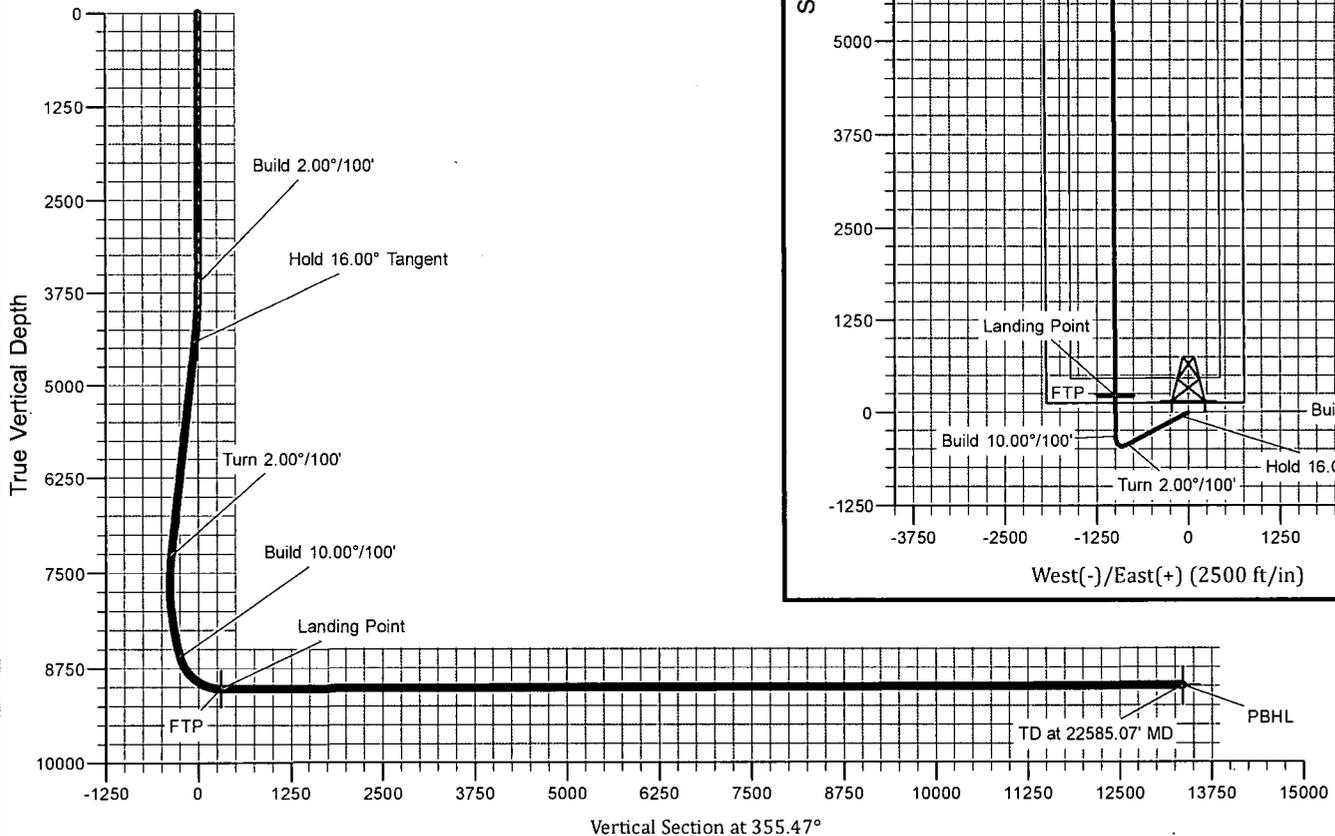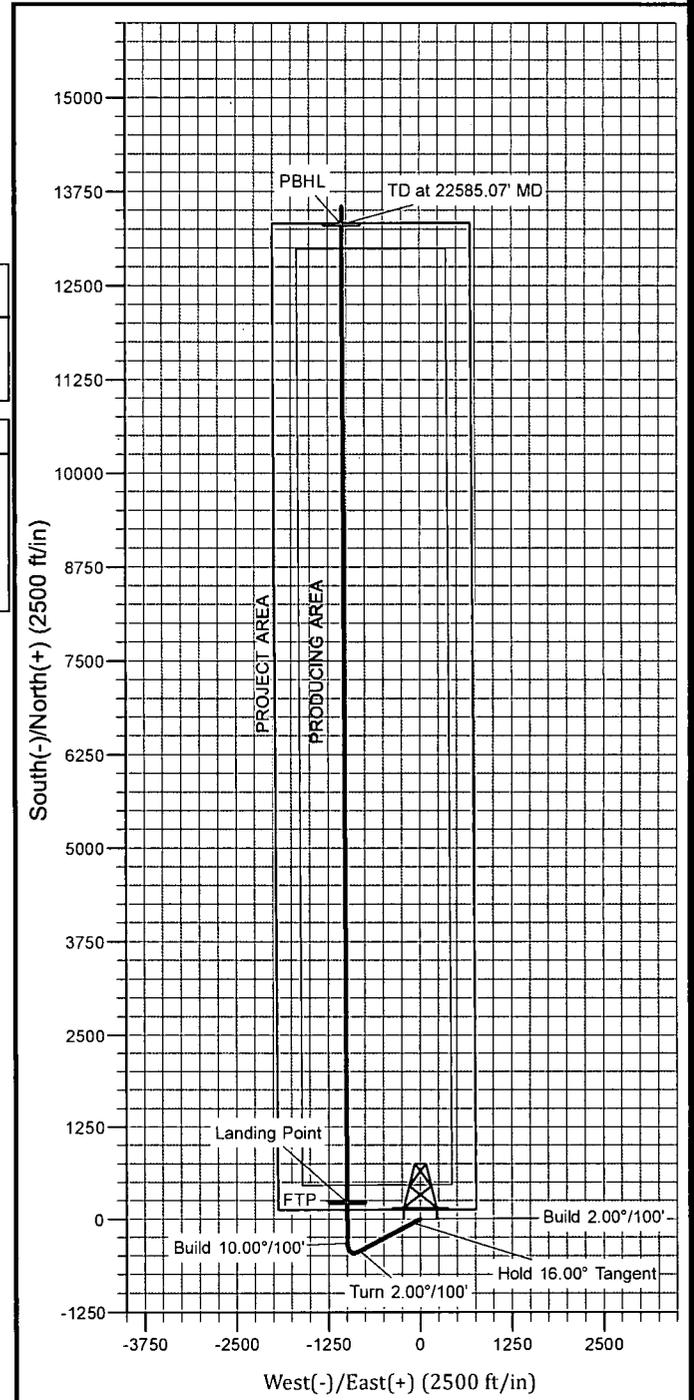

OXY USA Inc
APD ATTACHMENT: SPUDDER RIG DATA

OPERATOR NAME / NUMBER: OXY USA Inc

1. SUMMARY OF REQUEST:


Oxy USA respectfully requests approval for the following operations for the surface hole in the drill plan:

1. Utilize a spudder rig to pre-set surface casing for time and cost savings.

2. Description of Operations

1. Spudder rig will move in to drill the surface hole and pre-set surface casing on the well.
 - a. After drilling the surface hole section, the spudder rig will run casing and cement following all of the applicable rules and regulations (OnShore Order 2, all COAs and NMOCD regulations).
 - b. The spudder rig will utilize fresh water-based mud to drill the surface hole to TD. Solids control will be handled entirely on a closed loop basis. No earth pits will be used.
2. The wellhead will be installed and tested as soon as the surface casing is cut off and the WOC time has been reached.
3. A blind flange at the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with needle valves installed on two wingvalves.
 - a. A means for intervention will be maintained while the drilling rig is not over the well.
4. Spudder rig operations are expected to take 2-3 days per well on the pad.
5. The BLM will be contacted and notified 24 hours prior to commencing spudder rig operations.
6. Drilling operations will begin with a larger rig and a BOP stack equal to or greater than the pressure rating that was permitted will be nipped up and tested on the wellhead before drilling operations resume on each well.
 - a. The larger rig will move back onto the location within 90 days from the point at which the wells are secured and the spudder rig is moved off location.
 - b. The BLM will be contacted / notified 24 hours before the larger rig moves back on the pre-set locations.
7. Oxy will have supervision on the rig to ensure compliance with all BLM and NMOCD regulations and to oversee operations.
8. Once the rig is removed, Oxy will secure the wellhead area by placing a guard rail around the cellar area.

Spudder Rig Layout

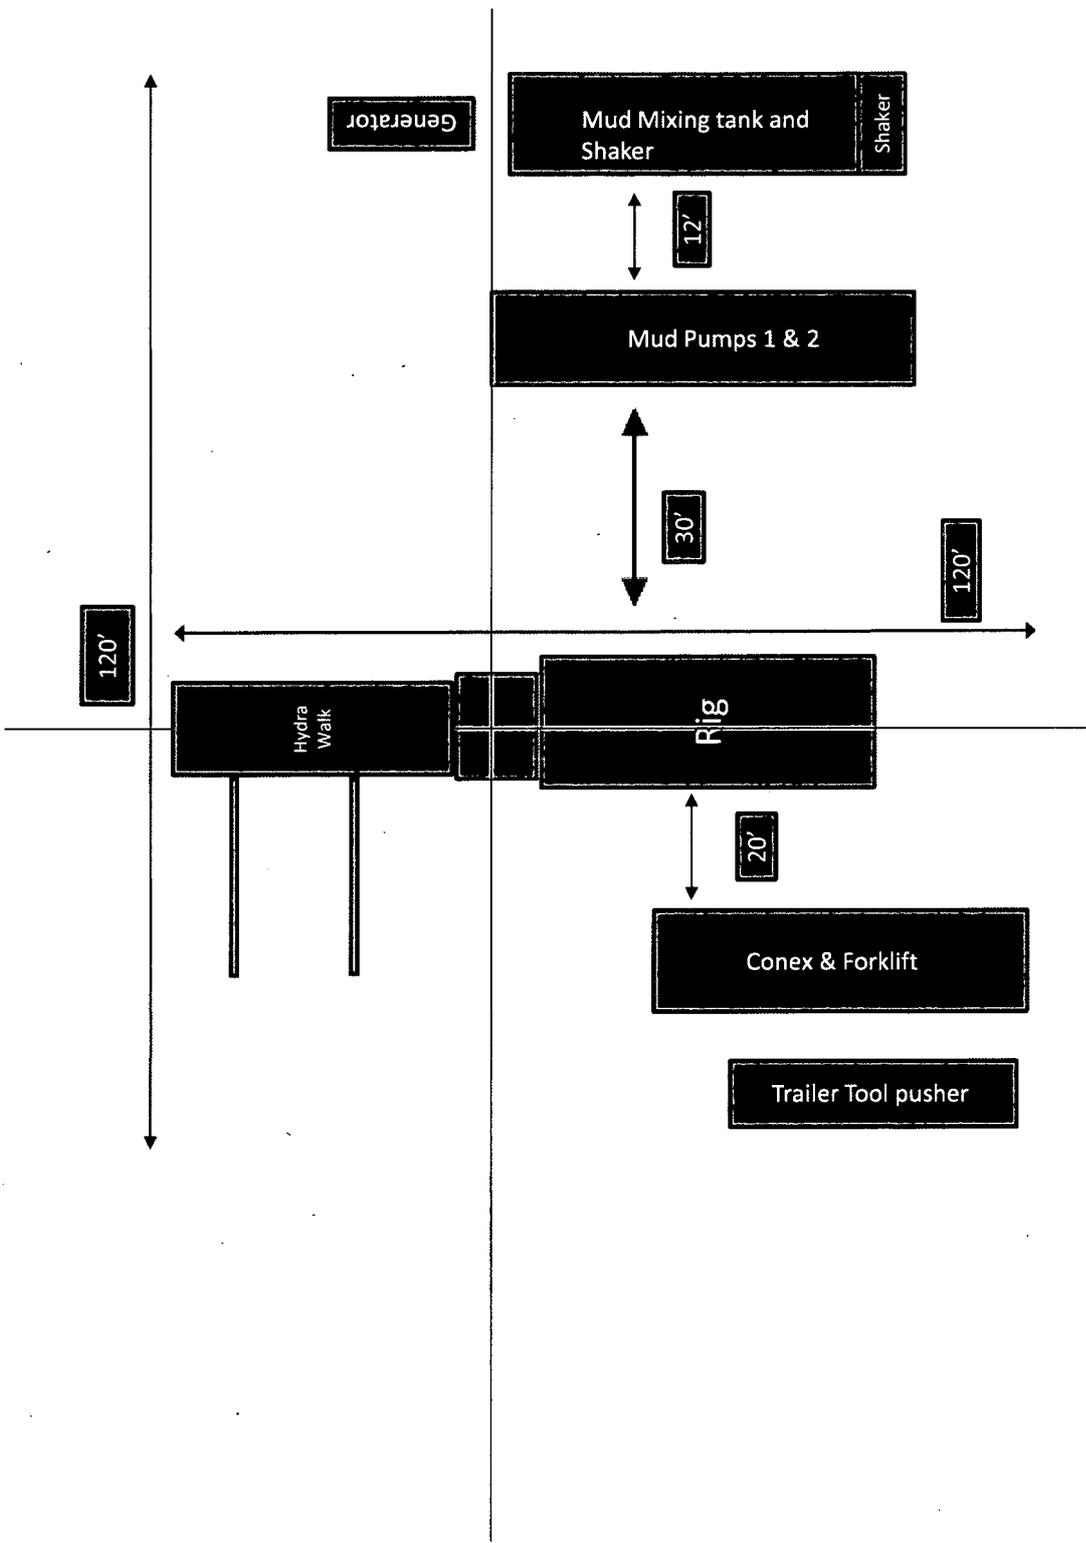

OXY USA Inc. - Precious 30-18 Federal Com 11H – Amended Drill Plan

1. Geologic Formations

| | | | |
|---------------|--------|-------------------------------|------|
| TVD of target | 9018' | Pilot Hole Depth | N/A |
| MD at TD: | 22585' | Deepest Expected fresh water: | 344' |

Delaware Basin

| Formation | TVD - RKB | Expected Fluids |
|------------------------|--------------|-----------------|
| Rustler | 344 | |
| Salado | 661 | Salt |
| Castile | 2,589 | Salt |
| Lamar/Delaware | 4,019 | Oil/Gas/Brine |
| Bell Canyon | 4,050 | Oil/Gas/Brine |
| Cherry Canyon | 4,952 | Oil/Gas/Brine |
| Brushy Canyon | 6,244 | Losses |
| Bone Spring | 7,923 | Oil/Gas |
| 1st Bone Spring | 8,954 | Oil/Gas |

*H2S, water flows, loss of circulation, abnormal pressures, etc.

2. Casing Program

Primary Plan:

| Hole Size (in) | Casing Interval | | Csg. Size (in) | Weight (lbs) | Grade | Conn. | SF | | Buoyant | |
|-------------------------------|-----------------|---------|----------------|--------------|-------|-------|----------|----------|---------|----------|
| | From (ft) | To (ft) | | | | | Collapse | SF Burst | Body SF | Joint SF |
| | | | | | | | | | Tension | Tension |
| 17.5 | 0 | 400 | 13.375 | 54.5 | J-55 | BTC | 1.125 | 1.2 | 1.4 | 1.4 |
| 12.25 | 0 | 4069 | 9.625 | 40 | L-80 | BTC | 1.125 | 1.2 | 1.4 | 1.4 |
| 8.5 | 0 | 22585 | 5.5 | 20 | P-110 | DQX | 1.125 | 1.2 | 1.4 | 1.4 |
| SF Values will meet or Exceed | | | | | | | | | | |

Contingency Plan:

| Hole Size (in) | Casing Interval | | Csg. Size (in) | Weight (lbs) | Grade | Conn. | SF | | Buoyant | |
|-------------------------------|-----------------|---------|----------------|--------------|---------|---|----------|----------|---------|----------|
| | From (ft) | To (ft) | | | | | Collapse | SF Burst | Body SF | Joint SF |
| | | | | | | | | | Tension | Tension |
| 17.5 | 0 | 400 | 13.375 | 54.5 | J-55 | BTC | 1.125 | 1.2 | 1.4 | 1.4 |
| 12.25 | 0 | 4069 | 9.625 | 40 | L-80 | BTC | 1.125 | 1.2 | 1.4 | 1.4 |
| 8.5 | 0 | 8656 | 7.625 | 26.4 | L-80 HC | SF (0 ft to 4000 ft) FJ (4000 ft to 8656 ft) | 1.125 | 1.2 | 1.4 | 1.4 |
| 6.75 | 0 | 22585 | 5.5 | 20 | P-110 | DQX | 1.125 | 1.2 | 1.4 | 1.4 |
| SF Values will meet or Exceed | | | | | | | | | | |

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

OXY USA Inc. - Precious 30-18 Federal Com 11H – Amended Drill Plan

*Oxy requests the option to set casing shallower yet still below the salts if losses or hole conditions require this. Cement volumes may be adjusted if casing is set shallower and a DV tool may be run in case hole conditions merit pumping a second stage cement job to comply with permitted top of cement. If cement circulated to surface during first stage, we will drop a cancelation cone and not pump the second stage.

*Oxy requests the option to run the 7.625” Intermediate II as a contingency string to be run only if severe hole conditions dictate an additional casing string necessary.

*Oxy requests the option to run production casing with DQX, SF TORQ, and/or DQW TORQ connections to accommodate hole conditions or drilling operations.

Annular Clearance Variance Request

As per the agreement reached in the Oxy/BLM meeting on Feb 22, 2018, Oxy requests permission to allow deviation from the 0.422” annular clearance requirement from Onshore Order #2 under the following conditions:

1. Annular clearance to meet or exceed 0.422” between intermediate casing ID and production casing coupling only on the first 500’ overlap between both casings.
2. Annular clearance less than 0.422” is acceptable for the curve and lateral portions of the production open hole section.

| | Y or N |
|--|--------|
| Is casing new? If used, attach certification as required in Onshore Order #1 | Y |
| Does casing meet API specifications? If no, attach casing specification sheet. | Y |
| Is premium or uncommon casing planned? If yes attach casing specification sheet. | Y |
| Does the above casing design meet or exceed BLM’s minimum standards? If not provide justification (loading assumptions, casing design criteria). | Y |
| Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing? | Y |
| Is well located within Capitan Reef? | N |
| If yes, does production casing cement tie back a minimum of 50’ above the Reef? | |
| Is well within the designated 4 string boundary. | |
| Is well located in SOPA but not in R-111-P? | N |
| If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500’ into previous casing? | |
| Is well located in R-111-P and SOPA? | Y |
| If yes, are the first three strings cemented to surface? | Y |
| Is 2 nd string set 100’ to 600’ below the base of salt? | Y |
| Is well located in high Cave/Karst? | N |
| If yes, are there two strings cemented to surface? | |
| (For 2 string wells) If yes, is there a contingency casing if lost circulation occurs? | |
| Is well located in critical Cave/Karst? | N |
| If yes, are there three strings cemented to surface? | |

OXY USA Inc. - Precious 30-18 Federal Com 11H – Amended Drill Plan

3. Cementing Program

Primary Plan:

| Casing String | # Skcs | Wt. (lb/gal) | Yld (ft ³ /sack) | H2O (gal/sk) | 500# Comp. Strength (hours) | Slurry Description |
|--|--------|-----------------|--------------------------------|-----------------|--------------------------------------|--|
| Surface (Lead) | N/A | N/A | N/A | N/A | N/A | N/A |
| Surface (Tail) | 429 | 14.8 | 1.33 | 6.365 | 5:26 | Class C Cement, Accelerator |
| Intermediate (Lead) | 945 | 12.9 | 1.73 | 8.784 | 15:26 | Pozzolan Cement, Retarder |
| Intermediate (Tail) | 155 | 14.8 | 1.33 | 6.368 | 7:11 | Class C Cement, Accelerator |
| Production 1st Stage (Lead) | 250 | 13.2 | 1.38 | 6.692 | 17:50 | Class H Cement, Retarder, Dispersant, Salt |
| Production 1st Stage (Tail) | 2564 | 13.2 | 1.38 | 6.686 | 3:49 | Class H Cement, Retarder, Dispersant, Salt |
| 2nd Stage Production Lead Slurry to be pumped as Bradenhead Squeeze from surface, down the Production annulus. | | | | | | |
| Production 2nd Stage (Tail) | 938 | 12.9 | 1.872 | 10.11 | 21:54 | Class C Cement, Accelerator |

| Casing String | Top (ft) | Bottom (ft) | % Excess |
|-----------------------------|----------|-------------|----------|
| Surface (Lead) | N/A | N/A | N/A |
| Surface (Tail) | 0 | 400 | 100% |
| Intermediate (Lead) | 0 | 3569 | 50% |
| Intermediate (Tail) | 3569 | 4069 | 20% |
| Production 1st Stage (Lead) | 6494 | 7923 | 5% |
| Production 1st Stage (Tail) | 7923 | 22585 | 5% |
| Production 2nd Stage (Tail) | 0 | 6494 | 25% |

Contingency Plan:

| Casing String | # Skcs | Wt. (lb/gal) | Yld (ft ³ /sack) | H2O (gal/sk) | 500# Comp. Strength (hours) | Slurry Description |
|--|--------|-----------------|--------------------------------|-----------------|--------------------------------------|--|
| Surface (Lead) | N/A | N/A | N/A | N/A | N/A | N/A |
| Surface (Tail) | 429 | 14.8 | 1.33 | 6.365 | 5:26 | Class C Cement, Accelerator |
| Intermediate (Lead) | 870 | 12.9 | 1.88 | 10.130 | 14:22 | Pozzolan Cement, Retarder |
| Intermediate (Tail) | 155 | 14.8 | 1.33 | 6.370 | 12:45 | Class C Cement, Accelerator |
| Intermediate II 1st Stage (Lead) | N/A | N/A | N/A | N/A | N/A | N/A |
| Intermediate II 1st Stage (Tail) | 107 | 13.2 | 1.65 | 8.640 | 11:54 | Class H Cement, Retarder, Dispersant, Salt |
| Intermediate II 2nd Stage (Tail Slurry) to be pumped as Bradenhead Squeeze from surface, down the Intermediate annulus | | | | | | |
| Intermediate II 2nd Stage (Lead) | N/A | N/A | N/A | N/A | N/A | N/A |
| Intermediate II 2nd Stage (Tail) | 358 | 12.9 | 1.92 | 10.410 | 23:10 | Class C Cement, Accelerator |
| Production (Lead) | N/A | N/A | N/A | N/A | N/A | N/A |
| Production (Tail) | 1056 | 13.2 | 1.38 | 6.686 | 3:49 | Class H Cement, Retarder, Dispersant, Salt |

| Casing String | Top (ft) | Bottom (ft) | % Excess |
|----------------------------------|----------|-------------|----------|
| Surface (Lead) | N/A | N/A | N/A |
| Surface (Tail) | 0 | 400 | 100% |
| Intermediate (Lead) | 0 | 3569 | 50% |
| Intermediate (Tail) | 3569 | 4069 | 20% |
| Intermediate II 1st Stage (Lead) | N/A | N/A | N/A |
| Intermediate II 1st Stage (Tail) | 6494 | 8656 | 5% |
| Intermediate II 2nd Stage (Lead) | N/A | N/A | N/A |
| Intermediate II 2nd Stage (Tail) | 0 | 6494 | 25% |
| Production (Lead) | N/A | N/A | N/A |
| Production (Tail) | 8156 | 22585 | 20% |

*Contingency design will only be employed if Oxy elects to run 7.625" Intermediate II string.
 *OXY respectfully requests a variance to cement the 9-5/8" and/or 7-5/8" intermediate casing strings offline, see attached for additional information.

OXY USA Inc. - Precious 30-18 Federal Com 11H – Amended Drill Plan

4. Pressure Control Equipment

| BOP installed and tested before drilling which hole? | Size? | Min. Required WP | Type | ✓ | Tested to: |
|--|---------|------------------|-----------|---|-------------------------|
| 12.25" Hole | 13-5/8" | 3M | Annular | ✓ | 70% of working pressure |
| | | | Blind Ram | ✓ | 250 psi / 3000 psi |
| | | Pipe Ram | | | |
| | | Double Ram | ✓ | | |
| Other* | | | | | |
| 8.5" Hole | 13-5/8" | 3M | Annular | ✓ | 70% of working pressure |
| | | | Blind Ram | ✓ | 250 psi / 3000 psi |
| | | Pipe Ram | | | |
| | | Double Ram | ✓ | | |
| Other* | | | | | |
| 6.75" Hole (Contingency) | 13-5/8" | 3M | Annular | ✓ | 70% of working pressure |
| | | | Blind Ram | ✓ | 250 psi / 3000 psi |
| | | Pipe Ram | | | |
| | | Double Ram | ✓ | | |
| Other* | | | | | |

*Specify if additional ram is utilized.

Oxy will utilize a 5M annular with a 10M BOPE stack. The BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

| |
|--|
| Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i. |
| A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart. |
| Y Are anchors required by manufacturer? |
| A multibowl or a unionized multibowl wellhead system will be employed. The wellhead and connection to the BOPE will meet all API 6A requirements. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. We will test the flange connection of the wellhead with a test port that is directly in the flange. We are proposing that we will run the wellhead through the rotary prior to cementing surface casing as discussed with the BLM on October 8, 2015. |

OXY USA Inc. - Precious 30-18 Federal Com 11H – Amended Drill Plan

| |
|---|
| <p>Due to the contingency of a four string design, Oxy plans to employ a 13-3/8” 5M MNDS sacrificial wellhead that will be employed to drill the 12.25” Intermediate Hole. Upon completion of drilling and cementing operations on the 12.25” Intermediate Hole section (along with proper WOC time), the wellhead will be cut off and salvaged. At this point, a standard 13-5/8 MNDS 5x10 Slips (13.375 x 9.625 x 7.625 x 5.5) wellhead will be welded onto the 9-5/8” casing for the remainder of drilling operations on the pad. See attached schematics.</p> |
|---|

BOP Break Testing Request

As per the agreement reached in the Oxy/BLM meeting on Feb 22, 2018, Oxy requests permission to allow BOP Break Testing under the following conditions:

- After a full BOP test is conducted on the first well on the pad.
- When skidding to drill an intermediate section that the casing point is either shallower than the 3rd Bone Spring or 10000’ TVD.
- Full BOP test will be required prior to drilling any production hole.

5. Mud Program

| Depth | | Type | Weight (ppg) | Viscosity | Water Loss |
|-----------|---------|------------------------------|--------------|-----------|------------|
| From (ft) | To (ft) | | | | |
| 0 | 400 | Water-Based Mud | 8.6-8.8 | 40-60 | N/C |
| 400 | 4069 | Saturated Brine-Based Mud | 9.8-10.0 | 35-45 | N/C |
| 4069 | 22585 | Water-Based or Oil-Based Mud | 8.0-9.6 | 38-50 | N/C |

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CACL2. Oxy will use a closed mud system.

| | |
|---|--------------------------------|
| What will be used to monitor the loss or gain of fluid? | PVT/MD Totco/Visual Monitoring |
|---|--------------------------------|

6. Logging and Testing Procedures

| Logging, Coring and Testing. | |
|------------------------------|---|
| Yes | Will run GR from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM. |
| No | Logs are planned based on well control or offset log information. |
| No | Drill stem test? If yes, explain |
| No | Coring? If yes, explain |
| Additional logs planned | Interval |
| No | Resistivity |
| No | Density |
| No | CBL |
| Yes | Mud log ICP - TD |
| No | PEX |

OXY USA Inc. - Precious 30-18 Federal Com 11H – Amended Drill Plan

7. Drilling Conditions

| Condition | Specify what type and where? |
|-------------------------------|------------------------------|
| BH Pressure at deepest TVD | 4502 psi |
| Abnormal Temperature | No |
| BH Temperature at deepest TVD | 153°F |

Pump high viscosity sweeps as needed for hole cleaning. The mud system will be monitored visually/manually as well as with an electronic PVT. The necessary mud products for additional weight and fluid loss control will be on location at all times. Appropriately weighted mud will be used to isolate potential gas, oil, and water zones until such time as casing can be cemented into place for zonal isolation.

| | |
|--|-------------------|
| Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM. | |
| N | H2S is present |
| Y | H2S Plan attached |

8. Other facets of operation

| | Yes/No |
|--|--------|
| Will the well be drilled with a walking/skidding operation? If yes, describe. <ul style="list-style-type: none"> We plan to drill the two well pad in batch by section: all surface sections, intermediate sections and production sections. The wellhead will be secured with a night cap whenever the rig is not over the well. | Yes |
| Will more than one drilling rig be used for drilling operations? If yes, describe. <ul style="list-style-type: none"> Oxy requests the option to contract a Surface Rig to drill, set surface casing, and cement for this well. If the timing between rigs is such that Oxy would not be able to preset surface, the Primary Rig will MIRU and drill the well in its entirety per the APD. Please see the attached document for information on the spudder rig. | Yes |

Total estimated cuttings volume: 1953.4 bbls.

9. Company Personnel

| Name | Title | Office Phone | Mobile Phone |
|------------------|------------------------------|--------------|--------------|
| Linsay Earle | Drilling Engineer | 713-350-4921 | 832-596-5507 |
| Margaret Giltner | Drilling Engineer Supervisor | 713-366-5026 | 210-683-8480 |
| Simon Benavides | Drilling Superintendent | 713-522-8652 | 281-684-6897 |
| Diego Tellez | Drilling Manager | 713-350-4602 | 713-303-4932 |

OXY USA Inc.
APD Attachment
Offline Cementing

OXY respectfully requests a variance to cement the 9-5/8" and/or 7-5/8" intermediate casing strings offline.

The summarized operational sequence will be as follows:

1. Run casing as per normal operations. While running casing, conduct negative pressure test and confirm integrity of the float equipment (float collar and shoe).
2. Land casing.
3. Fill pipe with kill weight fluid, and confirm well is static.
 - a. If well is not static notify BLM and kill well.
 - b. Once well is static notify BLM with intent to proceed with nipple down and offline cementing.
4. Set and pressure test annular packoff.
5. After confirmation of both annular barriers and internal barriers, nipple down BOP and install cap flange. If any barrier fails to test, the BOP stack will not be nipped down until after the cement job is completed.
6. Skid rig to next well on pad.
7. Confirm well is static before removing cap flange.
8. If well is not static notify BLM and kill well prior to cementing or nipping up for further remediation.
9. Install offline cement tool.
10. Rig up cement equipment.
 - a. Notify BLM prior to cement job.
11. Perform cement job.
12. Confirm well is static and floats are holding after cement job.
13. Remove cement equipment, offline cement tools and install night cap with pressure gauge for monitoring.



APD ID: 10400039845

Submission Date: 03/11/2019

Highlighted data
reflects the most
recent changes

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

Precious30_18FdCom11H_AccessRoadSvyMap_20190311120235.pdf

Precious30_18FdCom11H_LocDrillPath_20190311120248.pdf

Existing Road Purpose: FLUID TRANSPORT

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

Precious30_18FdCom11H_NewRoad_20190311120306.pdf

Precious30_18FdCom11H_AccessRoadSvyMap_20190311120317.pdf

New road type: LOCAL

Length: 2477

Feet

Width (ft.): 25

Max slope (%): 0

Max grade (%): 0

Army Corp of Engineers (ACOE) permit required? NO

ACOE Permit Number(s):

New road travel width: 14

New road access erosion control: Watershed Diversion every 200' if needed.

New road access plan or profile prepared? YES

New road access plan attachment:

Precious30_18FdCom11H_NewRoad_20190311120353.pdf

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

Access road engineering design? NO

Access road engineering design attachment:

Turnout? N

Access surfacing type: OTHER

Access topsoil source: ONSITE

Access surfacing type description: Caliche

Access onsite topsoil source depth: 0

Offsite topsoil source description:

Onsite topsoil removal process: If available

Access other construction information: None

Access miscellaneous information: The access road will run from an existing road going 184' southwest, then 1423' northwest, then 838' north, then 32' east through pasture to the southwest corner of the pad.

Number of access turnouts:

Access turnout map:

Drainage Control

New road drainage crossing: CULVERT,WATERDIP

Drainage Control comments: Watershed Diversion every 200' if needed.

Road Drainage Control Structures (DCS) description: Watershed Diversion every 200' if needed.

Road Drainage Control Structures (DCS) attachment:

Access Additional Attachments

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Attach Well map:

Precious30_18FdCom11H_ExistWells_20190311120924.pdf

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? SUBMIT

Production Facilities description: a. In the event the well is found productive, the Sand Dunes Precious Central Tank Battery would be utilized and the necessary production equipment will be installed at the well site. See proposed facilities layout diagram. b. All flow lines will adhere to API standards. They will consist of 3 – 4" composite flowlines operating 75% MAWP, surface to follow surveyed route. Survey of a strip of land 30' wide and 2169.8' in length crossing USA land in Sections 30 & 31, T23S R31E, NMPM, Eddy County, NM and being 15' left and 15' right of the centerline survey. Two-6" steel gas lift hp line operating 1500 psig, buried, lines to follow surveyed route. Survey of a strip of land 30' wide and 2796.7' in length crossing USA land in Section 30 & 31, T23S R31E, NMPM, Eddy County, NM and being 15' left and 15' right of the centerline survey. See attached. c. Electric line will follow a route approved by the BLM. Survey of a strip of land 30' wide and

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

1309.4' in length crossing USA land in Sections 31 T23S R31E NMPM, Eddy County, NM and being 15' left and 15' right of the centerline survey, see attached. d. See attached for additional information on the Sand Dunes Precious/Arkenstone Central Corridor Surface Production Facilities.

Production Facilities map:

Precious30_18FdCom11H_FacilityPLEL_20190311120944.pdf

Precious30_18FdCom11H_LeaseFacilityInfo_20190618152504.pdf

Precious30_18FdCom11H_CTBPlats_20190618152523.pdf

Section 5 - Location and Types of Water Supply

Water Source Table

Water source type: GW WELL

Water source use type:

SURFACE CASING

INTERMEDIATE/PRODUCTION
CASING

OTHER

Describe use type: Drilling

Source latitude:

Source longitude:

Source datum:

Water source permit type:

WATER WELL

Water source transport method:

PIPELINE

TRUCKING

Source land ownership: COMMERCIAL

Source transportation land ownership: COMMERCIAL

Water source volume (barrels): 2000

Source volume (acre-feet): 0.25778618

Source volume (gal): 84000

Water source and transportation map:

Precious30_18FdCom11H_GRRWtrSrc_20190311121035.pdf

Precious30_18FdCom11H_MesqWtrSrc_20190311121047.pdf

Water source comments: This well will be drilled using a combination of water mud systems. It will be obtained from commercial water stations (Gregory Rockhouse, Mesquite) in the area and will be hauled to location by transport truck using existing and proposed roads.

New water well? NO

New Water Well Info

Well latitude:

Well Longitude:

Well datum:

Well target aquifer:

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

Est. depth to top of aquifer(ft):

Est thickness of aquifer:

Aquifer comments:

Aquifer documentation:

Well depth (ft):

Well casing type:

Well casing outside diameter (in.):

Well casing inside diameter (in.):

New water well casing?

Used casing source:

Drilling method:

Drill material:

Grout material:

Grout depth:

Casing length (ft.):

Casing top depth (ft.):

Well Production type:

Completion Method:

Water well additional information:

State appropriation permit:

Additional information attachment:

Section 6 - Construction Materials

Using any construction materials: YES

Construction Materials description: Primary - All caliche utilized for the drilling pad and proposed access road will be obtained from an existing BLM/State/Fee approved pit or from prevailing deposits found on the location. Will use BLM recommended extra caliche from other locations close by for roads, if available. Secondary - The secondary way of obtaining caliche to build locations and roads will be by "turning over" the location. This means, caliche will be obtained from the actual well site. A caliche permit will be obtained from BLM prior to pushing up any caliche. 2400 cubic yards is max amount of caliche needed for pad and roads. Amount will vary for each pad. The procedure below has been approved by BLM personnel: a. The top 6" of topsoil is pushed off and stockpiled along the side of the location. b. An approximate 120' X 120' area is used within the proposed well site to remove caliche. c. Subsoil is removed and piled alongside the 120' X 120' within the pad site. d. When caliche is found, material will be stockpiled within the pad site to build the location and road. e. Then subsoil is pushed back in the hole and caliche is spread accordingly across entire location and road. f. Once the well is drilled the stockpiled top soil will be used for interim reclamation and spread along areas where caliche is picked up and the location size is reduced. Neither caliche nor subsoil will be stockpiled outside of the well pad. Topsoil will be stockpiled along the edge of the pad. Caliche will be provided from a pit located in Section 7 T24S R31E. Water will be provided from a frac pond located in Sections 7 T24S R31E.

Construction Materials source location attachment:

Section 7 - Methods for Handling Waste

Waste type: DRILLING

Waste content description: Water-Based Cuttings, Water-Based Mud, Oil-Based Cuttings, Oil-Based Mud, Produced Water

Amount of waste: 1953.4 barrels

Waste disposal frequency : Daily

Safe containment description: Haul-Off Bins

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL **Disposal location ownership:** COMMERCIAL

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

FACILITY

Disposal type description:

Disposal location description: An approved facility that can process drill cuttings, drill fluids, flowback water, produced water, contaminated soils, and other non-hazardous wastes.

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit?

Reserve pit length (ft.) **Reserve pit width (ft.)**

Reserve pit depth (ft.) **Reserve pit volume (cu. yd.)**

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? YES

Description of cuttings location A closed loop system will be utilized consisting of above ground steel tanks and haul-off bins. Disposal of liquids, drilling fluids and cuttings will be disposed of at an approved facility.

Cuttings area length (ft.) **Cuttings area width (ft.)**

Cuttings area depth (ft.) **Cuttings area volume (cu. yd.)**

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Cuttings area liner specifications and installation description

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: NO

Ancillary Facilities attachment:

Comments:

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

Section 9 - Well Site Layout

Well Site Layout Diagram:

Precious30_18FdCom11H_WellSiteCL_20190311121154.pdf

Comments: V-Door-East - CL Tanks-North - 330' X 1240' – 8 Well Pad

Section 10 - Plans for Surface Reclamation

Type of disturbance: New Surface Disturbance

Multiple Well Pad Name: ARKENSTONE 31 FEDERAL

Multiple Well Pad Number: 3H

Recontouring attachment:

Drainage/Erosion control construction: Reclamation to be wind rowed as needed to control erosion

Drainage/Erosion control reclamation: Reclamation to be wind rowed as needed to control erosion

| | | |
|--|---|---|
| Well pad proposed disturbance (acres): 9.39 | Well pad interim reclamation (acres): 3.43 | Well pad long term disturbance (acres): 5.97 |
| Road proposed disturbance (acres): 1.71 | Road interim reclamation (acres): 0.91 | Road long term disturbance (acres): 0.8 |
| Powerline proposed disturbance (acres): 0.9 | Powerline interim reclamation (acres): 0.9 | Powerline long term disturbance (acres): 0 |
| Pipeline proposed disturbance (acres): 3.42 | Pipeline interim reclamation (acres): 2.28 | Pipeline long term disturbance (acres): 1.14 |
| Other proposed disturbance (acres): 0 | Other interim reclamation (acres): 0.33 | Other long term disturbance (acres): 0 |
| Total proposed disturbance: 15.42 | Total interim reclamation: 7.85 | Total long term disturbance: 7.91 |

Disturbance Comments: See Below

Reconstruction method: If the well is deemed commercially productive, caliche from the areas of the pad site not required for operations will be reclaimed. The original topsoil will be returned to the area of the drill pad not necessary to operate the well. These unused areas of the drill pad will be contoured, as close as possible, to match the original topography, and the area will be seeded with an approved BLM mixture to re-establish vegetation. After concluding the drilling and/or completion operations, if the well is found non-commercial, the caliche will be removed from the pad and transported to the original caliche pit or used for other drilling locations. The road will be reclaimed as directed by the BLM. The original topsoil will again be returned to the pad and contoured, as close as possible, to the original topography, and the area will be seeded with an approved BLM mixture to re-establish vegetation.

Topsoil redistribution: The original topsoil will be returned to the area of the drill pad not necessary to operate the well.

Soil treatment: To be determined by the BLM.

Existing Vegetation at the well pad: To be determined by the BLM at Onsite.

Existing Vegetation at the well pad attachment:

Existing Vegetation Community at the road: To be determined by the BLM at Onsite.

Existing Vegetation Community at the road attachment:

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

Existing Vegetation Community at the pipeline: To be determined by the BLM at Onsite.

Existing Vegetation Community at the pipeline attachment:

Existing Vegetation Community at other disturbances: To be determined by the BLM at Onsite.

Existing Vegetation Community at other disturbances attachment:

Non native seed used? NO

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? NO

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation? NO

Seed harvest description:

Seed harvest description attachment:

Seed Management

Seed Table

Seed type:

Seed source:

Seed name:

Source name:

Source address:

Source phone:

Seed cultivar:

Seed use location:

PLS pounds per acre:

Proposed seeding season:

Seed Summary

Total pounds/Acre:

| Seed Summary | |
|--------------|-------------|
| Seed Type | Pounds/Acre |
| | |

Seed reclamation attachment:

Operator Contact/Responsible Official Contact Info

First Name: JIM

Last Name: WILSON

Phone: (575)631-2442

Email: jim_wilson@oxy.com

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

Seedbed prep:

Seed BMP:

Seed method:

Existing invasive species? NO

Existing invasive species treatment description:

Existing invasive species treatment attachment:

Weed treatment plan description: To be determined by the BLM.

Weed treatment plan attachment:

Monitoring plan description: To be determined by the BLM.

Monitoring plan attachment:

Success standards: To be determined by the BLM.

Pit closure description: NA

Pit closure attachment:

Section 11 - Surface Ownership

Disturbance type: WELL PAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

Disturbance type: PIPELINE

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Disturbance type: OTHER

Describe: Electric Line

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

Disturbance type: NEW ACCESS ROAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Section 12 - Other Information

Right of Way needed? YES

Use APD as ROW? YES

ROW Type(s): 281001 ROW - ROADS,285003 ROW – POWER TRANS,288100 ROW – O&G Pipeline,289001 ROW- O&G Well Pad

ROW Applications

SUPO Additional Information: Permian Basin MOA - To be submitted after APD acceptance. GIS Shapefiles available for BLM download from shared FTP site after APD submittal.

Use a previously conducted onsite? NO

Previous Onsite information:

Other SUPO Attachment

Precious30_18FdCom11H_GasCapPlan_20190311121406.pdf

Precious30_18FdCom11H_ImageryMap_20190311121420.pdf

Precious30_18FdCom11H_LandStatusMap_20190311121431.pdf

Precious30_18FdCom11H_LocDrillPath_20190311121443.pdf

Operator Name: OXY USA INCORPORATED


Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

Precious30_18FdCom11H_StakeForm_20190311121502.pdf

Precious30_18FdCom11H_SUPO_20190311121513.pdf

Precious30_18FdCom11H_VicinityMap_20190311121525.pdf

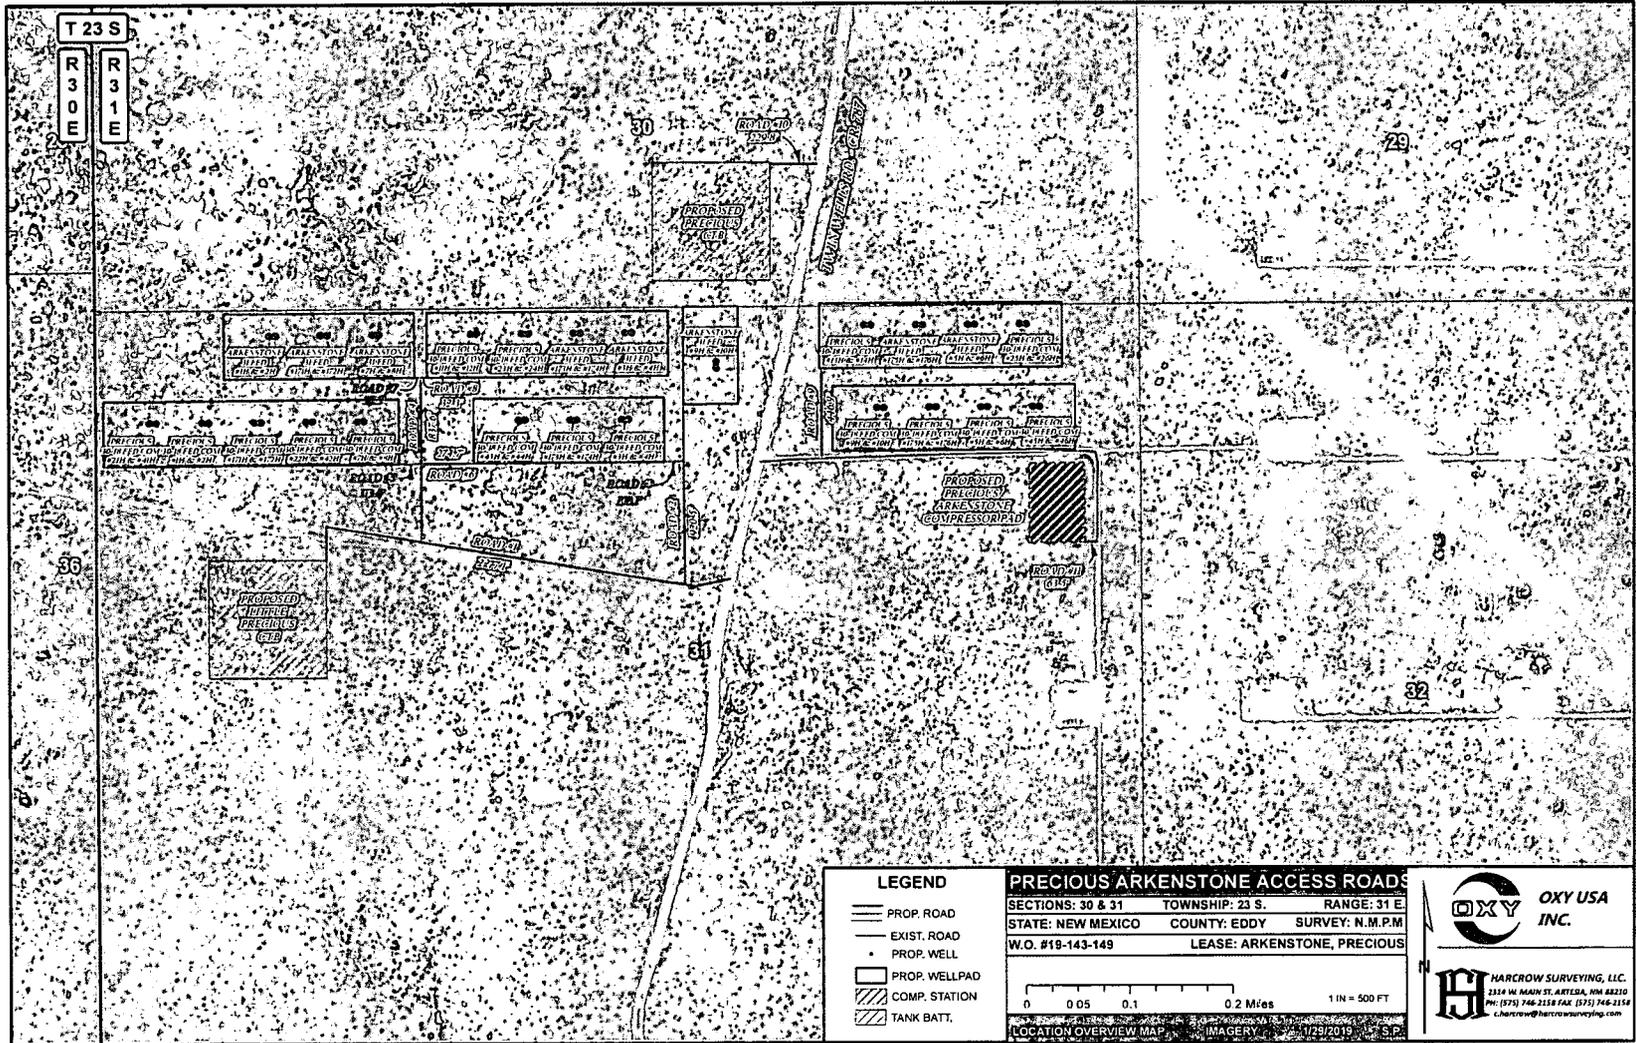

LEGEND

- PROP. ROAD
- EXIST. ROAD
- PROP. WELL
- PROP. WELLPAD
- COMP. STATION
- TANK BATT.

PRECIOUS ARKENSTONE ACCESS ROADS
 SECTIONS: 30 & 31 TOWNSHIP: 23 S. RANGE: 31 E
 STATE: NEW MEXICO COUNTY: EDDY SURVEY: N.M.P.M.
 W.O. #19-143-149 LEASE: ARKENSTONE, PRECIOUS

0 0.05 0.1 0.2 Miles 1 IN = 500 FT


LOCATION OVERVIEW MAP IMAGER: 1/28/2016 S.P.

OXY USA INC.

HARCROW SURVEYING, LLC.
 2330 W. MAIN ST. ARTERIA, NM 88210
 PH: (575) 746-2158 FAX: (575) 746-2159
 E-MAIL: info@harcrowsurveying.com

T 23 S

R 3 0 E R 3 1 E

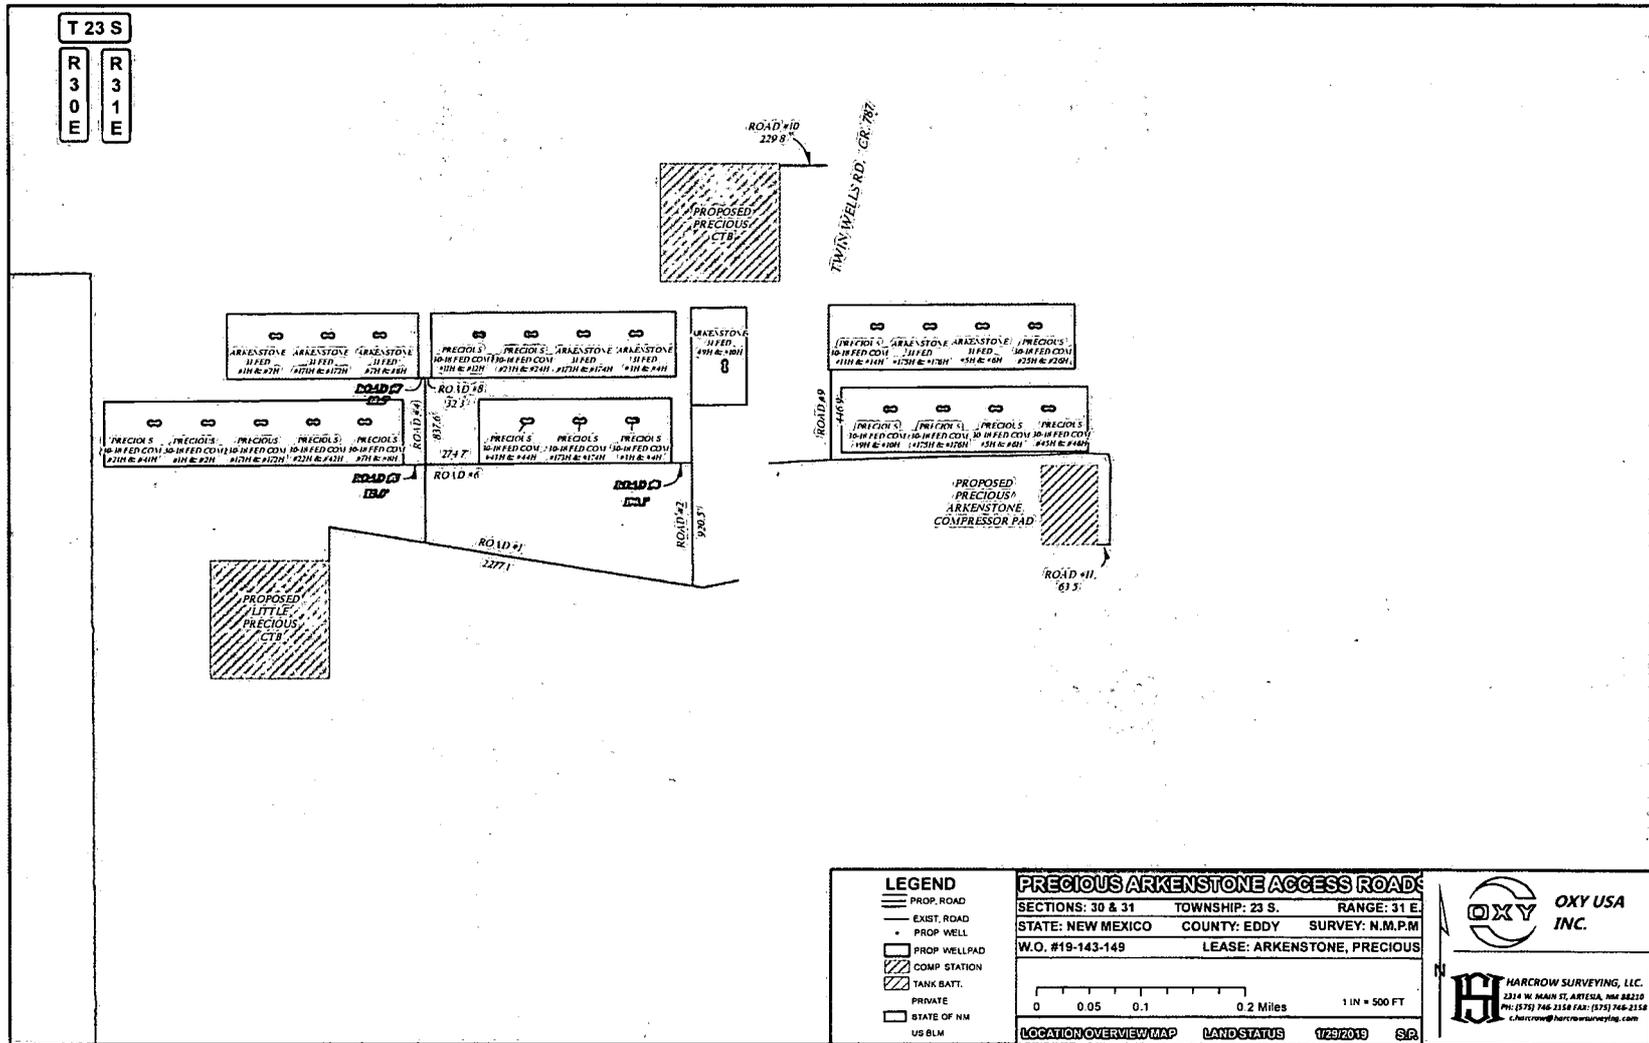

LEGEND

- PROP. ROAD
- - - EXIST. ROAD
- PROP WELL
- PROP WELLPAD
- ▨ COMP STATION
- ▧ TANK BATT.
- ▩ PRIVATE
- ▭ STATE OF NM
- US 8LM

PRECIOUS ARKENSTONE ACCESS ROADS

SECTIONS: 30 & 31 TOWNSHIP: 23 S. RANGE: 31 E.
 STATE: NEW MEXICO COUNTY: EDDY SURVEY: N.M.P.M.
 W.O. #19-143-149 LEASE: ARKENSTONE, PRECIOUS


0 0.05 0.1 0.2 Miles 1 IN = 500 FT

LOCATION OVERVIEW MAP LAND STATUS 1/23/2015 S.P.

OXY USA INC.

HARCROW SURVEYING, L.L.C.
 2314 W. MAIN ST., ARTESIA, NM 88210
 PH: (575) 746-2158 FAX: (575) 746-2158
 CHARCROW@HARCROWSURVEYING.COM

SECTION 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M.,
EDDY COUNTY, NEW MEXICO.

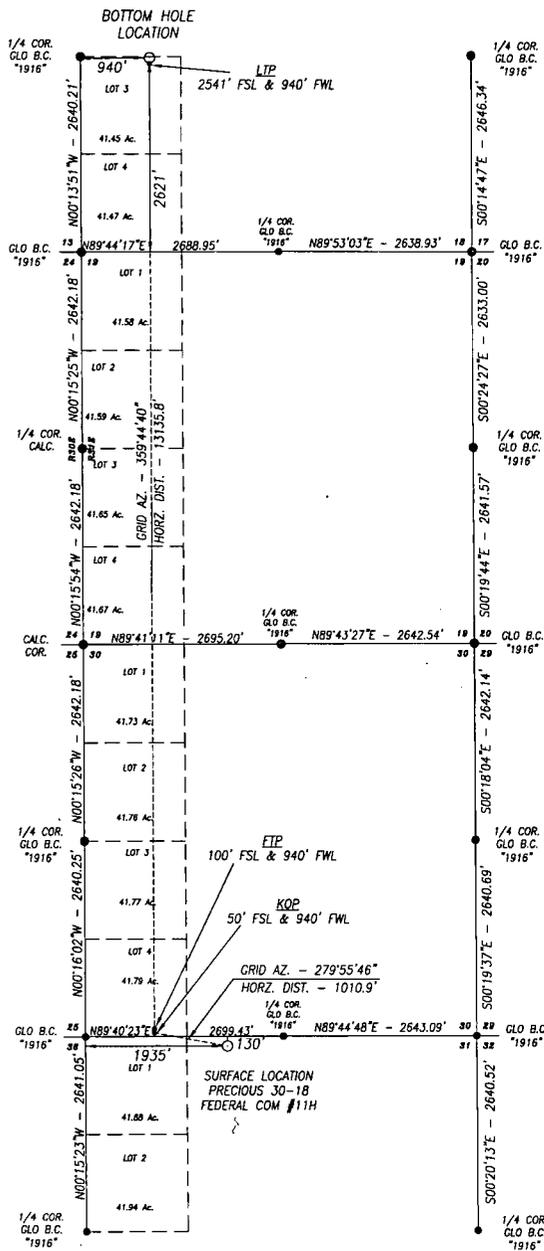

DIRECTIONS TO LOCATION:
BEGINNING AT THE INTERSECTION OF N.M. STATE HWY. #128 AND EDDY COUNTY ROAD #787 (TWIN WELLS ROAD), GO SOUTH ON EDDY COUNTY ROAD #787 FOR APPROX. 2.5 MILES; THEN TURN RIGHT ON PROPOSED ROAD AND GO SOUTHWEST FOR APPROX. 185 FEET; THEN TURN RIGHT AND GO NORTHWEST FOR .25 MILES; THEN TURN RIGHT AND GO NORTH FOR APPROX. 838 FEET; THEN TURN RIGHT AND GO EAST FOR APPROX. 32 FEET; THE PROPOSED WELL LIES APPROX. 318 FEET NORTHEAST.

BASIS OF BEARING:
BEARINGS SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983. DISTANCES ARE GRID VALUES.


CERTIFICATION
I, CHAD HARCROW, A NEW MEXICO REGISTERED PROFESSIONAL SURVEYOR CERTIFY THAT I DIRECTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF, AND THIS SURVEY AND PLAT MEET THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO.



Chad Harcrow
CHAD HARCROW N.M.P.S. NO. 17777

12/31/18
DATE

HARCROW SURVEYING, LLC
2314 W. MAIN ST, ARTESIA, N.M. 88210
PH: (575) 746-2158
c.harcrow@harcrowsurveying.com



| | |
|---|---------------|
| OXY USA INC. | |
| PRECIOUS 30-18 FEDERAL COM #11H SECTION 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, NMPM, EDDY COUNTY, NEW MEXICO | |
| SURVEY DATE: SEPTEMBER 18, 2018 | DRILL PATH |
| DRAFTING DATE: DECEMBER 17, 2018 | PAGE 1 OF 1 |
| APPROVED BY: CH | DRAWN BY: JR |
| | FILE: 18-1631 |

OXY USA INC. PRECIOUS 30-18 FEDERAL COM #11H SITE PLAN


PRECIOUS 30-18
FEDERAL COM #11H

FAA PERMIT: NO

NAD 83 NME
LAT. = 32.267820° N
LONG. = 103.819380° W
ELEV - 3344.1'

N/4 COR.
SEC. 31
C/O B.C.
"1916"


SECTION 30
SECTION 31

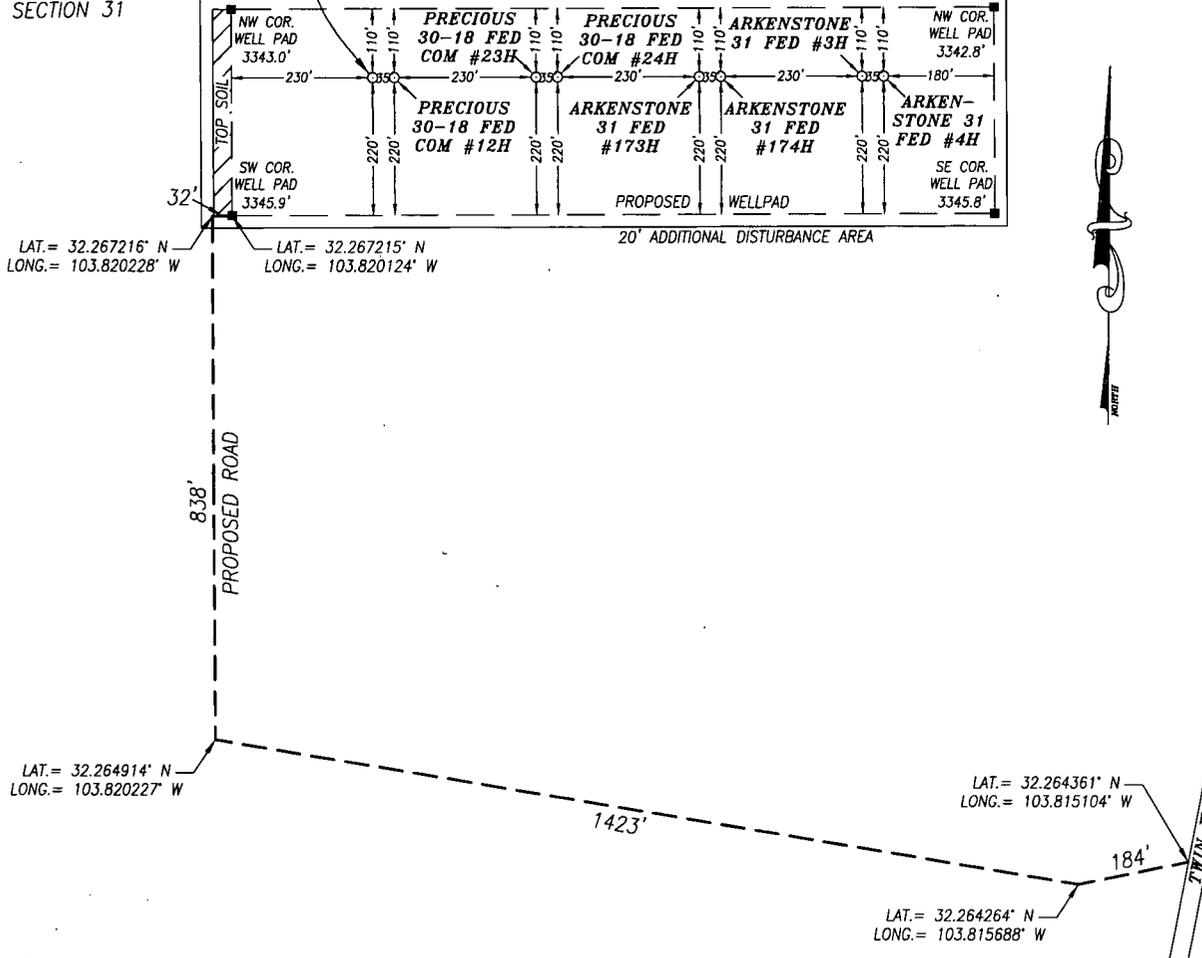

NOTES:


- 1) LATs & LONGS SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983.
- 2) DISTANCES ARE GRID VALUES.
- 3) ALL FEATURES ARE EXISTING UNLESS OTHERWISE NOTED

HARCROW SURVEYING, LLC
2314 W. MAIN ST, ARTESIA, N.M. 88210
PH: (575) 746-2158
c.harcrow@harcrowsurveying.com



CERTIFICATION


I, CHAD HARCROW, A NEW MEXICO REGISTERED PROFESSIONAL SURVEYOR CERTIFY THAT I DIRECTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

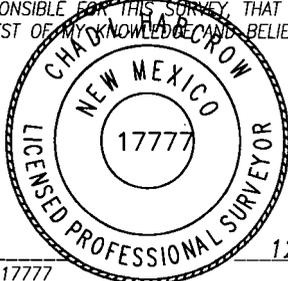

Chad Harcrow
CHAD HARCROW N.M.P.S. NO. 17777


12/31/18
DATE

| | |
|--|--------------|
| OXY USA INC. | |
| PRECIOUS 30-18 FEDERAL COM #11H LOCATED 130 FEET FROM THE NORTH LINE AND 1935 FEET FROM THE WEST LINE OF SECTION 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO | |
| SURVEY DATE: SEPTEMBER 18, 2018 | SITE PLAN |
| DRAFTING DATE: DECEMBER 27, 2018 | PAGE: 1 OF 1 |
| APPROVED BY: CH | DRAWN BY: SP |
| FILE: 18-1631 | |

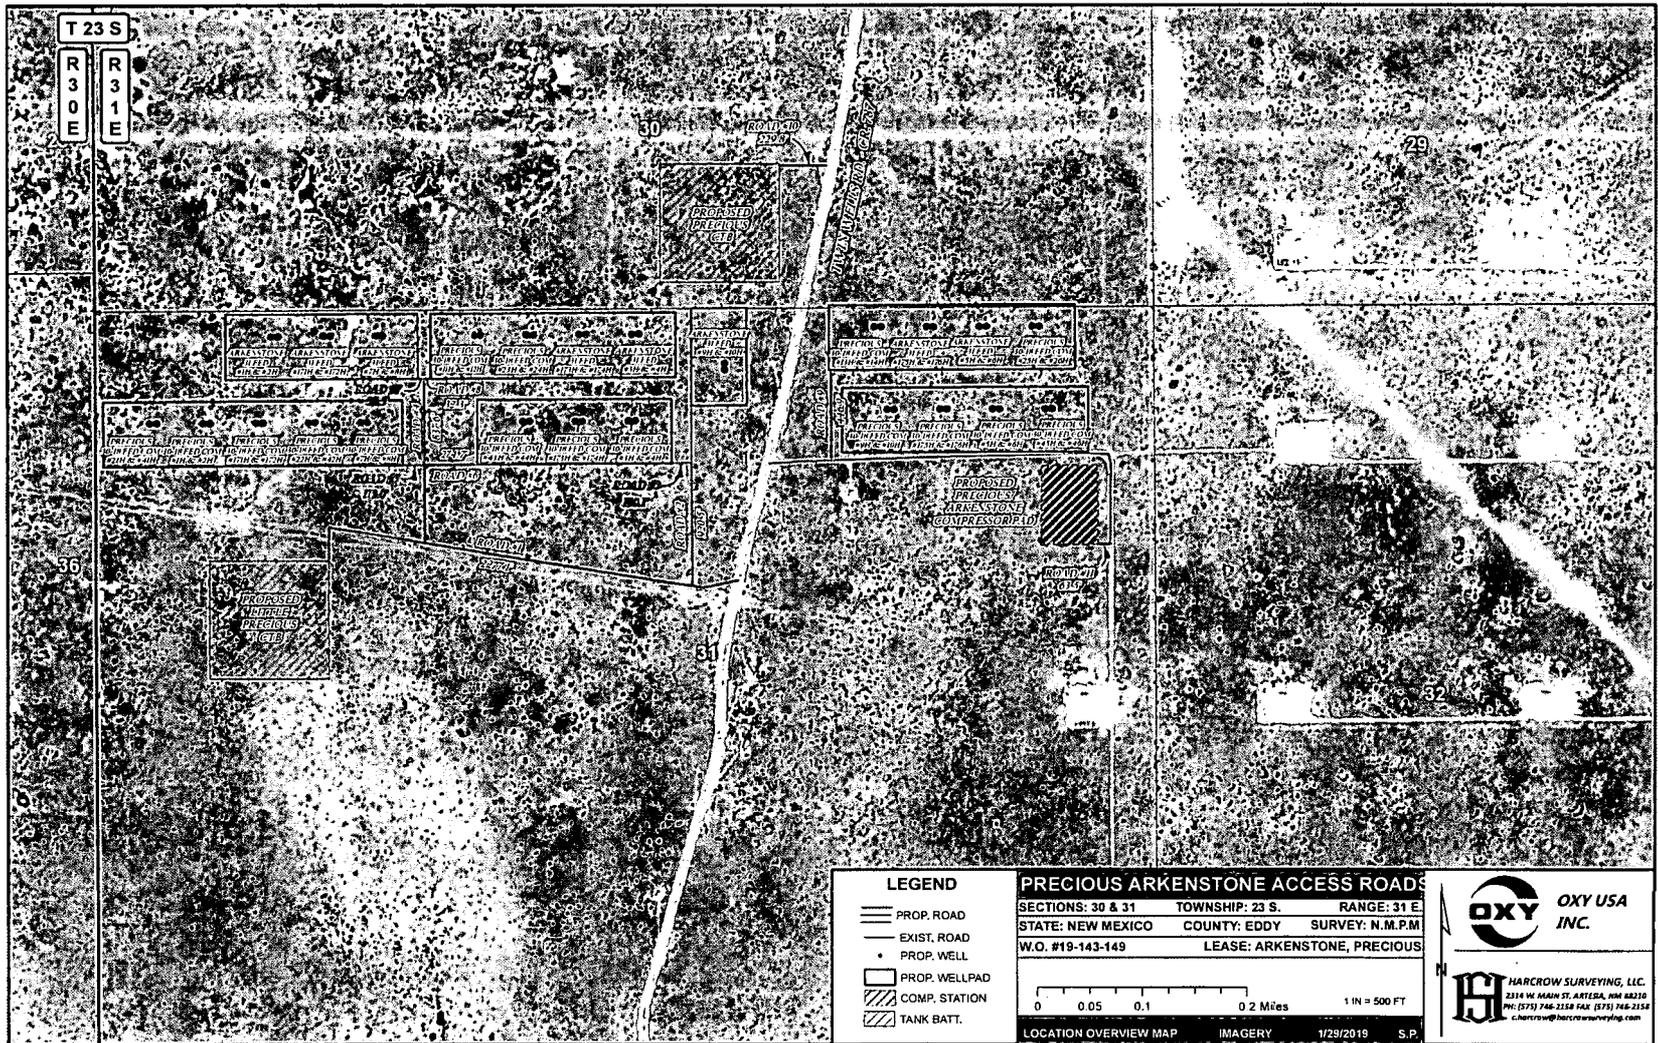

T 23 S

R 3 0 E R 3 1 E

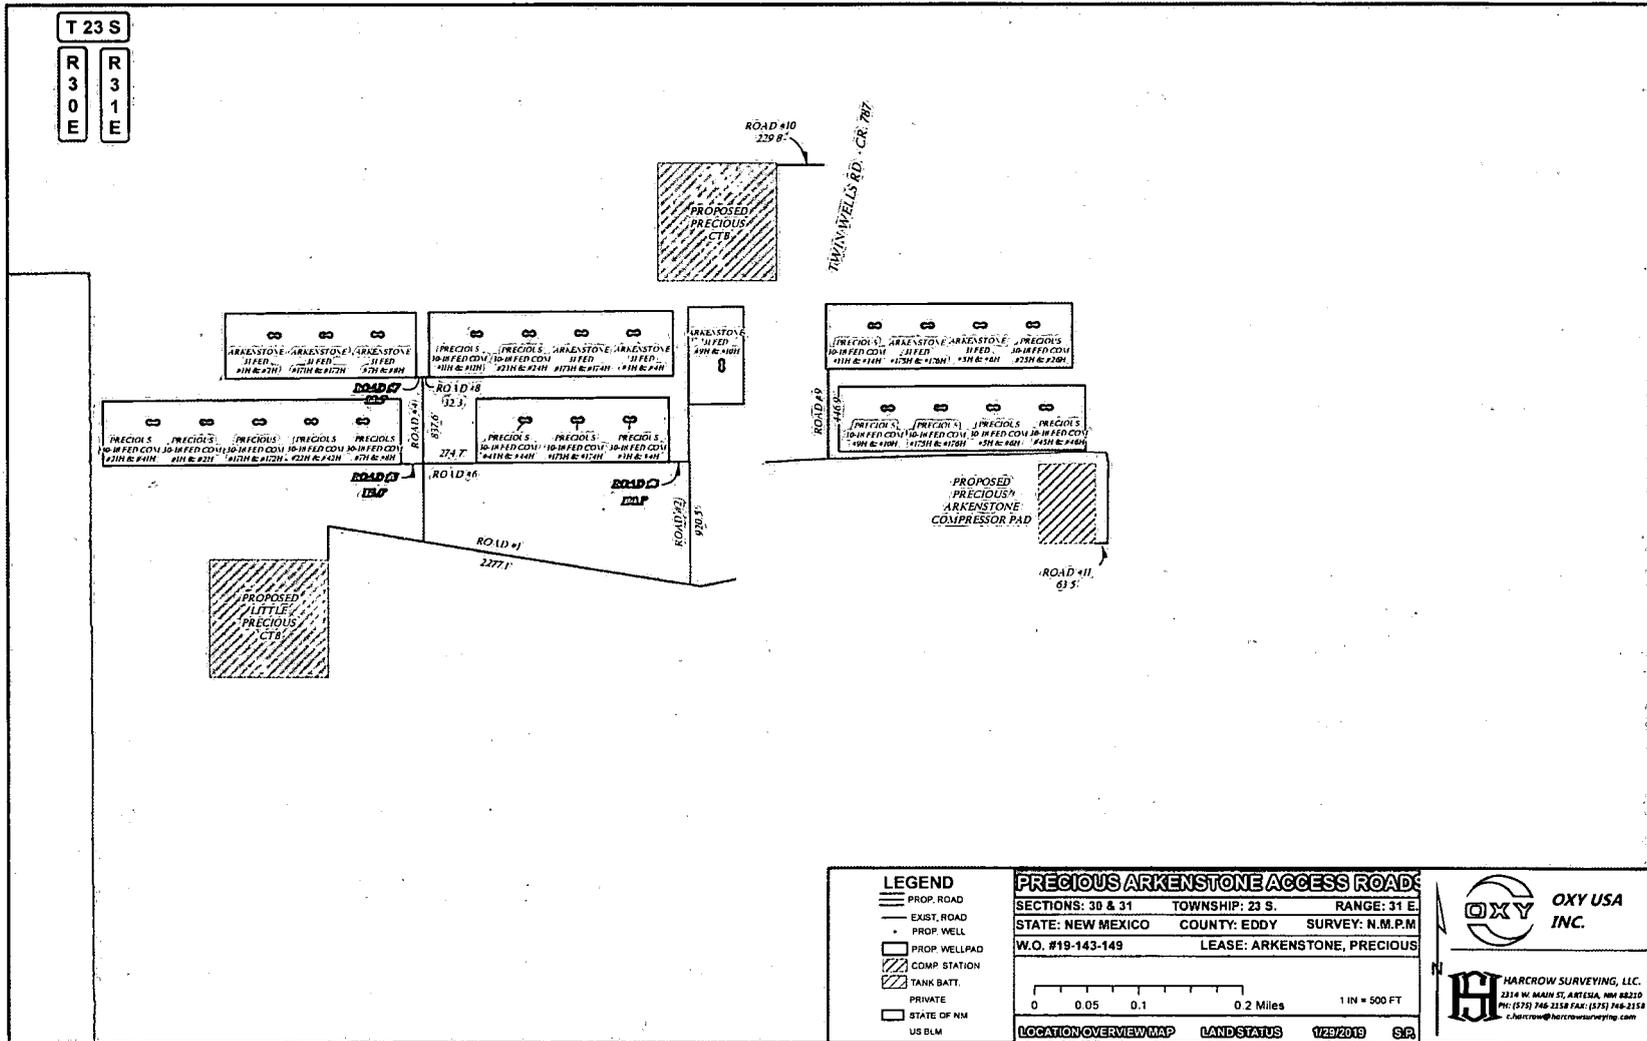

LEGEND

- PROP. ROAD
- EXIST. ROAD
- PROP. WELL
- PROP. WELLPAD
- COMP STATION
- TANK BATT.
- PRIVATE
- STATE OF NM
- US BLM

PRECIOUS ARKENSTONE ACCESS ROADS

| | | |
|-------------------|-----------------------------|------------------|
| SECTIONS: 30 & 31 | TOWNSHIP: 23 S. | RANGE: 31 E. |
| STATE: NEW MEXICO | COUNTY: EDDY | SURVEY: N.M.P.M. |
| W.O. #19-143-149 | LEASE: ARKENSTONE, PRECIOUS | |

0 0.05 0.1 0.2 Miles 1 IN = 500 FT

LOCATION OVERVIEW MAP LAND STATUS 1/29/2019 S.P.

OXY USA INC.

HARCROW SURVEYING, LLC.
 2314 W. MAIN ST., ARTESIA, NM 88210
 PH: (575) 746-2158 FAX: (575) 746-2158
 charcrow@harcrowsurveying.com

OXY USA INC. PRECIOUS 30-18 FEDERAL COM #11H SITE PLAN


PRECIOUS 30-18
FEDERAL COM #11H

FAA PERMIT: NO

NAD 83 NME
LAT. = 32.267820° N
LONG. = 103.819380° W
ELEV - 3344.1'

N/4 COR.
SEC. 31
C/O B.C.
"1916"

SECTION 30
SECTION 31

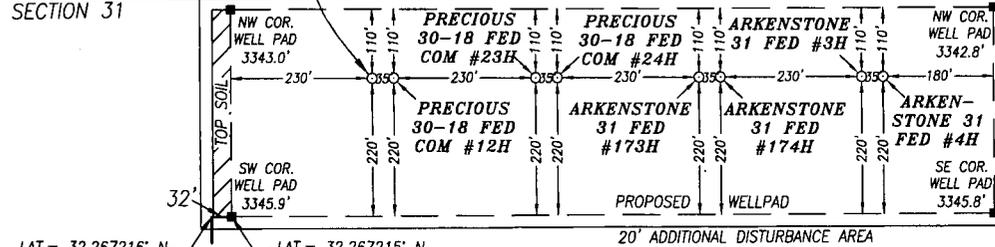

LAT. = 32.267216° N
LONG. = 103.820228° W

LAT. = 32.267215° N
LONG. = 103.820124° W

LAT. = 32.264914° N
LONG. = 103.820227° W


LAT. = 32.264361° N
LONG. = 103.815104° W

LAT. = 32.264264° N
LONG. = 103.815688° W

NOTES:

- 1) LATS & LONGS SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983.
- 2) DISTANCES ARE GRID VALUES.
- 3) ALL FEATURES ARE EXISTING UNLESS OTHERWISE NOTED

HARCROW SURVEYING, LLC
2314 W. MAIN ST, ARTESIA, N.M. 88210
PH: (575) 746-2158
c.harcrow@harcrowsurveying.com



CERTIFICATION
I, CHAD HARCROW, A NEW MEXICO REGISTERED PROFESSIONAL SURVEYOR CERTIFY THAT I DIRECTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.




Chad Harcrow
CHAD HARCROW N.M.P.S. NO. 17777

12/31/18
DATE


| | |
|--|--------------|
| OXY USA INC. | |
| PRECIOUS 30-18 FEDERAL COM #11H LOCATED 130 FEET FROM THE NORTH LINE AND 1935 FEET FROM THE WEST LINE OF SECTION 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO | |
| SURVEY DATE: SEPTEMBER 18, 2018 | SITE PLAN |
| DRAFTING DATE: DECEMBER 27, 2018 | PAGE: 1 OF 1 |
| APPROVED BY: CH | DRAWN BY: SP |
| FILE: 18-1631 | |

Precious 30-18 Federal - 1 Mile AOR

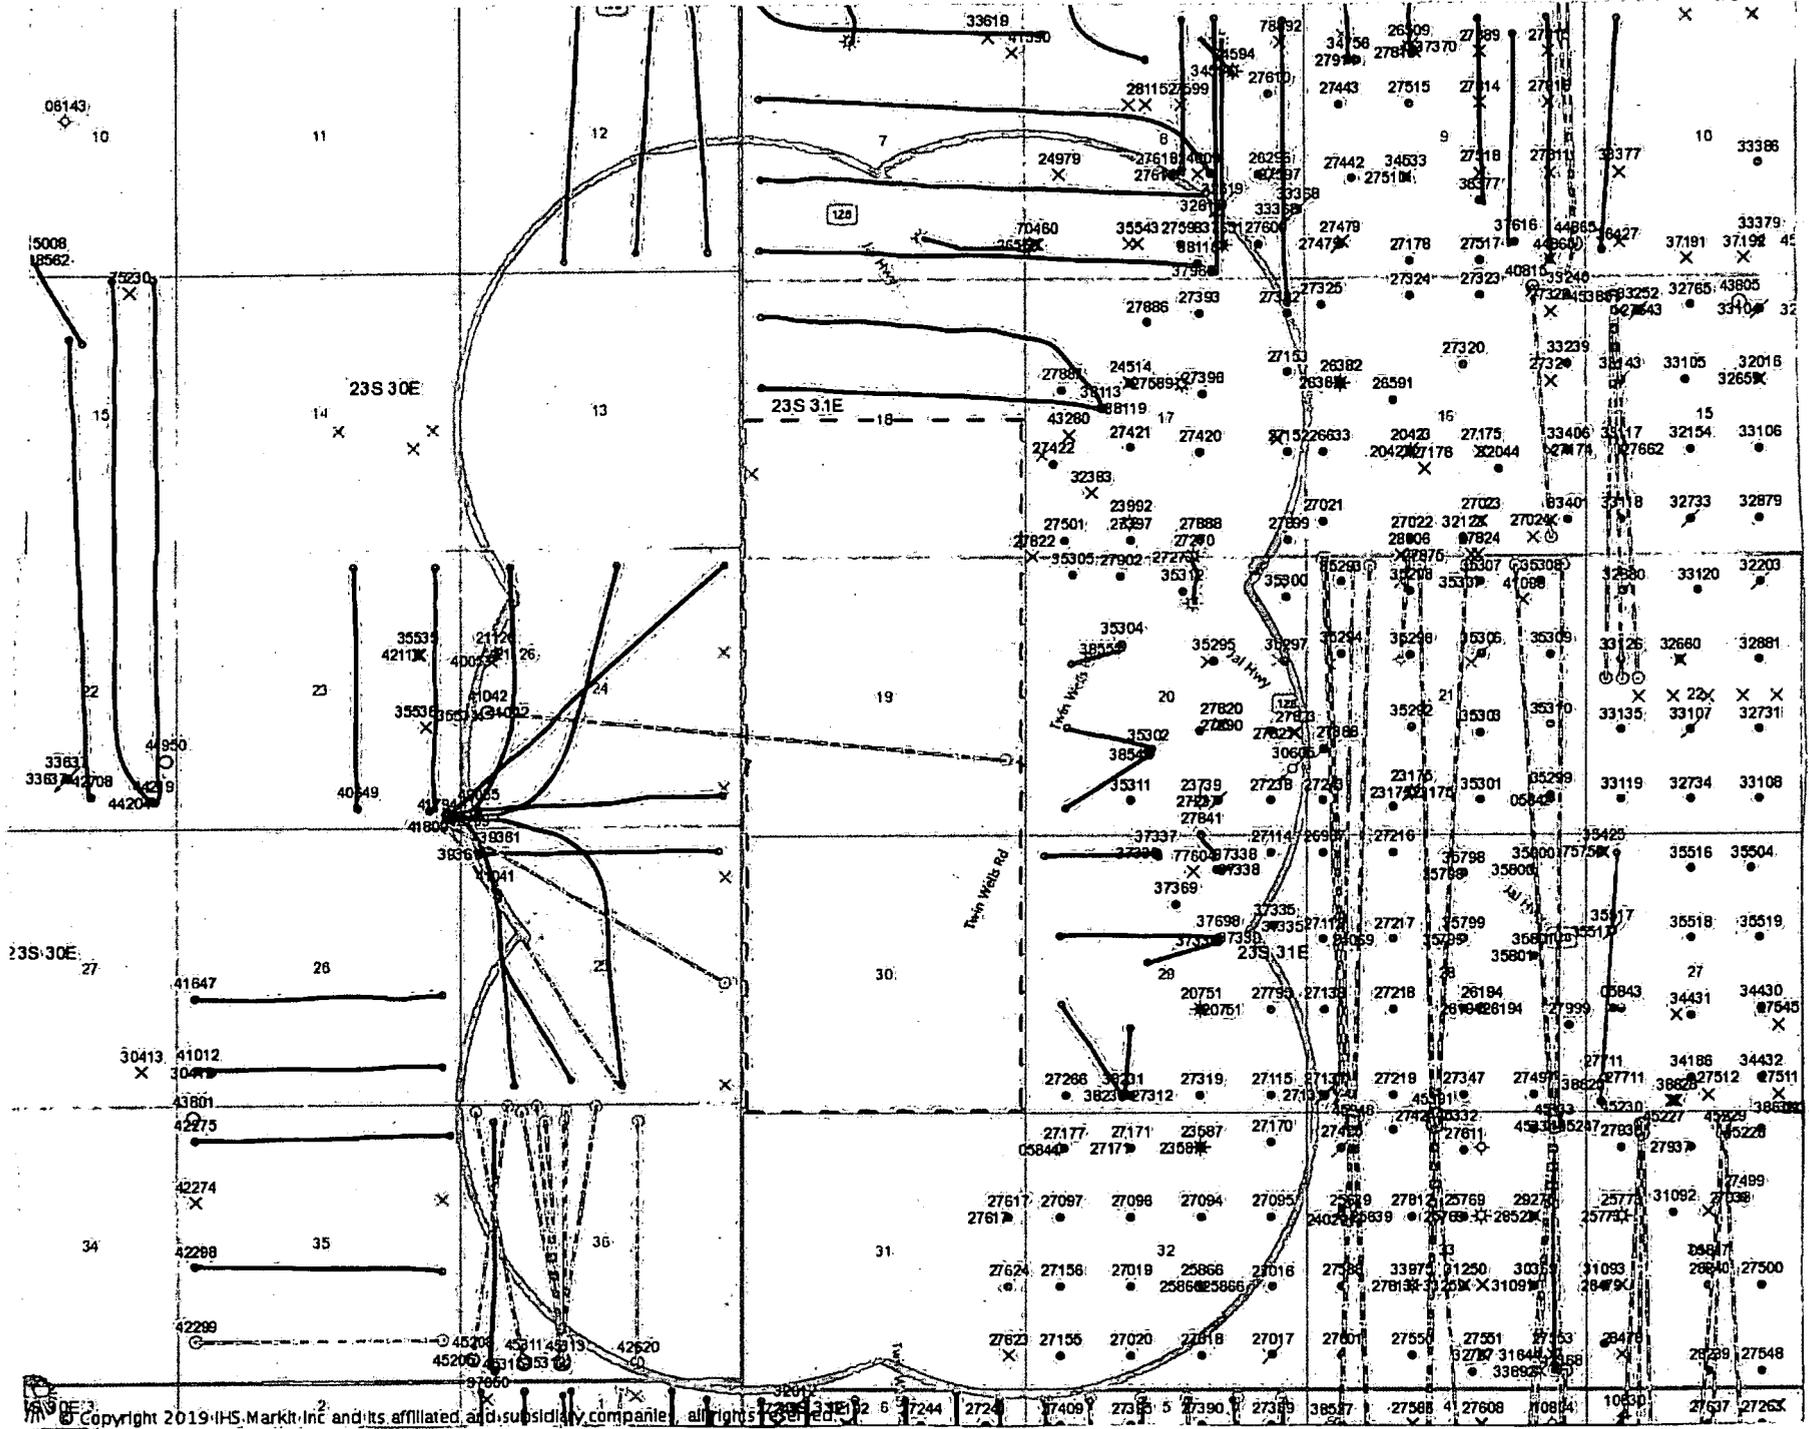

**GAS LINE SYSTEM
OXY USA INC.**

A PROPOSED GAS LINE SYSTEM KNOWN AS THE "PRECIOUS/ARKENSTONE GAS LINE SYSTEM" IN SECTIONS 29, 30, 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO.

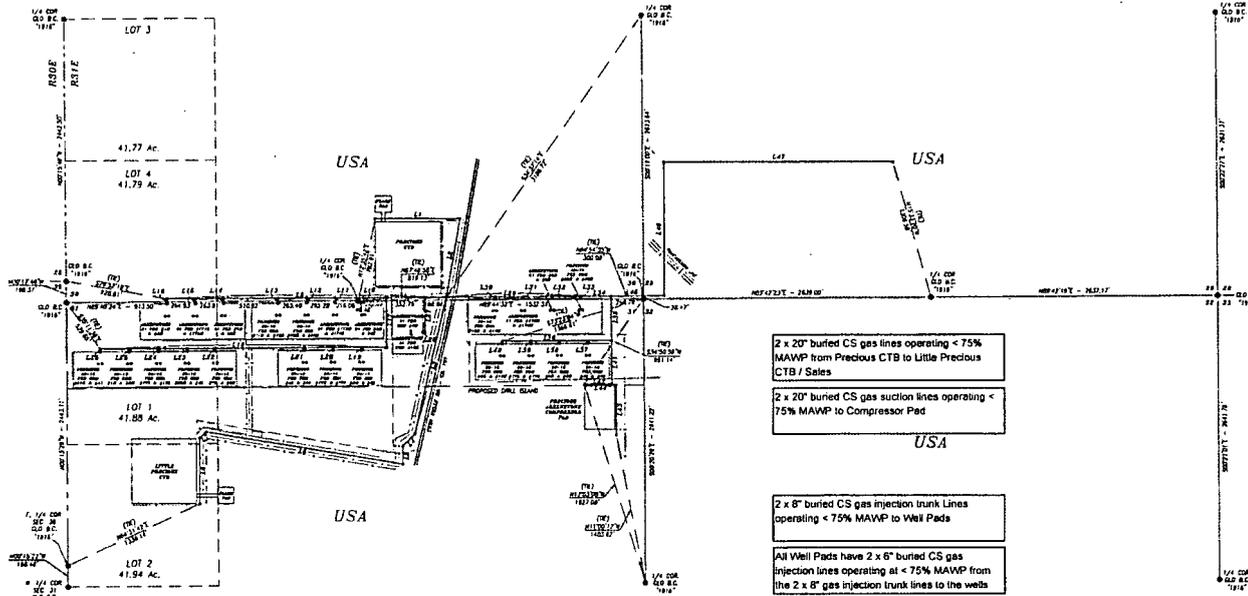

LINE #1 THRU #8 DESCRIPTION
EIGHT STRIPS OF LAND 30.0 FEET WIDE AND TOTALING 16963.3 FEET OR 1022.02 RODS OR 3.194 MILES IN LENGTH CROSSING USA LAND IN SECTIONS 30 & 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, EDDY COUNTY, NEW MEXICO AND BEING 15.0 FEET LEFT AND 15.0 FEET RIGHT OF THE ABOVE PLATTED CENTERLINE SURVEYS.


SUCTION LINE DESCRIPTION
A STRIP OF LAND 50.0 FEET WIDE AND BEING 3630.1 FEET OR 232.13 RODS OR 0.725 MILES IN LENGTH CROSSING USA LAND IN SECTIONS 29 & 30, TOWNSHIP 23 SOUTH, RANGE 31 EAST, EDDY COUNTY, NEW MEXICO AND BEING 15.0 FEET LEFT AND 15.0 FEET RIGHT OF THE ABOVE PLATTED CENTERLINE SURVEYS.

2 x 20" buried CS gas lines operating < 75% MAWP from Precious CTB to Little Precious CTB / Sales

2 x 20" buried CS gas suction lines operating < 75% MAWP to Compressor Pad

2 x 8" buried CS gas injection trunk Lines operating < 75% MAWP to Well Pads

All Well Pads have 2 x 6" buried CS gas injection lines operating at < 75% MAWP from the 2 x 8" gas injection trunk lines to the wells



LINE #1
A PROPOSED GAS LINE FROM THE "PRECIOUS CTB" TO THE "LITTLE PRECIOUS CTB"

| LINE # | MARKER | DISTANCE |
|--------|--------|----------|
| 1 | 100 | 100.00 |
| 2 | 100 | 100.00 |
| 3 | 100 | 100.00 |
| 4 | 100 | 100.00 |
| 5 | 100 | 100.00 |
| 6 | 100 | 100.00 |
| 7 | 100 | 100.00 |
| 8 | 100 | 100.00 |
| 9 | 100 | 100.00 |
| 10 | 100 | 100.00 |
| 11 | 100 | 100.00 |
| 12 | 100 | 100.00 |
| 13 | 100 | 100.00 |
| 14 | 100 | 100.00 |
| 15 | 100 | 100.00 |
| 16 | 100 | 100.00 |
| 17 | 100 | 100.00 |
| 18 | 100 | 100.00 |
| 19 | 100 | 100.00 |
| 20 | 100 | 100.00 |
| 21 | 100 | 100.00 |
| 22 | 100 | 100.00 |
| 23 | 100 | 100.00 |
| 24 | 100 | 100.00 |
| 25 | 100 | 100.00 |
| 26 | 100 | 100.00 |
| 27 | 100 | 100.00 |
| 28 | 100 | 100.00 |
| 29 | 100 | 100.00 |
| 30 | 100 | 100.00 |
| 31 | 100 | 100.00 |
| 32 | 100 | 100.00 |
| 33 | 100 | 100.00 |
| 34 | 100 | 100.00 |
| 35 | 100 | 100.00 |
| 36 | 100 | 100.00 |
| 37 | 100 | 100.00 |
| 38 | 100 | 100.00 |
| 39 | 100 | 100.00 |
| 40 | 100 | 100.00 |
| 41 | 100 | 100.00 |
| 42 | 100 | 100.00 |
| 43 | 100 | 100.00 |
| 44 | 100 | 100.00 |
| 45 | 100 | 100.00 |
| 46 | 100 | 100.00 |
| 47 | 100 | 100.00 |
| 48 | 100 | 100.00 |
| 49 | 100 | 100.00 |
| 50 | 100 | 100.00 |
| 51 | 100 | 100.00 |
| 52 | 100 | 100.00 |
| 53 | 100 | 100.00 |
| 54 | 100 | 100.00 |
| 55 | 100 | 100.00 |
| 56 | 100 | 100.00 |
| 57 | 100 | 100.00 |
| 58 | 100 | 100.00 |
| 59 | 100 | 100.00 |
| 60 | 100 | 100.00 |
| 61 | 100 | 100.00 |
| 62 | 100 | 100.00 |
| 63 | 100 | 100.00 |
| 64 | 100 | 100.00 |
| 65 | 100 | 100.00 |
| 66 | 100 | 100.00 |
| 67 | 100 | 100.00 |
| 68 | 100 | 100.00 |
| 69 | 100 | 100.00 |
| 70 | 100 | 100.00 |
| 71 | 100 | 100.00 |
| 72 | 100 | 100.00 |
| 73 | 100 | 100.00 |
| 74 | 100 | 100.00 |
| 75 | 100 | 100.00 |
| 76 | 100 | 100.00 |
| 77 | 100 | 100.00 |
| 78 | 100 | 100.00 |
| 79 | 100 | 100.00 |
| 80 | 100 | 100.00 |
| 81 | 100 | 100.00 |
| 82 | 100 | 100.00 |
| 83 | 100 | 100.00 |
| 84 | 100 | 100.00 |
| 85 | 100 | 100.00 |
| 86 | 100 | 100.00 |
| 87 | 100 | 100.00 |
| 88 | 100 | 100.00 |
| 89 | 100 | 100.00 |
| 90 | 100 | 100.00 |
| 91 | 100 | 100.00 |
| 92 | 100 | 100.00 |
| 93 | 100 | 100.00 |
| 94 | 100 | 100.00 |
| 95 | 100 | 100.00 |
| 96 | 100 | 100.00 |
| 97 | 100 | 100.00 |
| 98 | 100 | 100.00 |
| 99 | 100 | 100.00 |
| 100 | 100 | 100.00 |

LINE #2
A PROPOSED GAS LINE FROM THE PROPOSED MAIN LINE TO THE NORTHWESTERN MOST PRECIOUS/ARKENSTONE WELLPADS

| LINE # | MARKER | DISTANCE |
|--------|--------|----------|
| 1 | 100 | 100.00 |
| 2 | 100 | 100.00 |
| 3 | 100 | 100.00 |
| 4 | 100 | 100.00 |
| 5 | 100 | 100.00 |
| 6 | 100 | 100.00 |
| 7 | 100 | 100.00 |
| 8 | 100 | 100.00 |
| 9 | 100 | 100.00 |
| 10 | 100 | 100.00 |
| 11 | 100 | 100.00 |
| 12 | 100 | 100.00 |
| 13 | 100 | 100.00 |
| 14 | 100 | 100.00 |
| 15 | 100 | 100.00 |
| 16 | 100 | 100.00 |
| 17 | 100 | 100.00 |
| 18 | 100 | 100.00 |
| 19 | 100 | 100.00 |
| 20 | 100 | 100.00 |
| 21 | 100 | 100.00 |
| 22 | 100 | 100.00 |
| 23 | 100 | 100.00 |
| 24 | 100 | 100.00 |
| 25 | 100 | 100.00 |
| 26 | 100 | 100.00 |
| 27 | 100 | 100.00 |
| 28 | 100 | 100.00 |
| 29 | 100 | 100.00 |
| 30 | 100 | 100.00 |
| 31 | 100 | 100.00 |
| 32 | 100 | 100.00 |
| 33 | 100 | 100.00 |
| 34 | 100 | 100.00 |
| 35 | 100 | 100.00 |
| 36 | 100 | 100.00 |
| 37 | 100 | 100.00 |
| 38 | 100 | 100.00 |
| 39 | 100 | 100.00 |
| 40 | 100 | 100.00 |
| 41 | 100 | 100.00 |
| 42 | 100 | 100.00 |
| 43 | 100 | 100.00 |
| 44 | 100 | 100.00 |
| 45 | 100 | 100.00 |
| 46 | 100 | 100.00 |
| 47 | 100 | 100.00 |
| 48 | 100 | 100.00 |
| 49 | 100 | 100.00 |
| 50 | 100 | 100.00 |
| 51 | 100 | 100.00 |
| 52 | 100 | 100.00 |
| 53 | 100 | 100.00 |
| 54 | 100 | 100.00 |
| 55 | 100 | 100.00 |
| 56 | 100 | 100.00 |
| 57 | 100 | 100.00 |
| 58 | 100 | 100.00 |
| 59 | 100 | 100.00 |
| 60 | 100 | 100.00 |
| 61 | 100 | 100.00 |
| 62 | 100 | 100.00 |
| 63 | 100 | 100.00 |
| 64 | 100 | 100.00 |
| 65 | 100 | 100.00 |
| 66 | 100 | 100.00 |
| 67 | 100 | 100.00 |
| 68 | 100 | 100.00 |
| 69 | 100 | 100.00 |
| 70 | 100 | 100.00 |
| 71 | 100 | 100.00 |
| 72 | 100 | 100.00 |
| 73 | 100 | 100.00 |
| 74 | 100 | 100.00 |
| 75 | 100 | 100.00 |
| 76 | 100 | 100.00 |
| 77 | 100 | 100.00 |
| 78 | 100 | 100.00 |
| 79 | 100 | 100.00 |
| 80 | 100 | 100.00 |
| 81 | 100 | 100.00 |
| 82 | 100 | 100.00 |
| 83 | 100 | 100.00 |
| 84 | 100 | 100.00 |
| 85 | 100 | 100.00 |
| 86 | 100 | 100.00 |
| 87 | 100 | 100.00 |
| 88 | 100 | 100.00 |
| 89 | 100 | 100.00 |
| 90 | 100 | 100.00 |
| 91 | 100 | 100.00 |
| 92 | 100 | 100.00 |
| 93 | 100 | 100.00 |
| 94 | 100 | 100.00 |
| 95 | 100 | 100.00 |
| 96 | 100 | 100.00 |
| 97 | 100 | 100.00 |
| 98 | 100 | 100.00 |
| 99 | 100 | 100.00 |
| 100 | 100 | 100.00 |

LINE #3
A PROPOSED GAS LINE FROM THE PROPOSED LINE #1 TO THE SOUTHWESTERN MOST PRECIOUS WELLPADS

| LINE # | MARKER | DISTANCE |
|--------|--------|----------|
| 1 | 100 | 100.00 |
| 2 | 100 | 100.00 |
| 3 | 100 | 100.00 |
| 4 | 100 | 100.00 |
| 5 | 100 | 100.00 |
| 6 | 100 | 100.00 |
| 7 | 100 | 100.00 |
| 8 | 100 | 100.00 |
| 9 | 100 | 100.00 |
| 10 | 100 | 100.00 |
| 11 | 100 | 100.00 |
| 12 | 100 | 100.00 |
| 13 | 100 | 100.00 |
| 14 | 100 | 100.00 |
| 15 | 100 | 100.00 |
| 16 | 100 | 100.00 |
| 17 | 100 | 100.00 |
| 18 | 100 | 100.00 |
| 19 | 100 | 100.00 |
| 20 | 100 | 100.00 |
| 21 | 100 | 100.00 |
| 22 | 100 | 100.00 |
| 23 | 100 | 100.00 |
| 24 | 100 | 100.00 |
| 25 | 100 | 100.00 |
| 26 | 100 | 100.00 |
| 27 | 100 | 100.00 |
| 28 | 100 | 100.00 |
| 29 | 100 | 100.00 |
| 30 | 100 | 100.00 |
| 31 | 100 | 100.00 |
| 32 | 100 | 100.00 |
| 33 | 100 | 100.00 |
| 34 | 100 | 100.00 |
| 35 | 100 | 100.00 |
| 36 | 100 | 100.00 |
| 37 | 100 | 100.00 |
| 38 | 100 | 100.00 |
| 39 | 100 | 100.00 |
| 40 | 100 | 100.00 |
| 41 | 100 | 100.00 |
| 42 | 100 | 100.00 |
| 43 | 100 | 100.00 |
| 44 | 100 | 100.00 |
| 45 | 100 | 100.00 |
| 46 | 100 | 100.00 |
| 47 | 100 | 100.00 |
| 48 | 100 | 100.00 |
| 49 | 100 | 100.00 |
| 50 | 100 | 100.00 |
| 51 | 100 | 100.00 |
| 52 | 100 | 100.00 |
| 53 | 100 | 100.00 |
| 54 | 100 | 100.00 |
| 55 | 100 | 100.00 |
| 56 | 100 | 100.00 |
| 57 | 100 | 100.00 |
| 58 | 100 | 100.00 |
| 59 | 100 | 100.00 |
| 60 | 100 | 100.00 |
| 61 | 100 | 100.00 |
| 62 | 100 | 100.00 |
| 63 | 100 | 100.00 |
| 64 | 100 | 100.00 |
| 65 | 100 | 100.00 |
| 66 | 100 | 100.00 |
| 67 | 100 | 100.00 |
| 68 | 100 | 100.00 |
| 69 | 100 | 100.00 |
| 70 | 100 | 100.00 |
| 71 | 100 | 100.00 |
| 72 | 100 | 100.00 |
| 73 | 100 | 100.00 |
| 74 | 100 | 100.00 |
| 75 | 100 | 100.00 |
| 76 | 100 | 100.00 |
| 77 | 100 | 100.00 |
| 78 | 100 | 100.00 |
| 79 | 100 | 100.00 |
| 80 | 100 | 100.00 |
| 81 | 100 | 100.00 |
| 82 | 100 | 100.00 |
| 83 | 100 | 100.00 |
| 84 | 100 | 100.00 |
| 85 | 100 | 100.00 |
| 86 | 100 | 100.00 |
| 87 | 100 | 100.00 |
| 88 | 100 | 100.00 |
| 89 | 100 | 100.00 |
| 90 | 100 | 100.00 |
| 91 | 100 | 100.00 |
| 92 | 100 | 100.00 |
| 93 | 100 | 100.00 |
| 94 | 100 | 100.00 |
| 95 | 100 | 100.00 |
| 96 | 100 | 100.00 |
| 97 | 100 | 100.00 |
| 98 | 100 | 100.00 |
| 99 | 100 | 100.00 |
| 100 | 100 | 100.00 |

LINE #4
A PROPOSED GAS LINE FROM THE PROPOSED LINE #1 TO THE ARKENSTONE 31 FED COW #51 & #101

| LINE # | MARKER | DISTANCE |
|--------|--------|----------|
| 1 | 100 | 100.00 |
| 2 | 100 | 100.00 |
| 3 | 100 | 100.00 |
| 4 | 100 | 100.00 |
| 5 | 100 | 100.00 |
| 6 | 100 | 100.00 |
| 7 | 100 | 100.00 |
| 8 | 100 | 100.00 |
| 9 | 100 | 100.00 |
| 10 | 100 | 100.00 |
| 11 | 100 | 100.00 |
| 12 | 100 | 100.00 |
| 13 | 100 | 100.00 |
| 14 | 100 | 100.00 |
| 15 | 100 | 100.00 |
| 16 | 100 | 100.00 |
| 17 | 100 | 100.00 |
| 18 | 100 | 100.00 |
| 19 | 100 | 100.00 |
| 20 | 100 | 100.00 |
| 21 | 100 | 100.00 |
| 22 | 100 | 100.00 |
| 23 | 100 | 100.00 |
| 24 | 100 | 100.00 |
| 25 | 100 | 100.00 |
| 26 | 100 | 100.00 |
| 27 | 100 | 100.00 |
| 28 | 100 | 100.00 |
| 29 | 100 | 100.00 |
| 30 | 100 | 100.00 |
| 31 | 100 | 100.00 |
| 32 | 100 | 100.00 |
| 33 | 100 | 100.00 |
| 34 | 100 | 100.00 |
| 35 | 100 | 100.00 |
| 36 | 100 | 100.00 |
| 37 | 100 | 100.00 |
| 38 | 100 | 100.00 |
| 39 | 100 | 100.00 |
| 40 | 100 | 100.00 |
| 41 | 100 | 100.00 |
| 42 | 100 | 100.00 |
| 43 | 100 | 100.00 |
| 44 | 100 | 100.00 |
| 45 | 100 | 100.00 |

Sand Dunes Precious/Arkenstone Development – Surface Production Facilities

CTB/Satellite Site

Two new Central Tank Batteries in SE section 30 and in NW section 31 are required which will be composed of (3) tracts each with the following dimensions: 600'x600', 200'x30', and 150'x150' and access roads. These will be called the Precious CTB and Little Precious CTB respectively.

Reference plats:

- (2)-John West Surveying Company W.O. No: 18110359 Survey: 3/26/18 CAD: 4/11/18
- (1)-Harcrow Surveying, LLC File No: 18-1570 Survey: 11/18 CAD: 1/2/19

Production Flowlines

Each well will have (3) surface laid flowlines operating at less than 75% of the MAWP of the flowline per the survey plats from the well site to the CTB following access roads. The flowlines will be routed to the both CTBs and will be scrubbed of gas initially at the Precious CTB and the fluid may be transferred to the Little Precious CTB via two (2) 16" buried HDPE lines operating at < 300 PSIG for further liquid separation.

Reference plats per well APD package

- (1) Harcrow Surveying, LLC File No: 18-1572 Survey: 11/18 CAD: 12/20/18
- (1) Harcrow Surveying, LLC File No: 18-1578 Survey: 11/18 CAD: 12/19/18

Gas Lift

A new Centralized Gas Lift Station will be required in NE section 31 with two (2) 20" CS buried suction lines operating at < 250 PSIG and two (2) 8" CS buried gas lift injection trunk lines operating at < 1500 PSIG. Each well pad will have two (2) 6" CS buried gas lift supply lines operating at < 1500 PSIG branching off the 2 common 8" CS main lines.

Reference plats per well APD package

- (1) Harcrow Surveying, LLC File No: 18-1571 Survey: 11/18 CAD: 12/13/18
- (1) Harcrow Surveying, LLC File No: 19-46 Survey: 11/18 CAD: 1/9/19

Gas Sales

The Precious CTB in Section 30 and the Little Precious CTB in Section 31 will require gas sales pipelines to existing 3rd party compression. Gas will flow into two (2) 20" CS buried sales line operating at < 250 PSIG.

Reference plats:

- (1) John West Surveying Company W.O. No: 18110384 Survey: 3/29/18 CAD: 4/11/18

Oil Sales

The Little Precious CTB will require an oil sales pipeline. Oil will be pumped into two (2) 8" buried pipelines operating less than 750 PSIG and will be sold via pipeline through a 3rd Party Processor.

Reference plats:

- (1) John West Surveying Company W.O. No: 18110384 Survey: 3/29/18 CAD: 4/11/18

Water Disposal

The Precious CTB and Little Precious CTB will require a Water Disposal pipeline to the existing water disposal system. Water will be pumped through two (2) 16" HDPE buried lines operating at less than 300 PSIG.

Reference plats:

- (1) John West Surveying Company W.O. No: 18110360 Survey: 3/28/18 CAD: 4/11/18
- (1) Harcrow Surveying, LLC File No: 18-1572 Survey: 11/18 CAD: 12/20/18 (PF-1)


Electrical Systems

The new Precious CTB and Little Precious CTB will require electricity for site lighting, PLC, pumps, etc. Overhead electrical will be taken from the main electrical lines.

Electrical overhead connections are required from the existing electrical infrastructure to connect to each individual well pad.

Reference plats:

- (1) Harcrow Surveying, LLC File No: 18-1573 Survey: 11/18 CAD: 12/17/18

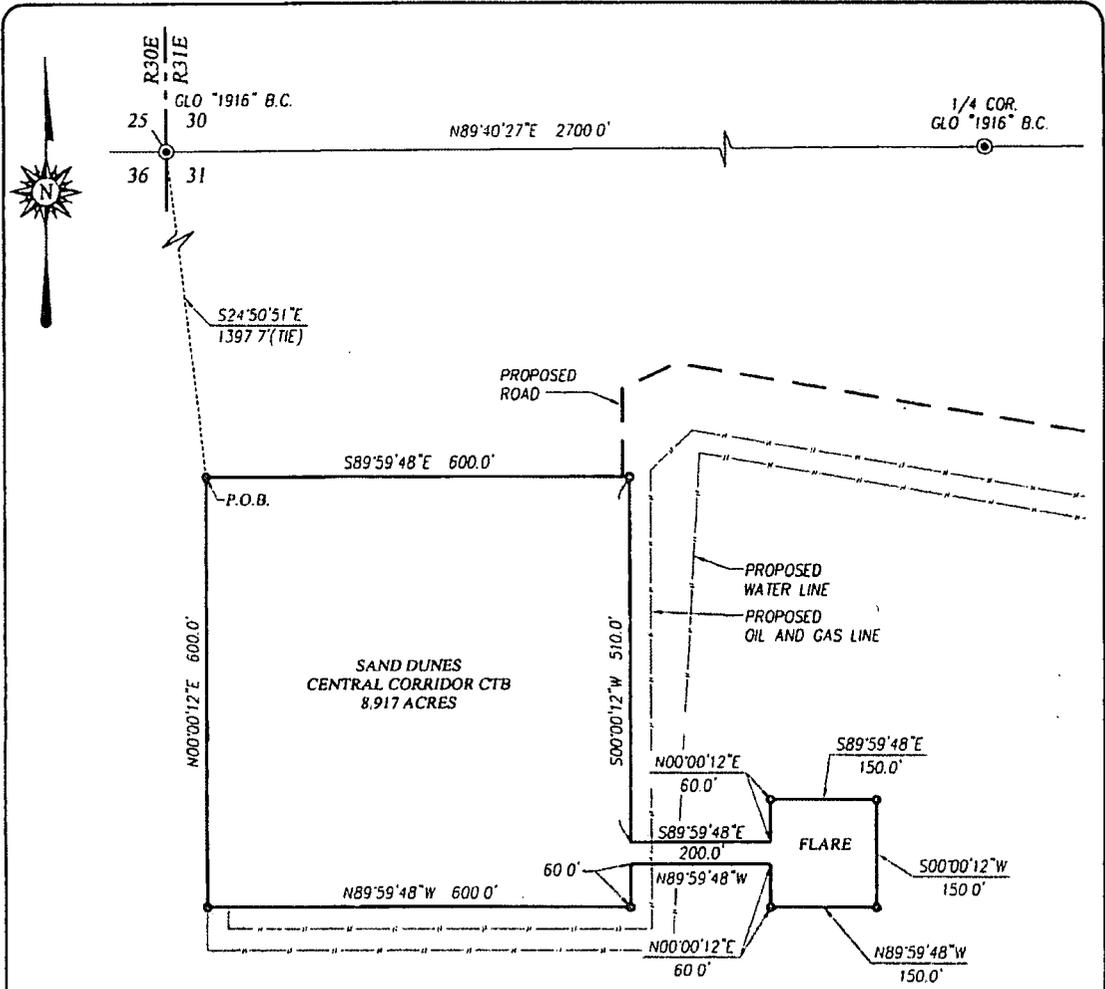


DESCRIPTION:
 SURVEY OF A TRACT IN THE NORTHWEST QUARTER OF SECTION 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO AND BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

BEGINNING AT THE NORTHWEST CORNER OF THIS TRACT WHICH LIES S24°50'51"E 1397.7 FEET FROM THE NORTHWEST CORNER; THEN S89°59'48"E 600.0 FEET; THEN S00°00'12"W 510.0 FEET; THEN S89°59'48"E 200.0 FEET; THEN N00°00'12"E 60.0 FEET; THEN S89°59'48"E 150.0 FEET; THEN S00°00'12"W 150.0 FEET; THEN N89°59'48"W 150.0 FEET; THEN N00°00'12"E 60.0 FEET; THEN N89°59'48"W 200.0 FEET; THEN S00°00'12"W 60.0 FEET; THEN N89°59'48"W 600.0 FEET; THEN N00°00'12"E 600.0 FEET TO THE POINT OF BEGINNING AND CONTAINING 8.917 ACRES MORE OR LESS.

NOTE
 BEARINGS SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983. DISTANCES ARE SURFACE VALUES.

I, RONALD J. EIDSON, NEW MEXICO PROFESSIONAL SURVEYOR No. 3239, DO HEREBY CERTIFY THAT THIS SURVEY WAS MADE AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WAS PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION. I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO AND THAT THIS IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

RONALD J. EIDSON, PROFESSIONAL SURVEYOR
 DATE: 4/13/2018

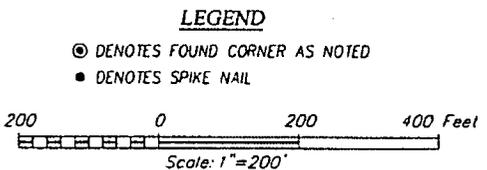


PROVIDING SURVEYING SERVICES SINCE 1946
JOHN WEST SURVEYING COMPANY
 412 N. DAL PASO HOBBES, N.M. 88240
 (575) 393-3117 www.jwsc.biz
 TBPLS# 10021000

OXY U.S.A. INC.

SURVEY FOR THE SAND DUNES CENTRAL CORRIDOR CTB AND FLARE PAD
 SITUATED IN THE NW/4 OF SECTION 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M. EDDY COUNTY, NEW MEXICO

| | | |
|-----------------------|--------------------|---------------|
| Survey Date: 03/26/18 | CAD Date: 04/12/18 | Drawn By: LSL |
| W.O. No.: 18110359 | Rev.: | Rel. W.O.: |

Sheet 1 of 1

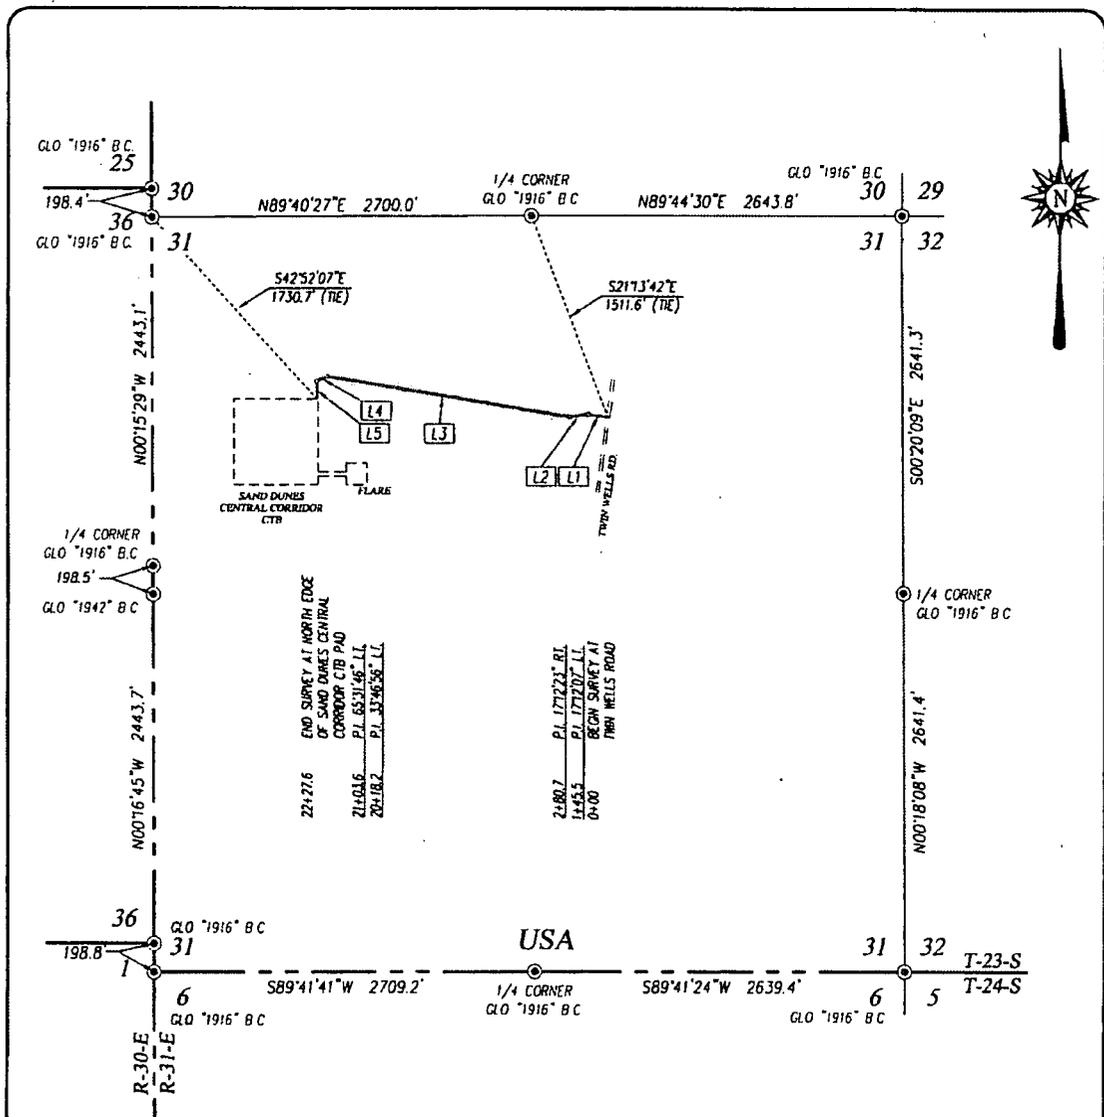

DESCRIPTION

SURVEY FOR A STRIP OF LAND 30.0 FEET WIDE AND 2227.6 FEET OR 0.422 MILES IN LENGTH CROSSING USA LAND IN SECTION 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO, AND BEING 15.0 FEET LEFT AND 15.0 FEET RIGHT OF THE ABOVE PLATTED CENTERLINE SURVEY.

LINE TABLE

| LINE | BEARING | DISTANCE |
|------|--------------|----------|
| L1 | N80°44'02\"W | 145.5' |
| L2 | S82°03'51\"W | 135.2' |
| L3 | N80°43'46\"W | 1737.5' |
| L4 | S65°29'18\"W | 85.4' |
| L5 | S00°02'28\"E | 124.0' |

NOTE

BEARINGS SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983. DISTANCES ARE SURFACE VALUES.


I, RONALD J. EIDSON, NEW MEXICO PROFESSIONAL SURVEYOR No. 3239, DO HEREBY CERTIFY THAT THIS SURVEY PLAN AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION AND I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

RONALD J. EIDSON *Ronald J. Eidson*
 DATE: 4/13/2018

PROVIDING SURVEYING SERVICES SINCE 1946
JOHN WEST SURVEYING COMPANY
 412 N. DAL PASO HOBBBS, N.M. 88240
 (575) 393-3117 www.jwsc.biz
 FBPLS# 10021000

LEGEND

⊙ DENOTES FOUND CORNER AS NOTED




OXY U.S.A. INC.

SURVEY FOR A ROAD TO SAND DUNES
 CENTRAL CORRIDOR CTB PAD
 CROSSING SECTION 31,
 TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M.
 EDDY COUNTY, NEW MEXICO

| | | |
|-----------------------|--------------------|---------------|
| Survey Date: 03/26/18 | CAD Date: 04/12/18 | Drawn By: LSL |
| W.O. No.: 18110359 | Rev.: | Rel. W.O.: |

**SURFACE SITE EASEMENT
OXY USA INC.**

A SURFACE SITE EASEMENT FOR THE PROPOSED
"PRECIOUS CENTRAL TANK BATTERY" & ATTACHED PROPOSED FLARE PAD IN
SECTION 30, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M.,
EDDY COUNTY, NEW MEXICO.

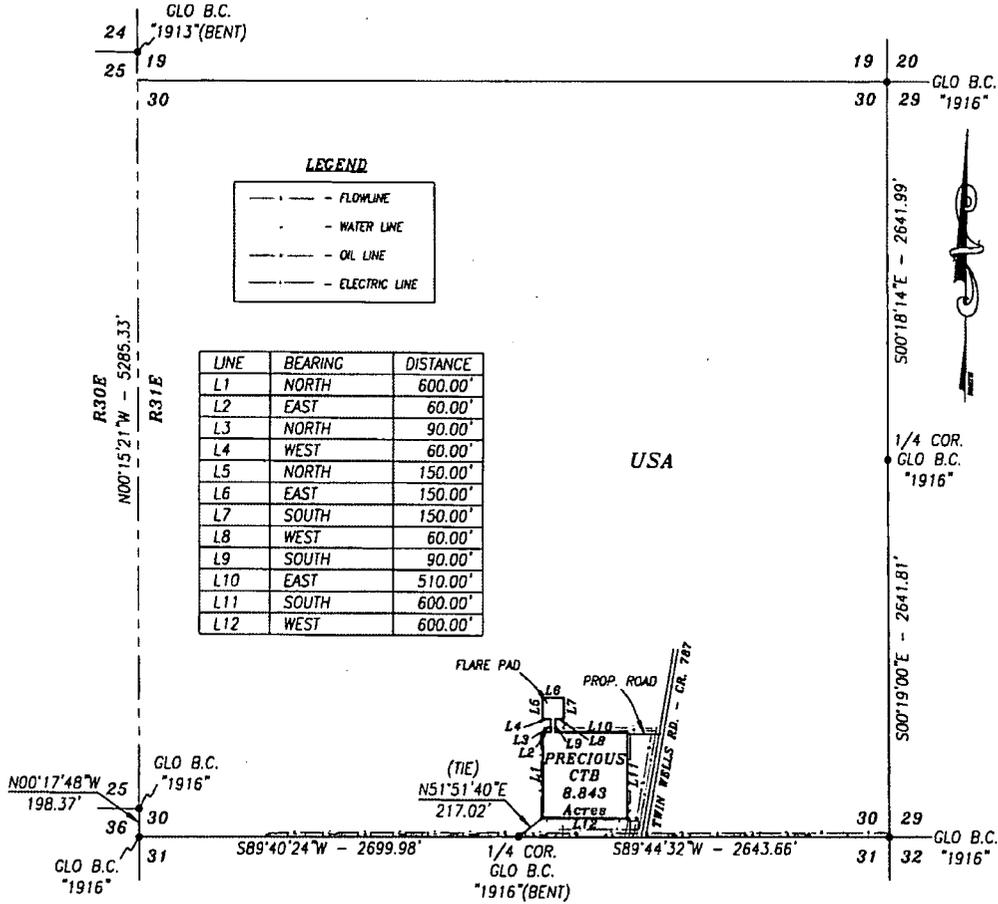

DESCRIPTION

A PROPOSED CENTRAL TANK BATTERY & FLARE PAD LYING WITHIN USA LAND IN SECTION 30, TOWNSHIP 23 SOUTH, RANGE 31 EAST, NMPM, EDDY COUNTY, NEW MEXICO AND BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

BEGINNING AT THE SOUTHWEST CORNER OF SAID CENTRAL TANK BATTERY, WHICH LIES N51°51'40"E 217.02 FEET FROM THE SOUTH QUARTER CORNER OF SAID SECTION; THEN NORTH 600.00 FEET; THEN EAST 60.00 FEET; THEN NORTH 90.00 FEET; THEN WEST 60.00 FEET; THEN NORTH 150.00 FEET; THEN EAST 150.00 FEET; THEN SOUTH 150.00 FEET; THEN WEST 60.00 FEET; THEN SOUTH 90.00 FEET; THEN EAST 510.00 FEET; THEN SOUTH 600.00 FEET; THEN WEST 600.00 FEET TO THE POINT OF BEGINNING.


SAID CENTRAL TANK BATTERY & FLARE PAD CONTAINS 8.843 ACRES.

BASIS OF BEARING:
BEARINGS SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983. DISTANCES ARE SURFACE VALUES.


HARCROW SURVEYING, LLC
2314 W. MAIN ST, ARTESIA, N.M. 88210
PH: (575) 746-2158 FAX: (575) 746-2158
c.harcrow@harcrowsurveying.com



CERTIFICATION
I, CHAD HARCROW, A NEW MEXICO REGISTERED PROFESSIONAL SURVEYOR CERTIFY THAT I DIRECTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF, AND THIS SURVEY AND PLAN MEET THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO.




Chad Harcrow
CHAD HARCROW N.M.P.S. NO. 17777
DATE 1/4/19



| | |
|--|---------------|
| OXY USA INC. | |
| SURVEY OF A PROPOSED CENTRAL TANK BATTERY LOCATED IN SECTION 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, NMPM, EDDY COUNTY, NEW MEXICO | |
| SURVEY DATE: NOVEMBER 2018 | SITE EASEMENT |
| DRAFTING DATE: JANUARY 2, 2019 | PAGE 1 OF 1 |
| APPROVED BY: CH | DRAWN BY: SP |
| | FILE: 18-1570 |

WATER LINE EASEMENT OXY USA INC.


A PROPOSED WATER LINE KNOWN AS THE "PRECIOUS/ARKENSTONE WATER LINE" IN
SECTIONS 30 & 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M.,
EDDY COUNTY, NEW MEXICO.

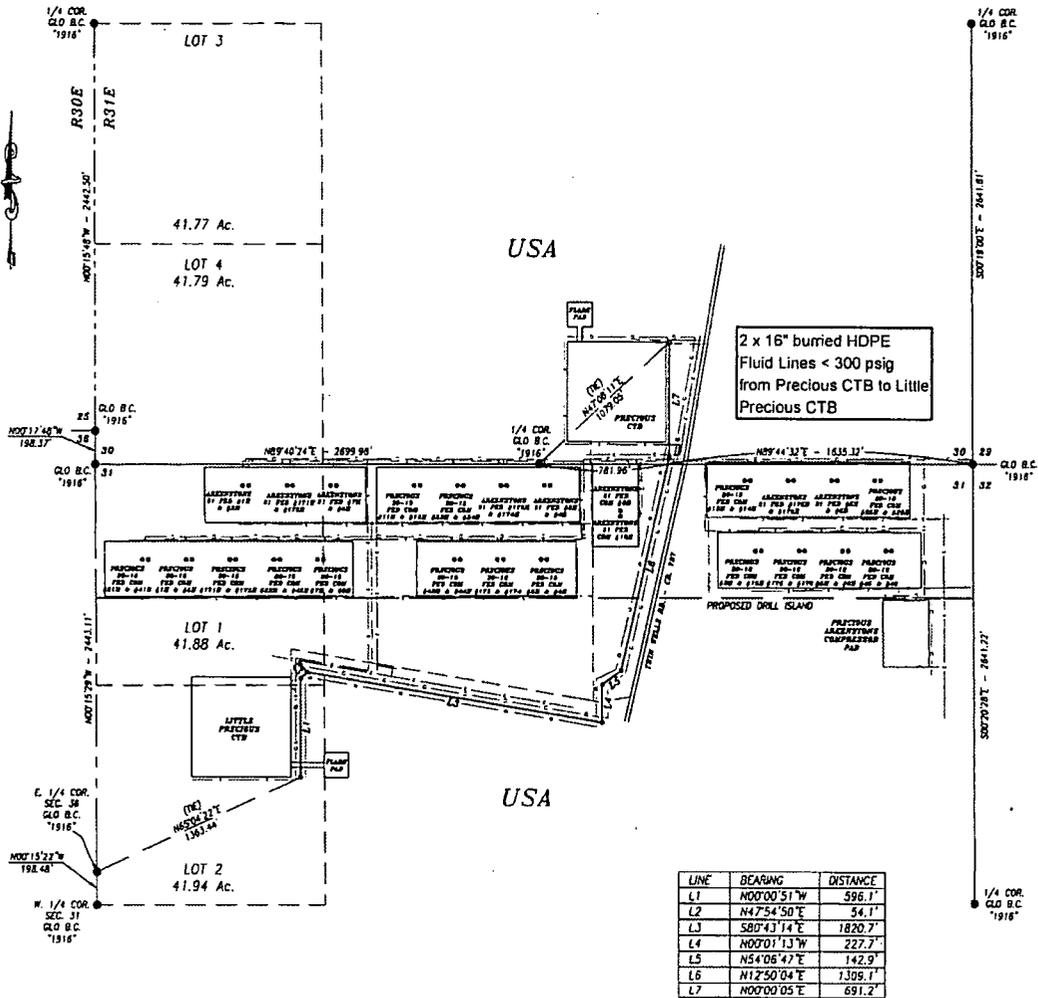

DESCRIPTION

A STRIP OF LAND 30.0 FEET WIDE AND BEING 4841.8 FEET OR 293.44 RODS OR 0.917 MILES IN LENGTH CROSSING USA LAND IN SECTIONS 30 & 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, EDDY COUNTY, NEW MEXICO AND BEING 15.0 FEET LEFT AND 15.0 FEET RIGHT OF THE ABOVE PLATTED CENTERLINE SURVEY.

LEGEND

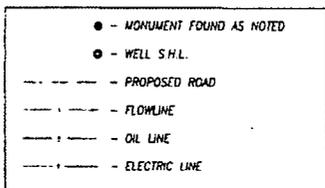


STATIONING

- 0+00.0 BEGIN SURVEY @ LITTLE PRECIOUS CTB
- 0+60.0 S. EDGE PROPOSED FLARE CORRIDOR
- 0+90.0 N. EDGE PROPOSED FLARE CORRIDOR
- 3+96.1 P.I. 47°55'42" RT
- 6+50.2 P.I. 51°21'56" RT
- 24+36.2 PROPOSED OIL LINE OXY
- 24+38.9 P.I. 39°12'52" LT
- 25+01.4 PROPOSED GAS LINE OXY
- 25+93.2 PROPOSED ROAD OXY
- 26+59.6 P.I. 54°08'00" RT
- 28+41.5 P.I. 41°16'31" LT
- 41+10.4 31-30 SECTION LINE
- 41+25.9 PROPOSED FLOWLINE OXY
- 41+38.6 PROPOSED GAS LINE OXY
- 41+50.6 P.I. 17°49'59" LT
- 41+67.0 PROPOSED GAS LINE OXY
- 42+26.8 PROPOSED FLOWLINE OXY
- 48+31.9 PROPOSED ROAD OXY
- 48+41.8 END SURVEY @ PRECIOUS CTB

BASIS OF BEARING:
BEARINGS SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983. DISTANCES ARE SURFACE VALUES.

CORRECTION:
I, CHAD HARCROW, A NEW MEXICO REGISTERED PROFESSIONAL SURVEYOR CERTIFY THAT I DIRECTED AND AM RESPONSIBLE FOR THIS SURVEY. THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF, AND THIS SURVEY AND PLAT, MEET THE MAXIMUM STANDARDS FOR SURVEYING IN NEW MEXICO.

HARCROW SURVEYING, LLC
2314 W MAIN ST. ARTESIA, N.M. 88210
PH: (973) 746-2118 FAX: (973) 746-2158
sharcrow@harcrowsurveying.com




Chad Harcrow
 CHAD HARCROW N.M.P.S. NO. 17777

| OXY USA INC. | |
|---|--------------|
| SURVEY OF A PROPOSED FLOWLINE SYSTEM LOCATED IN SECTIONS 30 & 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO | |
| SURVEY DATE: NOVEMBER 2018 | WATER LINE |
| DATE PLOTTED: DECEMBER 20, 2018 | PAGE 1 OF 1 |
| APPROVED BY: CKJ | DRAWN BY: SP |
| FILE: 18-1872 | |

**FLOWLINE SYSTEM
OXY USA INC.**

A PROPOSED FLOWLINE SYSTEM KNOWN AS THE "PRECIOUS/ARKENSTONE FLOWLINE SYSTEM" IN
SECTIONS 30 & 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M.,
EDDY COUNTY, NEW MEXICO.

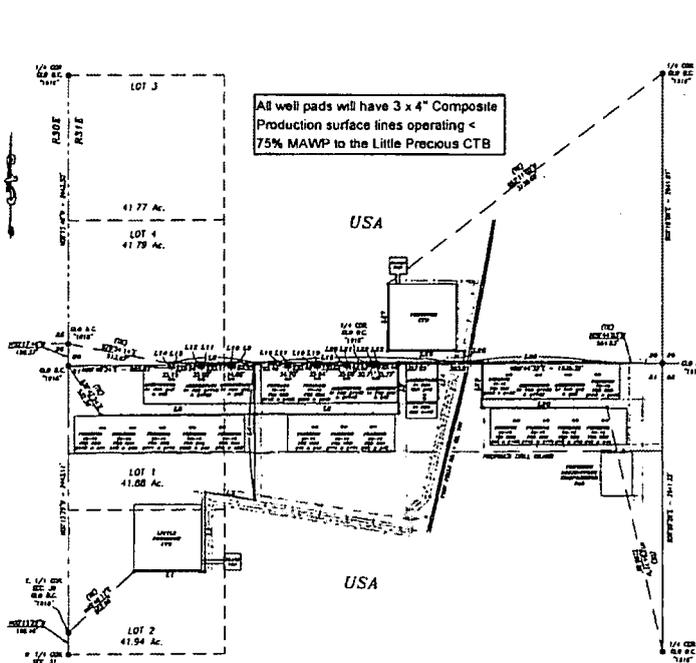

All well pads will have 3 x 4" Composite
Production surface lines operating c
75% MAWP to the Little Precious CTB

LINE #1
A PROPOSED FLOWLINE FROM THE "LITTLE PRECIOUS CTB"

| LINE # | WELL # | DEPTH | STATUS |
|--------|--------|-------|--------|
| 1 | 101 | 100' | PROD |
| 1 | 102 | 100' | PROD |
| 1 | 103 | 100' | PROD |
| 1 | 104 | 100' | PROD |
| 1 | 105 | 100' | PROD |
| 1 | 106 | 100' | PROD |
| 1 | 107 | 100' | PROD |
| 1 | 108 | 100' | PROD |
| 1 | 109 | 100' | PROD |
| 1 | 110 | 100' | PROD |
| 1 | 111 | 100' | PROD |
| 1 | 112 | 100' | PROD |
| 1 | 113 | 100' | PROD |
| 1 | 114 | 100' | PROD |
| 1 | 115 | 100' | PROD |
| 1 | 116 | 100' | PROD |
| 1 | 117 | 100' | PROD |
| 1 | 118 | 100' | PROD |
| 1 | 119 | 100' | PROD |
| 1 | 120 | 100' | PROD |
| 1 | 121 | 100' | PROD |
| 1 | 122 | 100' | PROD |
| 1 | 123 | 100' | PROD |
| 1 | 124 | 100' | PROD |
| 1 | 125 | 100' | PROD |
| 1 | 126 | 100' | PROD |
| 1 | 127 | 100' | PROD |
| 1 | 128 | 100' | PROD |
| 1 | 129 | 100' | PROD |
| 1 | 130 | 100' | PROD |
| 1 | 131 | 100' | PROD |
| 1 | 132 | 100' | PROD |
| 1 | 133 | 100' | PROD |
| 1 | 134 | 100' | PROD |
| 1 | 135 | 100' | PROD |
| 1 | 136 | 100' | PROD |
| 1 | 137 | 100' | PROD |
| 1 | 138 | 100' | PROD |
| 1 | 139 | 100' | PROD |
| 1 | 140 | 100' | PROD |
| 1 | 141 | 100' | PROD |
| 1 | 142 | 100' | PROD |
| 1 | 143 | 100' | PROD |
| 1 | 144 | 100' | PROD |
| 1 | 145 | 100' | PROD |
| 1 | 146 | 100' | PROD |
| 1 | 147 | 100' | PROD |
| 1 | 148 | 100' | PROD |
| 1 | 149 | 100' | PROD |
| 1 | 150 | 100' | PROD |
| 1 | 151 | 100' | PROD |
| 1 | 152 | 100' | PROD |
| 1 | 153 | 100' | PROD |
| 1 | 154 | 100' | PROD |
| 1 | 155 | 100' | PROD |
| 1 | 156 | 100' | PROD |
| 1 | 157 | 100' | PROD |
| 1 | 158 | 100' | PROD |
| 1 | 159 | 100' | PROD |
| 1 | 160 | 100' | PROD |
| 1 | 161 | 100' | PROD |
| 1 | 162 | 100' | PROD |
| 1 | 163 | 100' | PROD |
| 1 | 164 | 100' | PROD |
| 1 | 165 | 100' | PROD |
| 1 | 166 | 100' | PROD |
| 1 | 167 | 100' | PROD |
| 1 | 168 | 100' | PROD |
| 1 | 169 | 100' | PROD |
| 1 | 170 | 100' | PROD |
| 1 | 171 | 100' | PROD |
| 1 | 172 | 100' | PROD |
| 1 | 173 | 100' | PROD |
| 1 | 174 | 100' | PROD |
| 1 | 175 | 100' | PROD |
| 1 | 176 | 100' | PROD |
| 1 | 177 | 100' | PROD |
| 1 | 178 | 100' | PROD |
| 1 | 179 | 100' | PROD |
| 1 | 180 | 100' | PROD |
| 1 | 181 | 100' | PROD |
| 1 | 182 | 100' | PROD |
| 1 | 183 | 100' | PROD |
| 1 | 184 | 100' | PROD |
| 1 | 185 | 100' | PROD |
| 1 | 186 | 100' | PROD |
| 1 | 187 | 100' | PROD |
| 1 | 188 | 100' | PROD |
| 1 | 189 | 100' | PROD |
| 1 | 190 | 100' | PROD |
| 1 | 191 | 100' | PROD |
| 1 | 192 | 100' | PROD |
| 1 | 193 | 100' | PROD |
| 1 | 194 | 100' | PROD |
| 1 | 195 | 100' | PROD |
| 1 | 196 | 100' | PROD |
| 1 | 197 | 100' | PROD |
| 1 | 198 | 100' | PROD |
| 1 | 199 | 100' | PROD |
| 1 | 200 | 100' | PROD |

LINE #2
A PROPOSED FLOWLINE FROM THE "PRECIOUS 20-18 FCS COB"

| LINE # | WELL # | DEPTH | STATUS |
|--------|--------|-------|--------|
| 2 | 201 | 100' | PROD |
| 2 | 202 | 100' | PROD |
| 2 | 203 | 100' | PROD |
| 2 | 204 | 100' | PROD |
| 2 | 205 | 100' | PROD |
| 2 | 206 | 100' | PROD |
| 2 | 207 | 100' | PROD |
| 2 | 208 | 100' | PROD |
| 2 | 209 | 100' | PROD |
| 2 | 210 | 100' | PROD |
| 2 | 211 | 100' | PROD |
| 2 | 212 | 100' | PROD |
| 2 | 213 | 100' | PROD |
| 2 | 214 | 100' | PROD |
| 2 | 215 | 100' | PROD |
| 2 | 216 | 100' | PROD |
| 2 | 217 | 100' | PROD |
| 2 | 218 | 100' | PROD |
| 2 | 219 | 100' | PROD |
| 2 | 220 | 100' | PROD |
| 2 | 221 | 100' | PROD |
| 2 | 222 | 100' | PROD |
| 2 | 223 | 100' | PROD |
| 2 | 224 | 100' | PROD |
| 2 | 225 | 100' | PROD |
| 2 | 226 | 100' | PROD |
| 2 | 227 | 100' | PROD |
| 2 | 228 | 100' | PROD |
| 2 | 229 | 100' | PROD |
| 2 | 230 | 100' | PROD |
| 2 | 231 | 100' | PROD |
| 2 | 232 | 100' | PROD |
| 2 | 233 | 100' | PROD |
| 2 | 234 | 100' | PROD |
| 2 | 235 | 100' | PROD |
| 2 | 236 | 100' | PROD |
| 2 | 237 | 100' | PROD |
| 2 | 238 | 100' | PROD |
| 2 | 239 | 100' | PROD |
| 2 | 240 | 100' | PROD |
| 2 | 241 | 100' | PROD |
| 2 | 242 | 100' | PROD |
| 2 | 243 | 100' | PROD |
| 2 | 244 | 100' | PROD |
| 2 | 245 | 100' | PROD |
| 2 | 246 | 100' | PROD |
| 2 | 247 | 100' | PROD |
| 2 | 248 | 100' | PROD |
| 2 | 249 | 100' | PROD |
| 2 | 250 | 100' | PROD |
| 2 | 251 | 100' | PROD |
| 2 | 252 | 100' | PROD |
| 2 | 253 | 100' | PROD |
| 2 | 254 | 100' | PROD |
| 2 | 255 | 100' | PROD |
| 2 | 256 | 100' | PROD |
| 2 | 257 | 100' | PROD |
| 2 | 258 | 100' | PROD |
| 2 | 259 | 100' | PROD |
| 2 | 260 | 100' | PROD |
| 2 | 261 | 100' | PROD |
| 2 | 262 | 100' | PROD |
| 2 | 263 | 100' | PROD |
| 2 | 264 | 100' | PROD |
| 2 | 265 | 100' | PROD |
| 2 | 266 | 100' | PROD |
| 2 | 267 | 100' | PROD |
| 2 | 268 | 100' | PROD |
| 2 | 269 | 100' | PROD |
| 2 | 270 | 100' | PROD |
| 2 | 271 | 100' | PROD |
| 2 | 272 | 100' | PROD |
| 2 | 273 | 100' | PROD |
| 2 | 274 | 100' | PROD |
| 2 | 275 | 100' | PROD |
| 2 | 276 | 100' | PROD |
| 2 | 277 | 100' | PROD |
| 2 | 278 | 100' | PROD |
| 2 | 279 | 100' | PROD |
| 2 | 280 | 100' | PROD |
| 2 | 281 | 100' | PROD |
| 2 | 282 | 100' | PROD |
| 2 | 283 | 100' | PROD |
| 2 | 284 | 100' | PROD |
| 2 | 285 | 100' | PROD |
| 2 | 286 | 100' | PROD |
| 2 | 287 | 100' | PROD |
| 2 | 288 | 100' | PROD |
| 2 | 289 | 100' | PROD |
| 2 | 290 | 100' | PROD |
| 2 | 291 | 100' | PROD |
| 2 | 292 | 100' | PROD |
| 2 | 293 | 100' | PROD |
| 2 | 294 | 100' | PROD |
| 2 | 295 | 100' | PROD |
| 2 | 296 | 100' | PROD |
| 2 | 297 | 100' | PROD |
| 2 | 298 | 100' | PROD |
| 2 | 299 | 100' | PROD |
| 2 | 300 | 100' | PROD |

LINE #3
A PROPOSED FLOWLINE FROM THE "PRECIOUS 20-18 FCS COB"


| LINE # | WELL # | DEPTH | STATUS |
|--------|--------|-------|--------|
| 3 | 301 | 100' | PROD |
| 3 | 302 | 100' | PROD |
| 3 | 303 | 100' | PROD |
| 3 | 304 | 100' | PROD |
| 3 | 305 | 100' | PROD |
| 3 | 306 | 100' | PROD |
| 3 | 307 | 100' | PROD |
| 3 | 308 | 100' | PROD |
| 3 | 309 | 100' | PROD |
| 3 | 310 | 100' | PROD |
| 3 | 311 | 100' | PROD |
| 3 | 312 | 100' | PROD |
| 3 | 313 | 100' | PROD |
| 3 | 314 | 100' | PROD |
| 3 | 315 | 100' | PROD |
| 3 | 316 | 100' | PROD |
| 3 | 317 | 100' | PROD |
| 3 | 318 | 100' | PROD |
| 3 | 319 | 100' | PROD |
| 3 | 320 | 100' | PROD |
| 3 | 321 | 100' | PROD |
| 3 | 322 | 100' | PROD |
| 3 | 323 | 100' | PROD |
| 3 | 324 | 100' | PROD |
| 3 | 325 | 100' | PROD |
| 3 | 326 | 100' | PROD |
| 3 | 327 | 100' | PROD |
| 3 | 328 | 100' | PROD |
| 3 | 329 | 100' | PROD |
| 3 | 330 | 100' | PROD |
| 3 | 331 | 100' | PROD |
| 3 | 332 | 100' | PROD |
| 3 | 333 | 100' | PROD |
| 3 | 334 | 100' | PROD |
| 3 | 335 | 100' | PROD |
| 3 | 336 | 100' | PROD |
| 3 | 337 | 100' | PROD |
| 3 | 338 | 100' | PROD |
| 3 | 339 | 100' | PROD |
| 3 | 340 | 100' | PROD |
| 3 | 341 | 100' | PROD |
| 3 | 342 | 100' | PROD |
| 3 | 343 | 100' | PROD |
| 3 | 344 | 100' | PROD |
| 3 | 345 | 100' | PROD |
| 3 | 346 | 100' | PROD |
| 3 | 347 | 100' | PROD |
| 3 | 348 | 100' | PROD |
| 3 | 349 | 100' | PROD |
| 3 | 350 | 100' | PROD |
| 3 | 351 | 100' | PROD |
| 3 | 352 | 100' | PROD |
| 3 | 353 | 100' | PROD |
| 3 | 354 | 100' | PROD |
| 3 | 355 | 100' | PROD |
| 3 | 356 | 100' | PROD |
| 3 | 357 | 100' | PROD |
| 3 | 358 | 100' | PROD |
| 3 | 359 | 100' | PROD |
| 3 | 360 | 100' | PROD |
| 3 | 361 | 100' | PROD |
| 3 | 362 | 100' | PROD |
| 3 | 363 | 100' | PROD |
| 3 | 364 | 100' | PROD |
| 3 | 365 | 100' | PROD |
| 3 | 366 | 100' | PROD |
| 3 | 367 | 100' | PROD |
| 3 | 368 | 100' | PROD |
| 3 | 369 | 100' | PROD |
| 3 | 370 | 100' | PROD |
| 3 | 371 | 100' | PROD |
| 3 | 372 | 100' | PROD |
| 3 | 373 | 100' | PROD |
| 3 | 374 | 100' | PROD |
| 3 | 375 | 100' | PROD |
| 3 | 376 | 100' | PROD |
| 3 | 377 | 100' | PROD |
| 3 | 378 | 100' | PROD |
| 3 | 379 | 100' | PROD |
| 3 | 380 | 100' | PROD |
| 3 | 381 | 100' | PROD |
| 3 | 382 | 100' | PROD |
| 3 | 383 | 100' | PROD |
| 3 | 384 | 100' | PROD |
| 3 | 385 | 100' | PROD |
| 3 | 386 | 100' | PROD |
| 3 | 387 | 100' | PROD |
| 3 | 388 | 100' | PROD |
| 3 | 389 | 100' | PROD |
| 3 | 390 | 100' | PROD |
| 3 | 391 | 100' | PROD |
| 3 | 392 | 100' | PROD |
| 3 | 393 | 100' | PROD |
| 3 | 394 | 100' | PROD |
| 3 | 395 | 100' | PROD |
| 3 | 396 | 100' | PROD |
| 3 | 397 | 100' | PROD |
| 3 | 398 | 100' | PROD |
| 3 | 399 | 100' | PROD |
| 3 | 400 | 100' | PROD |

LINE #4
A PROPOSED FLOWLINE FROM THE "PRECIOUS 20-18 FCS COB"

| LINE # | WELL # | DEPTH | STATUS |
|--------|--------|-------|--------|
| 4 | 401 | 100' | PROD |
| 4 | 402 | 100' | PROD |
| 4 | 403 | 100' | PROD |
| 4 | 404 | 100' | PROD |
| 4 | 405 | 100' | PROD |
| 4 | 406 | 100' | PROD |
| 4 | 407 | 100' | PROD |
| 4 | 408 | 100' | PROD |
| 4 | 409 | 100' | PROD |
| 4 | 410 | 100' | PROD |
| 4 | 411 | 100' | PROD |
| 4 | 412 | 100' | PROD |
| 4 | 413 | 100' | PROD |
| 4 | 414 | 100' | PROD |
| 4 | 415 | 100' | PROD |
| 4 | 416 | 100' | PROD |
| 4 | 417 | 100' | PROD |
| 4 | 418 | 100' | PROD |
| 4 | 419 | 100' | PROD |
| 4 | 420 | 100' | PROD |
| 4 | 421 | 100' | PROD |
| 4 | 422 | 100' | PROD |
| 4 | 423 | 100' | PROD |
| 4 | 424 | 100' | PROD |
| 4 | 425 | 100' | PROD |
| 4 | 426 | 100' | PROD |
| 4 | 427 | 100' | PROD |
| 4 | 428 | 100' | PROD |
| 4 | 429 | 100' | PROD |
| 4 | 430 | 100' | PROD |
| 4 | 431 | 100' | PROD |
| 4 | 432 | 100' | PROD |
| 4 | 433 | 100' | PROD |
| 4 | 434 | 100' | PROD |
| 4 | 435 | 100' | PROD |
| 4 | 436 | 100' | PROD |
| 4 | 437 | 100' | PROD |
| 4 | 438 | 100' | PROD |
| 4 | 439 | 100' | PROD |
| 4 | 440 | 100' | PROD |
| 4 | 441 | 100' | PROD |
| 4 | 442 | 100' | PROD |
| 4 | 443 | 100' | PROD |
| 4 | 444 | 100' | PROD |
| 4 | 445 | 100' | PROD |
| 4 | 446 | 100' | PROD</ |


**GAS LINE SYSTEM
OXY USA INC.**

A PROPOSED GAS LINE SYSTEM KNOWN AS THE "PRECIOUS/ARKENSTONE GAS LINE SYSTEM" IN SECTIONS 29, 30, 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO.

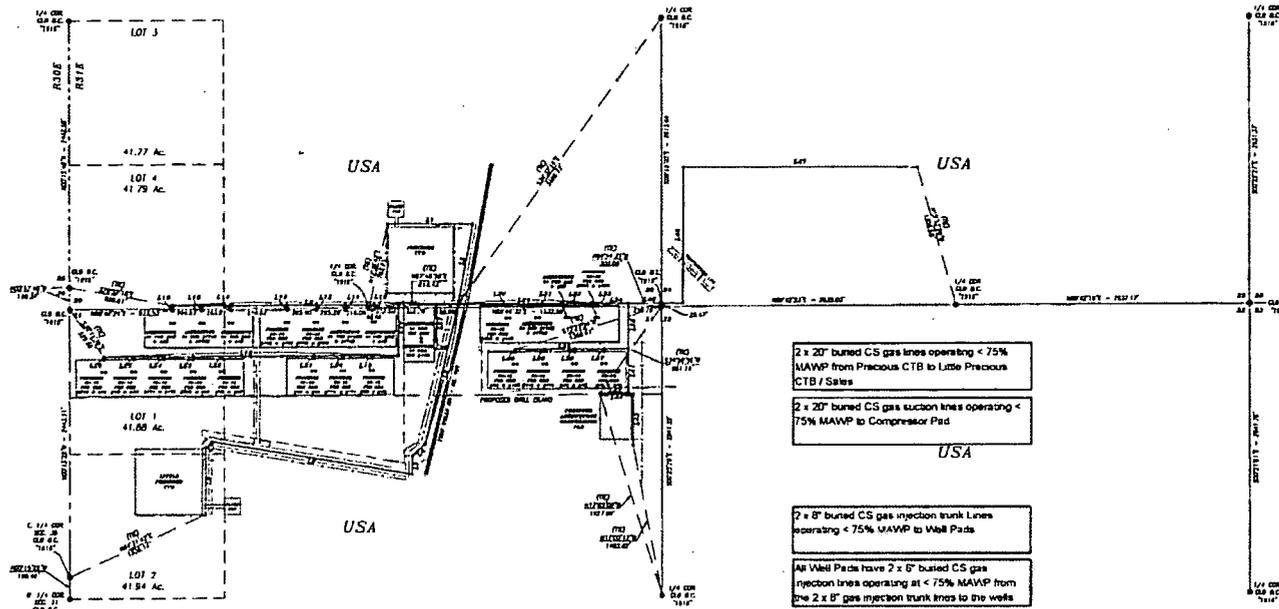

LINE #1 THRU #8 DESCRIPTION
EIGHT STRIPS OF LAND 30.0 FEET WIDE AND TOTALING 1686.3 FEET OR 1022.02 RODS OR 3.194 MILES IN LENGTH CROSSING USA LAND IN SECTIONS 30 & 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, EDDY COUNTY, NEW MEXICO AND BEING 15.0 FEET LEFT AND 15.0 FEET RIGHT OF THE ABOVE PLATTED CENTERLINE SURVEYS.

SUCTION LINE DESCRIPTION
A STRIP OF LAND 50.0 FEET WIDE AND BEING 3830.1 FEET OR 232.13 RODS OR 0.725 MILES IN LENGTH CROSSING USA LAND IN SECTIONS 29 & 30, TOWNSHIP 23 SOUTH, RANGE 31 EAST, EDDY COUNTY, NEW MEXICO AND BEING 15.0 FEET LEFT AND 15.0 FEET RIGHT OF THE ABOVE PLATTED CENTERLINE SURVEYS.



2 x 20" buried CS gas lines operating < 75% MAWP from Precious CTB to Little Precious CTB / Sales

2 x 20" buried CS gas suction lines operating < 75% MAWP to Compressor Pad

2 x 8" buried CS gas injection trunk Lines operating < 75% MAWP to Well Pads

All Well Pads have 2 x 6" buried CS gas injection lines operating at < 75% MAWP from the 2 x 8" gas injection trunk lines to the wells

LINE #1
A PROPOSED GAS LINE FROM THE "PRECIOUS CTB" TO THE "LITTLE PRECIOUS CTB"

| LINE # | START POINT | END POINT | LENGTH |
|--------|--------------|-----------|--------|
| 1.1 | PRECIOUS CTB | 110+00 | 100.00 |
| 1.2 | 110+00 | 115+00 | 50.00 |
| 1.3 | 115+00 | 120+00 | 50.00 |
| 1.4 | 120+00 | 125+00 | 50.00 |
| 1.5 | 125+00 | 130+00 | 50.00 |
| 1.6 | 130+00 | 135+00 | 50.00 |
| 1.7 | 135+00 | 140+00 | 50.00 |
| 1.8 | 140+00 | 145+00 | 50.00 |
| 1.9 | 145+00 | 150+00 | 50.00 |
| 1.10 | 150+00 | 155+00 | 50.00 |
| 1.11 | 155+00 | 160+00 | 50.00 |
| 1.12 | 160+00 | 165+00 | 50.00 |
| 1.13 | 165+00 | 170+00 | 50.00 |
| 1.14 | 170+00 | 175+00 | 50.00 |
| 1.15 | 175+00 | 180+00 | 50.00 |
| 1.16 | 180+00 | 185+00 | 50.00 |
| 1.17 | 185+00 | 190+00 | 50.00 |
| 1.18 | 190+00 | 195+00 | 50.00 |
| 1.19 | 195+00 | 200+00 | 50.00 |
| 1.20 | 200+00 | 205+00 | 50.00 |
| 1.21 | 205+00 | 210+00 | 50.00 |
| 1.22 | 210+00 | 215+00 | 50.00 |
| 1.23 | 215+00 | 220+00 | 50.00 |
| 1.24 | 220+00 | 225+00 | 50.00 |
| 1.25 | 225+00 | 230+00 | 50.00 |
| 1.26 | 230+00 | 235+00 | 50.00 |
| 1.27 | 235+00 | 240+00 | 50.00 |
| 1.28 | 240+00 | 245+00 | 50.00 |
| 1.29 | 245+00 | 250+00 | 50.00 |
| 1.30 | 250+00 | 255+00 | 50.00 |
| 1.31 | 255+00 | 260+00 | 50.00 |
| 1.32 | 260+00 | 265+00 | 50.00 |
| 1.33 | 265+00 | 270+00 | 50.00 |
| 1.34 | 270+00 | 275+00 | 50.00 |
| 1.35 | 275+00 | 280+00 | 50.00 |
| 1.36 | 280+00 | 285+00 | 50.00 |
| 1.37 | 285+00 | 290+00 | 50.00 |
| 1.38 | 290+00 | 295+00 | 50.00 |
| 1.39 | 295+00 | 300+00 | 50.00 |
| 1.40 | 300+00 | 305+00 | 50.00 |
| 1.41 | 305+00 | 310+00 | 50.00 |
| 1.42 | 310+00 | 315+00 | 50.00 |
| 1.43 | 315+00 | 320+00 | 50.00 |
| 1.44 | 320+00 | 325+00 | 50.00 |
| 1.45 | 325+00 | 330+00 | 50.00 |
| 1.46 | 330+00 | 335+00 | 50.00 |
| 1.47 | 335+00 | 340+00 | 50.00 |
| 1.48 | 340+00 | 345+00 | 50.00 |
| 1.49 | 345+00 | 350+00 | 50.00 |
| 1.50 | 350+00 | 355+00 | 50.00 |
| 1.51 | 355+00 | 360+00 | 50.00 |
| 1.52 | 360+00 | 365+00 | 50.00 |
| 1.53 | 365+00 | 370+00 | 50.00 |
| 1.54 | 370+00 | 375+00 | 50.00 |
| 1.55 | 375+00 | 380+00 | 50.00 |
| 1.56 | 380+00 | 385+00 | 50.00 |
| 1.57 | 385+00 | 390+00 | 50.00 |
| 1.58 | 390+00 | 395+00 | 50.00 |
| 1.59 | 395+00 | 400+00 | 50.00 |
| 1.60 | 400+00 | 405+00 | 50.00 |
| 1.61 | 405+00 | 410+00 | 50.00 |
| 1.62 | 410+00 | 415+00 | 50.00 |
| 1.63 | 415+00 | 420+00 | 50.00 |
| 1.64 | 420+00 | 425+00 | 50.00 |
| 1.65 | 425+00 | 430+00 | 50.00 |
| 1.66 | 430+00 | 435+00 | 50.00 |
| 1.67 | 435+00 | 440+00 | 50.00 |
| 1.68 | 440+00 | 445+00 | 50.00 |
| 1.69 | 445+00 | 450+00 | 50.00 |
| 1.70 | 450+00 | 455+00 | 50.00 |
| 1.71 | 455+00 | 460+00 | 50.00 |
| 1.72 | 460+00 | 465+00 | 50.00 |
| 1.73 | 465+00 | 470+00 | 50.00 |
| 1.74 | 470+00 | 475+00 | 50.00 |
| 1.75 | 475+00 | 480+00 | 50.00 |
| 1.76 | 480+00 | 485+00 | 50.00 |
| 1.77 | 485+00 | 490+00 | 50.00 |
| 1.78 | 490+00 | 495+00 | 50.00 |
| 1.79 | 495+00 | 500+00 | 50.00 |
| 1.80 | 500+00 | 505+00 | 50.00 |
| 1.81 | 505+00 | 510+00 | 50.00 |
| 1.82 | 510+00 | 515+00 | 50.00 |
| 1.83 | 515+00 | 520+00 | 50.00 |
| 1.84 | 520+00 | 525+00 | 50.00 |
| 1.85 | 525+00 | 530+00 | 50.00 |
| 1.86 | 530+00 | 535+00 | 50.00 |
| 1.87 | 535+00 | 540+00 | 50.00 |
| 1.88 | 540+00 | 545+00 | 50.00 |
| 1.89 | 545+00 | 550+00 | 50.00 |
| 1.90 | 550+00 | 555+00 | 50.00 |
| 1.91 | 555+00 | 560+00 | 50.00 |
| 1.92 | 560+00 | 565+00 | 50.00 |
| 1.93 | 565+00 | 570+00 | 50.00 |
| 1.94 | 570+00 | 575+00 | 50.00 |
| 1.95 | 575+00 | 580+00 | 50.00 |
| 1.96 | 580+00 | 585+00 | 50.00 |
| 1.97 | 585+00 | 590+00 | 50.00 |
| 1.98 | 590+00 | 595+00 | 50.00 |
| 1.99 | 595+00 | 600+00 | 50.00 |
| 1.100 | 600+00 | 605+00 | 50.00 |

LINE #2
A PROPOSED GAS LINE FROM THE PROPOSED MAIN LINE TO THE NORTHWESTERN MOST PRECIOUS/ARKENSTONE WELLPADS

| LINE # | START POINT | END POINT | LENGTH |
|--------|-------------|-----------|--------|
| 2.1 | MAIN LINE | 100+00 | 100.00 |
| 2.2 | 100+00 | 105+00 | 50.00 |
| 2.3 | 105+00 | 110+00 | 50.00 |
| 2.4 | 110+00 | 115+00 | 50.00 |
| 2.5 | 115+00 | 120+00 | 50.00 |
| 2.6 | 120+00 | 125+00 | 50.00 |
| 2.7 | 125+00 | 130+00 | 50.00 |
| 2.8 | 130+00 | 135+00 | 50.00 |
| 2.9 | 135+00 | 140+00 | 50.00 |
| 2.10 | 140+00 | 145+00 | 50.00 |
| 2.11 | 145+00 | 150+00 | 50.00 |
| 2.12 | 150+00 | 155+00 | 50.00 |
| 2.13 | 155+00 | 160+00 | 50.00 |
| 2.14 | 160+00 | 165+00 | 50.00 |
| 2.15 | 165+00 | 170+00 | 50.00 |
| 2.16 | 170+00 | 175+00 | 50.00 |
| 2.17 | 175+00 | 180+00 | 50.00 |
| 2.18 | 180+00 | 185+00 | 50.00 |
| 2.19 | 185+00 | 190+00 | 50.00 |
| 2.20 | 190+00 | 195+00 | 50.00 |
| 2.21 | 195+00 | 200+00 | 50.00 |
| 2.22 | 200+00 | 205+00 | 50.00 |
| 2.23 | 205+00 | 210+00 | 50.00 |
| 2.24 | 210+00 | 215+00 | 50.00 |
| 2.25 | 215+00 | 220+00 | 50.00 |
| 2.26 | 220+00 | 225+00 | 50.00 |
| 2.27 | 225+00 | 230+00 | 50.00 |
| 2.28 | 230+00 | 235+00 | 50.00 |
| 2.29 | 235+00 | 240+00 | 50.00 |
| 2.30 | 240+00 | 245+00 | 50.00 |
| 2.31 | 245+00 | 250+00 | 50.00 |
| 2.32 | 250+00 | 255+00 | 50.00 |
| 2.33 | 255+00 | 260+00 | 50.00 |
| 2.34 | 260+00 | 265+00 | 50.00 |
| 2.35 | 265+00 | 270+00 | 50.00 |
| 2.36 | 270+00 | 275+00 | 50.00 |
| 2.37 | 275+00 | 280+00 | 50.00 |
| 2.38 | 280+00 | 285+00 | 50.00 |
| 2.39 | 285+00 | 290+00 | 50.00 |
| 2.40 | 290+00 | 295+00 | 50.00 |
| 2.41 | 295+00 | 300+00 | 50.00 |
| 2.42 | 300+00 | 305+00 | 50.00 |
| 2.43 | 305+00 | 310+00 | 50.00 |
| 2.44 | 310+00 | 315+00 | 50.00 |
| 2.45 | 315+00 | 320+00 | 50.00 |
| 2.46 | 320+00 | 325+00 | 50.00 |
| 2.47 | 325+00 | 330+00 | 50.00 |
| 2.48 | 330+00 | 335+00 | 50.00 |
| 2.49 | 335+00 | 340+00 | 50.00 |
| 2.50 | 340+00 | 345+00 | 50.00 |
| 2.51 | 345+00 | 350+00 | 50.00 |
| 2.52 | 350+00 | 355+00 | 50.00 |
| 2.53 | 355+00 | 360+00 | 50.00 |
| 2.54 | 360+00 | 365+00 | 50.00 |
| 2.55 | 365+00 | 370+00 | 50.00 |
| 2.56 | 370+00 | 375+00 | 50.00 |
| 2.57 | 375+00 | 380+00 | 50.00 |
| 2.58 | 380+00 | 385+00 | 50.00 |
| 2.59 | 385+00 | 390+00 | 50.00 |
| 2.60 | 390+00 | 395+00 | 50.00 |
| 2.61 | 395+00 | 400+00 | 50.00 |
| 2.62 | 400+00 | 405+00 | 50.00 |
| 2.63 | 405+00 | 410+00 | 50.00 |
| 2.64 | 410+00 | 415+00 | 50.00 |
| 2.65 | 415+00 | 420+00 | 50.00 |
| 2.66 | 420+00 | 425+00 | 50.00 |
| 2.67 | 425+00 | 430+00 | 50.00 |
| 2.68 | 430+00 | 435+00 | 50.00 |
| 2.69 | 435+00 | 440+00 | 50.00 |
| 2.70 | 440+00 | 445+00 | 50.00 |
| 2.71 | 445+00 | 450+00 | 50.00 |
| 2.72 | 450+00 | 455+00 | 50.00 |
| 2.73 | 455+00 | 460+00 | 50.00 |
| 2.74 | 460+00 | 465+00 | 50.00 |
| 2.75 | 465+00 | 470+00 | 50.00 |
| 2.76 | 470+00 | 475+00 | 50.00 |
| 2.77 | 475+00 | 480+00 | 50.00 |
| 2.78 | 480+00 | 485+00 | 50.00 |
| 2.79 | 485+00 | 490+00 | 50.00 |
| 2.80 | 490+00 | 495+00 | 50.00 |
| 2.81 | 495+00 | 500+00 | 50.00 |
| 2.82 | 500+00 | 505+00 | 50.00 |
| 2.83 | 505+00 | 510+00 | 50.00 |
| 2.84 | 510+00 | 515+00 | 50.00 |
| 2.85 | 515+00 | 520+00 | 50.00 |
| 2.86 | 520+00 | 525+00 | 50.00 |
| 2.87 | 525+00 | 530+00 | 50.00 |
| 2.88 | 530+00 | 535+00 | 50.00 |
| 2.89 | 535+00 | 540+00 | 50.00 |
| 2.90 | 540+00 | 545+00 | 50.00 |
| 2.91 | 545+00 | 550+00 | 50.00 |
| 2.92 | 550+00 | 555+00 | 50.00 |
| 2.93 | 555+00 | 560+00 | 50.00 |
| 2.94 | 560+00 | 565+00 | 50.00 |
| 2.95 | 565+00 | 570+00 | 50.00 |
| 2.96 | 570+00 | 575+00 | 50.00 |
| 2.97 | 575+00 | 580+00 | 50.00 |
| 2.98 | 580+00 | 585+00 | 50.00 |
| 2.99 | 585+00 | 590+00 | 50.00 |
| 2.100 | 590+00 | 595+00 | 50.00 |


LINE #3
A PROPOSED GAS LINE FROM THE PROPOSED LINE #1 TO THE SOUTHWESTERN MOST PRECIOUS WELLPADS

| LINE # | START POINT | END POINT | LENGTH |
|--------|-------------|-----------|--------|
| 3.1 | LINE #1 | 100+00 | 100.00 |
| 3.2 | 100+00 | 105+00 | 50.00 |
| 3.3 | 105+00 | 110+00 | 50.00 |
| 3.4 | 110+00 | 115+00 | 50.00 |
| 3.5 | 115+00 | 120+00 | 50.00 |
| 3.6 | 120+00 | 125+00 | 50.00 |
| 3.7 | 125+00 | 130+00 | 50.00 |
| 3.8 | 130+00 | 135+00 | 50.00 |
| 3.9 | 135+00 | 140+00 | 50.00 |
| 3.10 | 140+00 | 145+00 | 50.00 |
| 3.11 | 145+00 | 150+00 | 50.00 |
| 3.12 | 150+00 | 155+00 | 50.00 |
| 3.13 | 155+00 | 160+00 | 50.00 |
| 3.14 | 160+00 | 165+00 | 50.00 |
| 3.15 | 165+00 | 170+00 | 50.00 |
| 3.16 | 170+00 | 175+00 | 50.00 |
| 3.17 | 175+00 | 180+00 | 50.00 |
| 3.18 | 180+00 | 185+00 | 50.00 |
| 3.19 | 185+00 | 190+00 | 50.00 |
| 3.20 | 190+00 | 195+00 | 50.00 |
| 3.21 | 195+00 | 200+00 | 50.00 |
| 3.22 | 200+00 | 205+00 | 50.00 |
| 3.23 | 205+00 | 210+00 | 50.00 |
| 3.24 | 210+00 | 215+00 | 50.00 |
| 3.25 | 215+00 | 220+00 | 50.00 |
| 3.26 | 220+00 | 225+00 | 50.00 |
| 3.27 | 225+00 | 230+00 | 50.00 |
| 3.28 | 230+00 | 235+00 | 50.00 |
| 3.29 | 235+00 | 240+00 | 50.00 |
| 3.30 | 240+00 | 245+00 | 50.00 |
| 3.31 | 245+00 | 250+00 | 50.00 |
| 3.32 | 250+00 | 255+00 | 50.00 |
| 3.33 | 255+00 | 260+00 | 50.00 |
| 3.34 | 260+00 | 265+00 | 50.00 |
| 3.35 | 265+00 | 270+00 | 50.00 |
| 3.36 | 270+00 | 275+00 | 50.00 |
| 3.37 | 275+00 | 280+00 | 50.00 |
| 3.38 | 280+00 | 285+00 | 50.00 |
| 3.39 | 285+00 | 290+ | |

GL-2

**SURFACE SITE EASEMENT
OXY USA INC.**

A SURFACE SITE EASEMENT FOR THE PROPOSED "PRECIOUS/ARKENSTONE COMPRESSOR PAD" IN SECTION 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO.

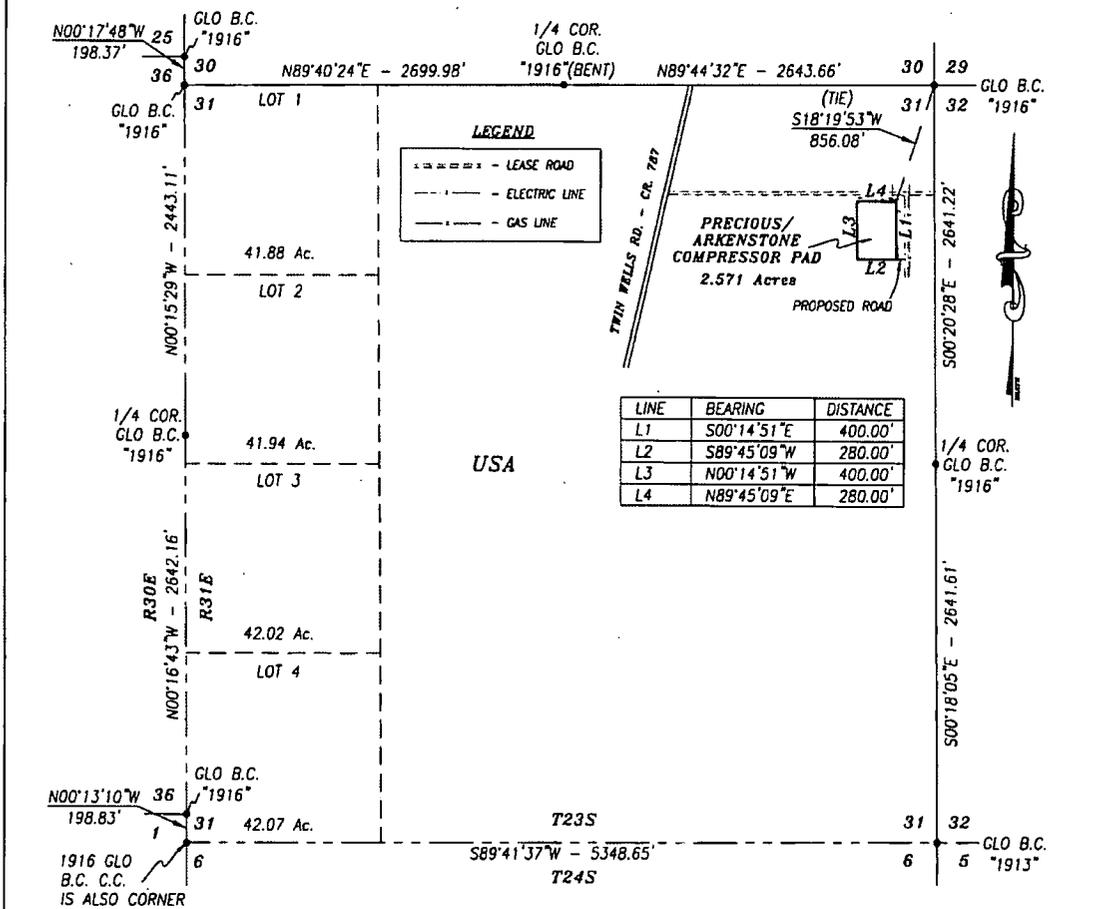

DESCRIPTION

A PROPOSED COMPRESSOR PAD LYING WITHIN USA LAND IN SECTION 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, NMPM, EDDY COUNTY, NEW MEXICO AND BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:


BEGINNING AT THE NORTHEAST CORNER OF SAID COMPRESSOR PAD, WHICH LIES S18°19'53"W 856.08 FEET FROM THE NORTHEAST CORNER OF SAID SECTION; THEN S00°14'51"E 400.00 FEET; THEN S89°45'09"W 280.00 FEET; THEN N00°14'51"W 400.00 FEET; THEN N89°45'09"E 280.00 FEET TO THE POINT OF BEGINNING.

SAID COMPRESSOR PAD CONTAINS 2.571 ACRES.

BASIS OF BEARING:
BEARINGS SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983. DISTANCES ARE SURFACE VALUES.


CERTIFICATION
I, CHAD HARCROW, A NEW MEXICO REGISTERED PROFESSIONAL SURVEYOR CERTIFY THAT I DIRECTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF, AND THIS SURVEY AND PLAT MEET THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO.

HARCROW SURVEYING, LLC
2314 W. MAIN ST, ARTESIA, N.M. 88210
PH: (575) 746-2158 FAX: (575) 746-2158
c.harcrow@harcrowsurveying.com



Chad Harcrow
CHAD HARCROW N.M.P.S. NO. 17777 DATE 1/10/19

| | |
|--|--------------------------|
| OXY USA INC. | |
| SURVEY OF A PROPOSED COMPRESSOR PAD LOCATED IN SECTION 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, NMPM, EDDY COUNTY, NEW MEXICO | |
| SURVEY DATE: NOVEMBER 2018 | SITE EASEMENT |
| DRAFTING DATE: JANUARY 9, 2019 | PAGE 1 OF 1 |
| APPROVED BY: CH | DRAWN BY: SP FILE: 18-48 |

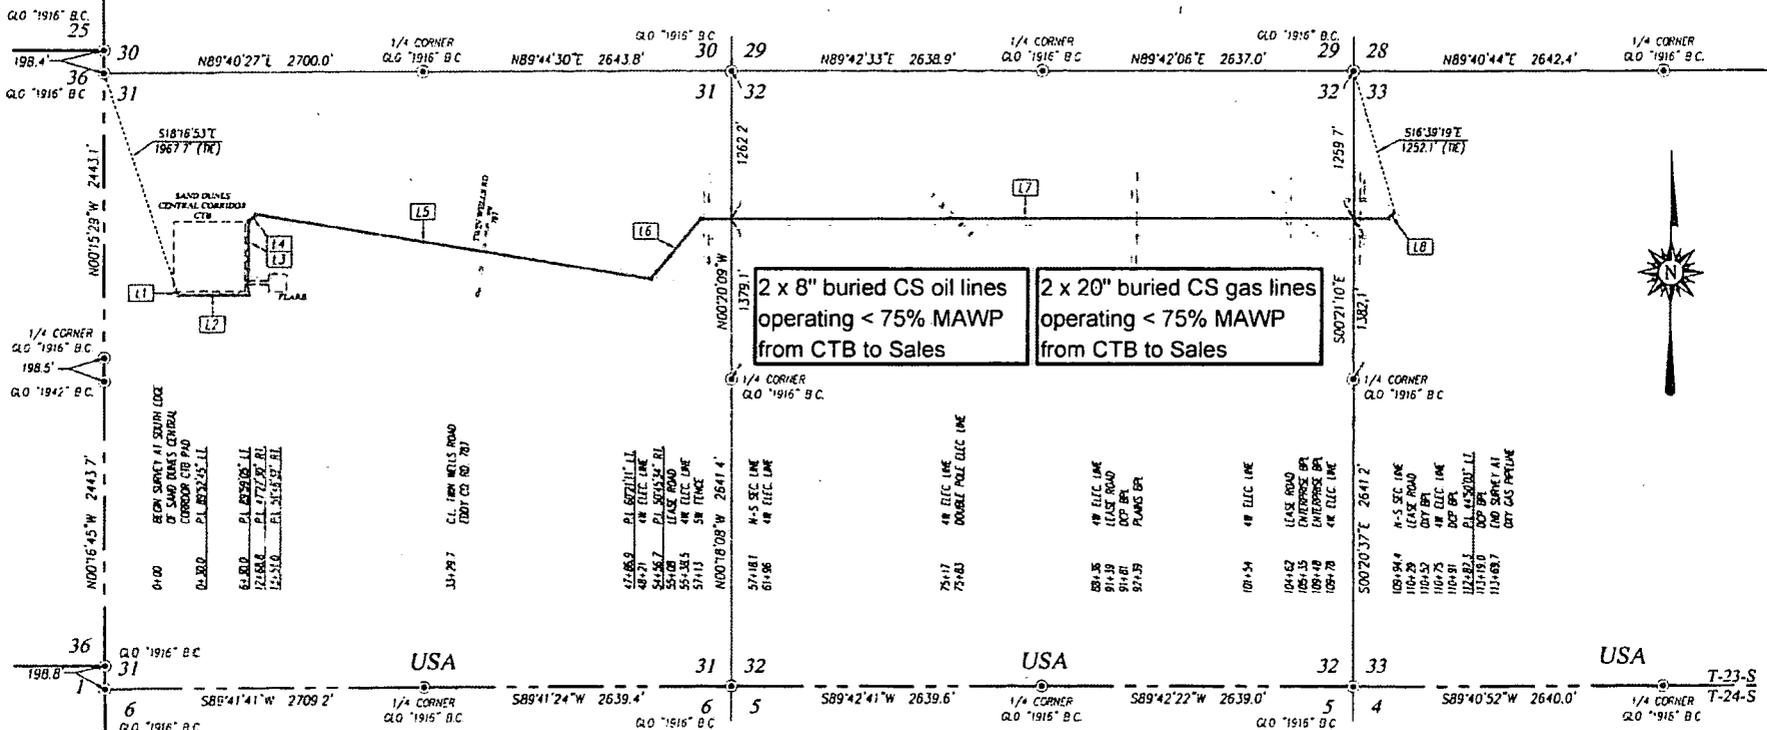

2 x 8" buried CS oil lines operating < 75% MAWP from CTB to Sales

2 x 20" buried CS gas lines operating < 75% MAWP from CTB to Sales

LINE TABLE

| LINE | BEARING | DISTANCE |
|------|-------------|----------|
| L1 | S00D7'54"E | 30.0' |
| L2 | N89°59'21"E | 600.0' |
| L3 | N00D0'16"E | 638.8' |
| L4 | N47°27'46"E | 82.2' |
| L5 | S80°43'42"E | 3435.9' |
| L6 | N18°59'07"E | 569.8' |
| L7 | S89°50'42"E | 27530.6' |
| L8 | S47°50'40"E | 82.2' |

DESCRIPTION

SURVEY FOR A STRIP OF LAND 30.0 FEET WIDE AND 11369.7 FEET OR 2.153 MILES IN LENGTH CROSSING USA LAND IN SECTIONS 31, 32 & 33, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO, AND BEING 25.0 FEET LEFT AND 25.0 FEET RIGHT OF THE ABOVE PLATTED CENTERLINE SURVEY.

I, RONALD J. EIDSON, HER MEXICO PROFESSIONAL SURVEYOR No. 3239, DO HEREBY CERTIFY THAT THIS SURVEY PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION, THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

RONALD J. EIDSON *Ronald J. Eidson* DATE: 4/13/2018

NOTE


BEARINGS SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983. DISTANCES ARE SURFACE VALUES.



PROVIDING SURVEYING SERVICES SINCE 1946
JOHN WEST SURVEYING COMPANY
 412 N. DAL PASO HOBBS, N.M. 88240
 (575) 393-3117 www.jwsc.biz
 TPLPSL 10021000

LEGEND

⊙ DENOTES FOUND CORNER AS NOTED




OXY U.S.A. INC.

SURVEY FOR BURIED OIL AND GAS LINE FROM SAND DUNES CENTRAL CORRIDOR CTB TO OXY WATER PIPELINE, CROSSING SECTIONS 31, 32 & 33, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO

| | | |
|-----------------------|--------------------|---------------|
| Survey Date: 03/29/18 | CAD Date: 04/11/18 | Drawn By: LSL |
| W.O. No.: 18110384 | Rev. | Rel. W.O.: |
| | | Sheet 1 of 1 |

OS-1

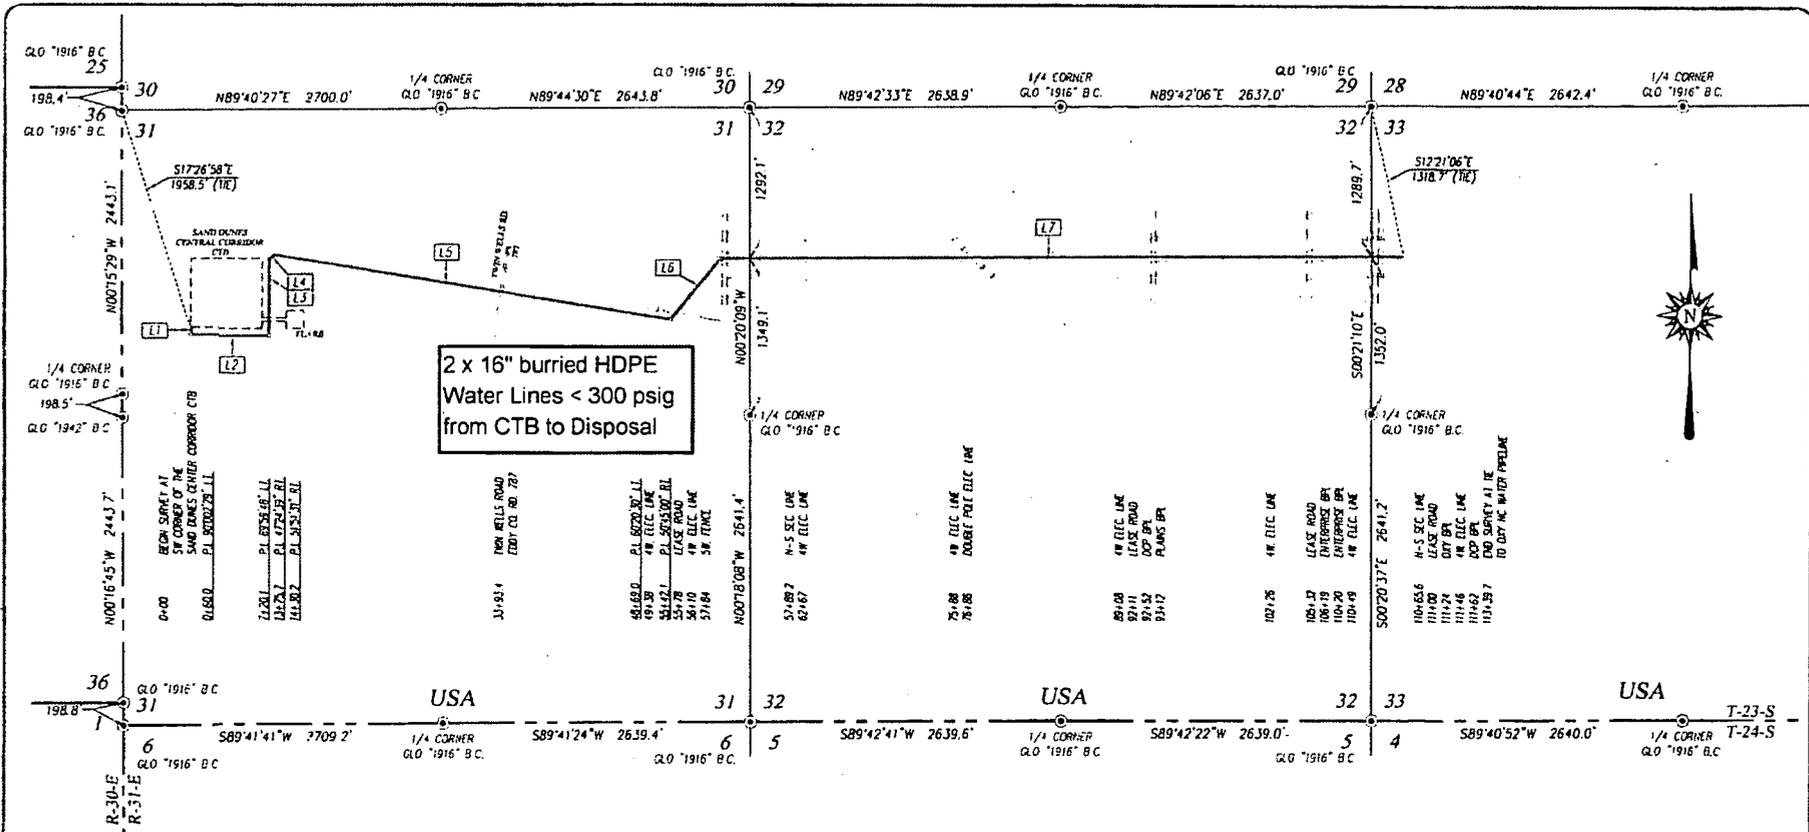

2 x 16" buried HDPE
Water Lines < 300 psig
from CTB to Disposal

LINE TABLE


| LINE | BEARING | DISTANCE |
|------|-------------|----------|
| L1 | S00°02'21"W | 60.0' |
| L2 | N89°59'52"E | 660.1' |
| L3 | N00°00'04"E | 655.6' |
| L4 | N47°24'43"E | 54.4' |
| L5 | S80°43'46"E | 3438.8' |
| L6 | N38°53'43"W | 673.7' |
| L7 | N89°04'18"E | 3797.6' |

DESCRIPTION

SURVEY FOR A STRIP OF LAND 30.0 FEET WIDE AND 11339.7 FEET OR 2.148 MILES IN LENGTH CROSSING USA LAND IN SECTIONS 31, 32 & 33, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO, AND BEING 15.0 FEET LEFT AND 15.0 FEET RIGHT OF THE ABOVE PLATTED CENTERLINE SURVEY.

LEGEND

⊙ DENOTES FOUND CORNER AS NOTED



I, RONALD J. EIDSON, NEW MEXICO PROFESSIONAL SURVEYOR No. 3239, DO HEREBY CERTIFY THAT THIS SURVEY PLAT AND INSTRUMENT, BEING ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION, THAT I AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO, AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

RONALD J. EIDSON _____ DATE: 4/13/2018 _____

NOTE

BEARINGS SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983. DISTANCES ARE SURFACE VALUES.


PROVIDING SURVEYING SERVICES SINCE 1946
JOHN WEST SURVEYING COMPANY
 417 N. DAL PASO HOBBS, N.M. 88240
 (575) 393-3117 www.jwsc.biz
 TBPLS# 10021000

OXY U.S.A. INC.

SURVEY FOR BURIED WATER LINE FROM SAND DUNES CENTRAL CORRIDOR CTB TO OXY WATER PIPELINE, CROSSING SECTIONS 31, 32 & 33, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO

| | | |
|-----------------------|--------------------|-------------------------|
| Survey Date: 03/28/18 | CAD Date: 04/11/18 | Drawn By: LSL |
| W.O. No.: 18110360 | Rev. | Rel. W.O.: Sheet 1 of 1 |

301

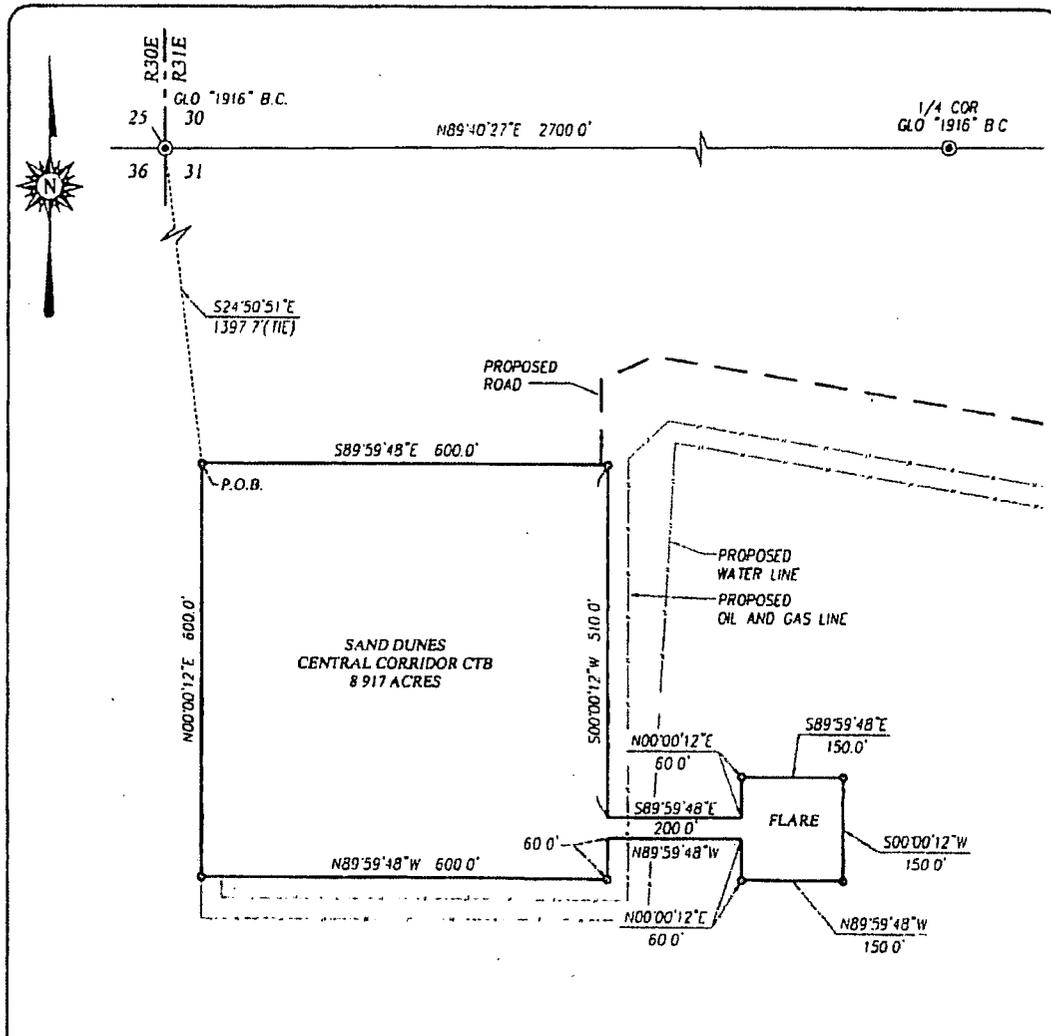

DESCRIPTION:

SURVEY OF A TRACT IN THE NORTHWEST QUARTER OF SECTION 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO AND BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

BEGINNING AT THE NORTHWEST CORNER OF THIS TRACT WHICH LIES S24°50'51"E 1397.7 FEET FROM THE NORTHWEST CORNER; THEN S89°59'48"E 600.0 FEET; THEN S00°00'12"W 510.0 FEET; THEN S89°59'48"E 200.0 FEET; THEN N00°00'12"E 60.0 FEET; THEN S89°59'48"E 150.0 FEET; THEN S00°00'12"W 150.0 FEET; THEN N89°59'48"W 150.0 FEET; N00°00'12"E 60.0 FEET; THEN N89°59'48"W 200.0 FEET; THEN S00°00'12"W 60.0 FEET; THEN N89°59'48"W 600.0 FEET; THEN N00°00'12"E 600.0 FEET TO THE POINT OF BEGINNING AND CONTAINING 8.917 ACRES MORE OR LESS.

NOTE

BEARINGS SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983. DISTANCES ARE SURFACE VALUES.

I, RONALD J. EIDSON, NEW MEXICO PROFESSIONAL SURVEYOR No. 3239, DO HEREBY CERTIFY THAT THE SURVEY PLAN AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION. I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO AND THERE IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.


RONALD J. EIDSON

DATE: 4/13/2018



LEGEND

- ⊙ DENOTES FOUND CORNER AS NOTED
- DENOTES SPIKE NAIL




OXY U.S.A. INC.

SURVEY FOR THE SAND DUNES CENTRAL CORRIDOR CTB AND FLARE PAD
SITUATED IN THE NW/4 OF SECTION 31,
TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M.
EDDY COUNTY, NEW MEXICO

| | | |
|-----------------------|--------------------|---------------|
| Survey Date: 03/26/18 | CAD Date: 04/12/18 | Drawn By: LSL |
| W O No.: 18110359 | Rev.: | Rel. W.O.: |

Sheet 1 of 1

PROVIDING SURVEYING SERVICES SINCE 1946
JOHN WEST SURVEYING COMPANY
412 N. DAL PASO HOBBES, N.M. 88240
(575) 393-3117 www.jwsc.biz
TBPLS# 10021000

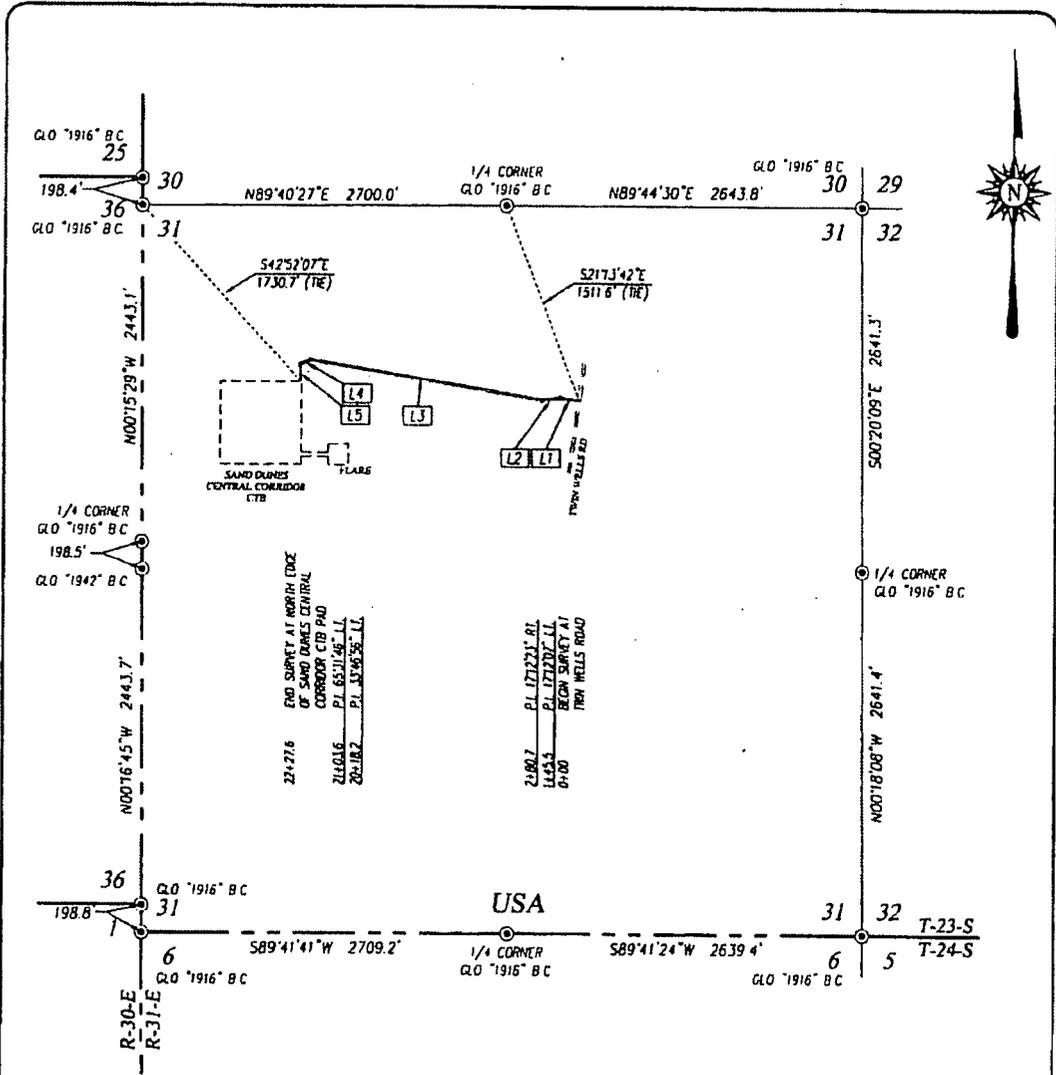

DESCRIPTION

SURVEY FOR A STRIP OF LAND 30.0 FEET WIDE AND 2227.6 FEET OR 0.422 MILES IN LENGTH CROSSING USA LAND IN SECTION 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO, AND BEING 15.0 FEET LEFT AND 15.0 FEET RIGHT OF THE ABOVE PLATTED CENTERLINE SURVEY.

LINE TABLE


| LINE | BEARING | DISTANCE |
|------|-------------|----------|
| L1 | N80°44'02"W | 145.5' |
| L2 | S82°03'51"W | 135.2' |
| L3 | N80°43'46"W | 1737.5' |
| L4 | S65°29'18"W | 85.4' |
| L5 | S00°02'28"E | 124.0' |

NOTE

BEARINGS SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983. DISTANCES ARE SURFACE VALUES.

LEGEND

⊙ DENOTES FOUND CORNER AS NOTED



I, RONALD J EIDSON, NEW MEXICO PROFESSIONAL SURVEYOR No. 3239, DO HEREBY CERTIFY THAT THIS SURVEY PLAN AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION, THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

RONALD J EIDSON
DATE: 4/13/2018

OXY U.S.A. INC.


SURVEY FOR A ROAD TO SAND DUNES
CENTRAL CORRIDOR CTB PAD
CROSSING SECTION 31,
TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M.
EDDY COUNTY, NEW MEXICO

PROVIDING SURVEYING SERVICES SINCE 1946
JOHN WEST SURVEYING COMPANY
412 N DAL PASO HOBBS, N.M. 88240
(575) 393-3117 www.jwsc.biz
TBPLSF 10021000

| | | |
|-----------------------|--------------------|---------------|
| Survey Date: 03/26/18 | CAD Date: 04/12/18 | Drawn By: LSL |
| W/O No.: 18110359 | Rev. | Rel W.O. |

**SURFACE SITE EASEMENT
OXY USA INC.**

A SURFACE SITE EASEMENT FOR THE PROPOSED
"PRECIOUS CENTRAL TANK BATTERY" & ATTACHED PROPOSED FLARE PAD IN
SECTION 30, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M.,
EDDY COUNTY, NEW MEXICO.

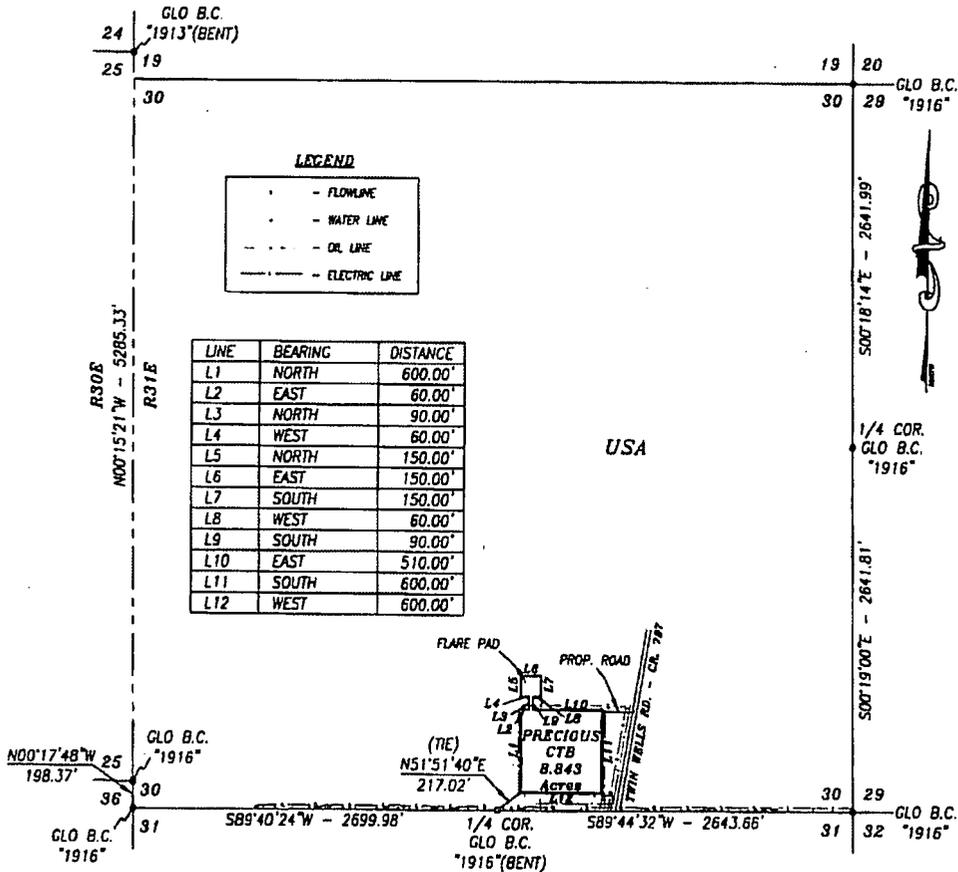

DESCRIPTION

A PROPOSED CENTRAL TANK BATTERY & FLARE PAD LYING WITHIN USA LAND IN SECTION 30, TOWNSHIP 23 SOUTH, RANGE 31 EAST, NMPM, EDDY COUNTY, NEW MEXICO AND BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

BEGINNING AT THE SOUTHWEST CORNER OF SAID CENTRAL TANK BATTERY, WHICH LIES N51°51'40"E 217.02 FEET FROM THE SOUTH QUARTER CORNER OF SAID SECTION; THEN NORTH 600.00 FEET; THEN EAST 60.00 FEET; THEN NORTH 90.00 FEET; THEN WEST 60.00 FEET; THEN NORTH 150.00 FEET; THEN EAST 150.00 FEET; THEN SOUTH 150.00 FEET; THEN WEST 60.00 FEET; THEN SOUTH 90.00 FEET; THEN EAST 510.00 FEET; THEN SOUTH 600.00 FEET; THEN WEST 600.00 FEET TO THE POINT OF BEGINNING.


SAID CENTRAL TANK BATTERY & FLARE PAD CONTAINS 8.843 ACRES.

BASIS OF BEARING:
BEARINGS SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983. DISTANCES ARE SURFACE VALUES.

HARCROW SURVEYING, LLC
2314 W. MAIN ST, ARTESIA, N.M. 88210
PH: (575) 746-2158 FAX: (575) 746-2158
c.harcrow@harcrowsurveying.com



CERTIFICATION
I, CHAD HARCROW, A NEW MEXICO REGISTERED PROFESSIONAL SURVEYOR CERTIFY THAT I DIRECTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF, AND THIS SURVEY AND PLAN MEET THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO.



Chad Harcrow
CHAD HARCROW N.M.P.S. NO. 17777
DATE 1/4/19

| | |
|--|----------------------------|
| OXY USA INC. | |
| SURVEY OF A PROPOSED CENTRAL TANK BATTERY LOCATED IN SECTION 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, NMPM, EDDY COUNTY, NEW MEXICO | |
| SURVEY DATE: NOVEMBER 2018 | SITE EASEMENT |
| DRAFTING DATE: JANUARY 2, 2019 | PAGE 1 OF 1 |
| APPROVED BY: CH | DRAWN BY: SP FILE: 18-1670 |

Prepared by:
Dave Andersen
GRR Land Department

GRR, INC. WATER SOURCES
FOR OXY CERTAIN POND LOCATIONS

08/26/2016

| Pond Name | Water Source1 | Water Source2 | Water Source3 | Water Source4 |
|--------------|------------------------|---------------|---------------------------------|---------------|
| Cedar Canyon | <u>Mine Industrial</u> | <u>C-3478</u> | <u>C-2772</u> | <u>C-1360</u> |
| Corral Fly | <u>C-1360</u> | <u>C-1361</u> | <u>C-3358</u> | <u>C-3836</u> |
| Cypress | <u>Mine Industrial</u> | <u>C-3478</u> | <u>C-2772</u> | <u>C-1361</u> |
| Mesa Verde | <u>C-2571</u> | <u>C-2574</u> | <u>J-27</u> | <u>J-5</u> |
| Peaches | <u>C-906</u> | <u>C-3200</u> | <u>SP-55 & SP-1279</u> A | <u>C-100</u> |

GRR Inc.

| NMOSE WELL NUMBER | WELL COMMON NAME | LAND OWNERSHIP | GPS LOCATION |
|-------------------------|---|----------------|-------------------------|
| C-100 | Tres Rios - Next to well shack | PRIVATE | 32.201921° -104.254317° |
| C-100-A | Tres Rios - Center of turnaround | PRIVATE | 32.201856° -104.254443° |
| C-272-B | Tres Rios - Northwest | PRIVATE | 32.202315° -104.254812° |
| C-906 | Whites City Commercial | PRIVATE | 32.176949° -104.374371° |
| C-1246-AC & C-1246-AC-S | Lackey | PRIVATE | 32.266978° -104.271212° |
| C-1886 | 1886 Tank | BLM | 32.229316° -104.312930° |
| C-1083 | Petska | PRIVATE | 32.30904° -104.16979° |
| C-1142 | Winston West | BLM | 32.507845 -104.177410 |
| C-1360 | ENG#1 | PRIVATE | 32.064922° -103.908818° |
| C-1361 | ENG#2 | PRIVATE | 32.064908° -103.906266° |
| C-1573 | Cooksey | PRIVATE | 32.113463° -104.108092° |
| C-1575 | ROCKHOUSE Ranch Well - Wildcat | BLM | 32.493190° -104.444163° |
| C-2270 | CW#1 (Oliver Kiehne) | PRIVATE | 32.021440° -103.559208° |
| C-2242 | Walterscheid | PRIVATE | 32.39199° -104.17694° |
| C-2492POD2 | Stacy Mills | PRIVATE | 32.324203° -103.812472° |
| C-2569 | Paduca well #2 | BLM | 32.160588 -103.742051 |
| C-2569POD2 | Paduca well replacement | BLM | 32.160588 -103.742051 |
| C-2570 | Paduca (tank) well #4 | BLM | 32.15668 -103.74114 |
| C-2571 | Paduca (road) well | BLM | 32.163993° -103.745457° |
| C-2572 | Paduca well #6 | BLM | 32.163985 -103.7412 |
| C-2573 | Paduca (in the bush) well | BLM | 32.16229 -103.74363 |
| C-2574 | Paduca well (on grid power) | BLM | 32.165777° -103.747590° |
| C-2701 | 401 Water Station | BLM | 32.458767° -104.528097° |
| C-2772 | Mobley Alternate | BLM | 32.305220° -103.852360° |
| C-3011 | ROCKY ARROYO - MIDDLE | BLM | 32.409046° -104.452045° |
| C-3060 | Max Vasquez | PRIVATE | 32.31291° -104.17033° |
| C-3095 | ROCKHOUSE Ranch Well - North of Rockcrusher | PRIVATE | 32.486794° -104.426227° |
| C-3200 | Beard East | PRIVATE | 32.168720 -104.276600 |
| C-3260 | Hayhurst | PRIVATE | 32.227110° -104.150925° |
| C-3350 | Winston Barn | PRIVATE | 32.511871° -104.139094° |
| C-3358 | Branson | PRIVATE | 32.19214° -104.06201° |
| C-3363 | Watts#2 | PRIVATE | 32.444637° -103.931313° |
| C-3453 | ROCKY ARROYO - FIELD | PRIVATE | 32.458657° -104.460804° |
| C-3478 | Mobley Private | PRIVATE | 32.294937° -103.888656° |
| C-3483pod1 | ENG#3 | BLM | 32.065556° -103.894722° |
| C-3483pod3 | ENG#5 | BLM | 32.06614° -103.89231° |
| C-3483POD4 | CW#4 (Oliver Kiehne) | PRIVATE | 32.021803° -103.559030° |
| C-3483POD5 | CW#5 (Oliver Kiehne) | PRIVATE | 32.021692° -103.560158° |
| C-3554 | Jesse Baker #1 well | PRIVATE | 32.071937° -103.723030° |
| C-3577 | CW#3 (Oliver Kiehne) | PRIVATE | 32.021773° -103.559738° |
| C-3581 | ENG#4 | BLM | 32.066083° -103.895024° |
| C-3595 | Oliver Kiehne house well #2 | PRIVATE | 32.025484° -103.682529° |
| C-3596 | CW#2 (Oliver Kiehne) | PRIVATE | 32.021793° -103.559018° |

GRR Inc.

| NMOSE WELL NUMBER | WELL COMMON NAME | LAND OWNERSHIP | GPS LOCATION |
|-------------------|---------------------------------------|----------------|-------------------------|
| C-3614 | Dale Hood #2 well | PRIVATE | 32.449290° -104.214500° |
| C-3639 | Jesse Baker #2 well | PRIVATE | 32.073692° -103.727121° |
| C-3679 | McCloy-Batty | PRIVATE | 32.215790° -103.537690° |
| C-3689 | Winston Barn_South | PRIVATE | 32.511504° -104.139073° |
| C-3731 | Ballard Construction | PRIVATE | 32.458551° -104.144219° |
| C-3764 | Watts#4 | PRIVATE | 32.443360° -103.942890° |
| C-3795 | Beckham#6 | BLM | 32.023434° -103.321968° |
| C-3821 | Three River Trucking | PRIVATE | 32.34636° -104.21355 |
| C-3824 | Collins | PRIVATE | 32.224053° -104.090129° |
| C-3829 | Jesse Baker #3 well | PRIVATE | 32.072545° -103.722258° |
| C-3830 | Paduca | BLM | 32.156400° -103.742060° |
| C-3836 | Granger | PRIVATE | 32.10073° -104.10284° |
| C-384 | ROCKHOUSE Ranch Well - Rockcrusher | PRIVATE | 32.481275° -104.420706° |
| C-459 | Walker | PRIVATE | 32.3379° -104.1498° |
| C-496pod2 | Munoz #3 Trash Pit Well | PRIVATE | 32.34224° -104.15365° |
| C-496pod3&4 | Munoz #2 Corner of Porter & Derrick | PRIVATE | 32.34182° -104.15272° |
| C-552 | Dale Hood #1 well | PRIVATE | 32.448720° -104.214330° |
| C-764 | Mike Vasquez | PRIVATE | 32.230553° -104.083518° |
| C-766(old) | Grandi | PRIVATE | 32.32352° -104.16941° |
| C-93-S | Don Kidd well | PRIVATE | 32.344876 -104.151793 |
| C-987 | ROCKY ARROYO - HOUSE | PRIVATE | 32.457049° -104.461506° |
| C-98-A | Bindel well | PRIVATE | 32.335125° -104.187255° |
| CP-1170POD1 | Beckham#1 | PRIVATE | 32.065889° -103.312583° |
| CP-1201 | Winston Ballard | BLM | 32.580380° -104.115980° |
| CP-1202 | Winston Ballard | BLM | 32.538178° -104.046024° |
| CP-1231 | Winston Ballard | PRIVATE | 32.618968° -104.122690° |
| CP-1263POD5 | Beckham#5 | PRIVATE | 32.065670° -103.307530° |
| CP-1414 | Crawford #1 | PRIVATE | 32.238380° -103.260890° |
| CP-1414 POD 1 | RRR | PRIVATE | 32.23911° -103.25988° |
| CP-1414 POD 2 | RRR | PRIVATE | 32.23914° -103.25981° |
| CP-519 | Bond_Private | PRIVATE | 32.485546 -104.117583 |
| CP-556 | Jimmy Mills (Stacy) | STATE | 32.317170° -103.495080° |
| CP-626 | Oi Loco (W) | STATE | 32.692660° -104.068064° |
| CP-626-S | Beach Exploration/ Oi Loco (E) | STATE | 32.694229° -104.064759° |
| CP-73 | Laguna #1 | BLM | 32.615015° -103.747615° |
| CP-74 | Laguna #2 | BLM | 32.615255° -103.747688° |
| CP-741 | Jimmy Richardson | BLM | 32.61913° -104.06101° |
| CP-742 | Jimmy Richardson | BLM | 32.614061° -104.017211° |
| CP-742 | Hidden Well | BLM | 32.614061 -104.017211 |
| CP-745 | Leaning Tower of Pisa | BLM | 32.584619° -104.037179° |
| CP-75 | Laguna #3 | BLM | 32.615499° -103.747715° |
| CP-924 | Winston Ballard | BLM | 32.545888° -104.110114° |
| CP-926 | Winchester well (Winston) | BLM | 32.601125° -104.128358° |

GRR Inc.

| NMOSE WELL NUMBER | WELL COMMON NAME | LAND OWNERSHIP | GPS LOCATION |
|----------------------------|---|----------------|-------------------------|
| J-27 | Beckham | PRIVATE | 32.020403° -103.299333° |
| J-5 | EPNG Jal Well | PRIVATE | 32.050232° -103.313117° |
| J-33 | Beckham | PRIVATE | 32.016443° -103.297714° |
| J-34 | Beckham | PRIVATE | 32.016443° -103.297714° |
| J-35 | Beckham | PRIVATE | 32.016443° -103.297714° |
| L-10167 | Angell Ranch well | PRIVATE | 32.785847° -103.644705° |
| L-10613 | Northcutt3 (2nd House well) | PRIVATE | 32.687922° -103.472452° |
| L-11281 | Northcutt4 | PRIVATE | 32.687675° -103.471512° |
| L-12459 | Northcutt1 (House well) | PRIVATE | 32.689498° -103.472697° |
| L-12462 | Northcutt8 Private Well | PRIVATE | 32.686238° -103.435409° |
| L-13049 | EPNG Maljamar well | PRIVATE | 32.81274° -103.67730° |
| L-13129 | Pearce State | STATE | 32.726305° -103.553172° |
| L-13179 | Pearce Trust | STATE | 32.731304° -103.548461° |
| L-13384 | Northcutt7 (State) CAZA | STATE | 32.694651° -103.434997° |
| L-1880S-2 | HB Intrepid well #7 | PRIVATE | 32.842212° -103.621299° |
| L-1880S-3 | HB Intrepid well #8 | PRIVATE | 32.852415° -103.620405° |
| L-1881 | HB Intrepid well #1 | PRIVATE | 32.829124° -103.624139° |
| L-1883 | HB Intrepid well #4 | PRIVATE | 32.828041° -103.607654° |
| L-3887 | Northcutt2 (Tower or Pond well) | PRIVATE | 32.689036° -103.472437° |
| L-5434 | Northcutt5 (State) | STATE | 32.694074° -103.405111° |
| L-5434-S | Northcutt6 (State) | STATE | 32.693355° -103.407004° |
| RA-14 | Horner Can | PRIVATE | 32.89348° -104.37208° |
| RA-1474 | Irvin Smith | PRIVATE | 32.705773° -104.393043° |
| RA-1474-B | NLake WS / Jack Clayton | PRIVATE | 32.561221° -104.293095° |
| RA-9193 | Angell Ranch North Hummingbird | PRIVATE | 32.885162° -103.676376° |
| SP-55 & SP-1279-A | Blue Springs Surface POD | PRIVATE | 32.181358° -104.294009° |
| SP-55 & SP-1279 (Bounds) | Bounds Surface POD | PRIVATE | 32.203875° -104.247076° |
| SP-55 & SP-1279 (Wilson) | Wilson Surface POD | PRIVATE | 32.243010° -104.052197° |
| City Treated Effluent | City of Carlsbad Waste Treatment Plant | PRIVATE | 32.411122° -104.177030° |
| Mine Industrial | Mosaic Industrial Water | PRIVATE | 32.370286° -103.947839° |
| Mobley State Well (NO OSE) | Mobley Ranch | STATE | 32.308859° -103.891806° |
| EPNG Industrial | Monument Water Well Pipeline (Oil Center, Eunice) | PRIVATE | 32.512943° -103.290300° |
| MCOX Commercial | Matt Cox Commercial | PRIVATE | 32.529431° -104.188017° |
| AMAX Mine Industrial | Mosaic Industrial Water | N/A | VARIOUS TAPS |
| WAG Mine Industrial | Mosaic Industrial Water | N/A | VARIOUS TAPS |
| HB Mine Industrial | Intrepid Industrial Water | N/A | VARIOUS TAPS |

Mesquite

Cedar Canyon

Major Source: C464 (McDonald) Sec. 13 T24S R28E

Secondary Source: C-00738 (McDonald/Faulk) Sec. 12 T24S R28E

Corral Fly – South of Cedar Canyon

Major Source: C464 (McDonald) Sec. 13 T24S R28E

Secondary Source: C-00738 (McDonald/Faulk) Sec. 12 T24S R28E

Cypress – North of Cedar Canyon

Major Source: Caviness B: C-501-AS2 Sec 23 T28S R15E

Secondary Source: George Arnis; C-1303

Sand Dunes – new frac pond

Major Source: 128 Fresh Water Pond (Mesquite/Mosaic) – located at MM 4 on 128; 240,000 bbl pond

Secondary Source: George Arnis; C-1303

Mesa Verde – east of Sand Dunes

Major Source: 128 Fresh Water Pond (Mesquite/Mosaic) – located at MM 4 on 128; 240,000 bbl pond

Secondary Source: Unknown at this time; needs coordinates to determine secondary source

Smokey Bits/Ivove/Misty – had posiden tanks before

Major Source: Unknown at this time; need coordinates to determine major source

Secondary Source: Unknown at this time; needs coordinates to determine secondary source

Red Tank/Lost Tank

Major Source: Unknown at this time; need coordinates to determine major source

Secondary Source: Unknown at this time; needs coordinates to determine secondary source

Peaches


Major Source: Unknown at this time; need coordinates to determine major source

Secondary Source: Unknown at this time; needs coordinates to determine secondary source

OXY USA INC.
PRECIOUS 30-18 FEDERAL COM #11H
SITE PLAN
FAA PERMIT: NO

PRECIOUS 30-18
 FEDERAL COM #11H
 NAD 83 NME
 LAT. = 32.267820° N
 LONG. = 103.819380° W
 ELEV - 3344.1'


N/4 COR.
 SEC. 31
 GLO. B.C.
 "1916"

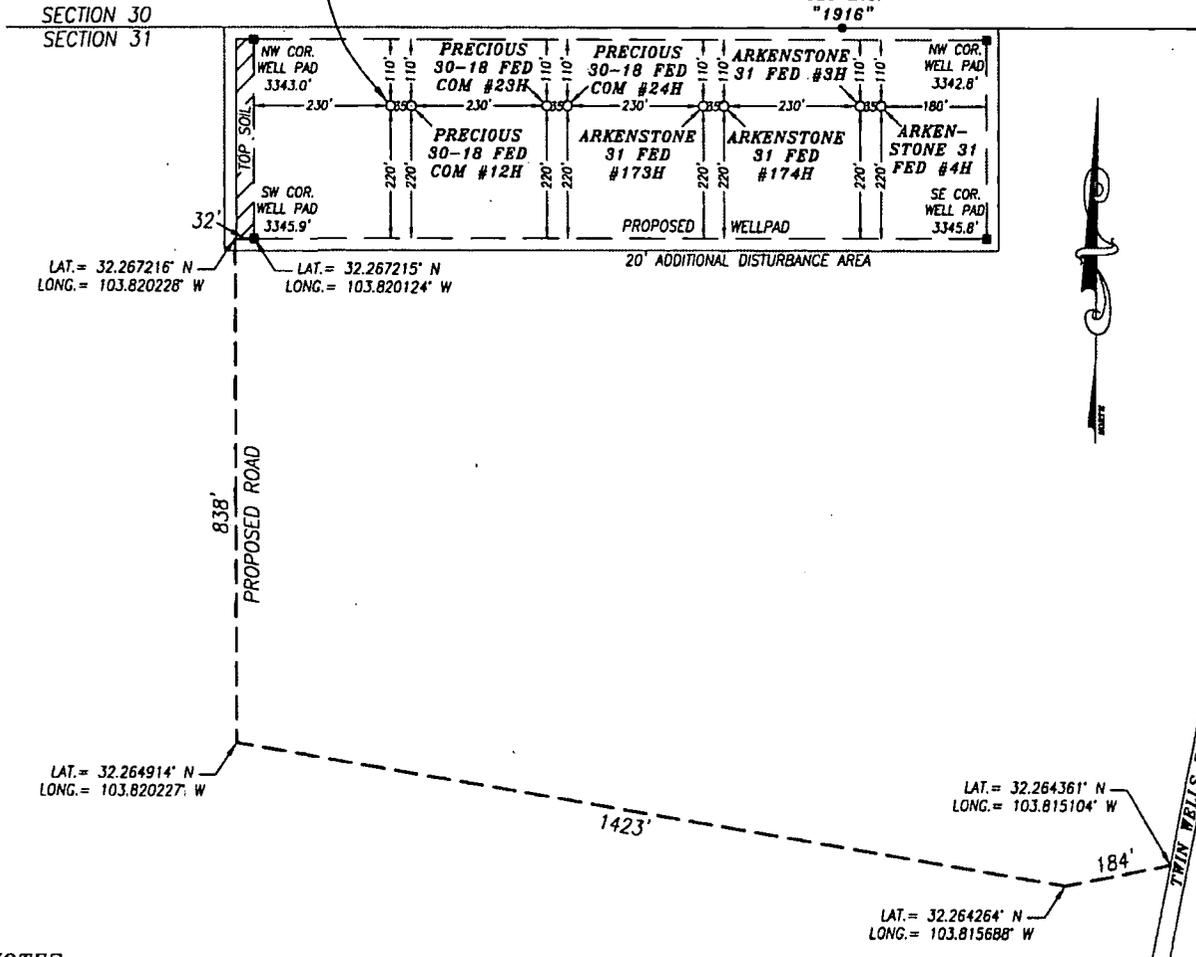


NOTES:

- 1) LATs & LONGS SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983.
- 2) DISTANCES ARE GRID VALUES.
- 3) ALL FEATURES ARE EXISTING UNLESS OTHERWISE NOTED

HARCROW SURVEYING, LLC
 2314 W. MAIN ST, ARTESIA, N.M. 88210
 PH: (575) 746-2158
 c.harcrow@harcrowsurveying.com



CERTIFICATION
 I, CHAD HARCROW, A NEW MEXICO REGISTERED PROFESSIONAL SURVEYOR CERTIFY THAT I DIRECTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

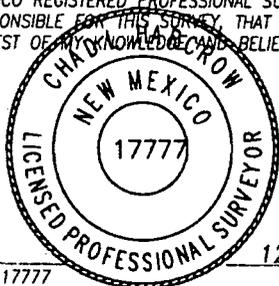


Chad Harcrow
 CHAD HARCROW N.M.P.S. NO. 17777



12/31/18
 DATE

| | |
|--|---------------|
| OXY USA INC. | |
| PRECIOUS 30-18 FEDERAL COM #11H LOCATED 130 FEET FROM THE NORTH LINE AND 1935 FEET FROM THE WEST LINE OF SECTION 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO | |
| SURVEY DATE: SEPTEMBER 18, 2018 | SITE PLAN |
| DRAFTING DATE: DECEMBER 27, 2018 | PAGE: 1 OF 1 |
| APPROVED BY: CH | DRAWN BY: SP |
| | FILE: 18-1631 |


Oxy Single Centrifuge
 Closed Loop System – New
 Mexico Flex III
 May 28, 2013

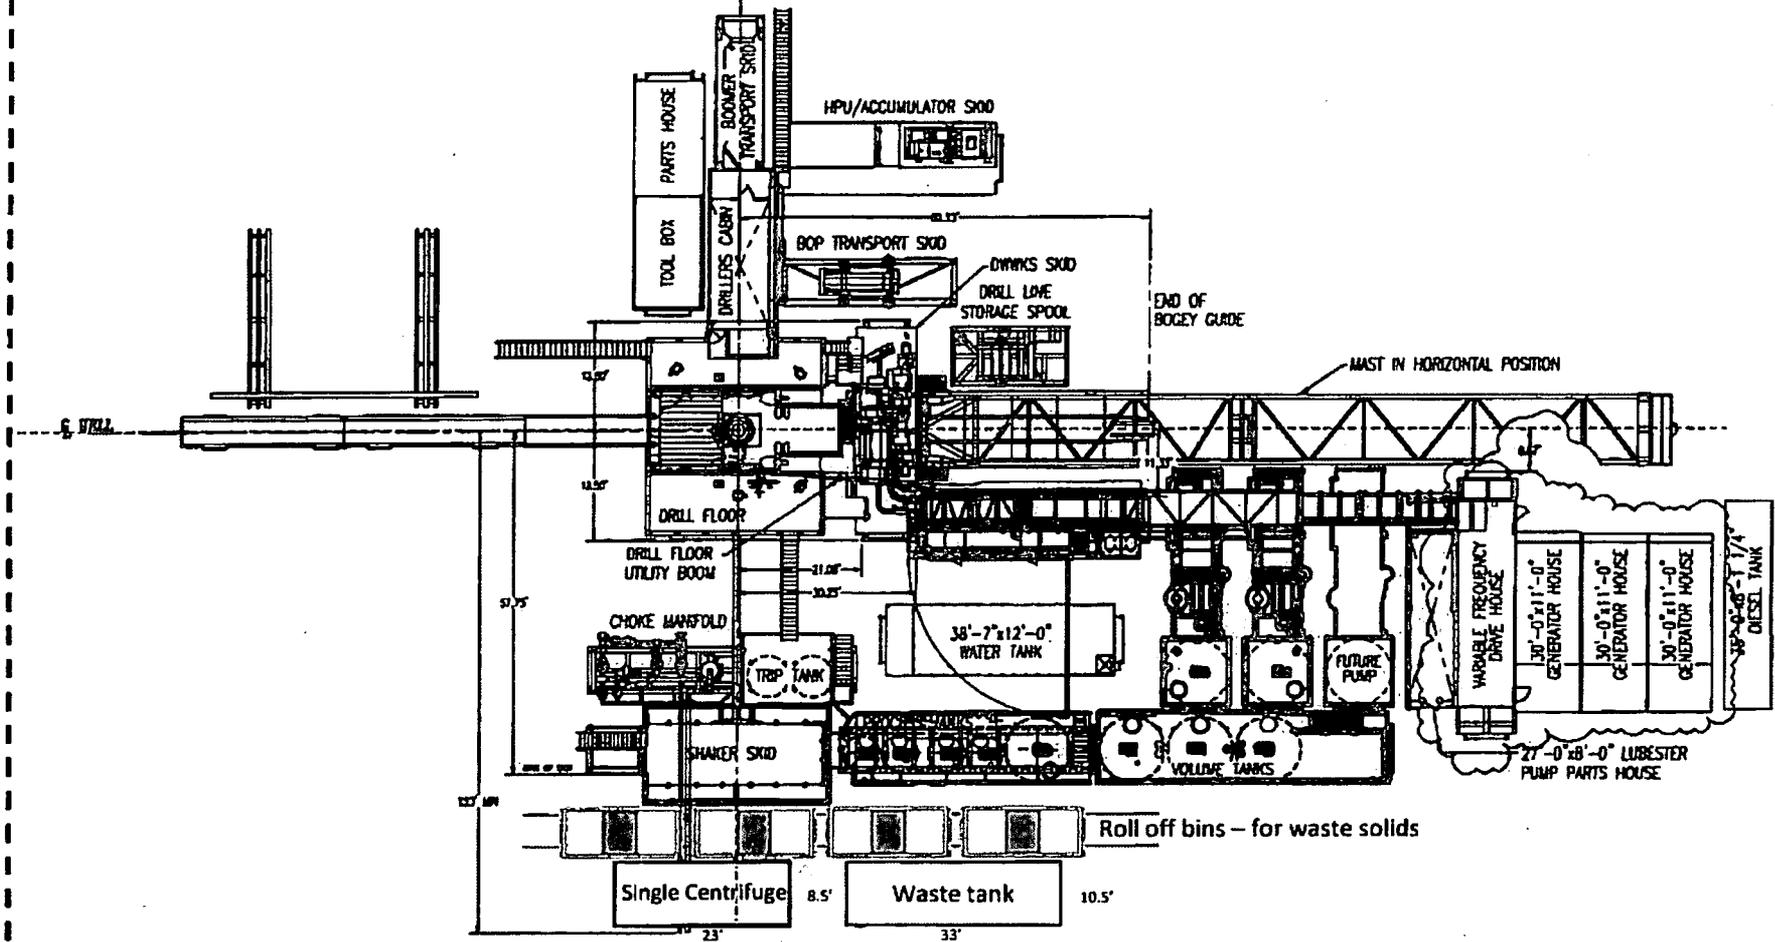

Oxy

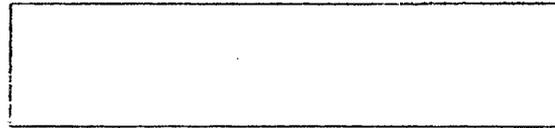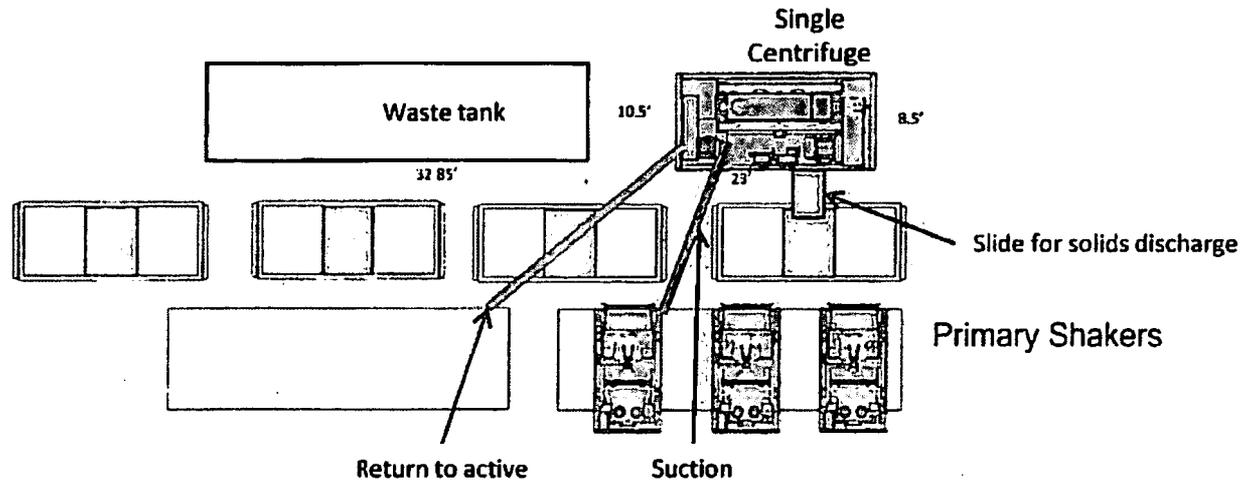

Well Head

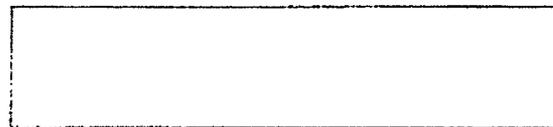

Oxy Single Centrifuge
Closed Loop System – New
Mexico Flex III

May 28, 2013

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Original
to Appropriate
District Office

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NM OIL CONSERVATION
ARTESIA DISTRICT

OCT 11 2019

GAS CAPTURE PLAN

Date: 01-15-2019

RECEIVED

Original

Operator & OGRID No.: OXY USA INC. - 16696

Amended - Reason for Amendment: _____

This Gas Capture Plan outlines actions to be taken by the Operator to reduce well/production facility flaring/venting for new completion (new drill, recomple to new zone, re-frac) activity.

Note: Form C-129 must be submitted and approved prior to exceeding 60 days allowed by Rule (Subsection A of 19.15.18.12 NMAC).

Well(s)/Production Facility – Name of facility

The well(s) that will be located at the production facility are shown in the table below.

| Well Name | API | Well Location (ULSTR) | Footages | Expected MCF/D | Flared or Vented | Comments |
|--------------------------------|---------|-----------------------|------------------|----------------|------------------|----------|
| Arkenstone 31 Federal 1H | Pending | D-1-31-23S-31E | 130 FNL 895 FWL | 2300 | 0 | |
| Arkenstone 31 Federal 2H | Pending | D-1-31-23S-31E | 130 FNL 930 FWL | 2300 | 0 | |
| Arkenstone 31 Federal 3H | Pending | B-31-23S-31E | 130 FNL 2613 FEL | 2300 | 0 | |
| Arkenstone 31 Federal 4H | Pending | B-31-23S-31E | 130 FNL 2578 FEL | 2300 | 0 | |
| Arkenstone 31 Federal 7H | Pending | C-31-23S-31E | 130 FNL 1425 FWL | 2300 | 0 | |
| Arkenstone 31 Federal 8H | Pending | C-31-23S-31E | 130 FNL 1460 FWL | 2300 | 0 | |
| Arkenstone 31 Federal 171H | Pending | D-1-31-23S-31E | 130 FNL 1160 FWL | 2700 | 0 | |
| Arkenstone 31 Federal 172H | Pending | D-1-31-23S-31E | 130 FNL 1195 FWL | 2700 | 0 | |
| Arkenstone 31 Federal 173H | Pending | C-31-23S-31E | 130 FNL 2465 FWL | 2700 | 0 | |
| Arkenstone 31 Federal 174H | Pending | C-31-23S-31E | 130 FNL 2500 FWL | 2700 | 0 | |
| Arkenstone 31 Federal Com 5H | Pending | A-31-23S-31E | 130 FNL 865 FEL | 2300 | 0 | |
| Arkenstone 31 Federal Com 6H | Pending | A-31-23S-31E | 100 FNL 830 FEL | 2300 | 0 | |
| Arkenstone 31 Federal Com 9H | Pending | B-31-23S-31E | 280 FNL 2150 FEL | 2300 | 0 | |
| Arkenstone 31 Federal Com 10H | Pending | B-31-23S-31E | 350 FNL 2150 FEL | 2300 | 0 | |
| Arkenstone 31 Federal Com 175H | Pending | A-31-23S-31E | 100 FNL 1130 FEL | 2700 | 0 | |
| Arkenstone 31 Federal Com 176H | Pending | A-31-23S-31E | 100 FNL 1095 FEL | 2700 | 0 | |
| Precious 30_18 Federal Com 1H | Pending | D-1-31-23S-31E | 570 FNL 550 FWL | 3900 | 0 | |
| Precious 30_18 Federal Com 2H | Pending | D-1-31-23S-31E | 570 FNL 585 FWL | 3900 | 0 | |
| Precious 30_18 Federal Com 3H | Pending | B-31-23S-31E | 570 FNL 2635 FEL | 3900 | 0 | |
| Precious 30_18 Federal Com 4H | Pending | B-31-23S-31E | 570 FNL 2600 FEL | 3900 | 0 | |
| Precious 30_18 Federal Com 5H | Pending | A-31-23S-31E | 520 FNL 800 FEL | 3900 | 0 | |
| Precious 30_18 Federal Com 6H | Pending | A-31-23S-31E | 520 FNL 765 FEL | 3900 | 0 | |
| Precious 30_18 Federal Com 7H | Pending | C-31-23S-31E | 570 FNL 1345 FWL | 3900 | 0 | |
| Precious 30_18 Federal Com 8H | Pending | C-31-23S-31E | 570 FNL 1380 FWL | 3900 | 0 | |
| Precious 30_18 Federal Com 9H | Pending | B-31-23S-31E | 520 FNL 1330 FEL | 3900 | 0 | |
| Precious 30_18 Federal Com 10H | Pending | A-31-23S-31E | 520 FNL 1295 FEL | 3900 | 0 | |
| Precious 30_18 Federal Com 11H | Pending | C-31-23S-31E | 130 FNL 1935 FWL | 1800 | 0 | |
| Precious 30_18 Federal Com 12H | Pending | C-31-23S-31E | 130 FNL 1970 FWL | 1800 | 0 | |
| Precious 30_18 Federal Com 13H | Pending | B-31-23S-31E | 100 FNL 1395 FEL | 1800 | 0 | |
| Precious 30_18 Federal Com 14H | Pending | B-31-23S-31E | 100 FNL 1360 FEL | 1800 | 0 | |
| Precious 30_18 Federal Com 21H | Pending | D-1-31-23S-31E | 570 FNL 285 FWL | 3000 | 0 | |
| Precious 30_18 Federal Com 22H | Pending | D-1-31-23S-31E | 570 FNL 1080 FWL | 3000 | 0 | |
| Precious 30_18 Federal Com 23H | Pending | C-31-23S-31E | 130 FNL 2200 FWL | 3000 | 0 | |
| Precious 30_18 Federal Com 24H | Pending | C-31-23S-31E | 130 FNL 2235 FWL | 3000 | 0 | |

| Well Name | API | Well Location (ULSTR) | Footages | Expected MCF/D | Flared or Vented | Comments |
|---------------------------------|---------|-----------------------|------------------|----------------|------------------|----------|
| Precious 30_18 Federal Com 25H | Pending | A-31-23S-31E | 100 FNL 600 FEL | 3000 | 0 | |
| Precious 30_18 Federal Com 26H | Pending | A-31-23S-31E | 100 FNL 565 FEL | 3000 | 0 | |
| Precious 30_18 Federal Com 41H | Pending | D-1-31-23S-31E | 570 FNL 320 FWL | 4000 | 0 | |
| Precious 30_18 Federal Com 42H | Pending | D-1-31-23S-31E | 570 FNL 1115 FWL | 4000 | 0 | |
| Precious 30_18 Federal Com 43H | Pending | C-31-23S-31E | 570 FNL 2178 FWL | 4000 | 0 | |
| Precious 30_18 Federal Com 44H | Pending | C-31-23S-31E | 570 FNL 2213 FWL | 4000 | 0 | |
| Precious 30_18 Federal Com 45H | Pending | A-31-23S-31E | 520 FNL 535 FEL | 4000 | 0 | |
| Precious 30_18 Federal Com 46H | Pending | A-31-23S-31E | 500 FNL 500 FEL | 4000 | 0 | |
| Precious 30_18 Federal Com 171H | Pending | D-1-31-23S-31E | 570 FNL 815 FWL | 3100 | 0 | |
| Precious 30_18 Federal Com 172H | Pending | D-1-31-23S-31E | 570 FNL 850 FWL | 3100 | 0 | |
| Precious 30_18 Federal Com 173H | Pending | C-31-23S-31E | 570 FNL 2443 FWL | 3100 | 0 | |
| Precious 30_18 Federal Com 174H | Pending | C-31-23S-31E | 570 FNL 2478 FWL | 3100 | 0 | |
| Precious 30_18 Federal Com 175H | Pending | A-31-23S-31E | 520 FNL 1065 FEL | 3100 | 0 | |
| Precious 30_18 Federal Com 176H | Pending | A-31-23S-31E | 520 FNL 1030 FEL | 3100 | 0 | |

Gathering System and Pipeline Notification

Well(s) will be connected to a production facility after flowback operations are complete, where a gas transporter system is in place. The gas produced from production facility is dedicated to Enterprise Field Services, LLC (“Enterprise”) and is connected to Enterprise low/high pressure gathering system located in Eddy County, New Mexico. OXY USA INC. (“OXY”) provides (periodically) to Enterprise a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, OXY and Enterprise have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at Enterprise’s Processing Plant located in Sec. 36, Twn. 24S, Rng. 30E, Eddy County, New Mexico. The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

Flowback Strategy


After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on Enterprise system at that time. Based on current information, it is OXY’s belief the system can take this gas upon completion of the well(s).

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

Alternatives to Reduce Flaring

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation – On lease
 - Only a portion of gas is consumed operating the generator, remainder of gas will be flared
- Compressed Natural Gas – On lease
 - Gas flared would be minimal, but might be uneconomical to operate when gas volume declines
- NGL Removal – On lease
 - Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines

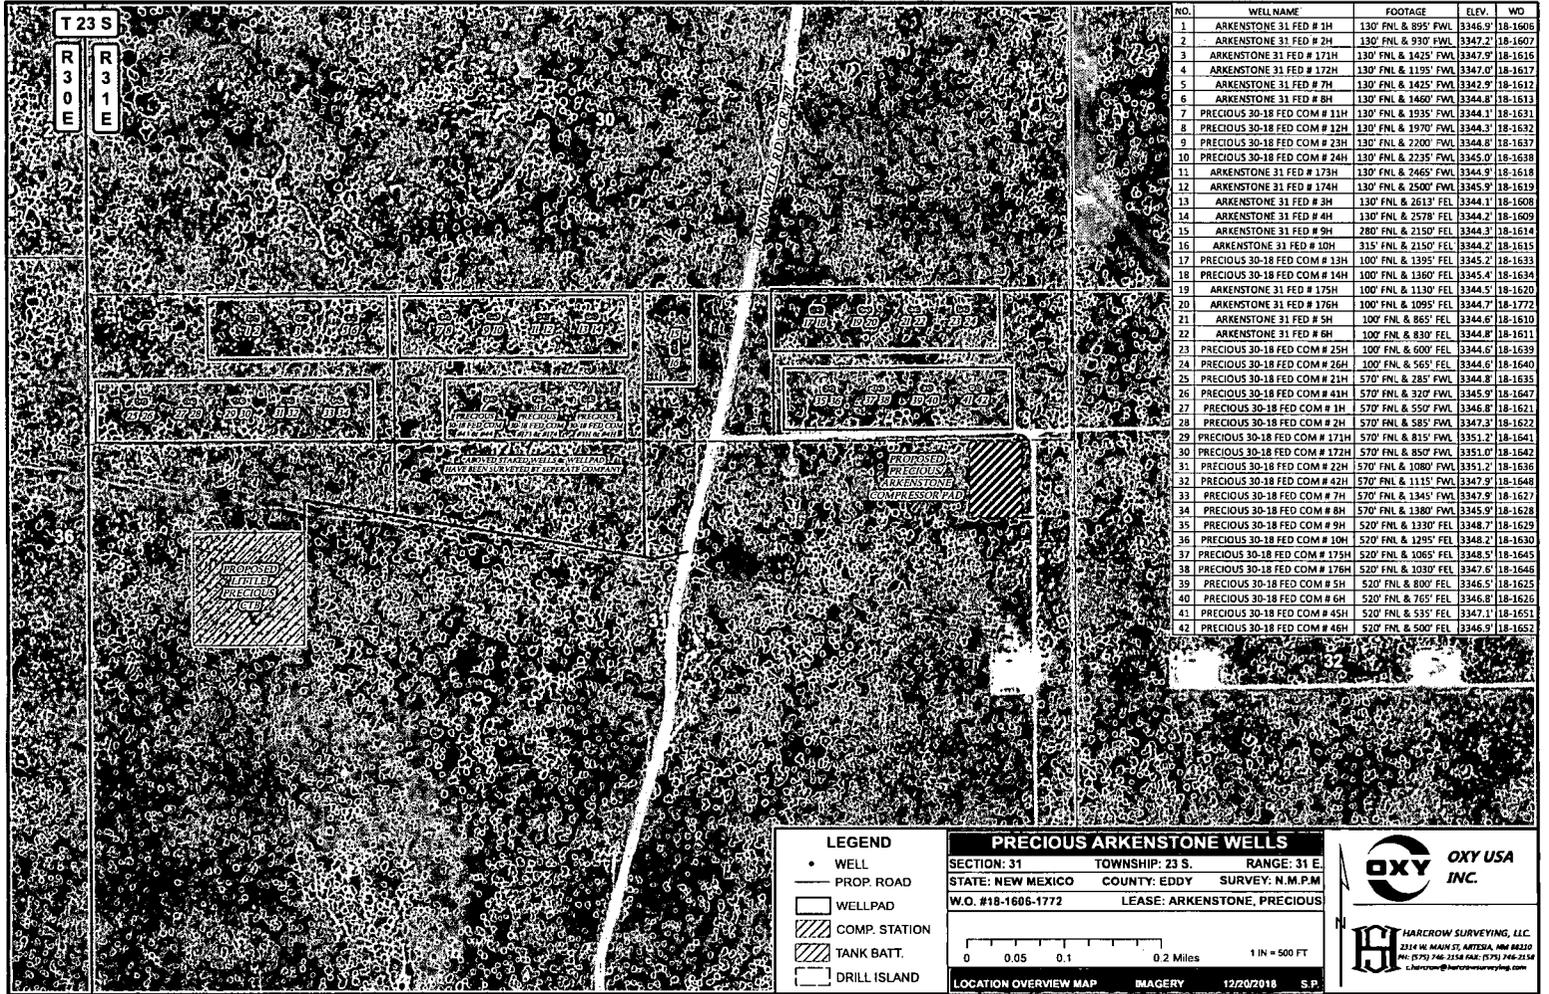

| NO. | WELL NAME | FOOTAGE | ELEV. | WD |
|-----|-------------------------------|----------------------|---------|---------|
| 1 | ARKENSTONE 31 FED # 1H | 130' FNL & 895' FWL | 3346.9' | 18-1606 |
| 2 | ARKENSTONE 31 FED # 2H | 130' FNL & 930' FWL | 3347.2' | 18-1607 |
| 3 | ARKENSTONE 31 FED # 173H | 130' FNL & 1425' FWL | 3347.9' | 18-1616 |
| 4 | ARKENSTONE 31 FED # 172H | 130' FNL & 1195' FWL | 3347.0' | 18-1617 |
| 5 | ARKENSTONE 31 FED # 7H | 130' FNL & 1425' FWL | 3342.9' | 18-1612 |
| 6 | ARKENSTONE 31 FED # 8H | 130' FNL & 1460' FWL | 3344.8' | 18-1613 |
| 7 | PRECIOUS 30-18 FED COM # 11H | 130' FNL & 1935' FWL | 3344.1' | 18-1631 |
| 8 | PRECIOUS 30-18 FED COM # 12H | 130' FNL & 1970' FWL | 3344.3' | 18-1632 |
| 9 | PRECIOUS 30-18 FED COM # 23H | 130' FNL & 2200' FWL | 3344.8' | 18-1637 |
| 10 | PRECIOUS 30-18 FED COM # 24H | 130' FNL & 2235' FWL | 3345.0' | 18-1638 |
| 11 | ARKENSTONE 31 FED # 173H | 130' FNL & 2465' FWL | 3344.9' | 18-1618 |
| 12 | ARKENSTONE 31 FED # 174H | 130' FNL & 2500' FWL | 3345.9' | 18-1619 |
| 13 | ARKENSTONE 31 FED # 3H | 130' FNL & 2613' FEL | 3344.1' | 18-1608 |
| 14 | ARKENSTONE 31 FED # 4H | 130' FNL & 2578' FEL | 3344.2' | 18-1609 |
| 15 | ARKENSTONE 31 FED # 9H | 280' FNL & 2150' FEL | 3344.3' | 18-1614 |
| 16 | ARKENSTONE 31 FED # 10H | 315' FNL & 2150' FEL | 3344.2' | 18-1615 |
| 17 | PRECIOUS 30-18 FED COM # 13H | 100' FNL & 1395' FEL | 3345.2' | 18-1633 |
| 18 | PRECIOUS 30-18 FED COM # 14H | 100' FNL & 1360' FEL | 3345.4' | 18-1634 |
| 19 | ARKENSTONE 31 FED # 175H | 100' FNL & 1130' FEL | 3344.5' | 18-1620 |
| 20 | ARKENSTONE 31 FED # 176H | 100' FNL & 1095' FEL | 3344.7' | 18-1772 |
| 21 | ARKENSTONE 31 FED # 5H | 100' FNL & 865' FEL | 3344.6' | 18-1610 |
| 22 | ARKENSTONE 31 FED # 6H | 100' FNL & 830' FEL | 3344.8' | 18-1611 |
| 23 | PRECIOUS 30-18 FED COM # 25H | 100' FNL & 600' FEL | 3344.6' | 18-1639 |
| 24 | PRECIOUS 30-18 FED COM # 26H | 100' FNL & 565' FEL | 3344.6' | 18-1640 |
| 25 | PRECIOUS 30-18 FED COM # 21H | 570' FNL & 285' FWL | 3344.8' | 18-1635 |
| 26 | PRECIOUS 30-18 FED COM # 41H | 570' FNL & 210' FWL | 3345.9' | 18-1647 |
| 27 | PRECIOUS 30-18 FED COM # 1H | 570' FNL & 550' FWL | 3346.8' | 18-1621 |
| 28 | PRECIOUS 30-18 FED COM # 2H | 570' FNL & 585' FWL | 3347.3' | 18-1622 |
| 29 | PRECIOUS 30-18 FED COM # 171H | 570' FNL & 815' FWL | 3351.2' | 18-1641 |
| 30 | PRECIOUS 30-18 FED COM # 172H | 570' FNL & 850' FWL | 3351.0' | 18-1642 |
| 31 | PRECIOUS 30-18 FED COM # 22H | 570' FNL & 1080' FWL | 3351.2' | 18-1636 |
| 32 | PRECIOUS 30-18 FED COM # 42H | 570' FNL & 1115' FWL | 3347.9' | 18-1648 |
| 33 | PRECIOUS 30-18 FED COM # 7H | 570' FNL & 1345' FWL | 3347.9' | 18-1627 |
| 34 | PRECIOUS 30-18 FED COM # 8H | 570' FNL & 1380' FWL | 3345.9' | 18-1628 |
| 35 | PRECIOUS 30-18 FED COM # 9H | 520' FNL & 1330' FEL | 3348.7' | 18-1629 |
| 36 | PRECIOUS 30-18 FED COM # 10H | 520' FNL & 1295' FEL | 3348.2' | 18-1630 |
| 37 | PRECIOUS 30-18 FED COM # 173H | 520' FNL & 1065' FEL | 3348.5' | 18-1643 |
| 38 | PRECIOUS 30-18 FED COM # 176H | 520' FNL & 1030' FEL | 3347.6' | 18-1646 |
| 39 | PRECIOUS 30-18 FED COM # 5H | 520' FNL & 800' FEL | 3346.5' | 18-1625 |
| 40 | PRECIOUS 30-18 FED COM # 6H | 520' FNL & 765' FEL | 3346.8' | 18-1626 |
| 41 | PRECIOUS 30-18 FED COM # 45H | 520' FNL & 535' FEL | 3347.1' | 18-1651 |
| 42 | PRECIOUS 30-18 FED COM # 46H | 520' FNL & 500' FEL | 3346.9' | 18-1652 |

LEGEND

- WELL
- PROP. ROAD
- WELLPAD
- ▨ COMP. STATION
- ▩ TANK BATT.
- DRILL ISLAND

PRECIOUS ARKENSTONE WELLS

SECTION: 31 TOWNSHIP: 23 S. RANGE: 31 E.

STATE: NEW MEXICO COUNTY: EDDY SURVEY: N.M.P.M.

W.O. #18-1606-1772 LEASE: ARKENSTONE, PRECIOS

0 0.05 0.1 0.2 Miles 1 IN = 500 FT


LOCATION OVERVIEW MAP IMAGERY 12/20/2016 S.P.

OXY USA INC.

HARCROW SURVEYING, LLC.
 2314 W. MAIN ST. ARTESIA, NM 88220
 PH: 505.746.3534 FAX: 505.746.2168
 c.harcrow@harcrowsurveying.com

T 23 S
R 30 E R 31 E

TWIN WELLS RD. - CR. 787

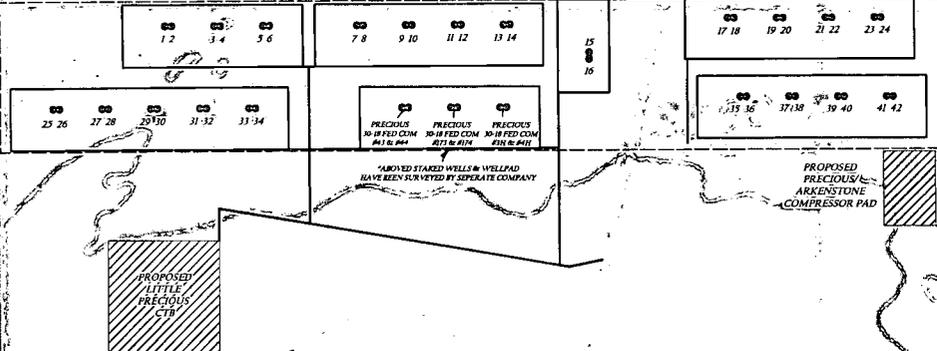

| NO. | WELL NAME | FOOTAGE | ELEV. | WD |
|-----|-------------------------------|----------------------|---------|---------|
| 1 | ARKENSTONE 31 FED # 1H | 130' FNL & 895' FWL | 3346.9' | 18-1606 |
| 2 | ARKENSTONE 31 FED # 2H | 130' FNL & 930' FWL | 3347.2' | 18-1607 |
| 3 | ARKENSTONE 31 FED # 171H | 130' FNL & 1425' FWL | 3347.9' | 18-1618 |
| 4 | ARKENSTONE 31 FED # 172H | 130' FNL & 1195' FWL | 3347.0' | 18-1617 |
| 5 | ARKENSTONE 31 FED # 7H | 130' FNL & 1425' FWL | 3342.9' | 18-1612 |
| 6 | ARKENSTONE 31 FED # 8H | 130' FNL & 1460' FWL | 3344.8' | 18-1613 |
| 7 | PRECIOUS 30-18 FED COM # 11H | 130' FNL & 1935' FWL | 3344.1' | 18-1631 |
| 8 | PRECIOUS 30-18 FED COM # 12H | 130' FNL & 1970' FWL | 3344.3' | 18-1632 |
| 9 | PRECIOUS 30-18 FED COM # 23H | 130' FNL & 2200' FWL | 3344.8' | 18-1637 |
| 10 | PRECIOUS 30-18 FED COM # 24H | 130' FNL & 2235' FWL | 3345.0' | 18-1638 |
| 11 | ARKENSTONE 31 FED # 173H | 130' FNL & 2465' FWL | 3344.9' | 18-1618 |
| 12 | ARKENSTONE 31 FED # 174H | 130' FNL & 2500' FWL | 3345.9' | 18-1619 |
| 13 | ARKENSTONE 31 FED # 3H | 130' FNL & 2613' FWL | 3344.1' | 18-1608 |
| 14 | ARKENSTONE 31 FED # 4H | 130' FNL & 2578' FWL | 3344.2' | 18-1609 |
| 15 | ARKENSTONE 31 FED # 9H | 280' FNL & 2150' FWL | 3344.3' | 18-1614 |
| 16 | ARKENSTONE 31 FED # 10H | 315' FNL & 2150' FWL | 3344.2' | 18-1615 |
| 17 | PRECIOUS 30-18 FED COM # 13H | 100' FNL & 1395' FEL | 3345.2' | 18-1633 |
| 18 | PRECIOUS 30-18 FED COM # 14H | 100' FNL & 1360' FEL | 3345.4' | 18-1634 |
| 19 | ARKENSTONE 31 FED # 175H | 100' FNL & 1130' FEL | 3344.5' | 18-1620 |
| 20 | ARKENSTONE 31 FED # 176H | 100' FNL & 1095' FEL | 3344.7' | 18-1772 |
| 21 | ARKENSTONE 31 FED # 5H | 100' FNL & 865' FEL | 3344.6' | 18-1610 |
| 22 | ARKENSTONE 31 FED # 6H | 100' FNL & 830' FEL | 3344.8' | 18-1611 |
| 23 | PRECIOUS 30-18 FED COM # 25H | 100' FNL & 600' FEL | 3344.6' | 18-1639 |
| 24 | PRECIOUS 30-18 FED COM # 26H | 100' FNL & 565' FEL | 3344.6' | 18-1640 |
| 25 | PRECIOUS 30-18 FED COM # 21H | 570' FNL & 285' FWL | 3344.8' | 18-1635 |
| 26 | PRECIOUS 30-18 FED COM # 41H | 570' FNL & 320' FWL | 3345.9' | 18-1647 |
| 27 | PRECIOUS 30-18 FED COM # 11H | 570' FNL & 550' FWL | 3346.8' | 18-1621 |
| 28 | PRECIOUS 30-18 FED COM # 21H | 570' FNL & 585' FWL | 3347.3' | 18-1622 |
| 29 | PRECIOUS 30-18 FED COM # 171H | 570' FNL & 815' FWL | 3351.2' | 18-1641 |
| 30 | PRECIOUS 30-18 FED COM # 172H | 570' FNL & 850' FWL | 3353.0' | 18-1642 |
| 31 | PRECIOUS 30-18 FED COM # 22H | 570' FNL & 1080' FWL | 3351.2' | 18-1636 |
| 32 | PRECIOUS 30-18 FED COM # 42H | 570' FNL & 1115' FWL | 3347.9' | 18-1648 |
| 33 | PRECIOUS 30-18 FED COM # 7H | 570' FNL & 1345' FWL | 3347.9' | 18-1627 |
| 34 | PRECIOUS 30-18 FED COM # 8H | 570' FNL & 1380' FWL | 3345.9' | 18-1628 |
| 35 | PRECIOUS 30-18 FED COM # 9H | 520' FNL & 1330' FEL | 3348.7' | 18-1629 |
| 36 | PRECIOUS 30-18 FED COM # 10H | 520' FNL & 1295' FEL | 3348.2' | 18-1630 |
| 37 | PRECIOUS 30-18 FED COM # 175H | 520' FNL & 1065' FEL | 3348.5' | 18-1645 |
| 38 | PRECIOUS 30-18 FED COM # 176H | 520' FNL & 1030' FEL | 3347.6' | 18-1646 |
| 39 | PRECIOUS 30-18 FED COM # 5H | 520' FNL & 800' FEL | 3346.5' | 18-1625 |
| 40 | PRECIOUS 30-18 FED COM # 6H | 520' FNL & 765' FEL | 3346.8' | 18-1626 |
| 41 | PRECIOUS 30-18 FED COM # 45H | 520' FNL & 535' FEL | 3347.1' | 18-1651 |
| 42 | PRECIOUS 30-18 FED COM # 46H | 520' FNL & 500' FEL | 3346.9' | 18-1652 |

LEGEND


- WELL
- PROP. ROAD
- WELLPAD
- ▨ COMP. STATION
- ▨ TANK BATT.
- DRILL ISLAND
- PRIVATE
- STATE OF NM
- US BLM

PRECIOUS ARKENSTONE WELLS

SECTION: 31 TOWNSHIP: 23 S. RANGE: 31 E.
STATE: NEW MEXICO COUNTY: EDDY SURVEY: N.M.P.M.
W.O. #18-1606-1772 LEASE: ARKENSTONE, PRECIOUS

0 0.05 0.1 0.2 Miles 1 IN = 500 FT
LOCATION OVERVIEW MAP LAND STATUS 12/20/2018 S.P.

SECTION 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M.,
EDDY COUNTY, NEW MEXICO.

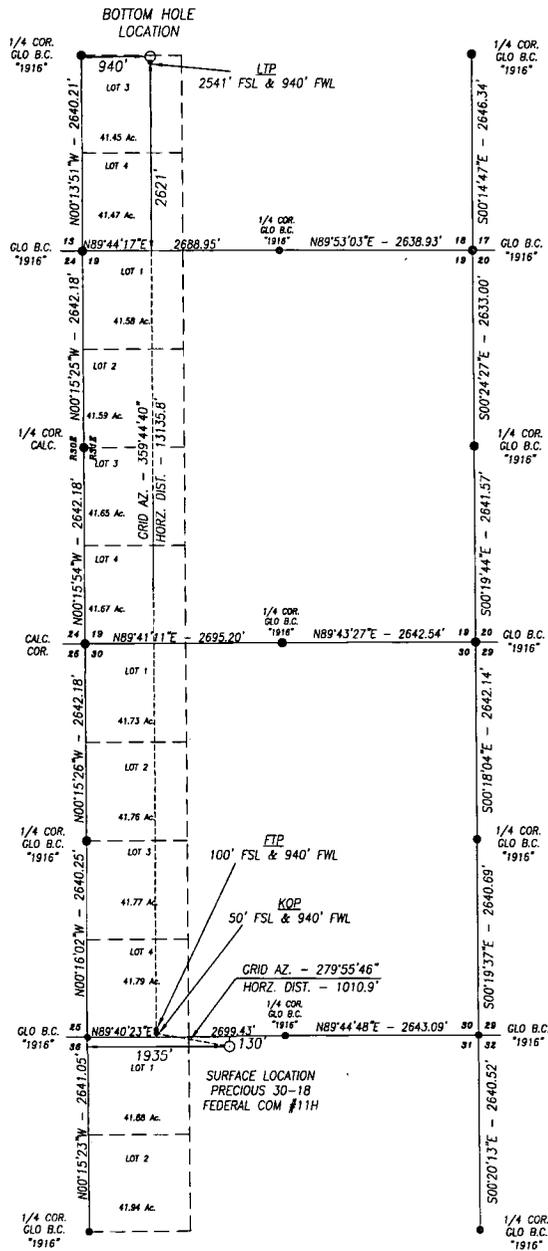

DIRECTIONS TO LOCATION:
BEGINNING AT THE INTERSECTION OF N.M. STATE HWY. #128 AND EDDY COUNTY ROAD #787 (TWIN WELLS ROAD), GO SOUTH ON EDDY COUNTY ROAD #787 FOR APPROX. 2.5 MILES; THEN TURN RIGHT ON PROPOSED ROAD AND GO SOUTHWEST FOR APPROX. 185 FEET; THEN TURN RIGHT AND GO NORTHWEST FOR .25 MILES; THEN TURN RIGHT AND GO NORTH FOR APPROX. 838 FEET; THEN TURN RIGHT AND GO EAST FOR APPROX. 32 FEET; THE PROPOSED WELL LIES APPROX. 318 FEET NORTHEAST.




BASIS OF BEARING:
BEARINGS SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983. DISTANCES ARE GRID VALUES.

HARCROW SURVEYING, LLC
2314 W. MAIN ST, ARTESIA, N.M. 88210
PH: (575) 746-2158
c.harcrow@harcrowsurveying.com



CERTIFICATION
I, CHAD HARCROW, A NEW MEXICO REGISTERED PROFESSIONAL SURVEYOR CERTIFY THAT I DIRECTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF, AND THIS SURVEY AND PLAT MEET THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO.



Chad Harcrow
CHAD HARCROW N.M.P.S. NO. 17777
DATE 12/31/18

| OXY USA INC. | |
|---|---------------|
| PRECIOUS 30-18 FEDERAL COM #11H SECTION 31, TOWNSHIP 23 SOUTH, RANGE 31 EAST, NMPM, EDDY COUNTY, NEW MEXICO | |
| SURVEY DATE: SEPTEMBER 18, 2018 | DRILL PATH |
| DRAFTING DATE: DECEMBER 17, 2018 | PAGE 1 OF 1 |
| APPROVED BY: CH | DRAWN BY: JR |
| | FILE: 18-1631 |

Pad
3113

330 x 1240 PAD
8 Wells

OXY U.S.A. INC.

NEW MEXICO STAKING FORM

Date Staked: 9-18-18

Lease / Well Name: Precious 30-18 Fed Com #11H

Legal Description: 130' FNL 1935' FWL Sec 31 T235 R31E

Latitude: 32° 16' 04.15" NAD 83

Longitude: -103° 49' 09.77" NAD 83

X: 700192.84 NAD 83

Y: 461546.28 NAD 83

Elevation: 3344.1 NAD 83

Move information:

County: Eddy

Surface Owner: BLM

Nearest Residence: ?

Nearest Water Well:

V-Door: EAST

Top soil: West

Road Description: SW Cor From SOUTH

New Road:

Upgrade Existing Road:

Interim Reclamation: 80' West 50' North

Source of Caliche: JESSIE BASSETT - BLM Jim Wilson - OXY

Onsite Attendees: SWCA A&E Survey

DATE: 2-22-18

Surface Use Plan of Operations

Operator Name/Number: OXY USA Inc. – 16696
Lease Name/Number: Precious 30-18 Federal Com #11H
Pool Name/Number: Wildcat Bone Spring
Surface Location: 130 FNL 1935 FWL NENW (C) Sec 31 T23S R31E – NMNM0546732A
Bottom Hole Location: 2621 FSL 940 FWL NWSW (3)(L) Sec 18 T23S R31E – NMNM0546732

1. Existing Roads

- a. A copy of the USGS “Los Medanos, NM” quadrangle map is attached showing the proposed location. The well location is spotted on the map, which shows the existing road system.
- b. The well was staked by Terry J. Asel, Certificate No. 15079 on 9/18/18, certified 12/31/18.
- c. Directions to Location: From the intersection of NM State Hwy 128 and CR 787 (Twin Wells Rd), go south on CR 787 for 2.5 miles. Turn right on proposed road and go southwest 184’. Turn right and go northwest for 1423’. Turn right and go north 838’. Turn right and go east for 32’ to location.

2. New or Reconstructed Access Roads:

- a. A new access road will be built. The access road will run from an existing road going 184’ southwest, then 1423’ northwest, then 838’ north, then 32’ east through pasture to the southwest corner of the pad.
- b. The maximum width of the road will be 14’. It will be crowned and made up of 6” of rolled and compacted caliche. Water will be deflected, as necessary, to avoid accumulation and prevent surface erosion.
- c. Surface material will be native caliche. This material will be obtained from a BLM approved pit nearest in proximity to the location. The average grade will be approximately 1%.
- d. No cattle guards, grates or fence cuts will be required. Turnouts every 1000’ as needed.
- e. Blade, water and repair existing caliche roads as needed.
- f. Water Bars will be incorporated every 200’ during the construction of the road.

3. Location of Existing Wells:

Existing wells within a one mile radius of the proposed well are shown on attached plat.

4. Location of Existing and/or Proposed Facilities:

- a. In the event the well is found productive, the Sand Dunes Precious Central Tank Battery would be utilized and the necessary production equipment will be installed at the well site. See proposed facilities layout diagram.
- b. All flow lines will adhere to API standards. They will consist of 3 – 4” composite flowlines operating < 75% MAWP, surface to follow surveyed route. Survey of a strip of land 30’ wide and 2169.8’ in length crossing USA land in Sections 30 & 31, T23S R31E, NMPM, Eddy County, NM and being 15’ left and 15’ right of the centerline survey. Two–6” steel gas lift hp line operating <1500 psig, buried, lines to follow surveyed route. Survey of a strip of land 30’ wide and 2796.7’ in length crossing USA land in Section 30 & 31, T23S R31E, NMPM, Eddy County, NM and being 15’ left and 15’ right of the centerline survey. See attached.
- c. Electric line will follow a route approved by the BLM. Survey of a strip of land 30’ wide and 1309.4’ in length crossing USA land in Sections 31 T23S R31E NMPM, Eddy County, NM and being 15’ left and 15’ right of the centerline survey, see attached.
- d. See attached for additional information on the Sand Dunes Precious/Arkenstone Central Corridor Surface Production Facilities.

5. Location and types of Water Supply

This well will be drilled using a combination of water mud systems. It will be obtained from commercial water stations in the area and will be hauled to location by transport truck using existing and proposed roads.

6. Construction Materials:

Primary

All caliche utilized for the drilling pad and proposed access road will be obtained from an existing BLM/State/Fee approved pit or from prevailing deposits found on the location. Will use BLM recommended extra caliche from other locations close by for roads, if available.

Secondary

The secondary way of obtaining caliche to build locations and roads will be by "turning over" the location. This means, caliche will be obtained from the actual well site. A caliche permit will be obtained from BLM prior to pushing up any caliche. 2400 cubic yards is max amount of caliche needed for pad and roads. Amount will vary for each pad. The procedure below has been approved by BLM personnel:

- a. The top 6" of topsoil is pushed off and stockpiled along the side of the location.
- b. An approximate 120' X 120' area is used within the proposed well site to remove caliche.
- c. Subsoil is removed and piled alongside the 120' X 120' within the pad site.
- d. When caliche is found, material will be stockpiled within the pad site to build the location and road.
- e. Then subsoil is pushed back in the hole and caliche is spread accordingly across entire location and road.
- f. Once the well is drilled the stockpiled top soil will be used for interim reclamation and spread along areas where caliche is picked up and the location size is reduced. Neither caliche nor subsoil will be stockpiled outside of the well pad. Topsoil will be stockpiled along the edge of the pad as depicted in the attached plat.

7. Methods of Handling Waste Material:

- a. A closed loop system will be utilized consisting of above ground steel tanks and haul-off bins. Disposal of liquids, drilling fluids and cuttings will be disposed of at an approved facility. Solids-CRI, Liquids-Laguna
- b. All trash, junk and other waste material will be contained in trash cages or bins to prevent scattering. When the job is completed, all contents will be removed and disposed of in an approved sanitary landfill.
- c. The supplier, including broken sacks, will pickup slats remaining after completion of well.
- d. A Porto-john will be provided for the rig crews. This equipment will be properly maintained during the drilling and completion operations and will be removed when all operations are complete.
- e. Disposal of fluids to be transported will be by the following companies. TFH Ltd, Laguna SWD Facility

8. Ancillary Facilities: None needed.

9. Well Site Layout:

The proposed well site layout with dimensions of the pad layout and equipment location.

V-Door – East

CL Tanks – North

Pad – 330' X 1240' – 8 Well Pad

10. Plans for Surface Reclamation:

- a. After concluding the drilling and/or completion operations, if the well is found non-commercial, the caliche will be removed from the pad and transported to the original caliche pit or used for other drilling locations. The road will be reclaimed as directed by the BLM. The original topsoil will again be returned to the pad and contoured, as close as possible, to the original topography, and the area will be seeded with an approved BLM mixture to re-establish vegetation.

- b. If the well is deemed commercially productive, caliche from the areas of the pad site not required for operations will be reclaimed. The original topsoil will be returned to the area of the drill pad not necessary to operate the well. These unused areas of the drill pad will be contoured, as close as possible, to match the original topography, and the area will be seeded with an approved BLM mixture to re-establish vegetation.

11. Surface Ownership:

The surface is owned by the U.S. Government and is administered by the BLM. The surface is multiple use with the primary uses of the region for the grazing of livestock and the production of oil and gas. The surface is leased to: Slash 46 Inc., P.O. Box 1358, Loving, NM 88256. They will be notified of our intention to drill prior to any activity.

12. Other Information:

- a. The vegetation cover is generally sparse consisting of mesquite, yucca, shinnery oak, sandsage and perennial native range grass. The topsoil is sandy in nature. Wildlife in the area is also sparse consisting of deer, coyotes, rabbits, rodents, reptiles, dove and quail.
- b. There is no permanent or live water in the general proximity of the location.
- c. There are no dwellings within one mile of the proposed well site.
- d. Cultural Resources Examination–This well is located in the Permian Basin PA. Payment to be determined by BLM. This well shares the same pad as the Arkenstone 31 Federal #3H, 4H, 173H, 174H, Precious 30-18 Federal Com #12H, 23H, 24H.

Copy of this application will be furnished to SWCA Environmental Consultants, 5647 Jefferson St. NE, Albuquerque, NM 87109. Potash lessee within one mile of surface location, Mosaic Potash Carlsbad, Inc., 1361 Potash Mines Rd., Carlsbad, NM 88220.

13. Bond Coverage:

Bond coverage is Individual-NMB000862, Nationwide-ESB00226.

14. Operators Representatives:


The OXY Permian representatives responsible for ensuring compliance of the surface use plan are listed below:

Leo Ortega
Operations Superintendent
1502 West Commerce Dr.
Carlsbad, NM 88220
Office – 575-628-4012
Cellular – 575-706-8995

Cuong Q. Phan
Asset Manager
P.O. Box 4294
Houston, TX Carlsbad, NM 88220
Office – 713-513-6645
Cellular – 281-832-0978

Jim Wilson
Operation Specialist
P.O. Box 50250
Midland, TX 79710
Cellular – 575-631-2442

Michael Walton
RMT Lead
P.O. Box 4294
Houston, TX 77210
Office – 713-366-5526
Cellular – 281-814-2971

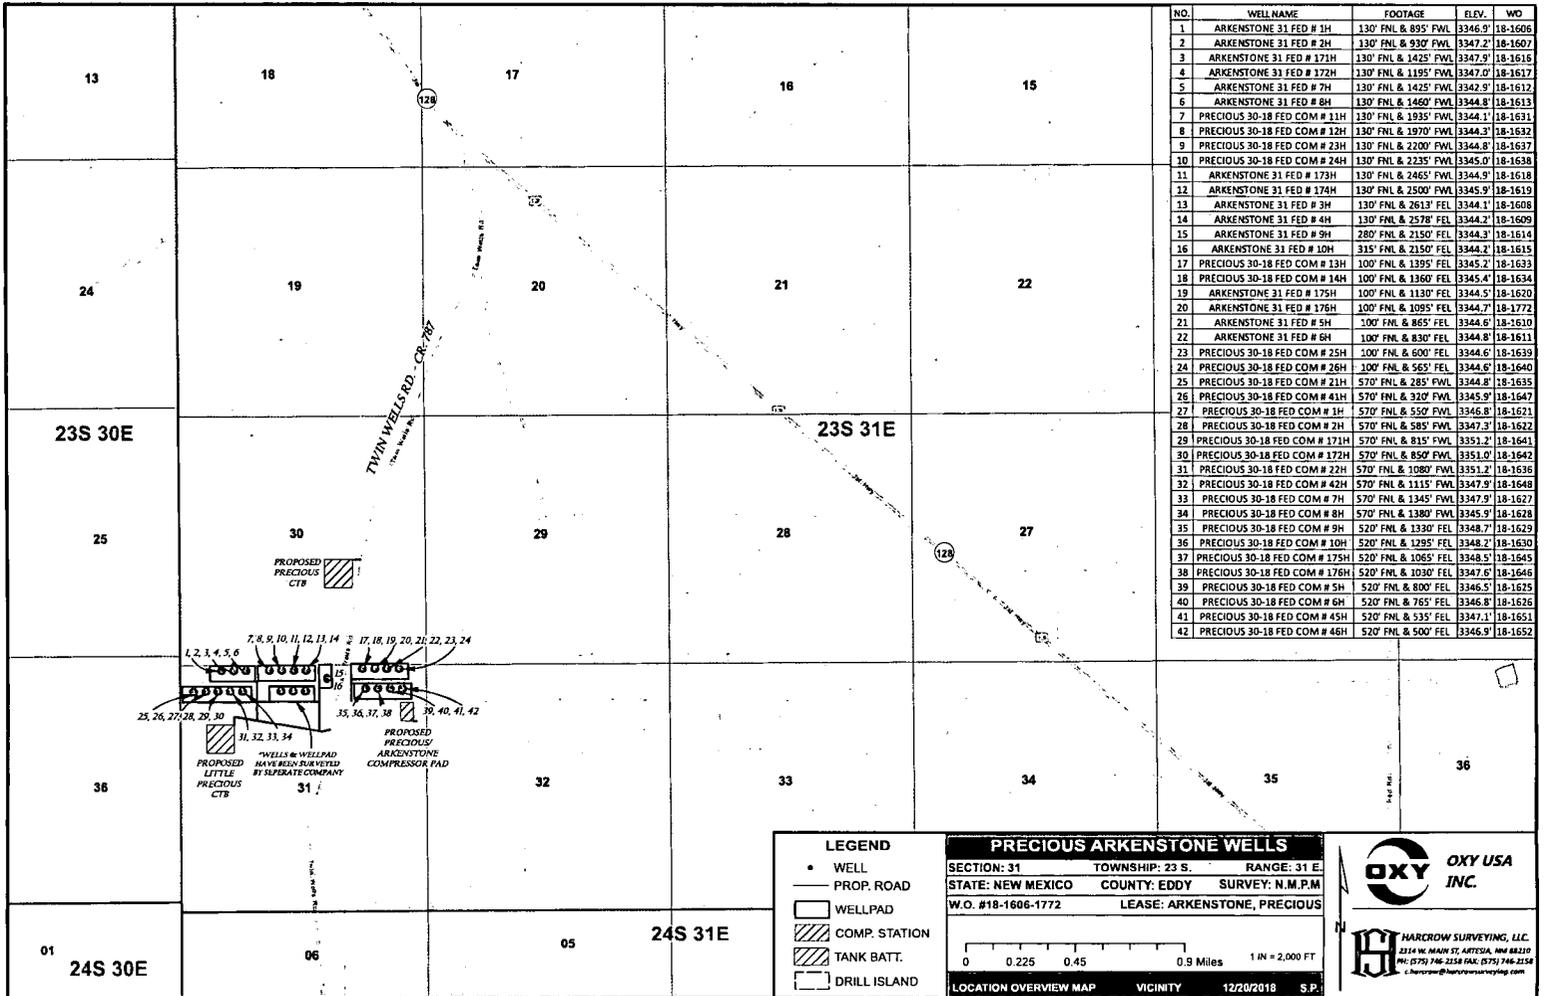

| NO. | WELL NAME | FOOTAGE | ELEV. | WO |
|-----|-------------------------------|----------------------|---------|---------|
| 1 | ARKENSTONE 31 FED # 1H | 130' FNL & 895' FWL | 3346.9' | 18-1606 |
| 2 | ARKENSTONE 31 FED # 2H | 130' FNL & 930' FWL | 3347.2' | 18-1607 |
| 3 | ARKENSTONE 31 FED # 171H | 130' FNL & 1425' FWL | 3347.9' | 18-1616 |
| 4 | ARKENSTONE 31 FED # 172H | 130' FNL & 1195' FWL | 3347.0' | 18-1617 |
| 5 | ARKENSTONE 31 FED # 7H | 130' FNL & 1425' FWL | 3348.9' | 18-1612 |
| 6 | ARKENSTONE 31 FED # 8H | 130' FNL & 1460' FWL | 3348.8' | 18-1613 |
| 7 | PRECIOUS 30-18 FED COM # 11H | 130' FNL & 1935' FWL | 3344.1' | 18-1631 |
| 8 | PRECIOUS 30-18 FED COM # 12H | 130' FNL & 1970' FWL | 3344.3' | 18-1632 |
| 9 | PRECIOUS 30-18 FED COM # 23H | 130' FNL & 2200' FWL | 3344.8' | 18-1637 |
| 10 | PRECIOUS 30-18 FED COM # 24H | 130' FNL & 2235' FWL | 3345.0' | 18-1638 |
| 11 | ARKENSTONE 31 FED # 173H | 130' FNL & 2465' FWL | 3344.9' | 18-1618 |
| 12 | ARKENSTONE 31 FED # 174H | 130' FNL & 2500' FWL | 3345.9' | 18-1619 |
| 13 | ARKENSTONE 31 FED # 3H | 130' FNL & 2613' FEL | 3344.1' | 18-1608 |
| 14 | ARKENSTONE 31 FED # 4H | 130' FNL & 2578' FEL | 3344.2' | 18-1609 |
| 15 | ARKENSTONE 31 FED # 9H | 280' FNL & 2150' FEL | 3344.3' | 18-1614 |
| 16 | ARKENSTONE 31 FED # 10H | 315' FNL & 2150' FEL | 3344.2' | 18-1615 |
| 17 | PRECIOUS 30-18 FED COM # 13H | 100' FNL & 1395' FEL | 3345.2' | 18-1633 |
| 18 | PRECIOUS 30-18 FED COM # 14H | 100' FNL & 1360' FEL | 3345.4' | 18-1634 |
| 19 | ARKENSTONE 31 FED # 175H | 100' FNL & 1130' FEL | 3344.5' | 18-1620 |
| 20 | ARKENSTONE 31 FED # 176H | 100' FNL & 1095' FEL | 3344.7' | 18-1772 |
| 21 | ARKENSTONE 31 FED # 5H | 100' FNL & 865' FEL | 3344.6' | 18-1610 |
| 22 | ARKENSTONE 31 FED # 6H | 100' FNL & 830' FEL | 3344.8' | 18-1611 |
| 23 | PRECIOUS 30-18 FED COM # 25H | 100' FNL & 600' FEL | 3344.6' | 18-1639 |
| 24 | PRECIOUS 30-18 FED COM # 26H | 100' FNL & 565' FEL | 3344.6' | 18-1640 |
| 25 | PRECIOUS 30-18 FED COM # 21H | 570' FNL & 285' FWL | 3344.8' | 18-1635 |
| 26 | PRECIOUS 30-18 FED COM # 41H | 570' FNL & 320' FWL | 3345.9' | 18-1647 |
| 27 | PRECIOUS 30-18 FED COM # 1H | 570' FNL & 550' FWL | 3346.8' | 18-1621 |
| 28 | PRECIOUS 30-18 FED COM # 2H | 570' FNL & 585' FWL | 3347.3' | 18-1622 |
| 29 | PRECIOUS 30-18 FED COM # 171H | 570' FNL & 815' FWL | 3351.2' | 18-1641 |
| 30 | PRECIOUS 30-18 FED COM # 172H | 570' FNL & 850' FWL | 3351.0' | 18-1642 |
| 31 | PRECIOUS 30-18 FED COM # 22H | 570' FNL & 1080' FWL | 3351.2' | 18-1636 |
| 32 | PRECIOUS 30-18 FED COM # 42H | 570' FNL & 1115' FWL | 3347.9' | 18-1648 |
| 33 | PRECIOUS 30-18 FED COM # 7H | 570' FNL & 1345' FWL | 3347.9' | 18-1627 |
| 34 | PRECIOUS 30-18 FED COM # 8H | 570' FNL & 1380' FWL | 3345.9' | 18-1628 |
| 35 | PRECIOUS 30-18 FED COM # 9H | 520' FNL & 1330' FEL | 3348.7' | 18-1629 |
| 36 | PRECIOUS 30-18 FED COM # 10H | 520' FNL & 1295' FEL | 3348.2' | 18-1630 |
| 37 | PRECIOUS 30-18 FED COM # 175H | 520' FNL & 1065' FEL | 3348.5' | 18-1645 |
| 38 | PRECIOUS 30-18 FED COM # 176H | 520' FNL & 1030' FEL | 3347.6' | 18-1646 |
| 39 | PRECIOUS 30-18 FED COM # 5H | 520' FNL & 800' FEL | 3346.5' | 18-1625 |
| 40 | PRECIOUS 30-18 FED COM # 6H | 520' FNL & 765' FEL | 3346.8' | 18-1626 |
| 41 | PRECIOUS 30-18 FED COM # 45H | 520' FNL & 535' FEL | 3347.1' | 18-1651 |
| 42 | PRECIOUS 30-18 FED COM # 46H | 520' FNL & 500' FEL | 3346.9' | 18-1652 |

LEGEND

- WELL
- PROP. ROAD
- WELLPAD
- ▨ COMP. STATION
- ▩ TANK BATT.
- DRILL ISLAND

PRECIOUS ARKENSTONE WELLS

SECTION: 31 TOWNSHIP: 23 S. RANGE: 31 E

STATE: NEW MEXICO COUNTY: EDDY SURVEY: N.M.P.M

W.O. #19-1606-1772 LEASE: ARKENSTONE, PRECIOUS

0 0.225 0.45 0.9 Miles 1 IN = 2,000 FT

LOCATION OVERVIEW MAP VICINITY 12/20/2018 S.P.



**OXY USA
INC.**



HARCROW SURVEYING, LLC.
2314 W. MAIN ST. ARTESIA, NM 88210
PH: (575) 746-2358 FAX: (575) 746-2358
c.harcrow@harcrowsurveying.com



APD ID: 10400039845

Submission Date: 03/11/2019

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD disturbance (acres):

PWD surface owner:

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number:

Injection well name:

Assigned injection well API number?

Injection well API number:

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD discharge volume (bbl/day):

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Info Data Report

10/09/2019

APD ID: 10400039845

Submission Date: 03/11/2019

Highlighted data
reflects the most
recent changes

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 11H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Bond Information

Federal/Indian APD: FED

BLM Bond number: ESB000226

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment: