

(SUBMIT IN TRIPLICATE)


Indian Agency \_\_\_\_\_

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Hearville \_\_\_\_\_

Allottee **Cont. # 56** \_\_\_\_\_

Lease No. \_\_\_\_\_

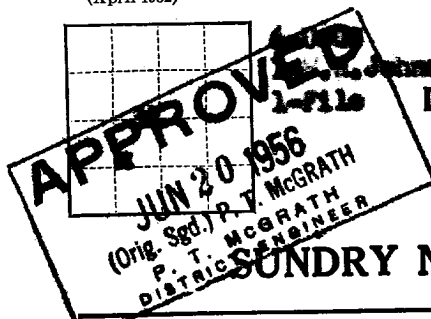

# SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL _____	SUBSEQUENT REPORT OF WATER SHUT-OFF _____
NOTICE OF INTENTION TO CHANGE PLANS _____	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING _____
NOTICE OF INTENTION TO TEST WATER SHUT-OFF _____	SUBSEQUENT REPORT OF ALTERING CASING _____
NOTICE OF INTENTION TO REDRILL OR REPAIR WELL _____	SUBSEQUENT REPORT OF REDRILLING OR REPAIR _____
NOTICE OF INTENTION TO SHOOT OR ACIDIZE _____	SUBSEQUENT REPORT OF ABANDONMENT _____
NOTICE OF INTENTION TO PULL OR ALTER CASING _____	SUPPLEMENTARY WELL HISTORY _____
NOTICE OF INTENTION TO ABANDON WELL _____	

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

RECEIVED  
JUN 21 1956  
U. S. GEOLOGICAL SURVEY  
FARMINGTON, NEW MEXICO

Indian "G" \_\_\_\_\_ June 20 \_\_\_\_\_, 19 ~~56~~

Well No. 2 is located 1650 ft. from S line and 1650 ft. from W line of sec. 34

24 24 and Sec. No. 24 24 (Twp.) 24 (Range) 24 (Meridian)

11000 (Field) Rio Arriba (County or Subdivision) New Mexico (State or Territory)

The elevation of the ungrated grd. derrick floor above sea level is 7063.3 ft.

## DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

propose to abandon this well, run 100 ex ent plug from ID to approx. 5500' and cover perfs. and exp excess ent to formation. Run jet cutter and recover as much 5-1/2" casing as possible. Fill hole from approx. 5500' to top of 5-1/2" casing cut off w/heavy mud, set 25 ex ent plug here. Run free point, cut and recover as much 7-5/8" casing as possible, then run heavy mud from ent plug at top of 5-1/2" casing cut off to top of 7-5/8" casing cut off, set 25 ex ent plug at this point and then fill w/heavy mud to approx. 20', set a 25 ex ent plug here, and fill with heavy mud to approx. 20' of surface, then set 25 ex ent plug from this point to surface. Install prescribed marker and abandon well.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Pacific Northwest Pipeline Corp.

Address 4134 N. Main, Farmington, N.M.

By Original signed by T. McGrath

Title District Engineer

